







DOT
Minimal LED Downlight





DOT-G

Economic Version



COLOUR








white



black

DOT-H

Premium Version



COLOUR



white



black

DECORATION REFLECTOR




white




black



gold



silver

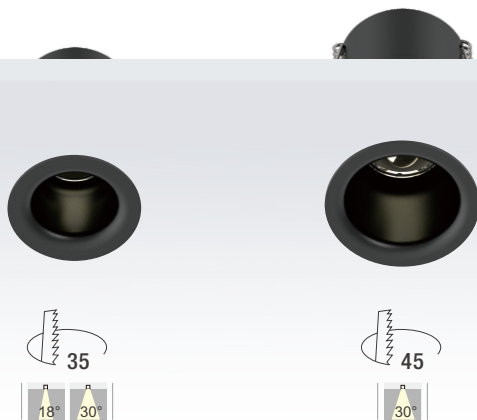

Quickinfo

GENERAL
recessed
fixed
round
LED
SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam
ESTIMATED LED LIFETIME
L80 / 50.000h
OPTICAL
direct illumination
beam angle 18°, 30°
PHYSICAL
aluminium
wet painting

Function


Minimalistic design with cutout of 35mm,45mm.
Deep recessed LED.
Soft curved design.
With complete glare control and visual comfort.
Broad choices of different beam angle lens by tool free change.

Order options

SYSTEM POWER
2,5W 8W
COLOUR TEMPERATURE
2700K 3000K 4000K
COLOR RENDERING INDEX
CRI 80 CRI 90
ELECTRICAL
non DIM


LENS
 
18°Beam 30°Beam
COLOUR
 
Black White

DOT35,45-G

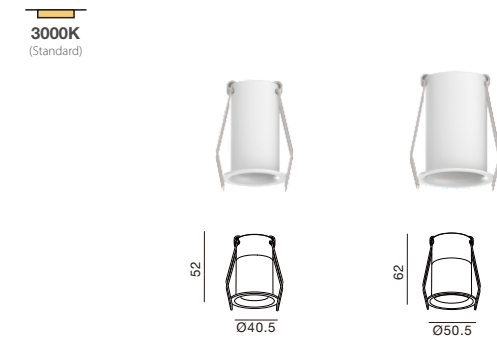

Light distribution for 3000K


DOT35-G 1.5W 110 lm-120 lm

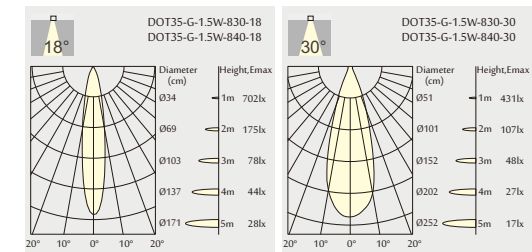

Order Information


DOT35-G-1.5W 110-120 Lm MODELS (CREE LED)									
Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
DOT35-G-830-18	150 lm	110 lm	3.2 V	500 mA	1.5 W	2.5 W	83	3000K	18°
DOT35-G-840-18	160 lm	120 lm	3.2 V	500 mA	1.5 W	2.5 W	83	4000K	18°
DOT35-G-830-30	150 lm	110 lm	3.2 V	500 mA	1.5 W	2.5 W	83	3000K	30°
DOT35-G-840-30	160 lm	120 lm	3.2 V	500 mA	1.5 W	2.5 W	83	4000K	30°

DOT45-G 6W 450 lm-480 lm



Order Information

DOT45-G-6W 420-450 Lm MODELS (CITIZEN LED)									
Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
DOT45-G-830-30	550 lm	450 lm	18 V	350 mA	6 W	8 W	83	3000K	30°
DOT45-G-840-30	600 lm	480 lm	18 V	350 mA	6 W	8 W	83	4000K	30°

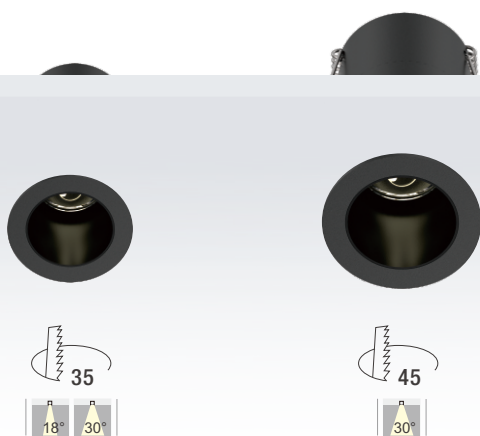

Quickinfo

GENERAL
recessed
fixed
round
LED
SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam
ESTIMATED LED LIFETIME
L80 / 50.000h
OPTICAL
direct illumination
beam angle 18°, 30°
PHYSICAL
aluminium
wet painting
decoration ring aluminium

Function


Minimalistic design with cutout of 35mm,45mm.
Deep recessed LED.
Soft curved design.
With complete glare control and visual comfort.
Broad choices of different beam angle lens by tool free change.
Interchangeable internal ring with various decoration colors.

Order options

SYSTEM POWER
2.5W 8W
COLOUR TEMPERATURE
2700K 3000K 4000K
COLOR RENDERING INDEX
CRI 80 CRI 90
ELECTRICAL
non DIM


LENS
 
18°Beam 30°Beam
COLOUR
 
Black White
DECORATION RING
 
Silver White
 
Gold Black

DOT35,45-H

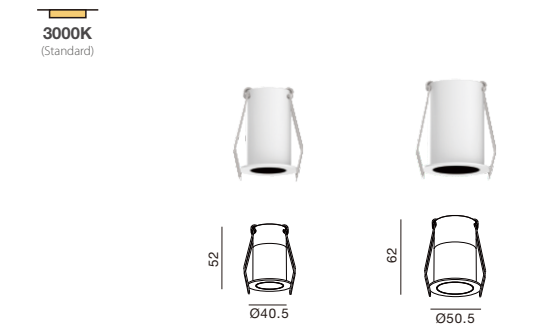

Light distribution for 3000K

DOT35-H 1.5W 110 lm-120 lm

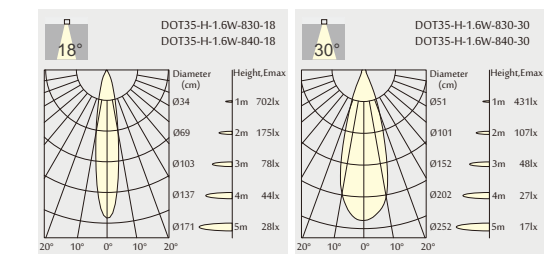


Order Information

DOT35-H-1.5W 110-120 Lm MODELS (CREE LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
DOT35-H-830-18	150 lm	110 lm	3.2 V	500 mA	1.5 W	2.5 W	83	3000K	18°
DOT35-H-840-18	160 lm	120 lm	3.2 V	500 mA	1.5 W	2.5 W	83	4000K	18°
DOT35-H-830-30	150 lm	110 lm	3.2 V	500 mA	1.5 W	2.5 W	83	3000K	30°
DOT35-H-840-30	160 lm	120 lm	3.2 V	500 mA	1.5 W	2.5 W	83	4000K	30°

DOT45-H 6W 450 lm-480 lm



Order Information

DOT45-H-6W 420-450 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
DOT45-H-830-30	550 lm	450 lm	18 V	350 mA	6 W	8 W	83	3000K	30°
DOT45-H-840-30	600 lm	480 lm	18 V	350 mA	6 W	8 W	83	4000K	30°



DOT Display Case

