


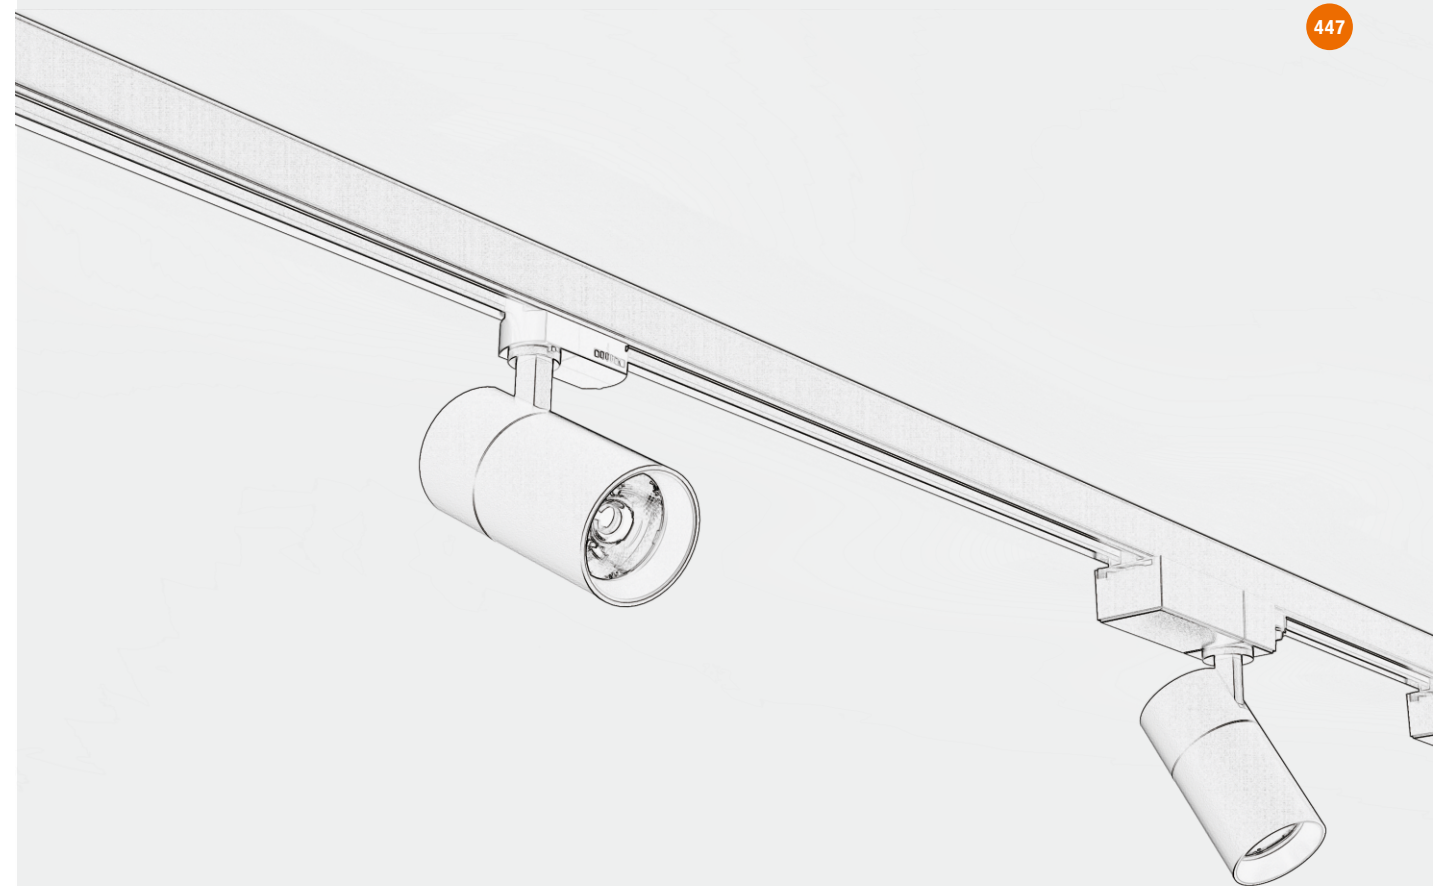


TRACKLIGHT

LED Spotlight System

- Concise structure with driver inside housing or gear box
- High quality optical lens ensures precise lighting distribution

Narrow, medium and wide beam angles are available for different lighting applications

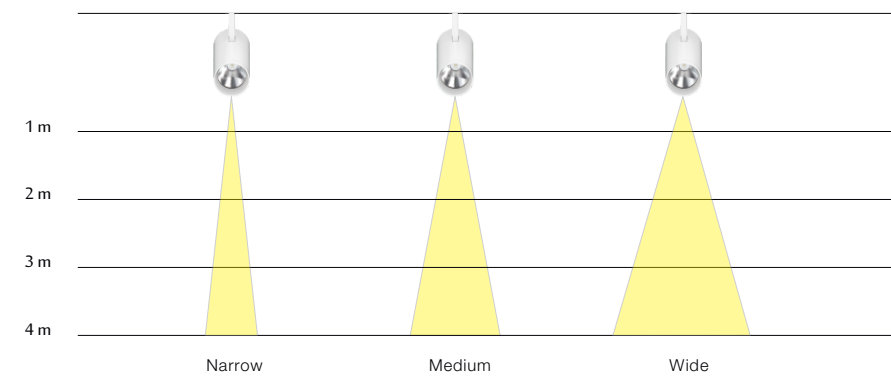

TRACKLIGHT/GRACE



LED Spotlight System






TRACKLIGHT/FELLOW
LED Spotlight System

Narrow, medium and wide beam angles are available for different lighting applications

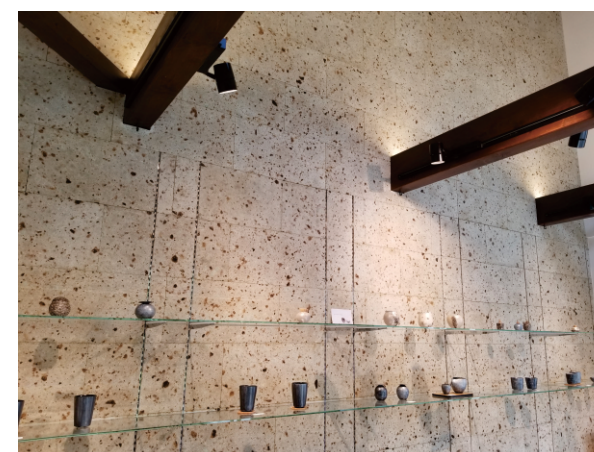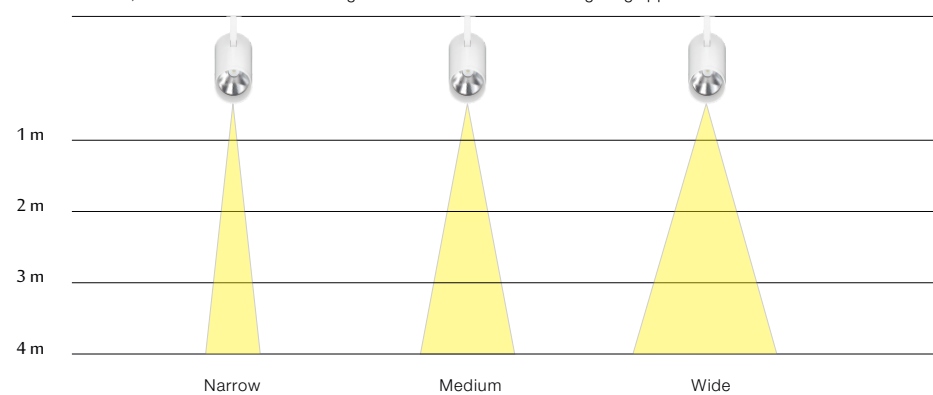



Quickinfo

GENERAL

track light
with internal LED driver

LED

COB LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 15°, 25°, 30°

ELECTRICAL

non DIM

PHYSICAL

aluminium
powder coating

Function

FELLOW S perfectly combines functionality and esthetics. Elegant design with LED driver inside housing. The head rotates through 355° and pivots through 90°. Optimized passive cooling system ensures low temperature and long lifetime of LED.

Front ring provides good glare control. Adopt of lens guarantees high luminous efficiency and uniform distribution. High visual comfort.

Features



Concise structure with driver inside housing
High quality optical lens ensures precise lighting distribution

Order options

SYSTEM POWER

15W
21W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 80
CRI 90

HOUSING



LENS




ANTI-GLARE ACCESSORY




Honeycomb mesh
HM-M

TRACK ADAPTER




FELLOW S

3000K
(Standard)



Light distribution for 3000K


15 W 1200lm-1300lm

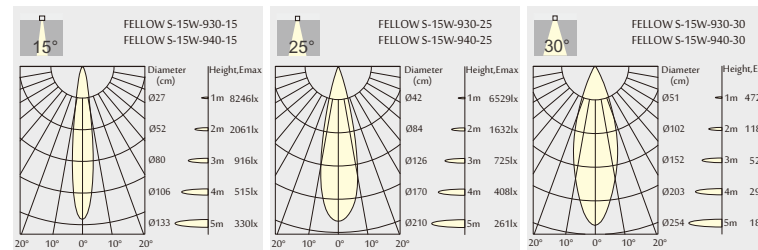

Order Information

FELLOW S-15W 1200 Lm MODELS (CITIZEN LED)							
Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT
FELLOW S-15W-930-15	1500 lm	1200 lm	8246 cd	13 W	15 W	90	3000K 15°
FELLOW S-15W-940-15	1600 lm	1300 lm	8486 cd	13 W	15 W	90	4000K 15°
FELLOW S-15W-930-25	1500 lm	1200 lm	6532 cd	13 W	15 W	90	3000K 25°
FELLOW S-15W-940-25	1600 lm	1300 lm	6658 cd	13 W	15 W	90	4000K 25°
FELLOW S-15W-930-30	1500 lm	1200 lm	4727 cd	13 W	15 W	90	3000K 30°
FELLOW S-15W-940-30	1600 lm	1300 lm	4944 cd	13 W	15 W	90	4000K 30°

21 W 1600lm-1700lm

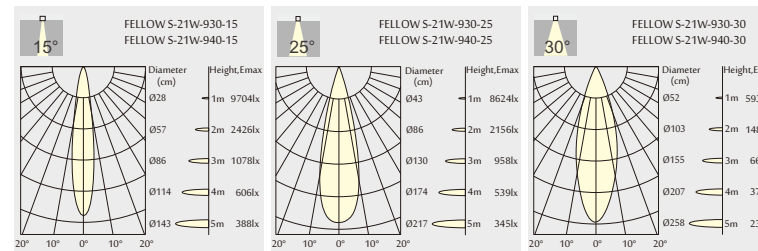

Order Information

FELLOW S-21W 1600 Lm MODELS (CITIZEN LED)							
Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT
FELLOW S-21W-930-15	2000 lm	1600 lm	9709cd	18 W	21 W	90	3000K 15°
FELLOW S-21W-940-15	2100 lm	1700 lm	10616 cd	18 W	21 W	90	4000K 15°
FELLOW S-21W-930-25	2000 lm	1600 lm	8624 cd	18 W	21 W	90	3000K 25°
FELLOW S-21W-940-25	2100 lm	1700 lm	9494 cd	18 W	21 W	90	4000K 25°
FELLOW S-21W-930-30	2000 lm	1600 lm	5939 cd	18 W	21 W	90	3000K 30°
FELLOW S-21W-940-30	2100 lm	1700 lm	6837 cd	18 W	21 W	90	4000K 30°



Quickinfo

GENERAL
track light
with internal LED driver

LED
COB LED module
2700K, 3000K, 4000K
CRI>80, CRI>90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME
L80 / 50,000h

OPTICAL
direct illumination
beam angle 18°, 30°, 45°

ELECTRICAL
non DIM

PHYSICAL
aluminium
powder coating

Function

FELLOW M perfectly combines functionality and esthetics. Elegant design with LED driver inside housing
The head rotates through 355° and pivots through 90°.
Optimized passive cooling system ensures low temperature and long lifetime of LED.

Front ring provides good glare control. Adopt of lens guarantees high luminous efficiency and uniform distribution .
High visual comfort.

Features



Concise structure with driver inside housing
High quality optical lens ensures precise lighting distribution

Order options

COLOUR TEMPERATURE
2700K
3000K
4000K

COLOUR RENDERING INDEX
CRI 80
CRI 90

HOUSING

White Black

LENS

18°Beam 30°Beam 45°Beam

ANTI-GLARE ACCESSORY


Honeycomb mesh
HM-M

TRACK ADAPTER

1-Circuit (Standard) 3-Circuits


FELLOW M

3000K
(Standard)



Light distribution for 3000K

28 W 2700lm-2900lm

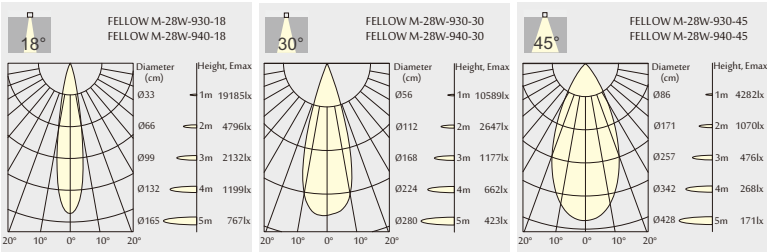

Order Information

FELLOW M-28W 2700 Lm MODELS				(CITIZEN LED)				
Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT	BEAM
FELLOW M-28W-930-18	3400 lm	2700 lm	19194 cd	25 W	28 W	90	3000K	18°
FELLOW M-28W-940-18	3600 lm	2900 lm	20012 cd	25 W	28 W	90	4000K	18°
FELLOW M-28W-930-30	3400 lm	2700 lm	10662 cd	25 W	28 W	90	3000K	30°
FELLOW M-28W-940-30	3600 lm	2900 lm	11854 cd	25 W	28 W	90	4000K	30°
FELLOW M-28W-930-45	3400 lm	2700 lm	4285 cd	25 W	28 W	90	3000K	45°
FELLOW M-28W-940-45	3600 lm	2900 lm	4588 cd	25 W	28 W	90	4000K	45°

