

LEDGO

LED Downlight

- **U**ltra miniature recessed LED downlight
- Perfect combination of lens & reflector



LF 1

Secondary Reflector



Colour





LX4




65X65

Secondary Reflector

Colour



black white matt gold



white black



LEDGO



FIXED

ADJUSTABLE

TRIMLESS

Secondary Reflector



Colour





Colour



white



black

Secondary Reflector



black




white



matt



gold

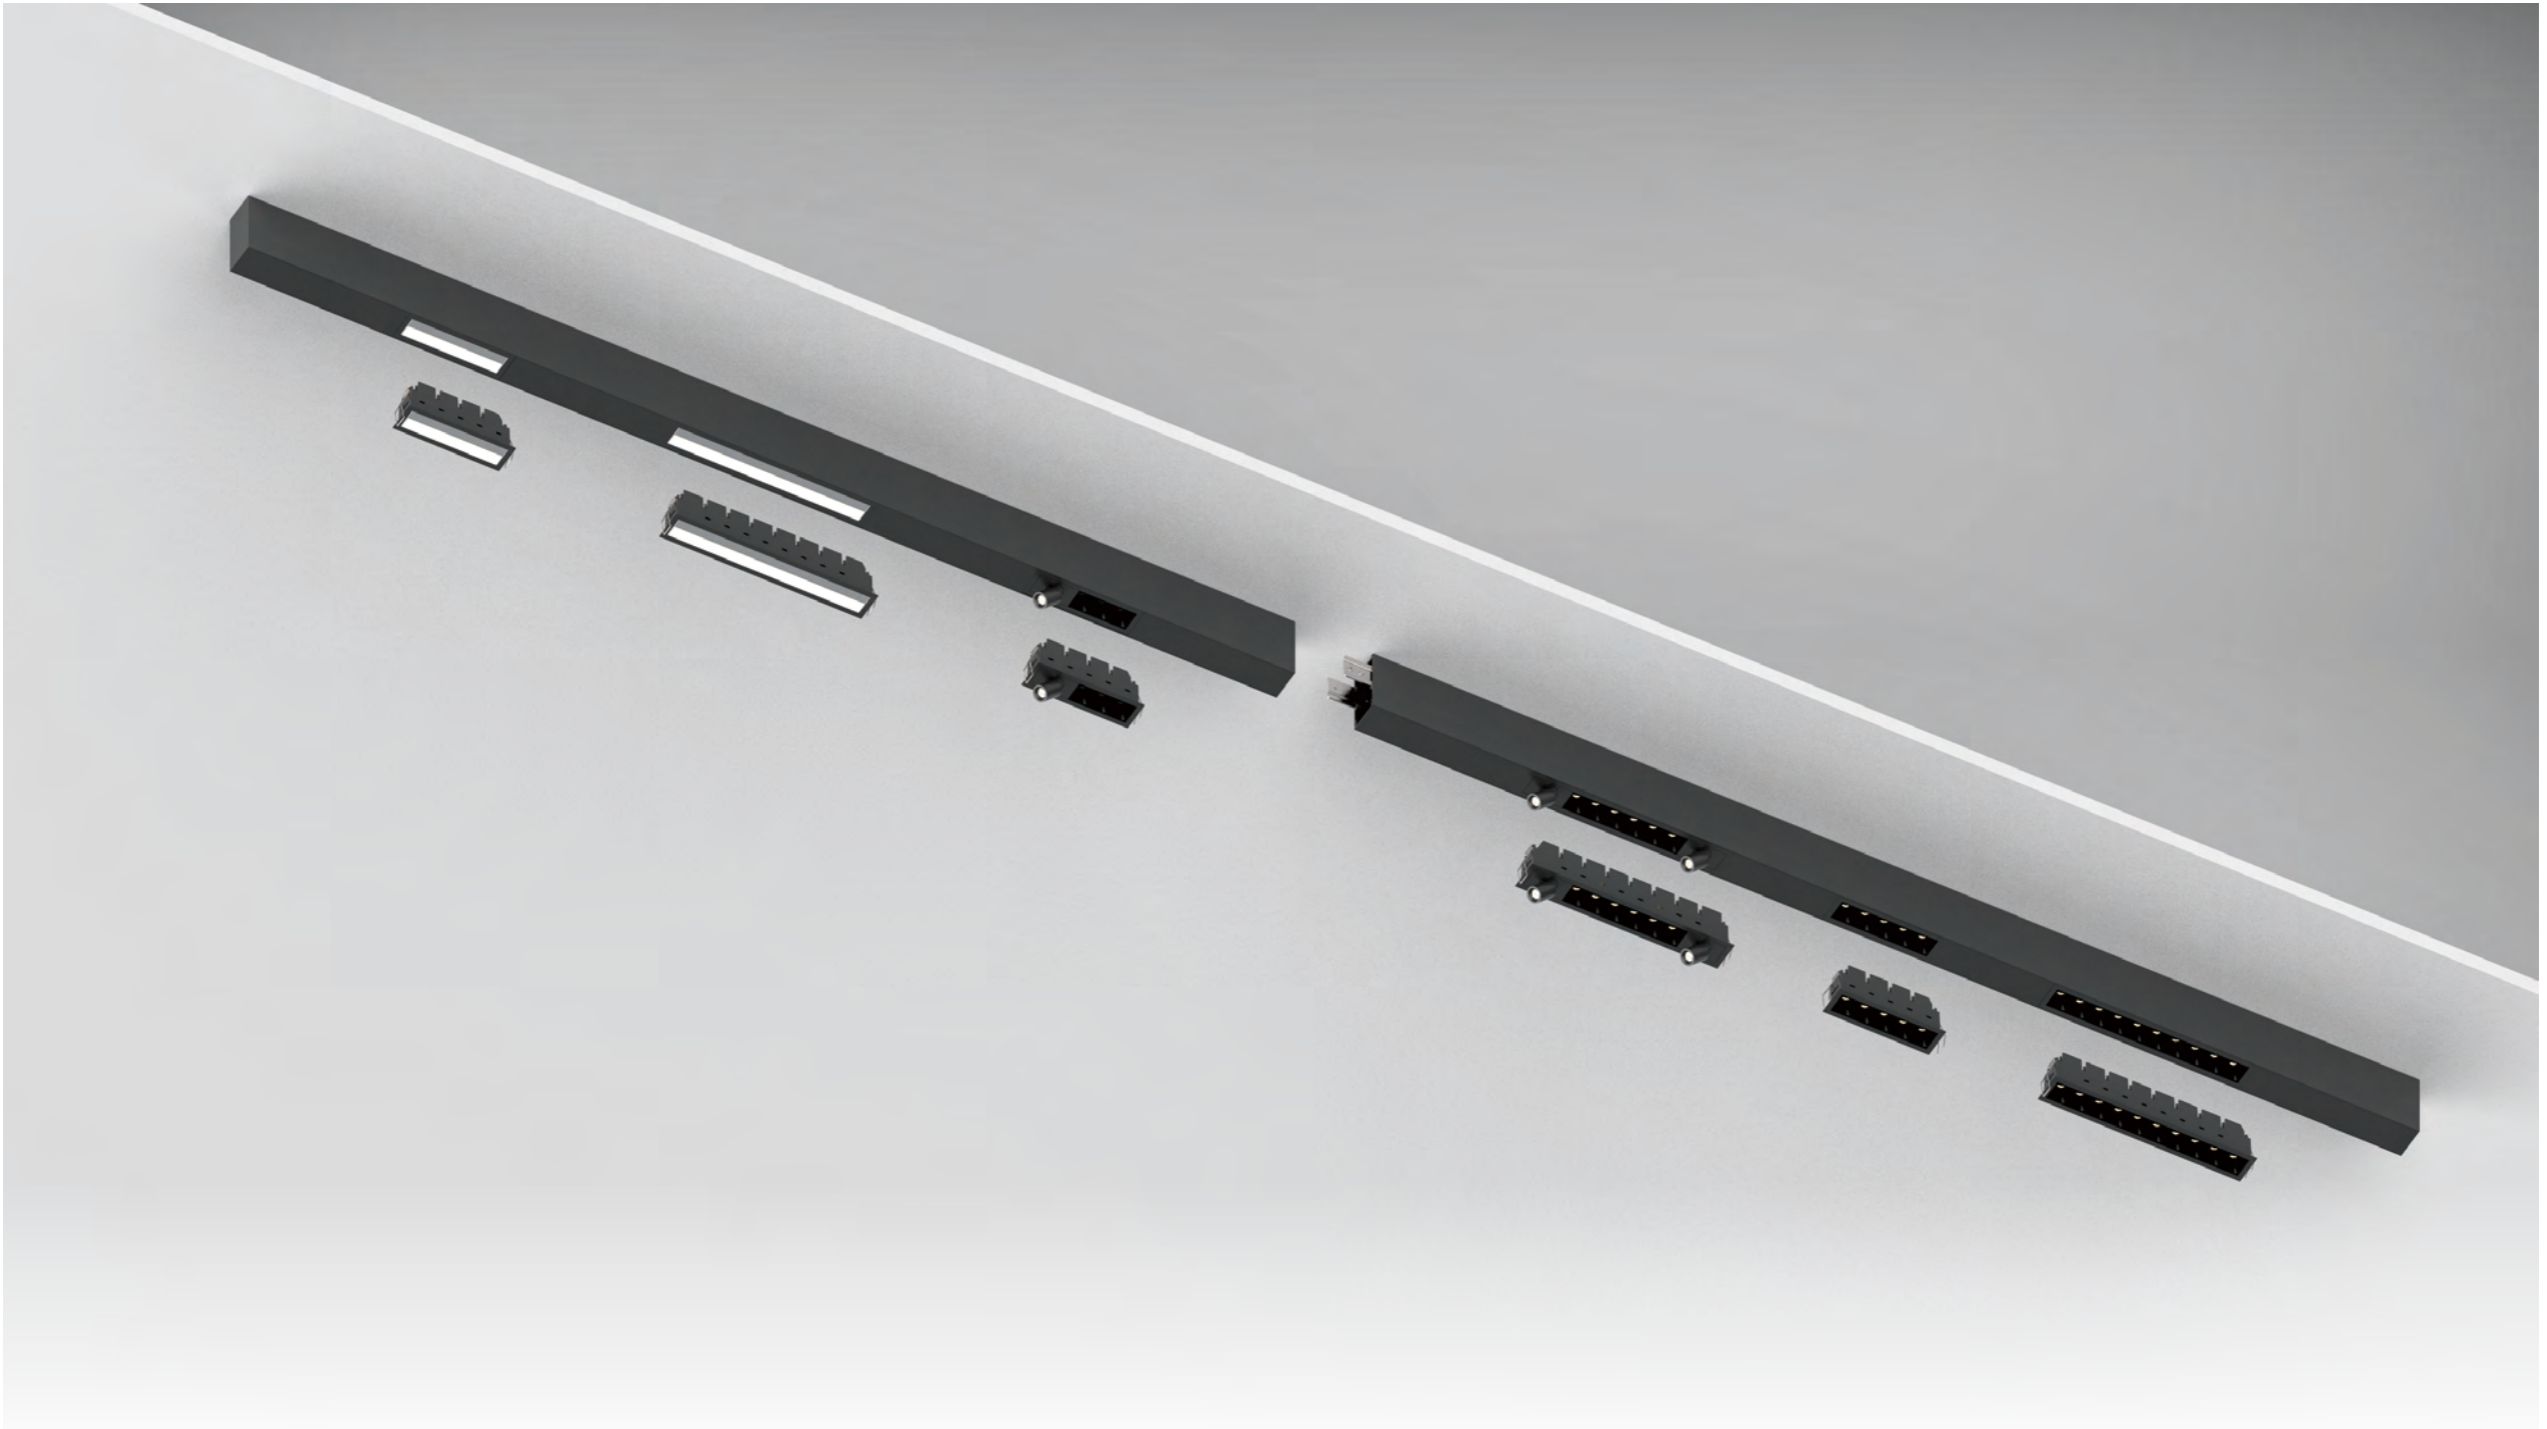



Secondary Reflector



black white matt gold

Colour



white black





Secondary Reflector

Colour



black white matt gold



white black






FIXED




ADJUSTABLE



WALLWASHER



TRIMLESS

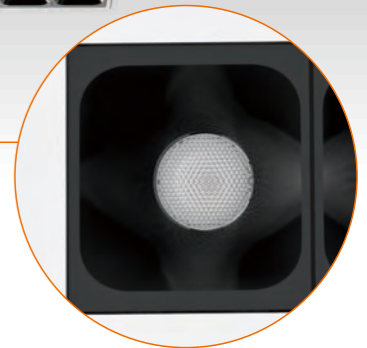

LEDGO

LF1
37X37
2W 170-180Lm



LF2
62X37
4W 300-350Lm



LF3
90X37
7W 500-550Lm



LX4
65X65



LF5
144X37
13W 800-850Lm




LF10
282X37
22W 1600-1700Lm



LF3-LS1
144X37
9W 600-650Lm



LF6-LS2
282X37
17W 1200-1300Lm



LA5
160X52
11W 800-850Lm



LA10
298X52
22W 1600-1700Lm



LW5
144X37
11W 500-550Lm



LW10
282X37
22W 1000-1100Lm



LFT5
154X47
13W 800-850Lm



LFT10
292X47
22W 1600-1700Lm



LFT3-LS1
154X47
9W 600-650Lm



LFT6-LS2
292X47
17W 1200-1300Lm



LWT5
154X47
11W 500-550Lm



LWT10
292X47
22W 1000-1100Lm



Secondary Reflector




black white matt gold

Colour



white black

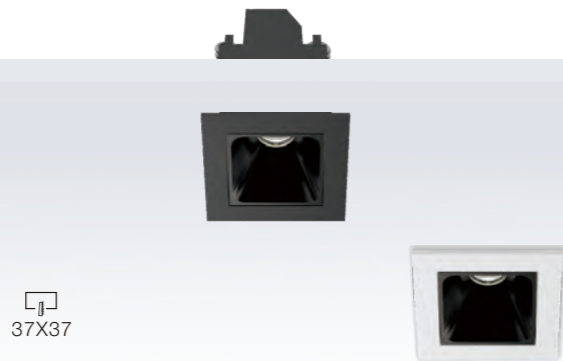

Quickinfo

GENERAL
recessed
fixed
square

LED
SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME
L80 / 50,000h

OPTICAL
direct illumination
beam angle 24°, 40°

PHYSICAL
aluminium
wet painting
secondary reflector plastic

Function

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control

Order options


SYSTEM POWER
3W

COLOUR TEMPERATURE
2700K
3000K
4000K

COLOR RENDERING INDEX
CRI 80
CRI 90

ELECTRICAL
non DIM
phase DIM
1-10V


LENS



COLOUR




SECONDARY REFLECTOR




LF1

3000K
(Standard)

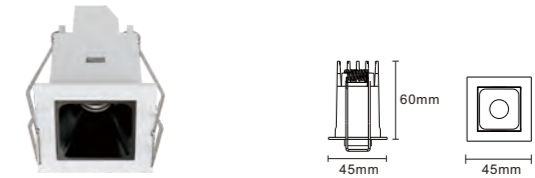

Light distribution for 3000K

2W 150lm-160lm

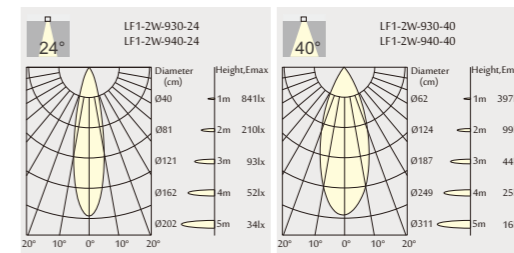

Order Information

LF1-2W 150-160 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LF1-2W-930-24	210 lm	150 lm	3 V	700 mA	2W	3W	90	3000K	24°
LF1-2W-940-24	230 lm	160 lm	3 V	700 mA	2W	3W	90	4000K	24°
LF1-2W-930-40	210 lm	150 lm	3 V	700 mA	2W	3W	90	3000K	40°
LF1-2W-940-40	230 lm	160 lm	3 V	700 mA	2W	3W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



Quickinfo

GENERAL

recessed
fixed
square

LED

SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 24°, 40°

PHYSICAL

aluminium
wet painting
secondary reflector plastic

Function

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control

Order options

SYSTEM POWER

6W

COLOUR TEMPERATURE

2700K
3000K
4000K


COLOR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

non DIM
phase DIM
1-10V
DALI


LENS



COLOUR




SECONDARY REFLECTOR




LF2

3000K
(Standard)

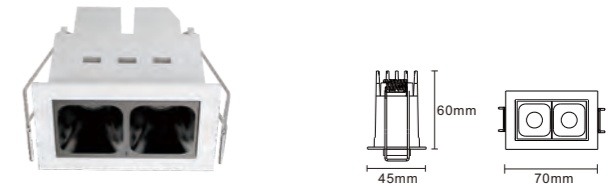

Light distribution for 3000K

4W 300lm-320lm

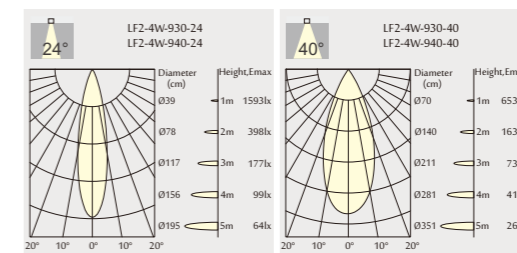

Order Information

LF2-4W 300-320 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LF2-4W-930-24	380 lm	300 lm	6.5 V	700 mA	4W	6W	90	3000K	24°
LF2-4W-940-24	400 lm	320 lm	6.5 V	700 mA	4W	6W	90	4000K	24°
LF2-4W-930-40	380 lm	300 lm	6.5 V	700 mA	4W	6W	90	3000K	40°
LF2-4W-940-40	400 lm	320 lm	6.5 V	700 mA	4W	6W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



90X37

Quickinfo

GENERAL

recessed
fixed
square

LED

SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 24°, 40°

PHYSICAL

aluminium
wet painting
secondary reflector plastic

Function

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control

Order options

SYSTEM POWER

9W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

non DIM
phase DIM
1-10V
DALI


LENS



COLOUR




SECONDARY REFLECTOR




LF3

3000K
(Standard)

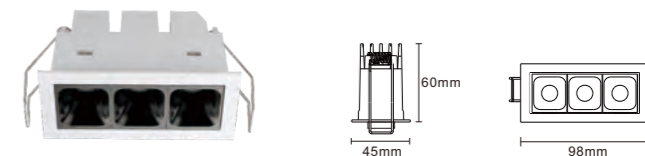

Light distribution for 3000K

7W 500lm-550lm

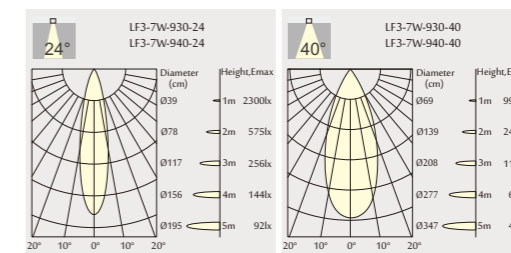

Order Information

LF3-7W 500-550 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LF3-7W-930-24	650 lm	500 lm	10 V	700 mA	7W	9W	90	3000K	24°
LF3-7W-940-24	700 lm	550 lm	10 V	700 mA	7W	9W	90	4000K	24°
LF3-7W-930-40	650 lm	500 lm	10 V	700 mA	7W	9W	90	3000K	40°
LF3-7W-940-40	700 lm	550 lm	10 V	700 mA	7W	9W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



Quickinfo

GENERAL

recessed
fixed
square

LED

SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 24°, 40°

PHYSICAL

aluminium
wet painting
secondary reflector plastic

Function

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control

Order options

SYSTEM POWER

9W

COLOUR TEMPERATURE

2700K
3000K
4000K


COLOR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

non DIM
phase DIM
1-10V
DALI


LENS



COLOUR




SECONDARY REFLECTOR




LX 4

3000K
(Standard)

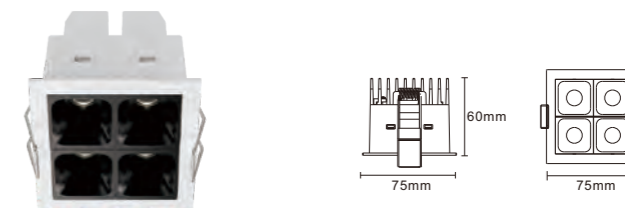

Light distribution for 3000K

9W 650lm-700lm

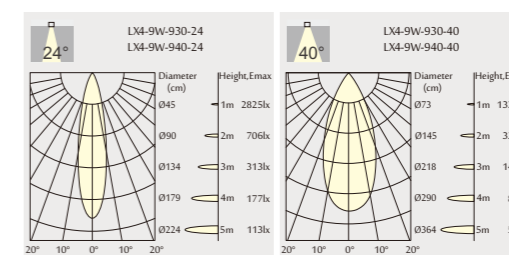

Order Information

LX4-9W 650-700 Lm MODELS (OSRAM LED)


Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LX4-9W-930-24	800 lm	650 lm	12 V	700 mA	9W	11W	90	3000K	24°
LX4-9W-940-24	850 lm	700 lm	12 V	700 mA	9W	11W	90	4000K	24°
LX4-9W-930-40	800 lm	650 lm	12 V	700 mA	9W	11W	90	3000K	40°
LX4-9W-940-40	850 lm	700 lm	12 V	700 mA	9W	11W	90	4000K	40°



LF5
144X37



LFT5
154X47



Quickinfo

GENERAL

- recessed
- fixed
- square
- trimless

LED

- SMD LED module
- 2700K, 3000K, 4000K
- CRI > 80, CRI > 90
- Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

- direct illumination
- beam angle 24°, 40°

PHYSICAL

- aluminium
- wet painting
- secondary reflector plastic

Function

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control
- Trimless available

Order options

SYSTEM POWER

13W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

non DIM
phase DIM
1-10V
DALI


LENS



COLOUR




SECONDARY REFLECTOR




LF5/LFT5

3000K
(Standard)

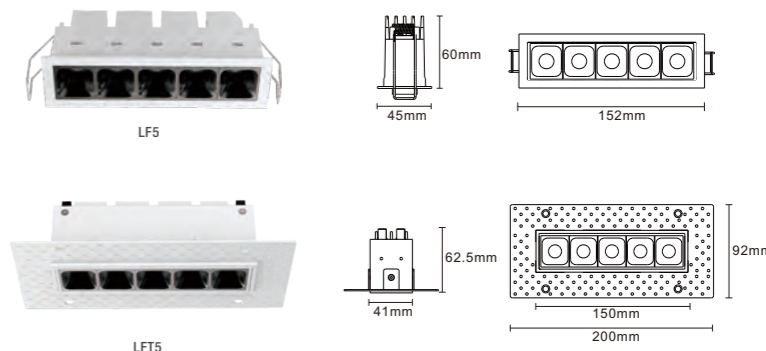

Light distribution for 3000K

11W 800lm-850lm

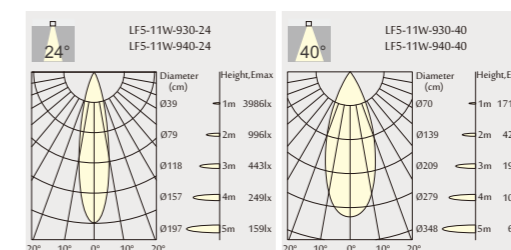

Order Information

LF5-11W 800-850 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LF5-11W-930-24	1050 lm	800 lm	15 V	700 mA	11W	13W	90	3000K	24°
LF5-11W-940-24	1100 lm	850 lm	15 V	700 mA	11W	13W	90	4000K	24°
LF5-11W-930-40	1050 lm	800 lm	15 V	700 mA	11W	13W	90	3000K	40°
LF5-11W-940-40	1100 lm	850 lm	15 V	700 mA	11W	13W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

Order Information

LFT5-11W 800-850 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LFT5-11W-930-24	1050 lm	800 lm	15 V	700 mA	11W	13W	90	3000K	24°
LFT5-11W-940-24	1100 lm	850 lm	15 V	700 mA	11W	13W	90	4000K	24°
LFT5-11W-930-40	1050 lm	800 lm	15 V	700 mA	11W	13W	90	3000K	40°
LFT5-11W-940-40	1100 lm	850 lm	15 V	700 mA	11W	13W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



LF10
282X37

LFT10
292X47



Quickinfo

GENERAL

- recessed
- fixed
- square
- trimless

LED

- SMD LED module
- 2700K, 3000K, 4000K
- CRI > 80, CRI > 90
- Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

- L80 / 50,000h

OPTICAL

- direct illumination
- beam angle 24°, 40°

PHYSICAL

- aluminium
- wet painting
- secondary reflector plastic

Function

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control
- Trimless available

Order options

SYSTEM POWER

24W

COLOUR TEMPERATURE

2700K
3000K
4000K


COLOR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

non DIM
phase DIM
1-10V
DALI


LENS



COLOUR



SECONDARY REFLECTOR




LF10/LFT10


3000K
(Standard)



LF10

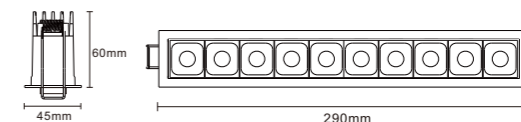


LFT10

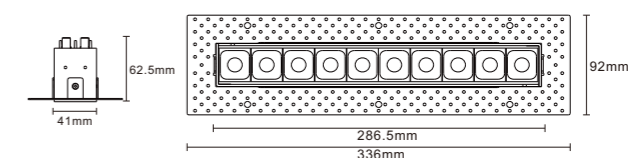

Light distribution for 3000K

22W 1600lm-1700lm

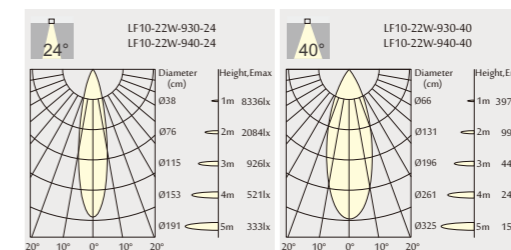

Order Information

LF10-22W 1600-1700 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LF10-22W-930-24	2100 lm	1600 lm	30 V	700 mA	22W	24W	90	3000K	24°
LF10-22W-940-24	2200 lm	1700 lm	30 V	700 mA	22W	24W	90	4000K	24°
LF10-22W-930-40	2100 lm	1600 lm	30 V	700 mA	22W	24W	90	3000K	40°
LF10-22W-940-40	2200 lm	1700 lm	30 V	700 mA	22W	24W	90	4000K	40°



Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

LFT10-22W 1600-1700 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LFT10-22W-930-24	2100 lm	1600 lm	30 V	700 mA	22W	24W	90	3000K	24°
LFT10-22W-940-24	2200 lm	1700 lm	30 V	700 mA	22W	24W	90	4000K	24°
LFT10-22W-930-40	2100 lm	1600 lm	30 V	700 mA	22W	24W	90	3000K	40°
LFT10-22W-940-40	2200 lm	1700 lm	30 V	700 mA	22W	24W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


 LF3-LS1
 144X37

 LFT3-LS1
 154X47


Quickinfo

GENERAL

recessed
 fixed
 square

LED

SMD LED module
 2700K, 3000K, 4000K
 CRI > 80, CRI > 90
 Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
 beam angle 24°, 40°

PHYSICAL

aluminium
 wet painting
 secondary reflector plastic

Function

- Ultra miniature recessed LED spotlight
- Spotlight 355° rotation & 90° pivot
- Superior glare control
- Square trim/ trimless

Order options

SYSTEM POWER

11W

COLOUR TEMPERATURE

2700K
 3000K
 4000K

COLOR RENDERING INDEX

CRI 80
 CRI 90

ELECTRICAL

non DIM
 phase DIM
 1-10V
 DALI

LENS



24°Beam 40°Beam

COLOUR



Black White

SECONDARY REFLECTOR



Matt White




Gold Black

LF3-LS1/LFT3-LS1


3000K
 (Standard)



LF3-LS1




LFT3-LS1

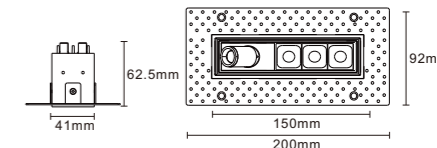

Light distribution for 3000K

9W 600lm-650lm

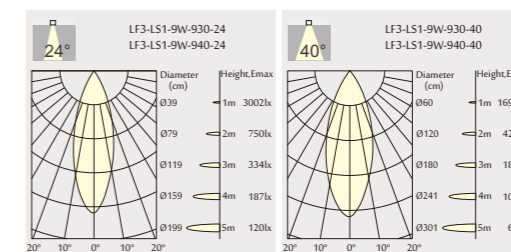

Order Information

LF3-LS1-9W 600-650 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LF3-LS1-9W-930-24	800 lm	600 lm	13 V	700 mA	9W	11W	90	3000K	24°
LF3-LS1-9W-940-24	850 lm	650 lm	13 V	700 mA	9W	11W	90	4000K	24°
LF3-LS1-9W-930-40	800 lm	600 lm	13 V	700 mA	9W	11W	90	3000K	40°
LF3-LS1-9W-940-40	850 lm	650 lm	13 V	700 mA	9W	11W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



Order Information

LFT3-LS1-9W 600-650 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LFT3-LS1-9W-930-24	800 lm	600 lm	13 V	700 mA	9W	11W	90	3000K	24°
LFT3-LS1-9W-940-24	850 lm	650 lm	13 V	700 mA	9W	11W	90	4000K	24°
LFT3-LS1-9W-930-40	800 lm	600 lm	13 V	700 mA	9W	11W	90	3000K	40°
LFT3-LS1-9W-940-40	850 lm	650 lm	13 V	700 mA	9W	11W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


 LF6-LS2
 282X37

 LFT6-LS2
 292X47

Quickinfo
GENERAL

recessed
 fixed
 square

LED

SMD LED module
 2700K, 3000K, 4000K
 CRI > 80, CRI > 90
 Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
 beam angle 24°, 40°

PHYSICAL

aluminium
 wet painting
 secondary reflector plastic

Function

- Ultra miniature recessed LED spotlight
- Spotlight 355° rotation & 90° pivot
- Superior glare control
- Square trim/ trimless

Order options
SYSTEM POWER

19W

COLOUR TEMPERATURE

2700K
 3000K
 4000K

COLOR RENDERING INDEX


CRI 80
 CRI 90

ELECTRICAL

non DIM
 phase DIM
 1-10V
 DALI

LENS


COLOUR

SECONDARY REFLECTOR

LF6-LS2/LFT6-LS2



3000K
 (Standard)

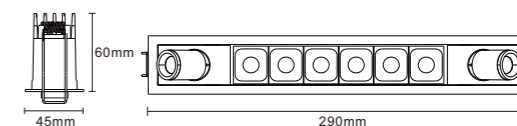

LF6-LS2



LFT6-LS2

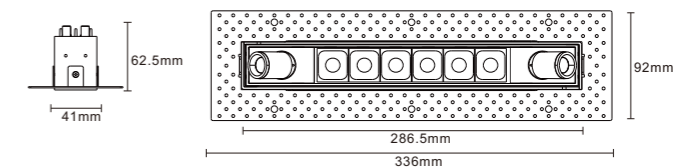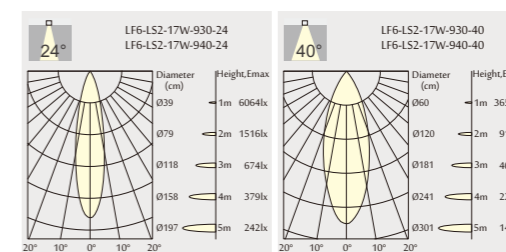
Light distribution for 3000K
17W 1200lm-1300lm

Order Information
LF6-LS2-17W 1200-1300 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LF6-LS2-17W-930-24	1600 lm	1200 lm	25 V	700 mA	17W	19W	90	3000K	24°
LF6-LS2-17W-940-24	1700 lm	1300 lm	25 V	700 mA	17W	19W	90	4000K	24°
LF6-LS2-17W-930-40	1600 lm	1200 lm	25 V	700 mA	17W	19W	90	3000K	40°
LF6-LS2-17W-940-40	1700 lm	1300 lm	25 V	700 mA	17W	19W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

Order Information
LFT6-LS2-17W 1200-1300 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LFT6-LS2-17W-930-24	1600 lm	1200 lm	25 V	700 mA	17W	19W	90	3000K	24°
LFT6-LS2-17W-940-24	1700 lm	1300 lm	25 V	700 mA	17W	19W	90	4000K	24°
LFT6-LS2-17W-930-40	1600 lm	1200 lm	25 V	700 mA	17W	19W	90	3000K	40°
LFT6-LS2-17W-940-40	1700 lm	1300 lm	25 V	700 mA	17W	19W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



Quickinfo

GENERAL
recessed
adjustable
square

LED
SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME
L80 / 50,000h

OPTICAL
direct illumination
beam angle 24°, 40°

PHYSICAL
aluminium
wet painting
secondary reflector plastic

Function

- Adjustable LED downlight
- Perfect combination of lens & reflector
- Superior glare control



Order options

SYSTEM POWER
13W




COLOUR TEMPERATURE
2700K
3000K
4000K

COLOR RENDERING INDEX
CRI 80
CRI 90

ELECTRICAL
non DIM
phase DIM
1-10V
DALI


LENS
 
24°Beam 40°Beam

COLOUR
 
Black White

SECONDARY REFLECTOR
 
Matt White
 
Gold Black


LA5

3000K
(Standard)

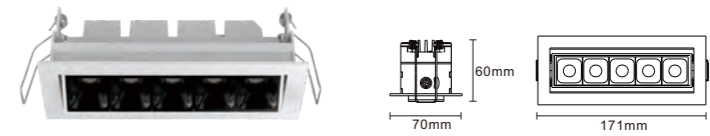

Light distribution for 3000K

11W 800lm-850lm

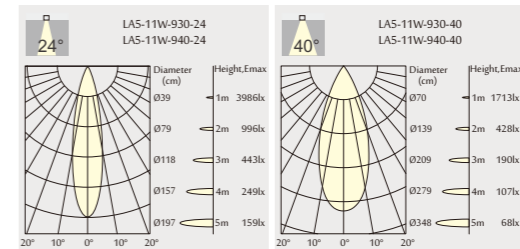

Order Information

LA5-11W 800-850 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LA5-11W-930-24	1050 lm	800 lm	15 V	700 mA	11W	13W	90	3000K	24°
LA5-11W-940-24	1100 lm	850 lm	15 V	700 mA	11W	13W	90	4000K	24°
LA5-11W-930-40	1050 lm	800 lm	15 V	700 mA	11W	13W	90	3000K	40°
LA5-11W-940-40	1100 lm	850 lm	15 V	700 mA	11W	13W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



298X52

Quickinfo

GENERAL

recessed
adjustable
square

LED

SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 24°, 40°

PHYSICAL

aluminium
wet painting
secondary reflector plastic

Function

- Adjustable LED downlight
- Perfect combination of lens & reflector
- Superior glare control

Order options

SYSTEM POWER

24W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

non DIM
phase DIM
1-10V
DALI

LENS



24°Beam 40°Beam

COLOUR



Black White

SECONDARY REFLECTOR




Matt White



Gold Black


LA10

3000K
(Standard)



Light distribution for 3000K

22W 1600lm-1700lm

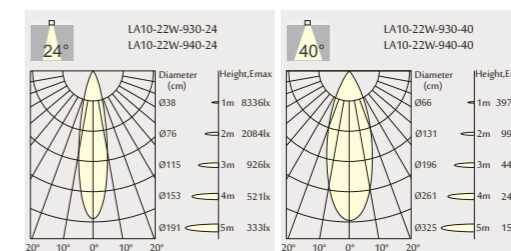

Order Information

LF10-22W 1600-1700 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
LA10-22W-930-24	2100 lm	1600 lm	30 V	700 mA	22W	24W	90	3000K	24°
LA10-22W-940-24	2200 lm	1700 lm	30 V	700 mA	22W	24W	90	4000K	24°
LA10-22W-930-40	2100 lm	1600 lm	30 V	700 mA	22W	24W	90	3000K	40°
LA10-22W-940-40	2200 lm	1700 lm	30 V	700 mA	22W	24W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

CE UGR
 < 19

 LW5
 144X37

 LWT5
 154X47

Quickinfo
GENERAL

 recessed
 wallwasher
 square
 trimless

LED

 SMD LED module
 2700K, 3000K, 4000K
 CRI > 80, CRI > 90
 Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination

PHYSICAL

 aluminium
 wet painting

Function

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control
- Trimless available

Order options
SYSTEM POWER

13W

COLOUR TEMPERATURE

 2700K
 3000K
 4000K

COLOR RENDERING INDEX

 CRI 80
 CRI 90

ELECTRICAL

 non DIM
 phase DIM
 1-10V
 DALI

COLOUR


Black





White




LW5/LWT5

 3000K
 (Standard)


LW5



LWT5


Light distribution for 3000K
11W 500lm-550lm

Order Information
LW5-11W 500-550 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT
LW5-11W-930	1050 lm	500 lm	15 V	700 mA	11W	13W	90	3000K
LW5-11W-940	1100 lm	550 lm	15 V	700 mA	11W	13W	90	4000K

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

Order Information
LWT5-11W 500-550 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT
LWT5-11W-930	1050 lm	500 lm	15 V	700 mA	11W	13W	90	3000K
LWT5-11W-940	1100 lm	550 lm	15 V	700 mA	11W	13W	90	4000K

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



Quickinfo

- GENERAL
- recessed
- wallwasher
- square
- trimless
- LED
- SMD LED module
- 2700K, 3000K, 4000K
- CRI > 80, CRI > 90
- Bining < 3-Step MacAdam

- ESTIMATED LED LIFETIME
- L80 / 50,000h

- OPTICAL
- direct illumination

- PHYSICAL
- aluminium
- wet painting

Function

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control
- Trimless available

Order options

SYSTEM POWER
24W

COLOUR TEMPERATURE
2700K
3000K
4000K

COLOR RENDERING INDEX
CRI 80
CRI 90


ELECTRICAL
non DIM
phase DIM
1-10V
DALI

COLOUR




LW10

3000K
(Standard)

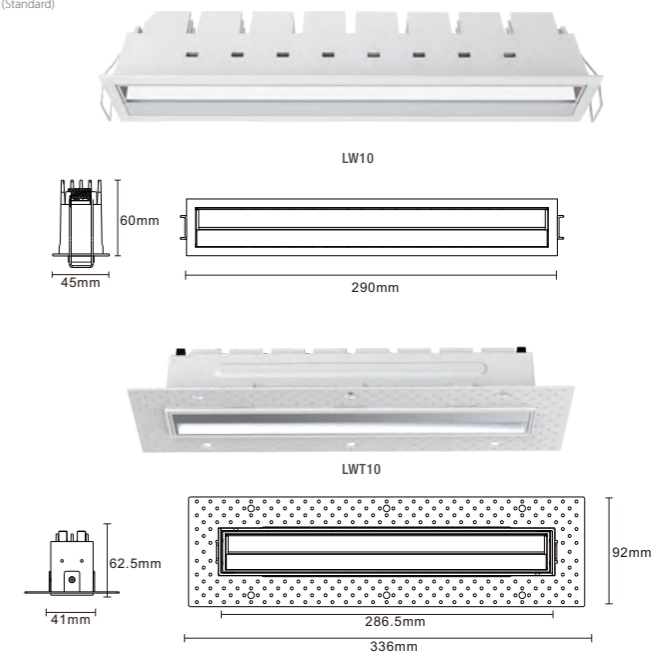

Light distribution for 3000K

22W 1000lm-1100lm



Order Information

LW10-22W 1000-1100 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT
LW10-22W-930	2100 lm	1000 lm	30 V	700 mA	22W	24W	90	3000K
LW10-22W-940	2200 lm	1100 lm	30 V	700 mA	22W	24W	90	4000K

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

Order Information

LWT10-22W 1000-1100 Lm MODELS (OSRAM LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT
LWT10-22W-930	2100 lm	1000 lm	30 V	700 mA	22W	24W	90	3000K
LWT10-22W-940	2200 lm	1100 lm	30 V	700 mA	22W	24W	90	4000K

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



LEDGO Display Case

