


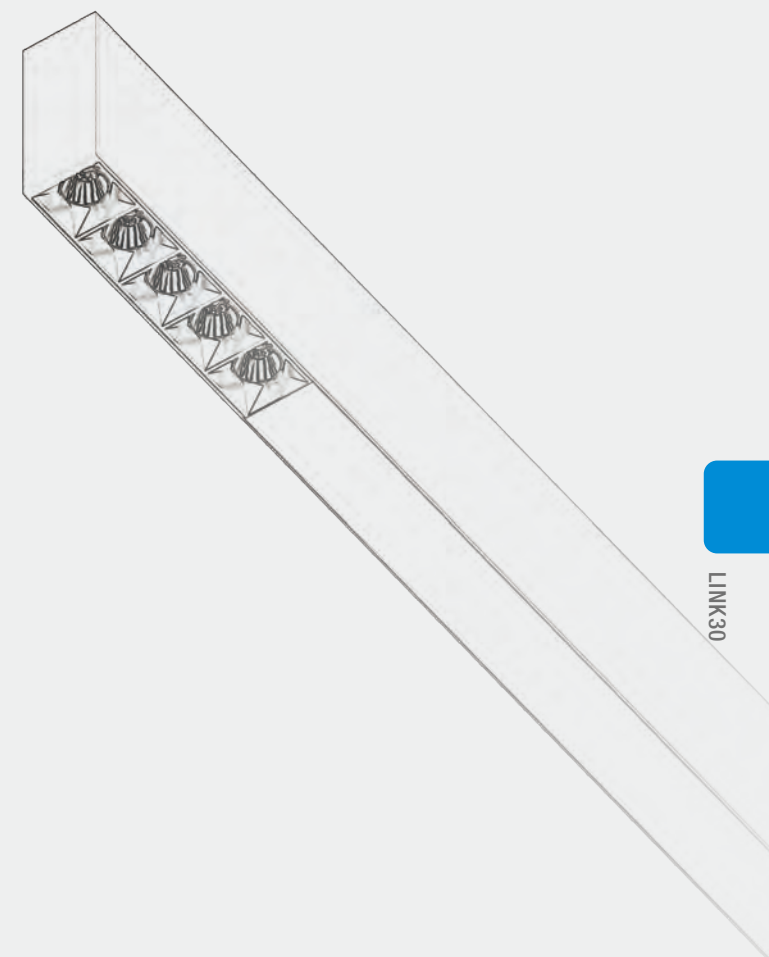
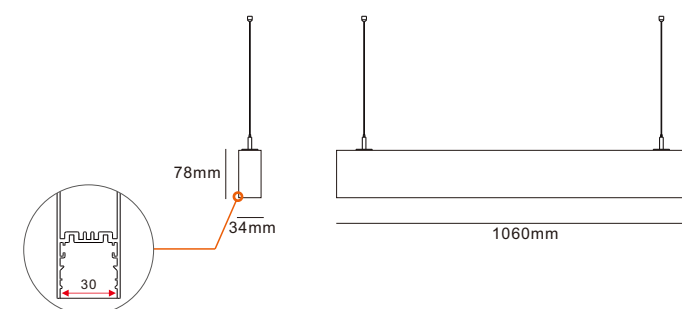


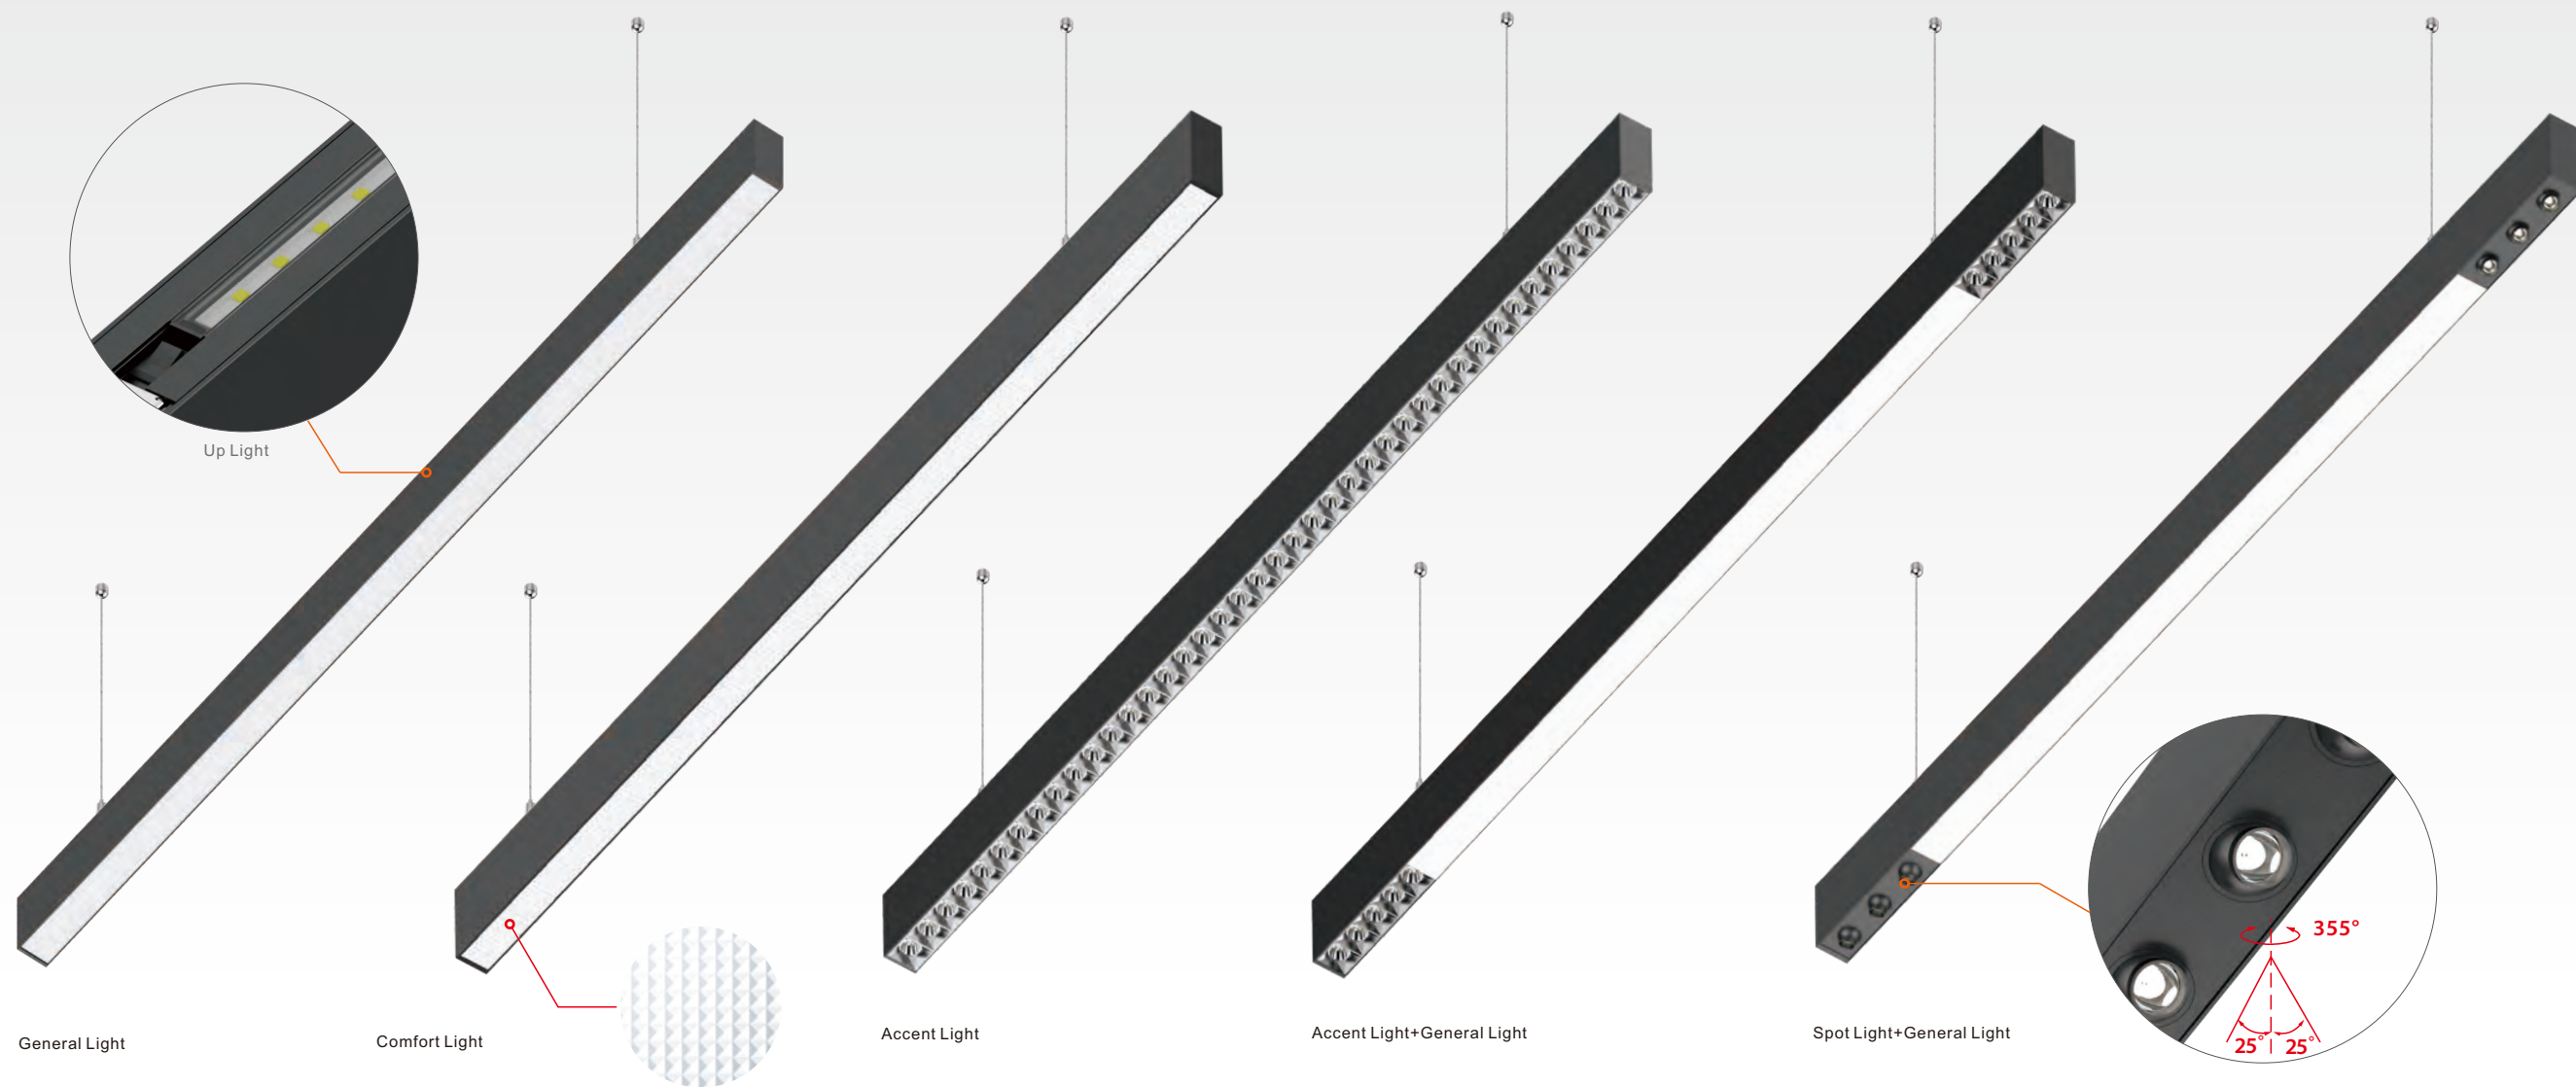


LINK30

LINK30 Series
LINEAR LIGHTING SYSTEM

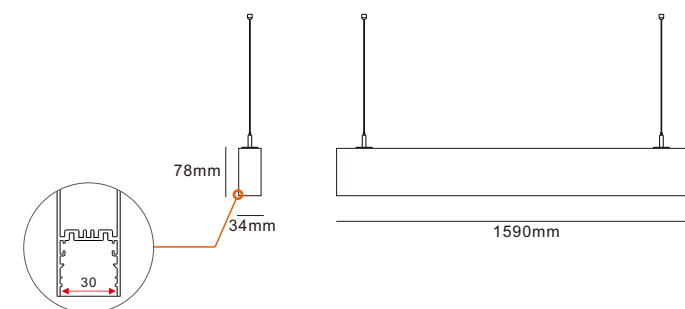

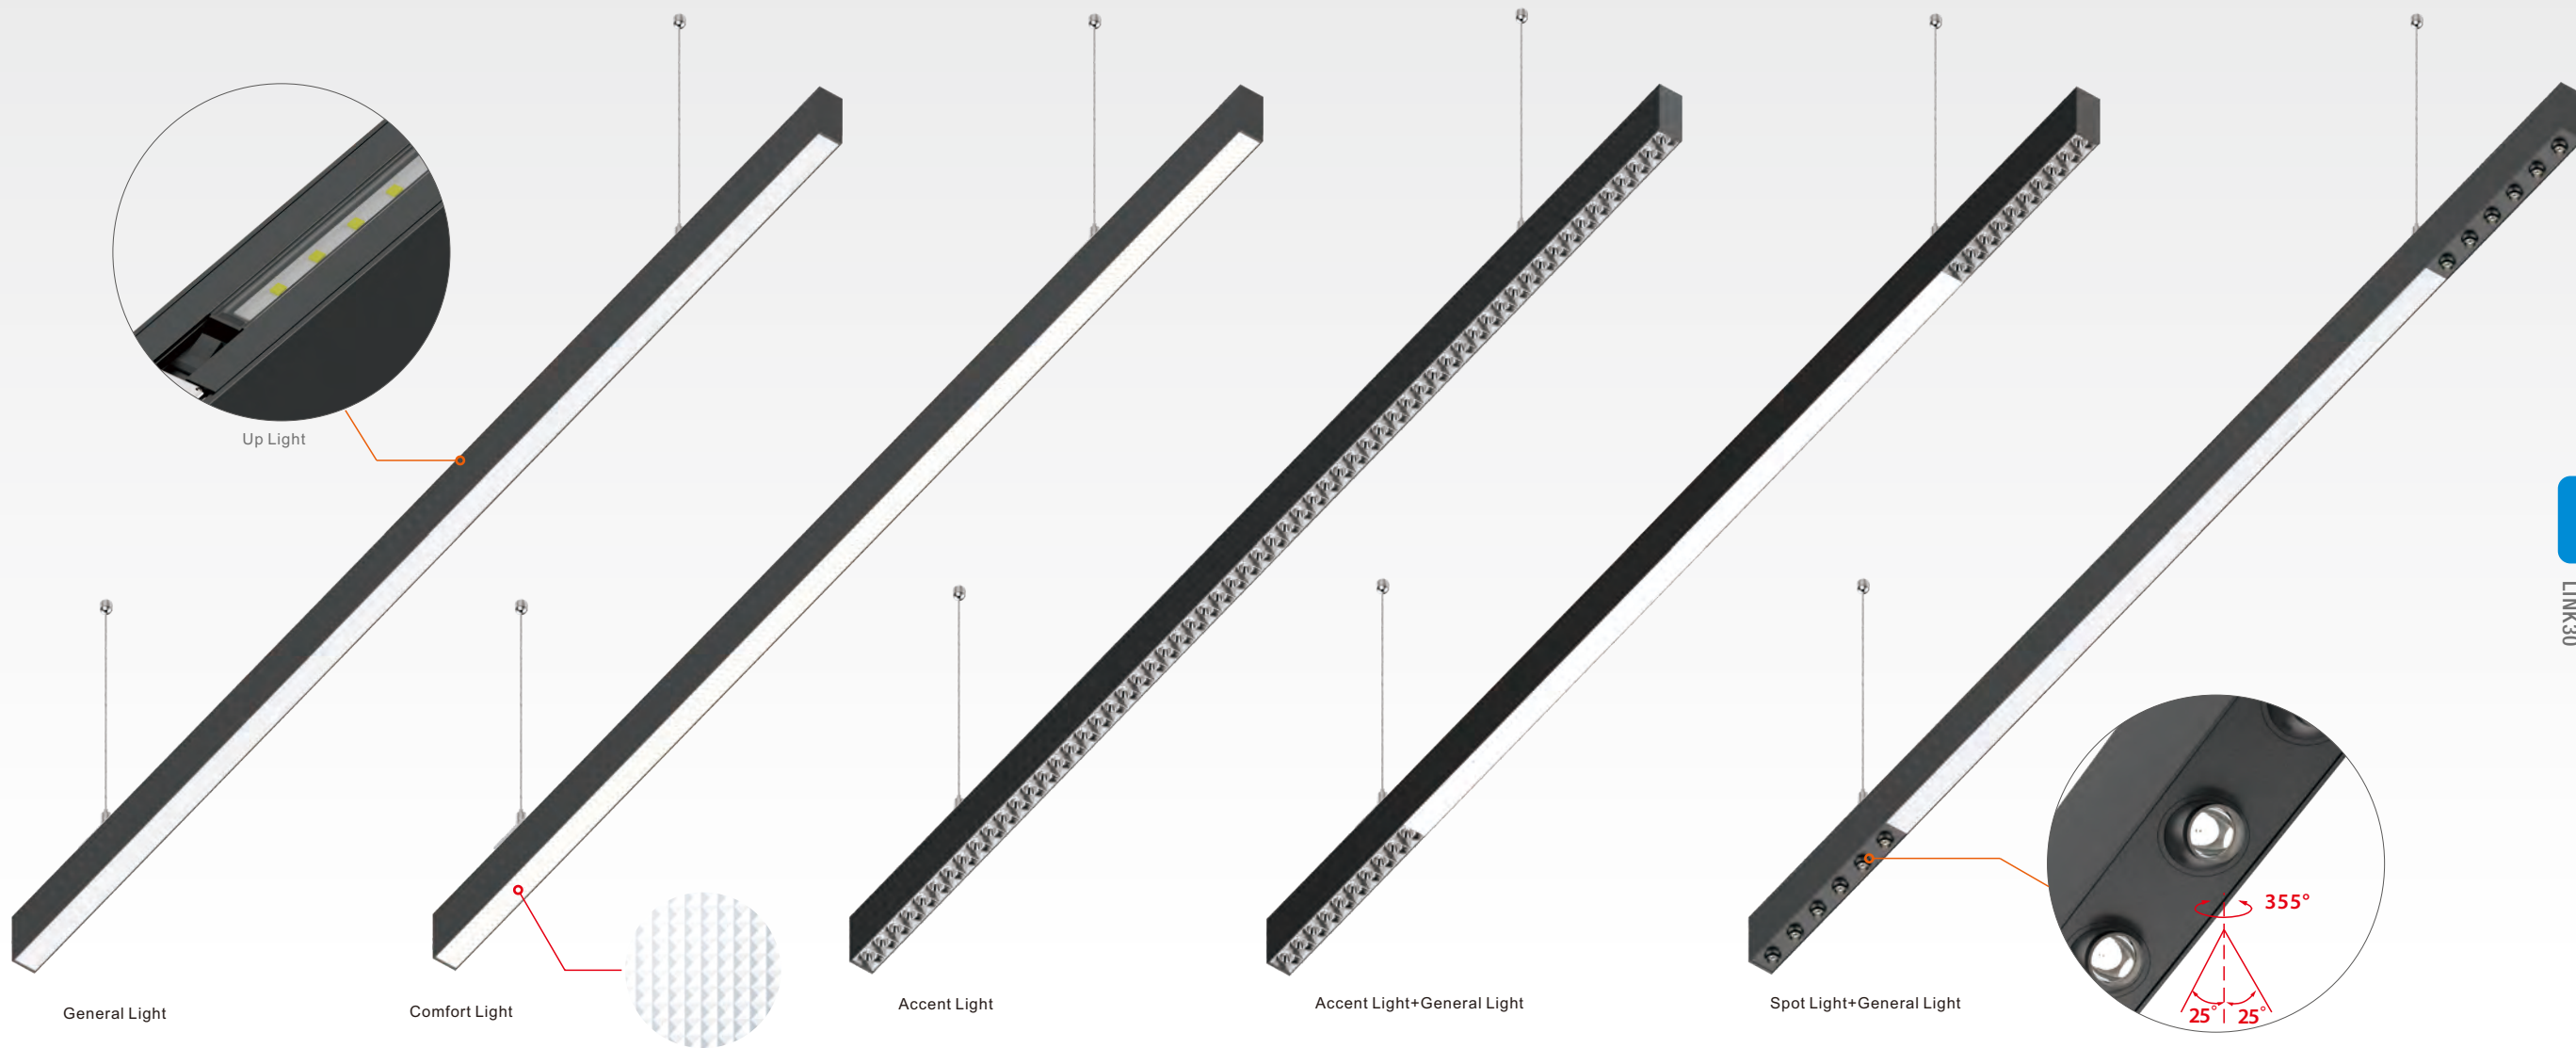

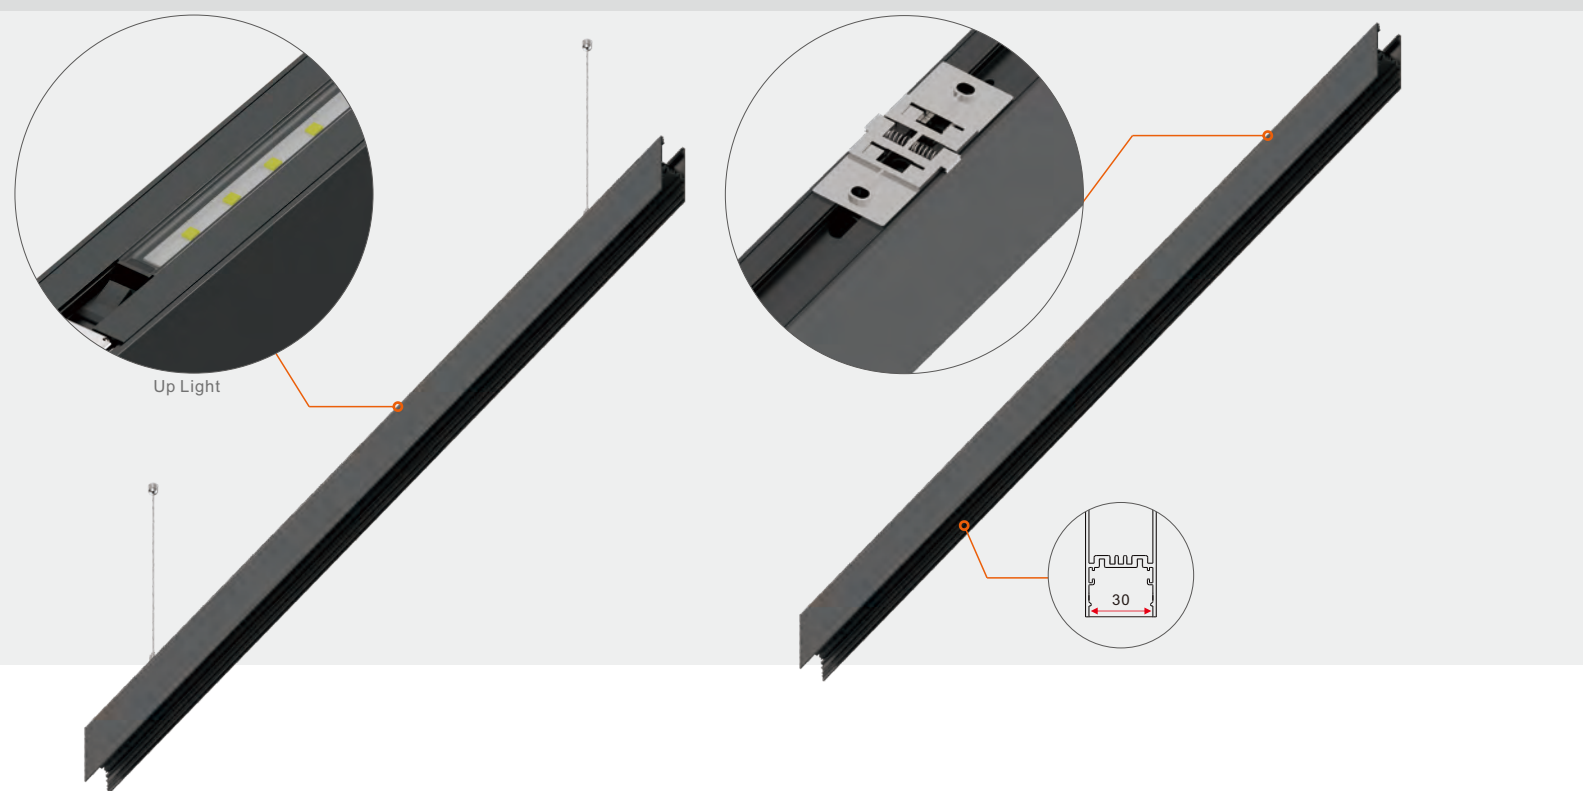

Suspended

Surface Mounted

Channels

Combination



General Light


Accent Light

Spot Light

Inserts




Standard





General Light

Accent Light

Accent Light
+General LightSpot Light
+General Light

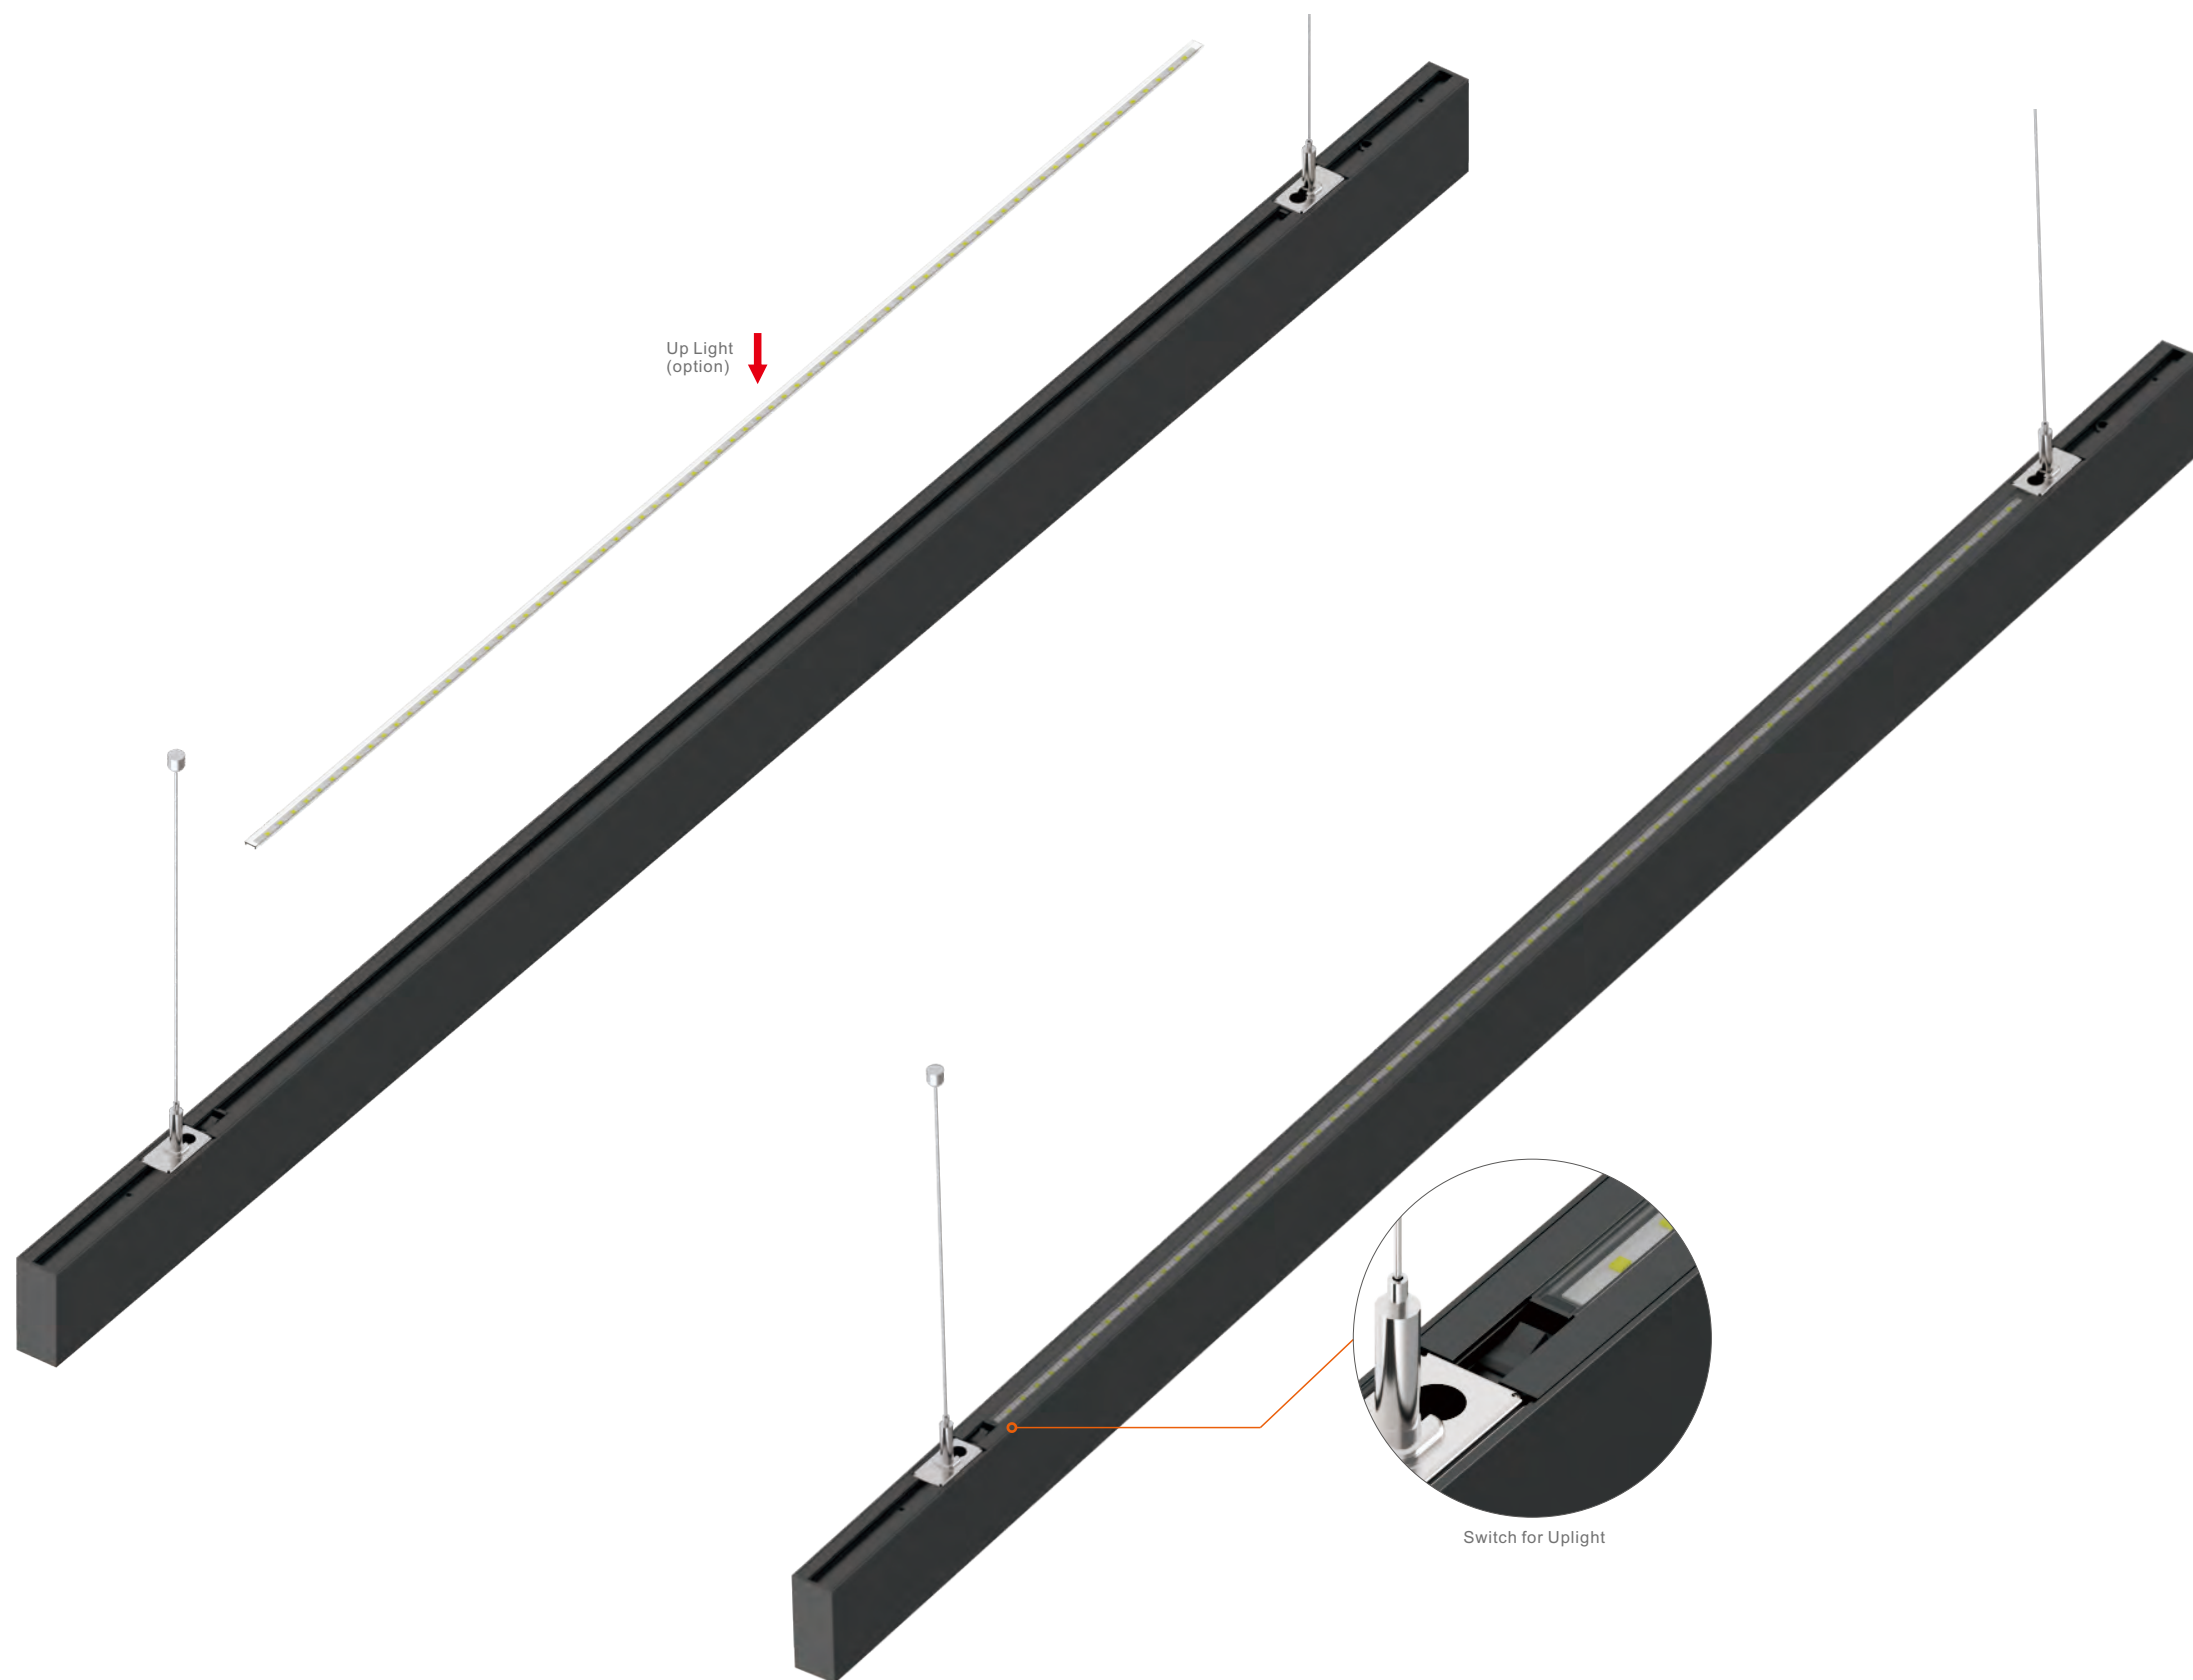

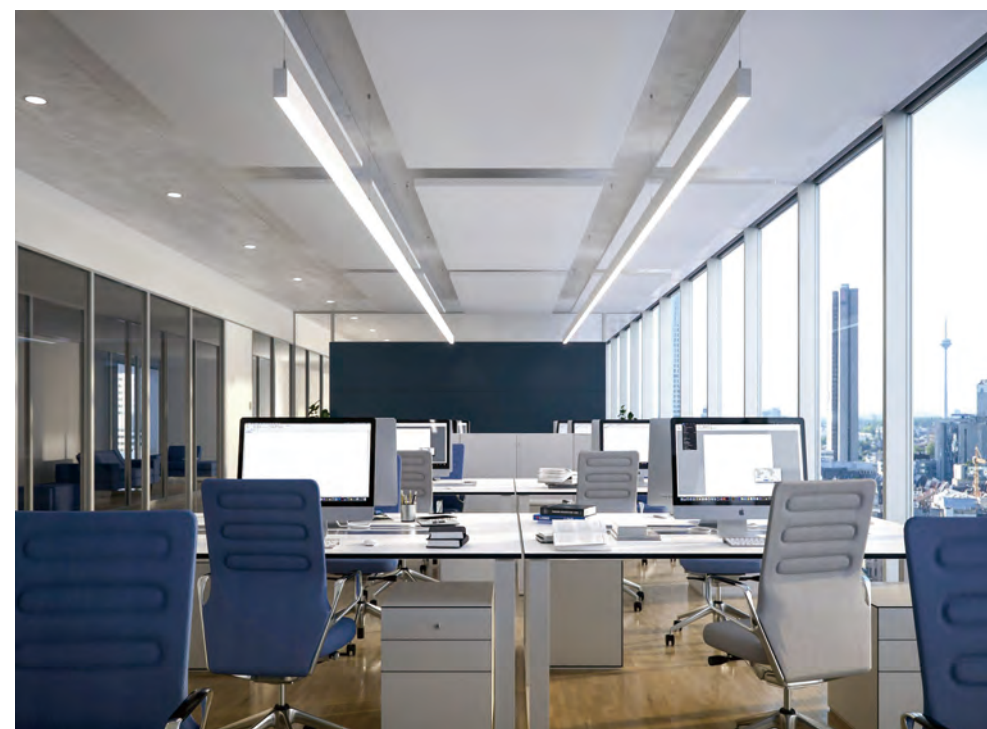

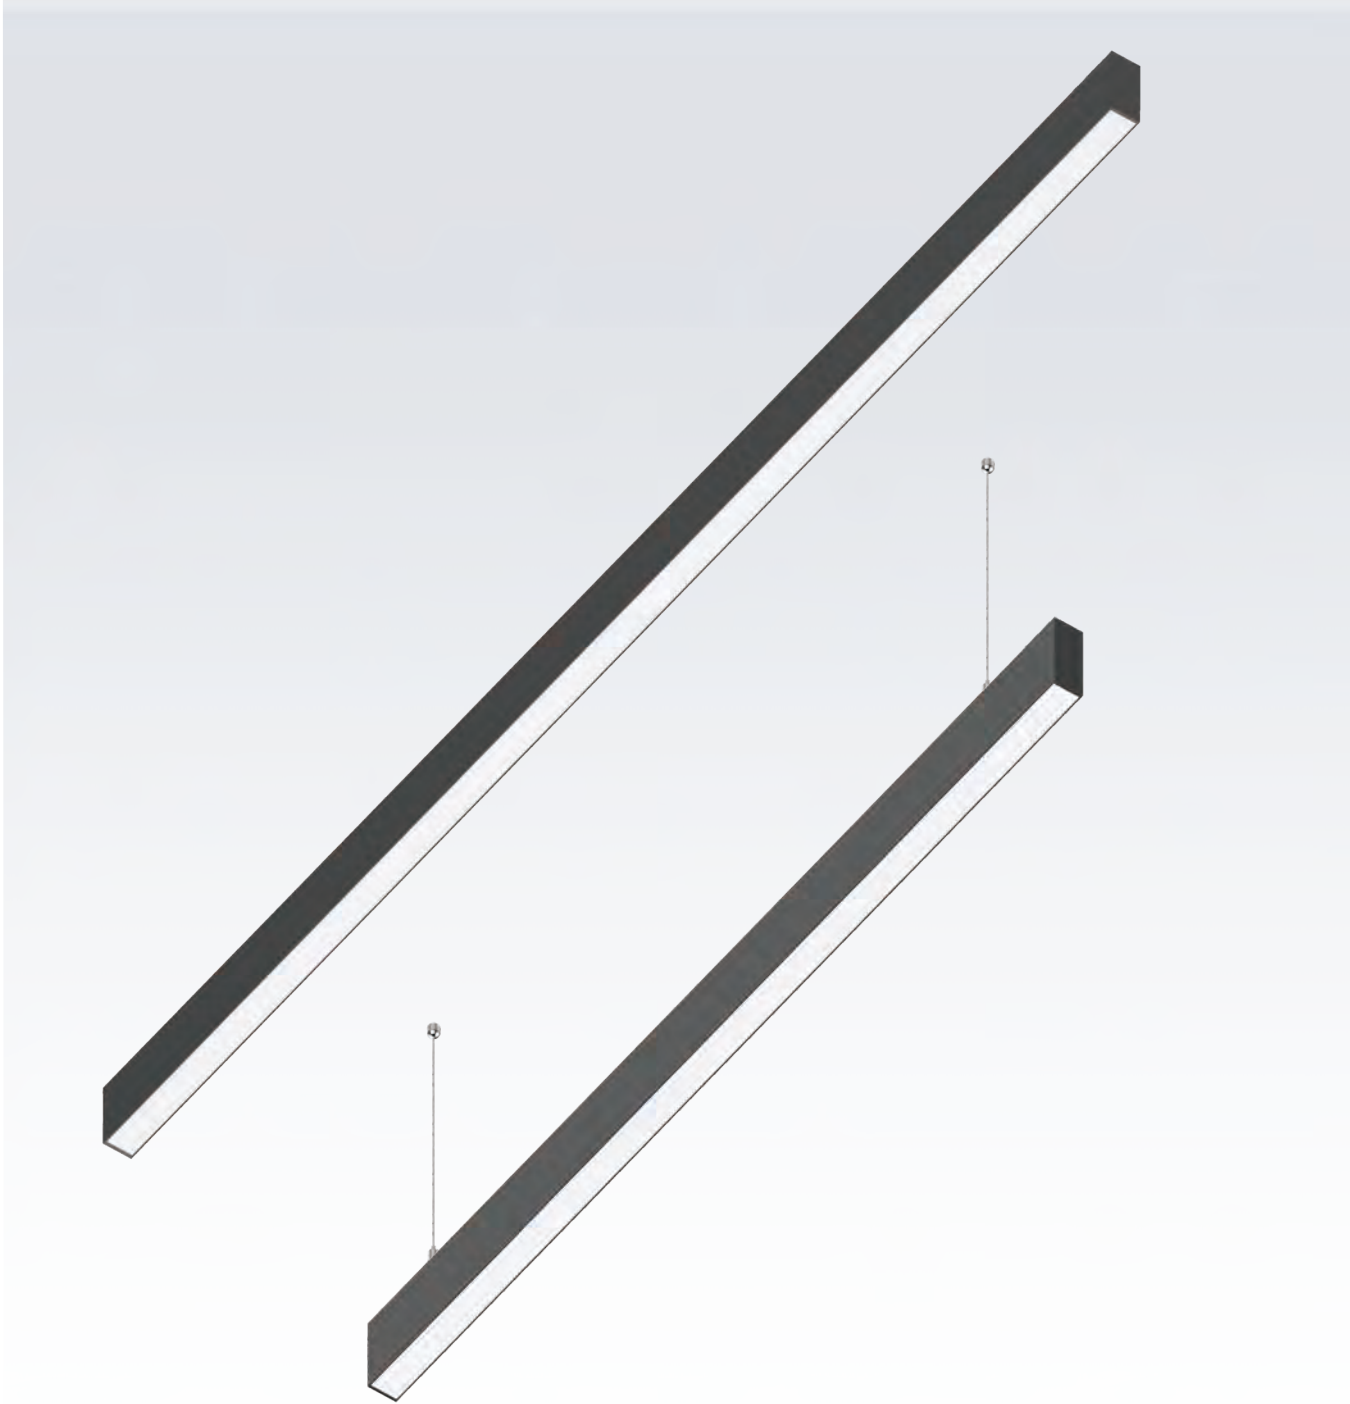

Order options

SYSYTEM POWER

36W
56W

COLOUR TEMPERATURE

3000K
4000K

COLOR RENDERING INDEX

CRI 80
CRI 90

ILLUMINATION TYPE




DIFFUSER




PROFILE LENGTH

1060MM
1590MM


PROFILE COLOUR



INSTALLATION TYPE



GL Fixture

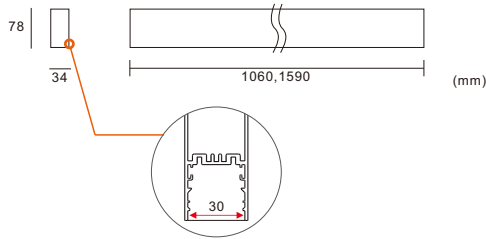

Light distribution

1060MM


Order Information

Link30-GL1060U-36W 3500-3800 Lm MODELS (SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-GL1060U-36W-830	4400 lm	2400 lm	1100 lm	32W	36W	80	3000K	110°	
Link30-GL1060U-36W-840	4600 lm	2600 lm	1200 lm	32W	36W	80	4000K	110°	

1590MM

Order Information

Link30-GL1590U-56W 5600-5900 Lm MODELS(SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-GL1590U-54W-830	6900 lm	4000 lm	1600 lm	48W	56W	80	3000K	110°	
Link30-GL1590U-54W-840	7200 lm	4200 lm	1700 lm	48W	56W	80	4000K	110°	

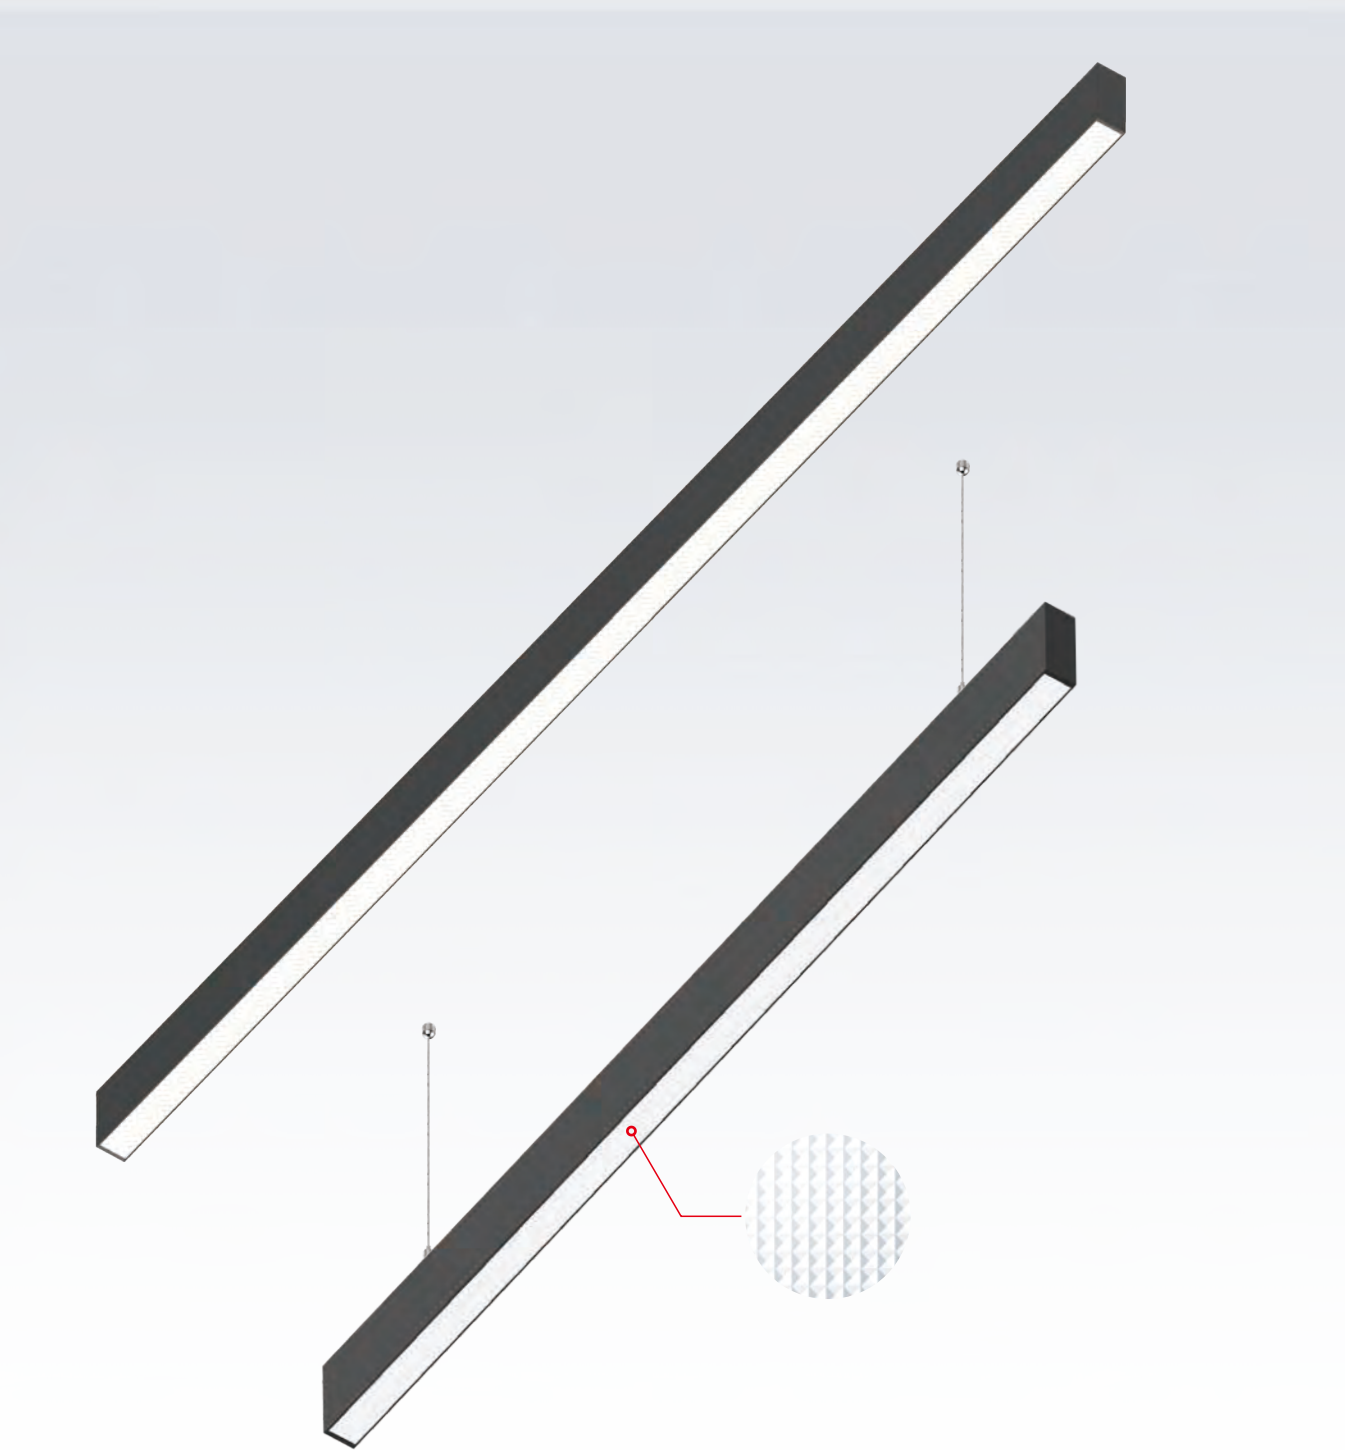

Order options

SYSYTEM POWER

36W

54W

COLOUR TEMPERATURE

3000K

4000K

COLOR RENDERING INDEX

CRI 80

CRI 90

ILLUMINATION TYPE

direct

indirect (option)

DIFFUSER

Microprismatic cover

PROFILE LENGTH

1060MM

1590MM

PROFILE COLOUR

sliver

white

black


INSTALLATION TYPE

direct

indirect

indirect

CL Fixture

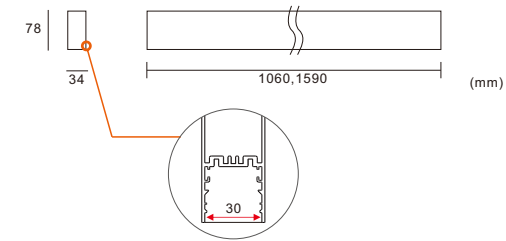


Light distribution

1060MM

Link30-CL1060U-36W 3300-3600 Lm MODELS (SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-CL1060U-36W-830	4400 lm	2200 lm	1100 lm	32W	36W	80	3000K	70°	
Link30-CL1060U-36W-840	4600 lm	2400 lm	1200 lm	32W	36W	80	4000K	70°	

1590MM

Link30-CL1590U-54W 5200-5500 Lm MODELS (SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-CL1590U-54W-830	6900 lm	3600 lm	1600 lm	48W	54W	80	3000K	70°	
Link30-CL1590U-54W-840	7200 lm	3800 lm	1700 lm	48W	54W	80	4000K	70°	

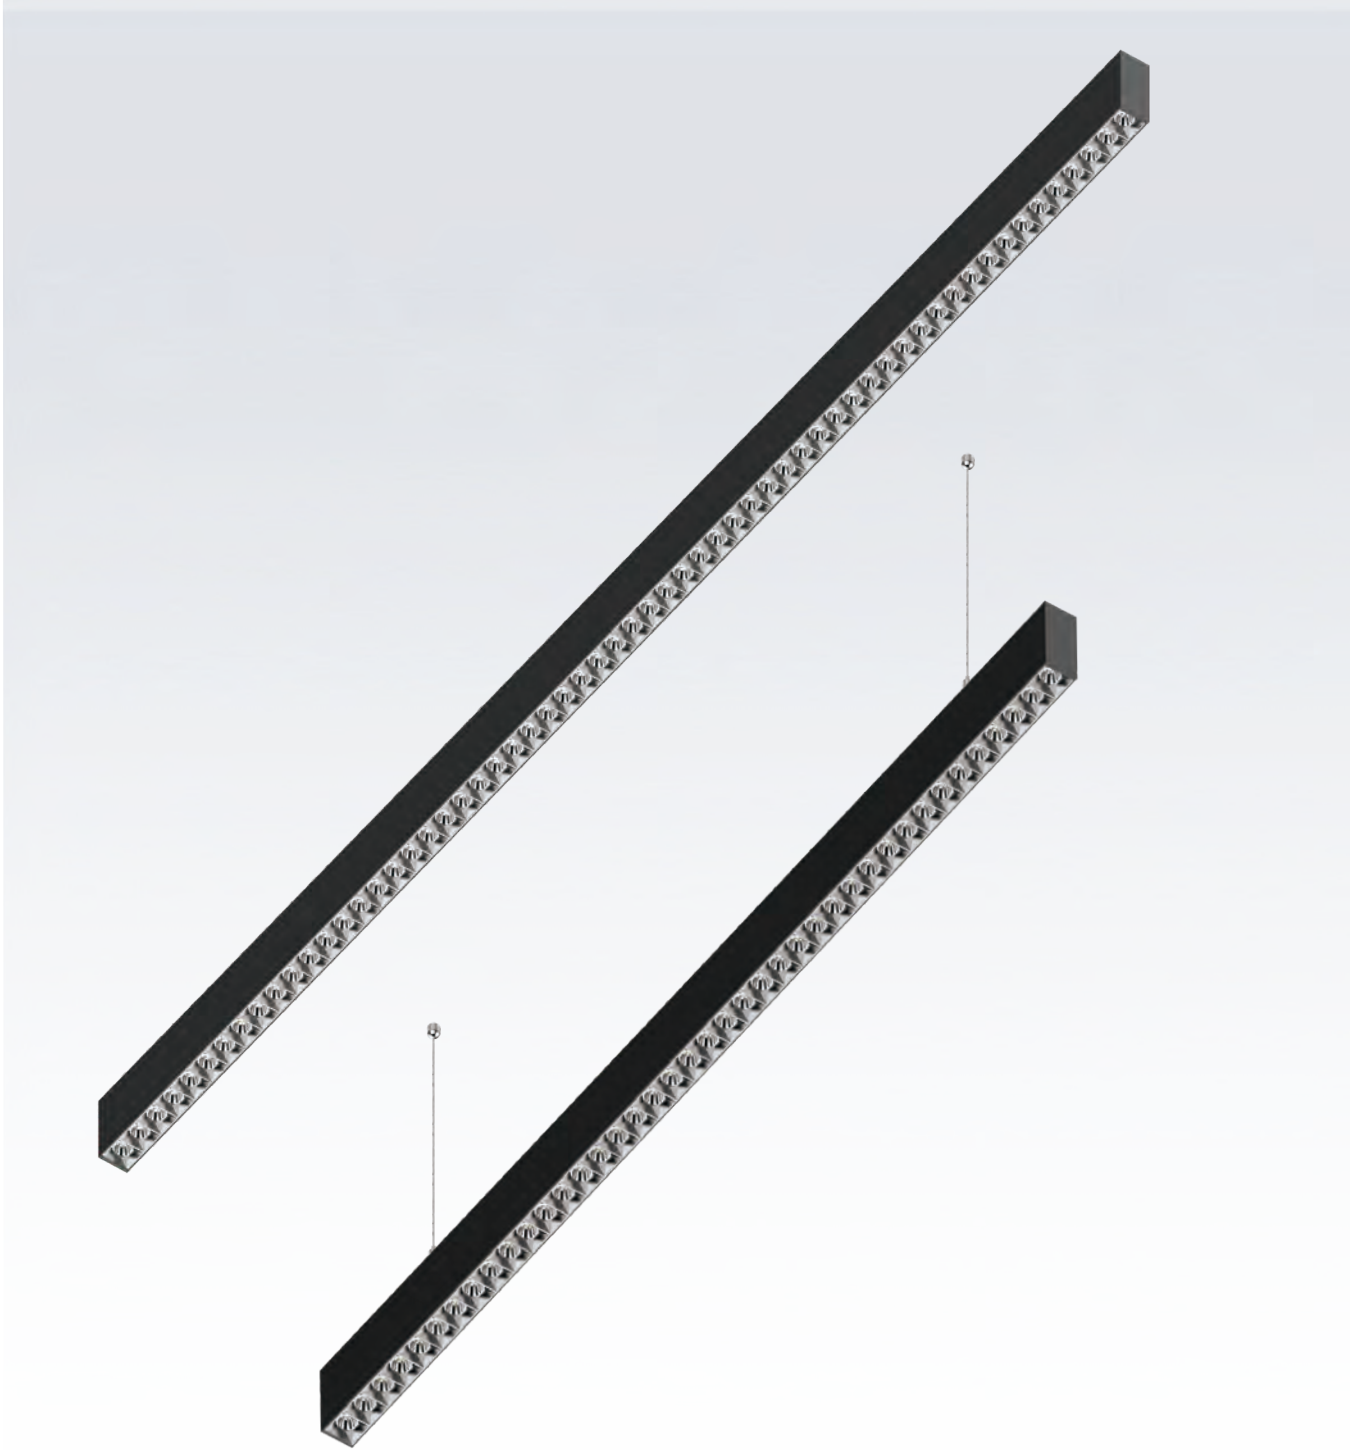

Order options

SYSYTEM POWER

36W
54W

COLOUR TEMPERATURE

3000K
4000K

COLOR RENDERING INDEX

CRI 80
CRI 90


ILLUMINATION TYPE




PROFILE LENGTH

1060MM
1590MM


PROFILE COLOUR



INSTALLATION TYPE



AL Fixture

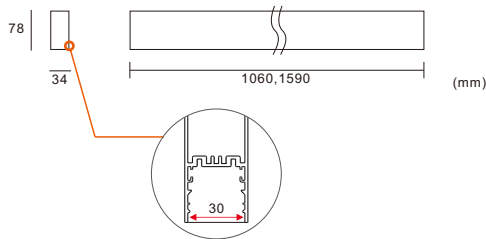

Light distribution

1060MM



Order Information

Link30-AL1060U-36W 3800-4100 Lm MODELS (SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-AL1060U-36W-830-15	4300 lm	2700 lm	1100 lm	32W	36W	80	3000K	15°	
Link30-AL1060U-36W-840-15	4500 lm	2900 lm	1200 lm	32W	36W	80	4000K	15°	
Link30-AL1060U-36W-830-35	4300 lm	2700 lm	1100 lm	32W	36W	80	3000K	35°	
Link30-AL1060U-36W-840-35	4500 lm	2900 lm	1200 lm	32W	36W	80	4000K	35°	
Link30-AL1060U-36W-830-60	4300 lm	2700 lm	1100 lm	32W	36W	80	3000K	60°	
Link30-AL1060U-36W-840-60	4500 lm	2900 lm	1200 lm	32W	36W	80	4000K	60°	

1590MM

Order Information

Link30-AL1590U-54W 5700-6000 Lm MODELS (SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-AL1590U-54W-830-15	6400 lm	4100 lm	1600 lm	48W	54W	80	3000K	15°	
Link30-AL1590U-54W-840-15	6700 lm	4300 lm	1700 lm	48W	54W	80	4000K	15°	
Link30-AL1590U-54W-830-35	6400 lm	4100 lm	1600 lm	48W	54W	80	3000K	35°	
Link30-AL1590U-54W-840-35	6700 lm	4300 lm	1700 lm	48W	54W	80	4000K	35°	
Link30-AL1590U-54W-830-60	6400 lm	4100 lm	1600 lm	48W	54W	80	3000K	60°	
Link30-AL1590U-54W-840-60	6700 lm	4300 lm	1700 lm	48W	54W	80	4000K	60°	

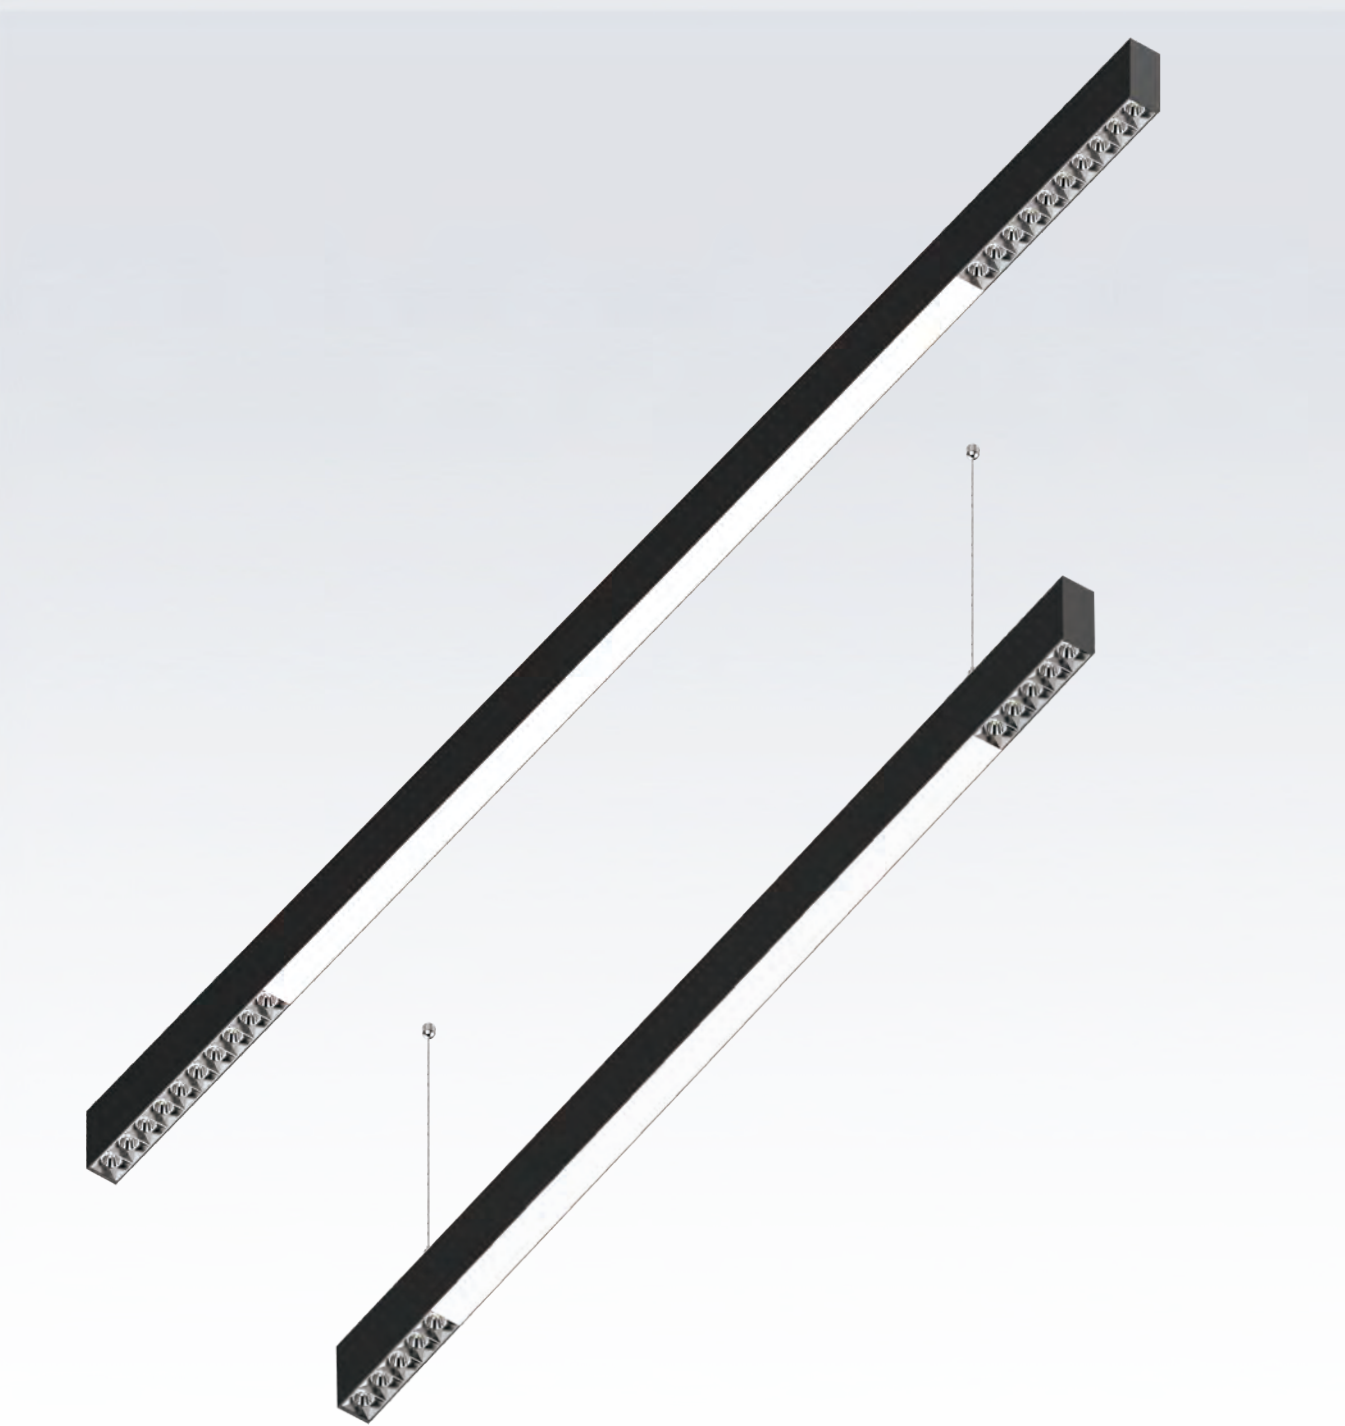

Order options

SYSYTEM POWER

36W
54W

COLOUR TEMPERATURE

3000K
4000K

COLOR RENDERING INDEX

CRI 80
CRI 90

ILLUMINATION TYPE



DIFFUSER




PROFILE LENGTH

1060MM
1590MM


PROFILE COLOUR



INSTALLATION TYPE



AL+GL Fixture

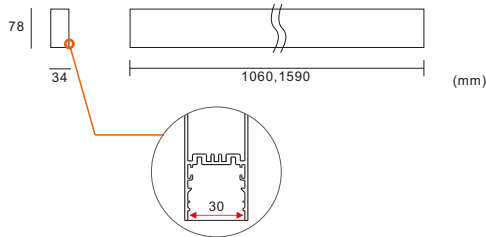

Light distribution

1060MM


Order Information

Link30-AL+GL-1060U-36W 3600-3900 Lm MODELS (SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-AL+GL-1060U-36W-830-15	4400 lm	2500 lm	1100 lm	32W	36W	80	3000K	15+110°	
Link30-AL+GL-1060U-36W-840-15	4600 lm	2700 lm	1200 lm	32W	36W	80	4000K	15+110°	
Link30-AL+GL-1060U-36W-830-35	4400 lm	2500 lm	1100 lm	32W	36W	80	3000K	35+110°	
Link30-AL+GL-1060U-36W-840-35	4600 lm	2700 lm	1200 lm	32W	36W	80	4000K	35+110°	
Link30-AL+GL-1060U-36W-830-60	4400 lm	2500 lm	1100 lm	32W	36W	80	3000K	60+110°	
Link30-AL+GL-1060U-36W-840-60	4600 lm	2700 lm	1200 lm	32W	36W	80	4000K	60+110°	

1590MM

Order Information

Link30-AL+GL-1590U-54W 5600-5900 Lm MODELS (SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-AL+GL-1590U-54W-830-15	6900 lm	4000 lm	1600 lm	48W	54W	80	3000K	15+110°	
Link30-AL+GL-1590U-54W-840-15	7200 lm	4200 lm	1700 lm	48W	54W	80	4000K	15+110°	
Link30-AL+GL-1590U-54W-830-35	6900 lm	4000 lm	1600 lm	48W	54W	80	3000K	35+110°	
Link30-AL+GL-1590U-54W-840-35	7200 lm	4200 lm	1700 lm	48W	54W	80	4000K	35+110°	
Link30-AL+GL-1590U-54W-830-60	6900 lm	4000 lm	1600 lm	48W	54W	80	3000K	60+110°	
Link30-AL+GL-1590U-54W-840-60	7200 lm	4200 lm	1700 lm	48W	54W	80	4000K	60+110°	

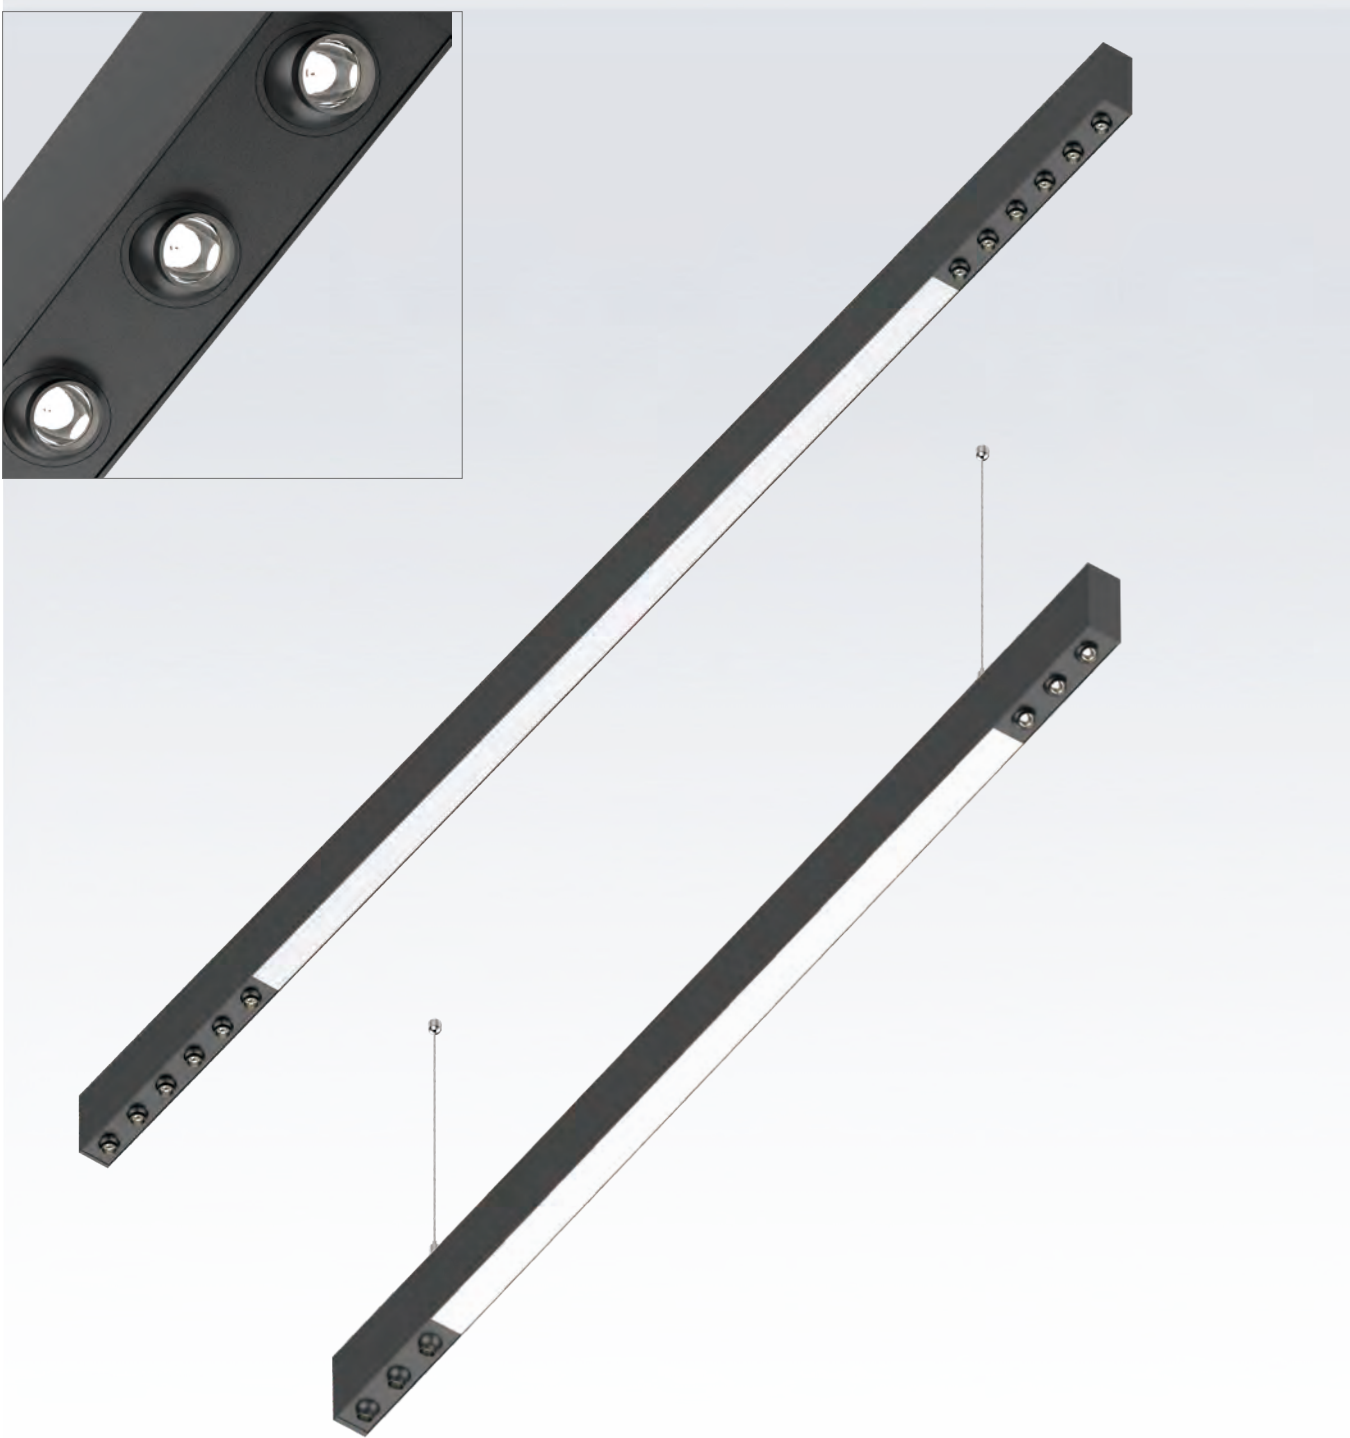

Order options

SYSYTEM POWER

42W
66W

COLOUR TEMPERATURE

3000K
4000K

COLOR RENDERING INDEX

CRI 80
CRI 90

ILLUMINATION TYPE



DIFFUSER




PROFILE LENGTH

1060MM
1590MM


PROFILE COLOUR



INSTALLATION TYPE



SL+GL Fixture

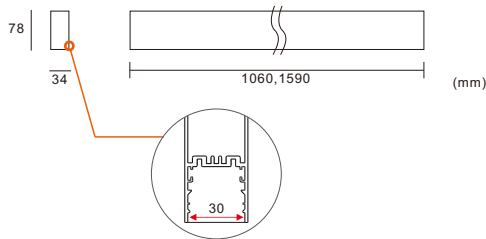

Light distribution

1060MM

Order Information

Link30-SL+GL-1060U-42W 3600-3900 Lm MODELS (OSRAM+SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-SL+GL-1060U-42W-830-15	4300 lm	2500 lm	1100 lm	38W	42W	80	3000K	15+110°	
Link30-SL+GL-1060U-42W-840-15	4500 lm	2700 lm	1200 lm	38W	42W	80	4000K	15+110°	
Link30-SL+GL-1060U-42W-830-25	4300 lm	2500 lm	1100 lm	38W	42W	80	3000K	25+110°	
Link30-SL+GL-1060U-42W-840-25	4500 lm	2700 lm	1200 lm	38W	42W	80	4000K	25+110°	

1590MM

Order Information

Link30-SL+GL-1590U-66W 5600-5900 Lm MODELS (OSRAM+SAMSUNG LED)									
Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM	
Link30-SL+GL-1590U-66W-830-15	6900 lm	4000 lm	1600 lm	60W	66W	83	3000K	15+110°	
Link30-SL+GL-1590U-66W-840-15	7200 lm	4200 lm	1700 lm	60W	66W	83	4000K	15+110°	
Link30-SL+GL-1590U-66W-830-25	6900 lm	4000 lm	1600 lm	60W	66W	83	3000K	25+110°	
Link30-SL+GL-1590U-66W-840-25	7200 lm	4200 lm	1700 lm	60W	66W	83	4000K	25+110°	