

YOUR OEM/ODM PARTNER

Architectural Lighting

Technical Lighting

Commercial Lighting

Headquarters

Office:

10/F, Building A, Sen Yang High-Tech Park,
KeLian Road, GuangMing Hign-Tech Area,
GuangMing District, Shenzhen, China.

Tel: (+86) 755 3669 7711
E-mail: Sales@e-litelighting.com
www.e-litelighting.com

Factory:

Nairui Industrial Park, No.9, Xin Le Wu Road,
Ma'an Town, Huicheng District,
Huizhou, Guangdong, China



NORTH AMERICA MARKET

23



Huizhou Factory Building **new**



Huizhou Factory Building

About Us

E-Lite Lighting Co., Ltd. is a trusted OEM/ODM/NDA partner to many global lighting brands due to specialization in professional LED commercial & architectural lighting design, development and production since 2007.

Our reliable production facility, laboratory and design capability enable partners to realize the best implementation of their ideal concepts and launch cutting edge new products to build brands and markets in their countries with minimal operations investment.

E-Lite's team has decades of experience in lighting industry and can provide high quality and professional comprehensive lighting solutions for customers.


Index

1 Low Voltage Linear Light




LINE X26 04-49

2 High Voltage Linear Light



LINK30 50-59



QUICK50 60-79

3 Surface & Pendant



LUCIA 80-91



FLATIA 80-91

4 Downlight



START 92-113



V68 114-119



DOME 120-137



VTRIM 138-159




LEDGO 160-175



LINE X 26

LineX 26 DC48V Track

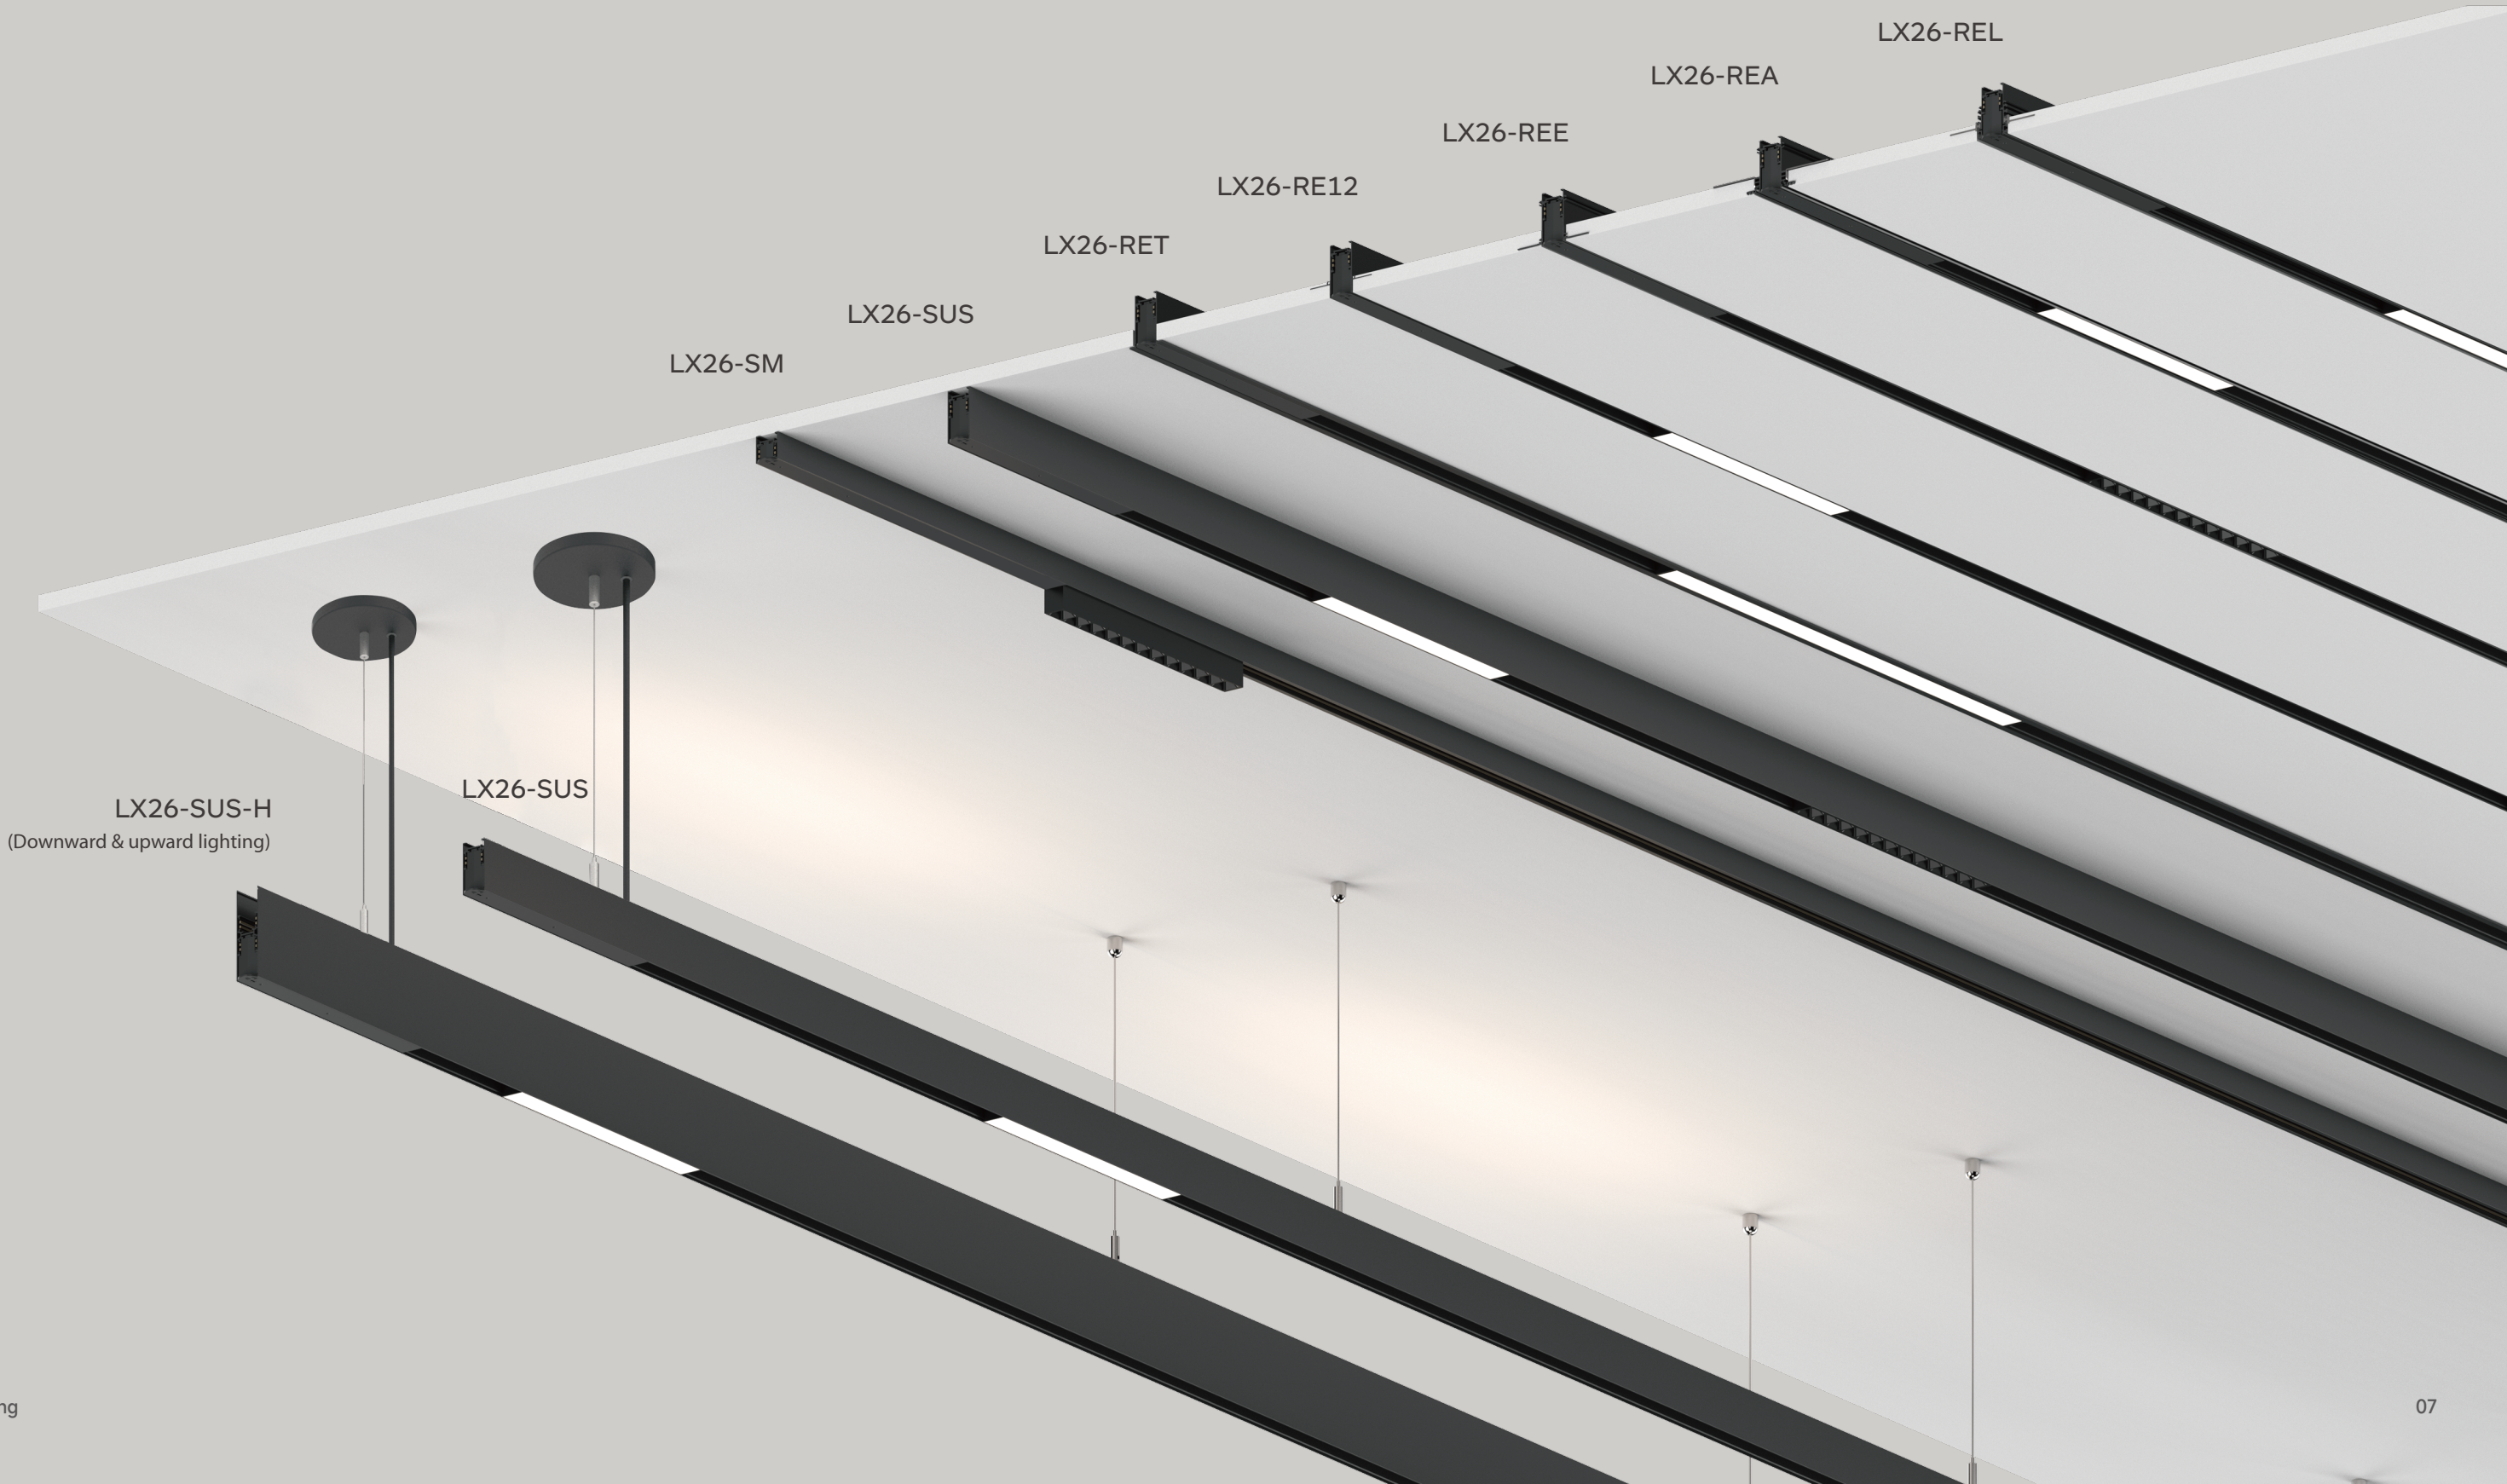




1
Surface-mounted
Track



LX26-SM
Surface-mounted




LX26-SUS
Standard track




2
Suspended
Track




LX26-SUS-H
Downward & upward lighting



LX26-SUS
Standard track

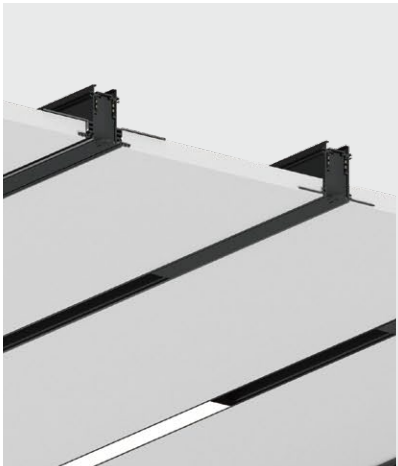

3
Recessed
Track



LX26-RET
With trim



LX26-RE12
Compatible with 1/2" ceiling



LX26-REE
Easy installation



LX26-REA
With adjustable trimless
recessed installation kit



LX26-REL
Compatible with various
thickness of ceiling




LineX 26 DC48V Track



Surface-mounted

Surface-mounted Track

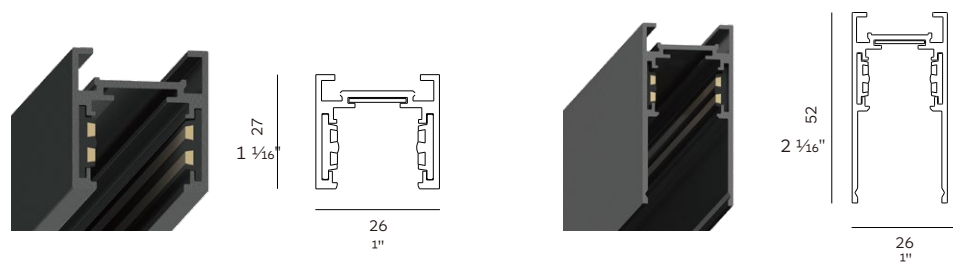

Order Options

Code	Description	Length(mm)	Power supply	Installation
LX26-SM	surface-mounted	1000/2000/3000	built-in available	surface-mounted
LX26-SUS	standard	1000/2000/3000	built-in available	surface-mounted, suspended

Accessories

LX26-SM



LX26-LC



LX26-FEC01



LX26-SM-TEK



LX26-SM-TEKO



LX26-SM-LHC



LX26-SM-LVC



LX26-SM-LOC



LX26-SM-TC-Left



LX26-SM-TC-Right



LX26-SM-XC



LX26-SMK

HLG-40H-48 HLG-120H-48
HLG-60H-48 HLG-150H-48
HLG-80H-48 HLG-240H-48
HLG-100H-48 *(optional)



LX26-EJC01



LX26-PLF01



LX26-LEF01

LX26-SUS



LX26-LC




LX26-FEC01



LX26-SUS-TEK




LX26-SUS-TEKO



LX26-SUS-LHC




LX26-SUS-LVC



LX26-SUS-LOC



LX26-SUS-TC-Left



LX26-SUS-TC-Right



LX26-SUS-XC



LX26-SMK

HLG-40H-48 HLG-120H-48
HLG-60H-48 HLG-150H-48
HLG-80H-48 HLG-240H-48
HLG-100H-48 *(optional)



LX26-EJC01




LX26-PLF01




LX26-LEF01

LINE X 26 Series
Low Voltage Linear Light

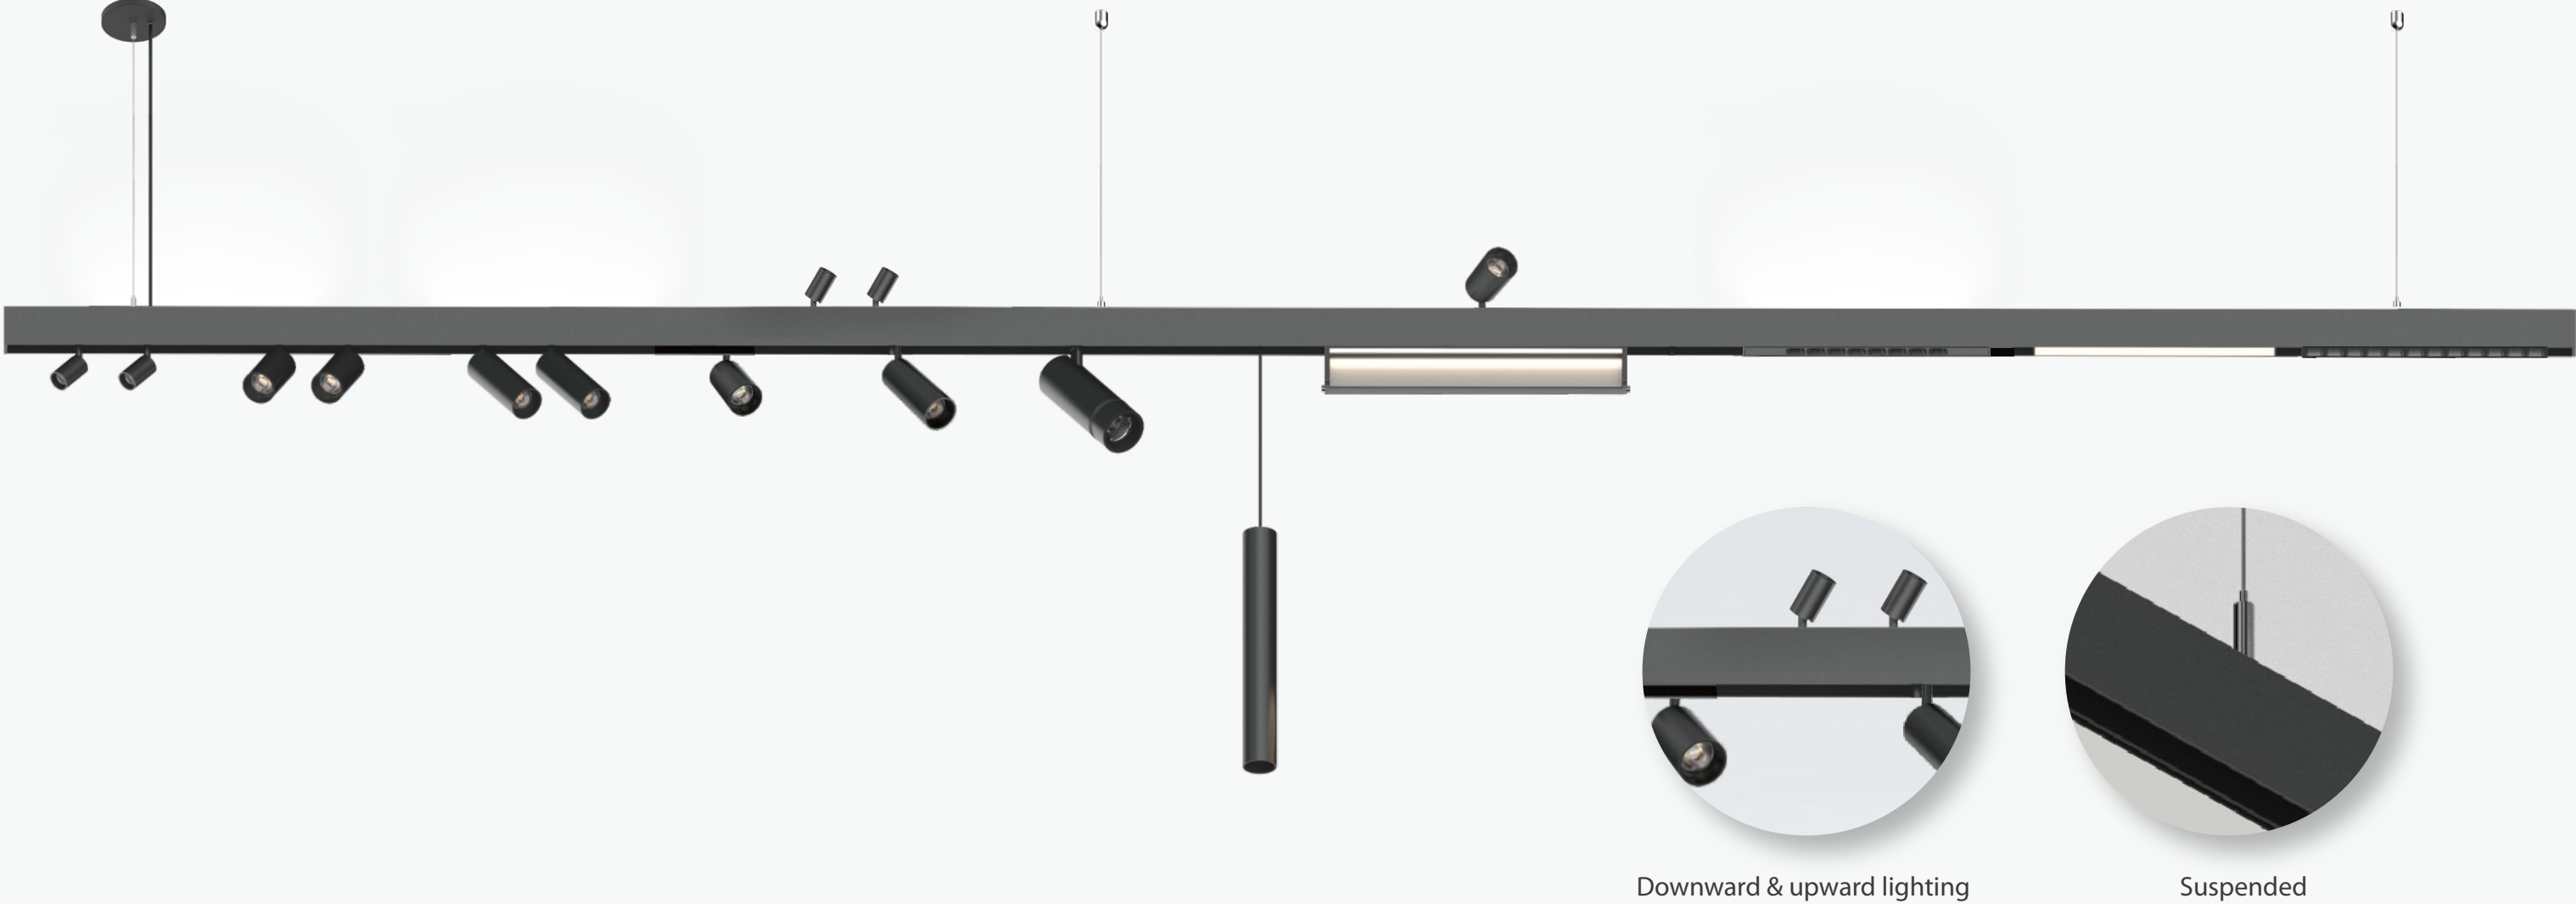

Suspended Track

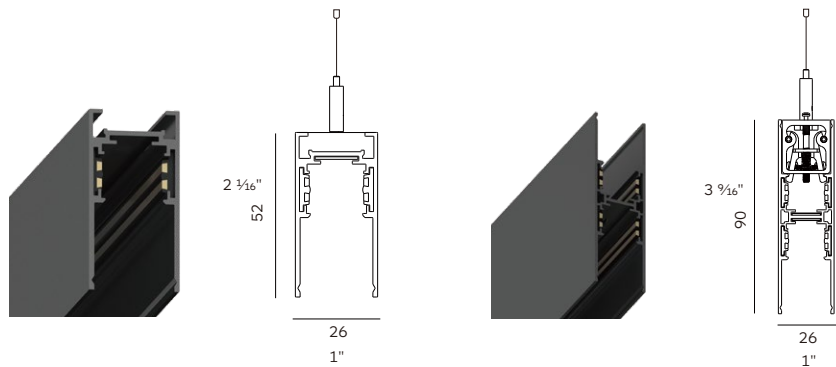

Order Options



Code	Description	Length(mm)	Power supply	Installation
LX26-SUS	standard	1000/2000/3000	built-in available	suspended
LX26-SUS-H	downward & upward lighting	1000/2000/3000	built-in available	suspended

Accessories


LX26-SUS



LX26-SUS-H

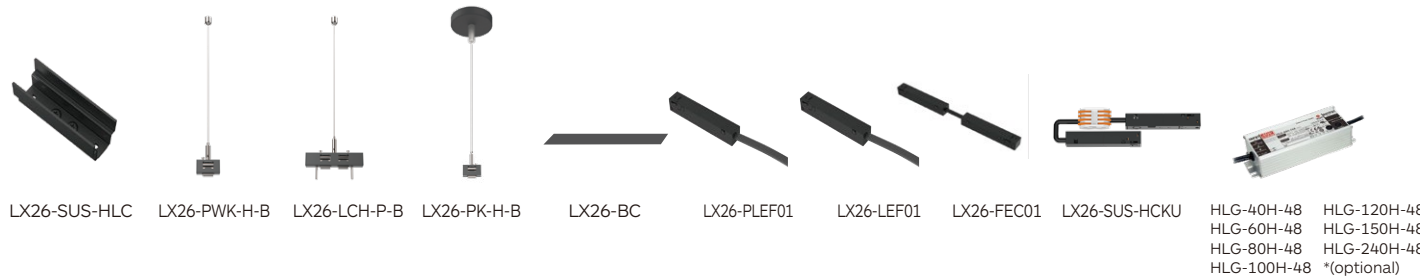

LINE X 26 Series
Low Voltage Linear Light

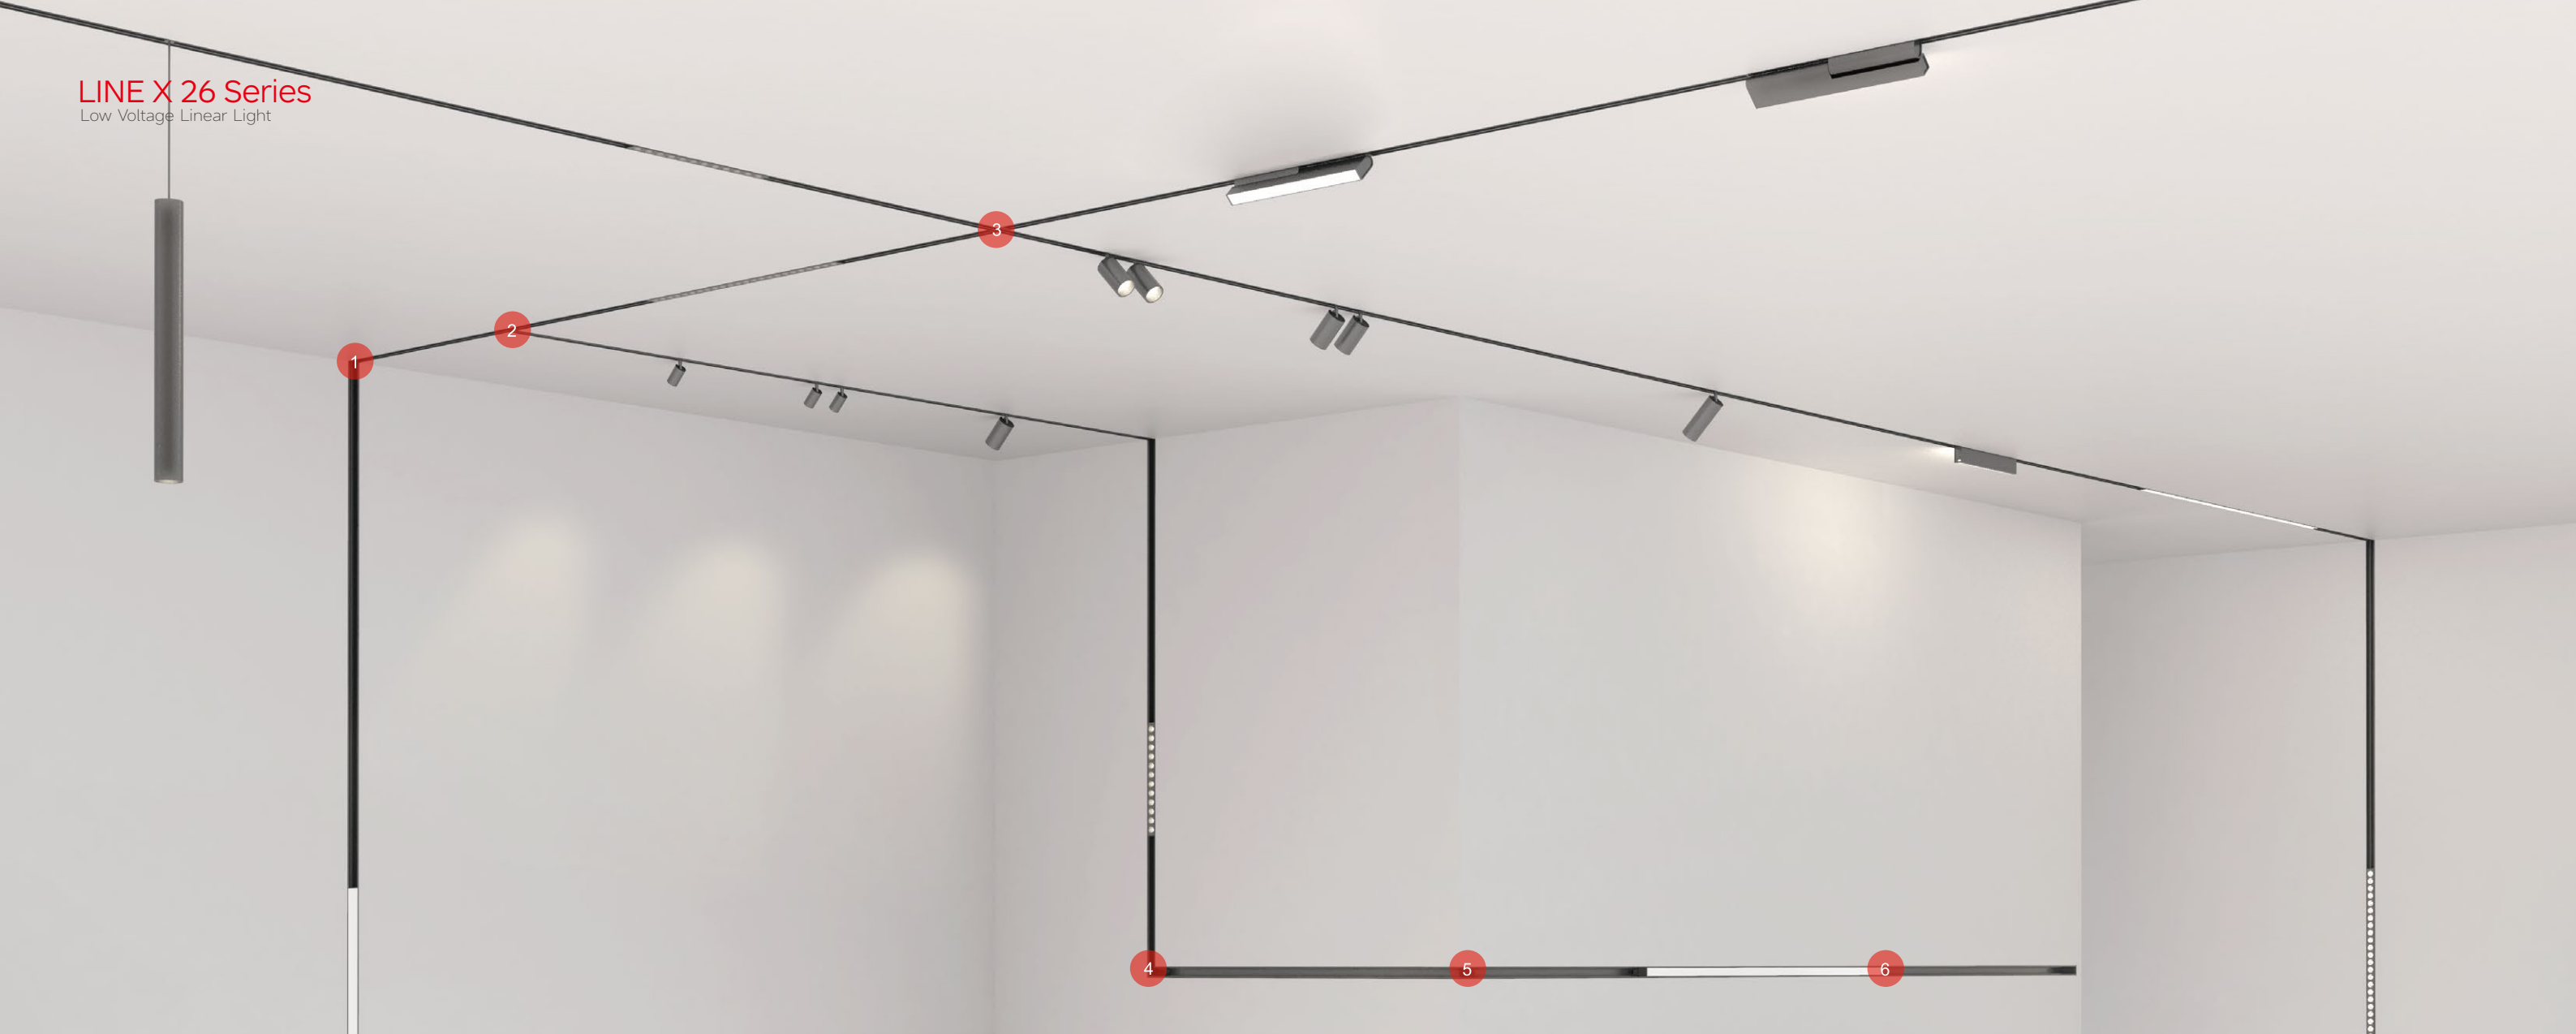

Recessed Track



LX26-RET



LX26-RE12



LX26-REE



LX26-REA



LX26-REL

Corner

1. 'L'shape vertical corner

2. 'T'shape corner

3. 'X'shape corner
4. 'L'shape corner

5. 'L'shape outer corner

6. Linear connector


Order Options

Code	Description	Length(mm)	Power supply	Installation
LX26-RET	with trim	1000/2000/3000	built-in available	recessed with trim
LX26-RE12	compatible with ½" ceiling	1000/2000/3000	built-in available	trimless recessed
LX26-REE	easy installation	1000/2000/3000	built-in available	trimless recessed
LX26-REA	with adjustable trimless recessed installation kit	1000/2000/3000	built-in available	trimless recessed
LX26-REL	compatible with various thickness of ceiling	1000/2000/3000	built-in available	trimless recessed


Accessories





LX26-RET

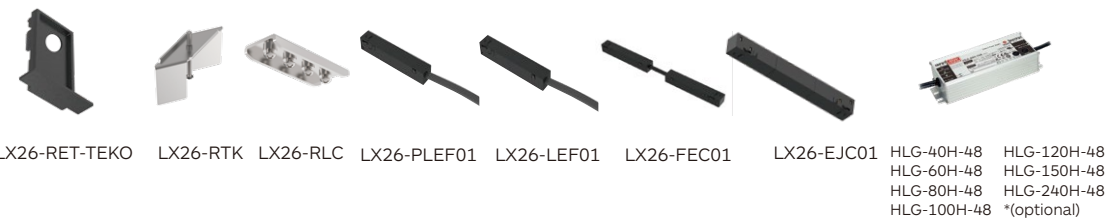

LX26-RE12

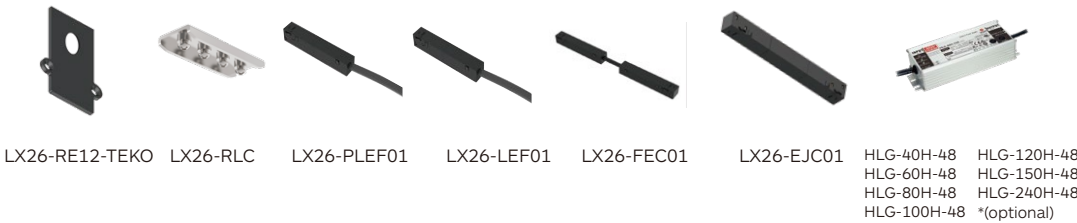



LX26-REE

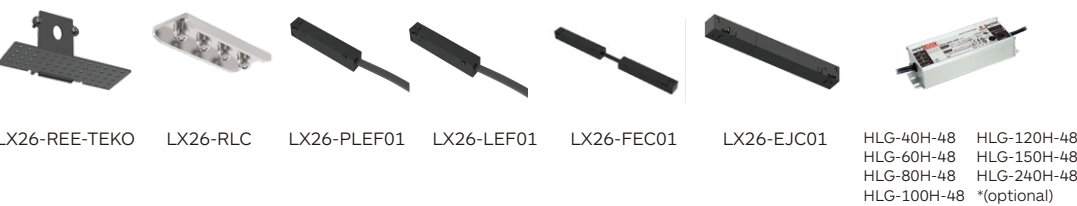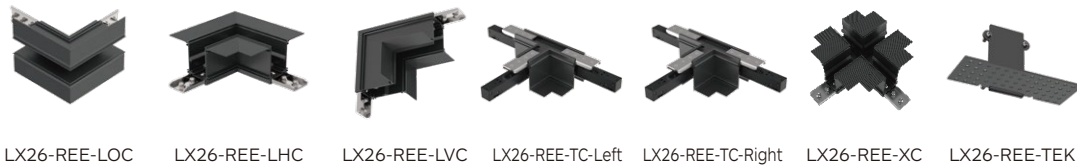

Accessories



LX26-REA

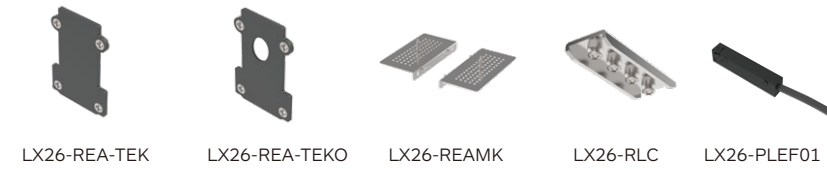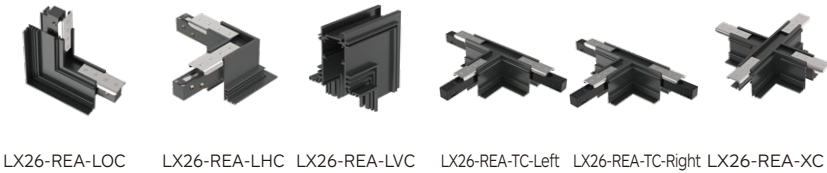


LX26-REL



*Several plastic anti-deformation accessories have been put into the tracks, so the tracks can remain the original shape, despite that they are installed into the ceiling board.


Installation

Surface-mounted track

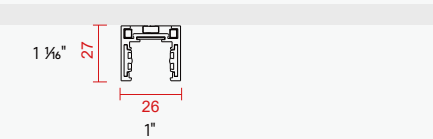


Code: LX26-SM
Description: surface-mounted
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white

Surface-mounted track




Code: LX26-SUS
Description: standard
Length: 1000/2000/3000(mm)
Color:RAL9005 black, RAL9016 white

Suspended track

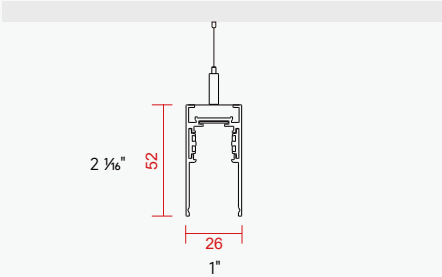


Code: LX26-SUS
Description: standard
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white

Suspended track




Code: LX26-SUS-H
Description: downward & upward lighting
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white

Recessed track




Code: LX26-RET
Description: with trim
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white


Recessed track

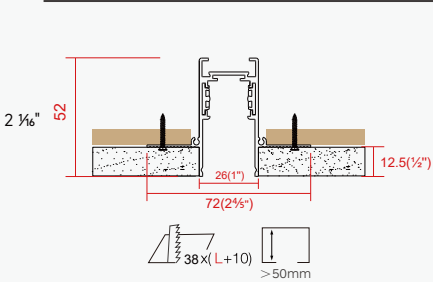


Code: LX26-RE12
Description: compatible with 1/2" ceiling
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white



Code: LX26-REE
Description: easy installation
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white



Code: LX26-REA
Description: with adjustable trimless recessed installation kit
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white
*Compatible with the ceiling of thickness between 12.5-20.5mm

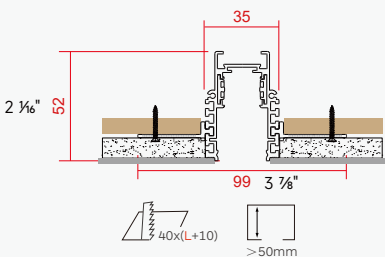

Code: LX26-REL
Description: compatible with various thickness of ceiling
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white
*Compatible with the ceiling of thickness: 5mm/9mm/12.5mm/15mm/18mm/20mm/25mm

**All dimensions in the catalogue in mm*

Inserts for track

Spotlight Insert



LX26-RS25-3W



LX26-RS25-5W



LX26-RS40-8W



LX26-RS40-16W



LX26-RS40-12W



LX26-RS40-24W



LX26-RT55-10W



LX26-RS72-19W
LX26-RS72-26W




LX26-WRS96-9W

Accent Light Insert



LX26-AL190-S2-3W



LX26-AL190-S6-7W



LX26-AL280-S8-9W



LX26-AL280-S12-13W



LX26-SA280-13W



LX26-Rita315-15W



LX26-AL-A-280-13W
LX26-AL-A-560-26W

Inserts for track

General light insert



Downlight insert



Decorative light insert



Comfort light insert



Wall washer insert






Spotlight Insert



Drawings

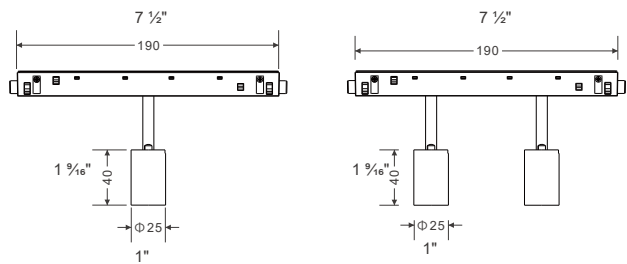

Order Options


LX26-RS25-3W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-RS40-3W-930-18	180Lm	3W	DC48V	90	3000K	18°
LX26-RS40-3W-940-18	190Lm				4000K	
LX26-RS40-3W-930-30	180Lm	3W	DC48V	90	3000K	30°
LX26-RS40-3W-940-30	190Lm				4000K	
LX26-RS40-3W-930-45	180Lm	3W	DC48V	90	3000K	45°
LX26-RS40-3W-940-45	190Lm				4000K	
LX26-RS25-5W						
LX26-RS40-5W-930-18	350Lm	5W	DC48V	90	3000K	18°
LX26-RS40-5W-940-18	380Lm				4000K	
LX26-RS40-5W-930-30	350Lm	5W	DC48V	90	3000K	30°
LX26-RS40-5W-940-30	380Lm				4000K	
LX26-RS40-5W-930-45	350Lm	5W	DC48V	90	3000K	45°
LX26-RS40-5W-940-45	380Lm				4000K	



Spotlight Insert



Drawings

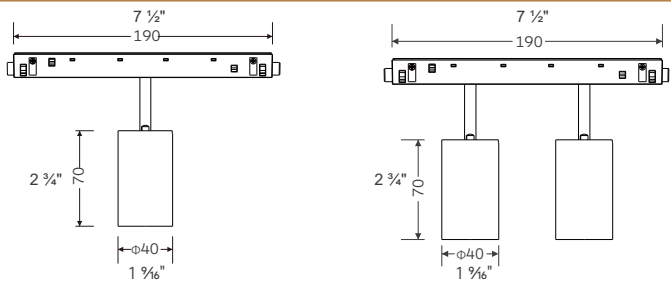

Order Options

LX26-RS40-8W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-RS40-8W-930-18	580Lm	8W	DC48V	90	3000K	18°
LX26-RS40-8W-940-18	620Lm				4000K	
LX26-RS40-8W-930-30	580Lm	8W	DC48V	90	3000K	30°
LX26-RS40-8W-940-30	620Lm				4000K	
LX26-RS40-8W-930-45	580Lm	8W	DC48V	90	3000K	45°
LX26-RS40-8W-940-45	620Lm				4000K	
LX26-RS40-16W						
LX26-RS40-16W-930-18	1100Lm	16W	DC48V	90	3000K	18°
LX26-RS40-16W-940-18	1200Lm				4000K	
LX26-RS40-16W-930-30	1100Lm	16W	DC48V	90	3000K	30°
LX26-RS40-16W-940-30	1200Lm				4000K	
LX26-RS40-16W-930-45	850Lm	16W	DC48V	90	3000K	45°
LX26-RS40-16W-940-45	900Lm				4000K	


LINE X 26 Series
Low Voltage Linear Light



Spotlight Insert




Drawings

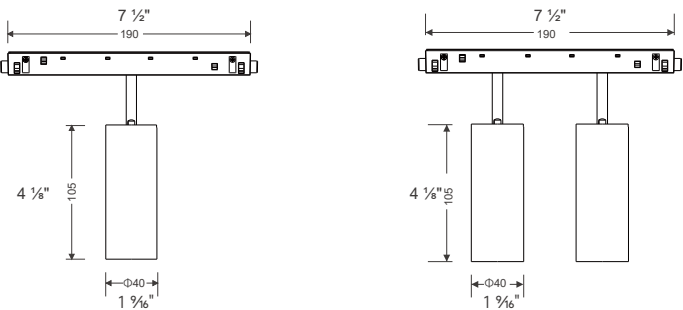

Order Options


LX26-RS40-12W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-RS40-12W-930-18	750Lm	12W	DC48V	90	3000K	18°
LX26-RS40-12W-940-18	800Lm				4000K	
LX26-RS40-12W-930-30	750Lm	12W	DC48V	90	3000K	30°
LX26-RS40-12W-940-30	800Lm				4000K	
LX26-RS40-12W-930-45	600Lm	12W	DC48V	90	3000K	45°
LX26-RS40-12W-940-45	650Lm				4000K	
LX26-RS40-24W						
LX26-RS40-24W-930-18	1500Lm	24W	DC48V	90	3000K	18°
LX26-RS40-24W-940-18	1600Lm				4000K	
LX26-RS40-24W-930-30	1500Lm	24W	DC48V	90	3000K	30°
LX26-RS40-24W-940-30	1600Lm				4000K	
LX26-RS40-24W-930-45	1200Lm	24W	DC48V	90	3000K	45°
LX26-RS40-24W-940-45	1300Lm				4000K	

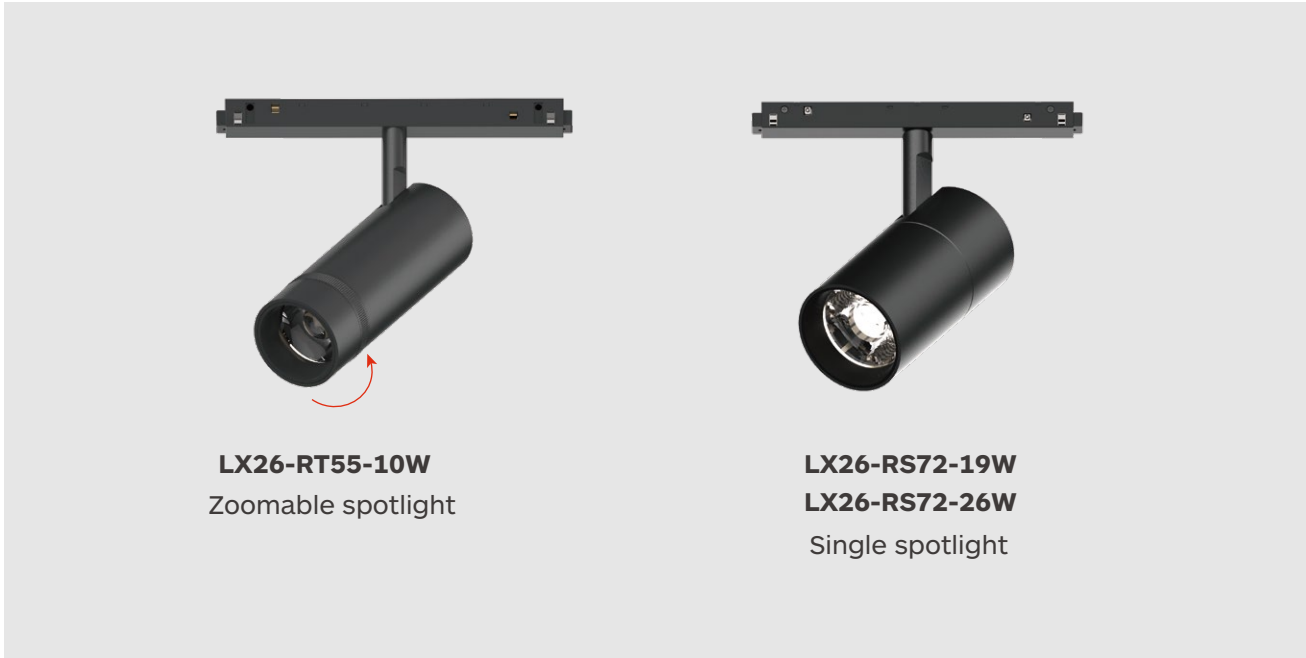

Spotlight Insert



Drawings

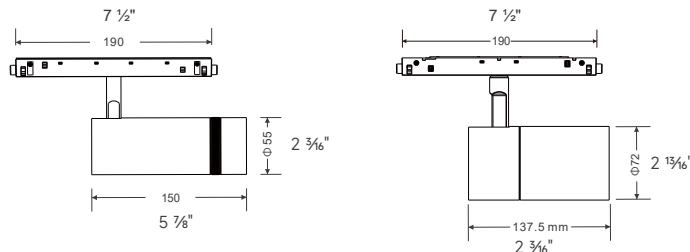

Order Options

LX26-RT55-10W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-RT55-10W-930	800Lm	10W	DC48V	90	3000K	20° -40°
LX26-RT55-10W-940	850Lm				4000K	
LX26-RT55-10W-930	750Lm	10W	DC48V	90	3000K	35° -60°
LX26-RT55-10W-940	800Lm				4000K	
LX26-RS72-19W						
LX26-RS72-19W-930-20	1700Lm	19W	DC48V	90	3000K	20°
LX26-RS72-19W-940-20	1800Lm				4000K	
LX26-RS72-19W-930-35	1700Lm	19W	DC48V	90	3000K	35°
LX26-RS72-19W-940-35	1800Lm				4000K	
LX26-RS72-19W-930-55	1700Lm	19W	DC48V	90	3000K	55°
LX26-RS72-19W-940-55	1800Lm				4000K	
LX26-RS72-26W						
LX26-RS72-26W-930-20	2300Lm	26W	DC48V	90	3000K	20°
LX26-RS72-26W-940-20	2500Lm				4000K	
LX26-RS72-26W-930-35	2300Lm	26W	DC48V	90	3000K	35°
LX26-RS72-26W-940-35	2500Lm				4000K	
LX26-RS72-26W-930-55	2300Lm	26W	DC48V	90	3000K	55°
LX26-RS72-26W-940-55	2500Lm				4000K	

LINE X 26 Series
Low Voltage Linear Light




LX26-WRS96-9W

Spotlight Insert



Drawings

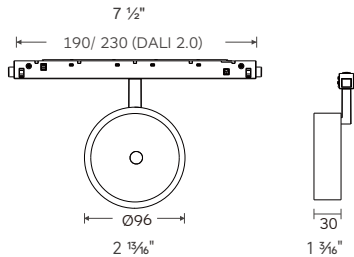

Order Options

LX26-WRS96-9W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-WRS96-9W-930-15	720Lm	9W	DC48V	90	3000K	15°
LX26-WRS96-9W-940-15	780Lm				4000K	
LX26-WRS96-9W-930-25	750Lm	9W	DC48V	90	3000K	25°
LX26-WRS96-9W-940-25	830Lm				4000K	
LX26-WRS96-9W-930-35	750Lm	9W	DC48V	90	3000K	35°
LX26-WRS96-9W-940-35	830Lm				4000K	

Optional






Accent Light Insert




Drawings



Order Options


LX26-AL190-S2-3W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-AL190-S2-3W-930-20	180Lm	3W	DC48V	90	3000K	20°
LX26-AL190-S2-3W-940-20	200Lm				4000K	
LX26-AL190-S2-3W-930-35	180Lm	3W	DC48V	90	3000K	35°
LX26-AL190-S2-3W-940-35	200Lm				4000K	
LX26-AL190-S6-7W						
LX26-AL190-S6-7W-930-20	550Lm	7W	DC48V	90	3000K	20°
LX26-AL190-S6-7W-940-20	600Lm				4000K	
LX26-AL190-S6-7W-930-35	550Lm	7W	DC48V	90	3000K	35°
LX26-AL190-S6-7W-940-35	600Lm				4000K	

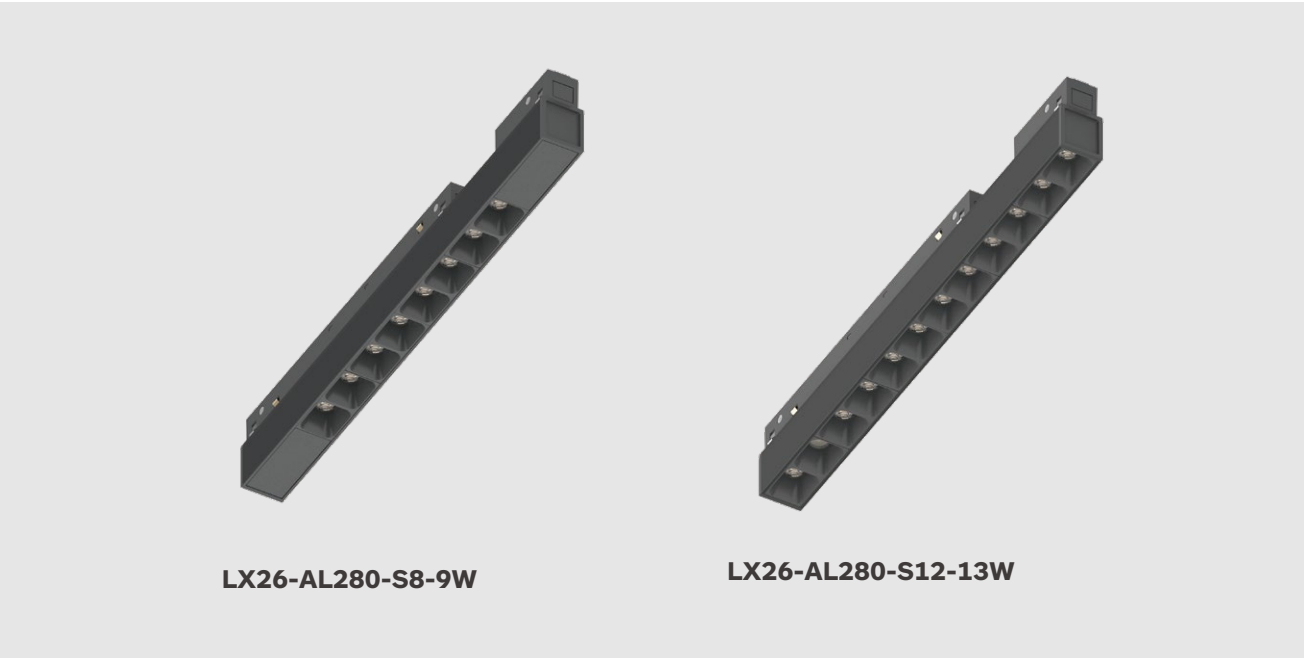

Accent Light Insert



Drawings

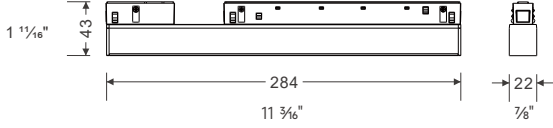

Order Options


LX26-AL280-S8-9W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-AL280-S8-9W-930-20	750Lm	9W	DC48V	90	3000K	20°
LX26-AL280-S8-9W-940-20	800Lm				4000K	
LX26-AL280-S8-9W-930-35	750Lm	9W	DC48V	90	3000K	35°
LX26-AL280-S8-9W-940-35	800Lm				4000K	
LX26-AL280-S12-13W						
LX26-AL280-S12-13W-930-20	1100Lm	13W	DC48V	90	3000K	20°
LX26-AL280-S12-13W-940-20	1200Lm				4000K	
LX26-AL280-S12-13W-930-35	1100Lm	13W	DC48V	90	3000K	35°
LX26-AL280-S12-13W-940-35	1200Lm				4000K	



Accent Light Insert



Drawings

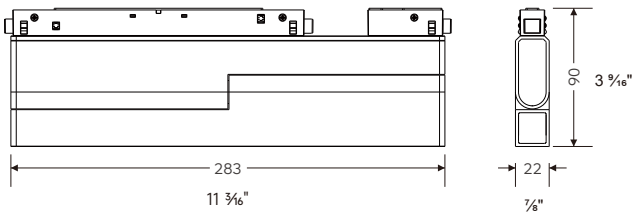

Order Options


LX26-SA280-13W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-SA280-13W-930-20	1100Lm	13W	DC48V	90	3000K	20°
LX26-SA280-13W-940-20	1200Lm				4000K	
LX26-SA280-13W-930-35	1100Lm	13W	DC48V	90	3000K	35°
LX26-SA280-13W-940-35	1200Lm				4000K	



Accent Light Insert




Drawings

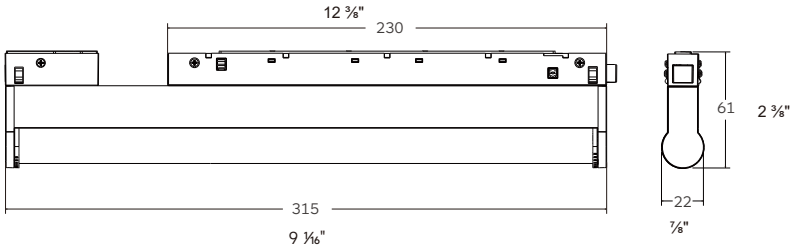

Order Options

LX26-Rita315-15W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-Rita315-15W-930-30	1100Lm	15W	DC48V	90	3000K	30°
LX26-Rita315-15W-940-30	1180Lm				4000K	


LINE X 26 Series
Low Voltage Linear Light

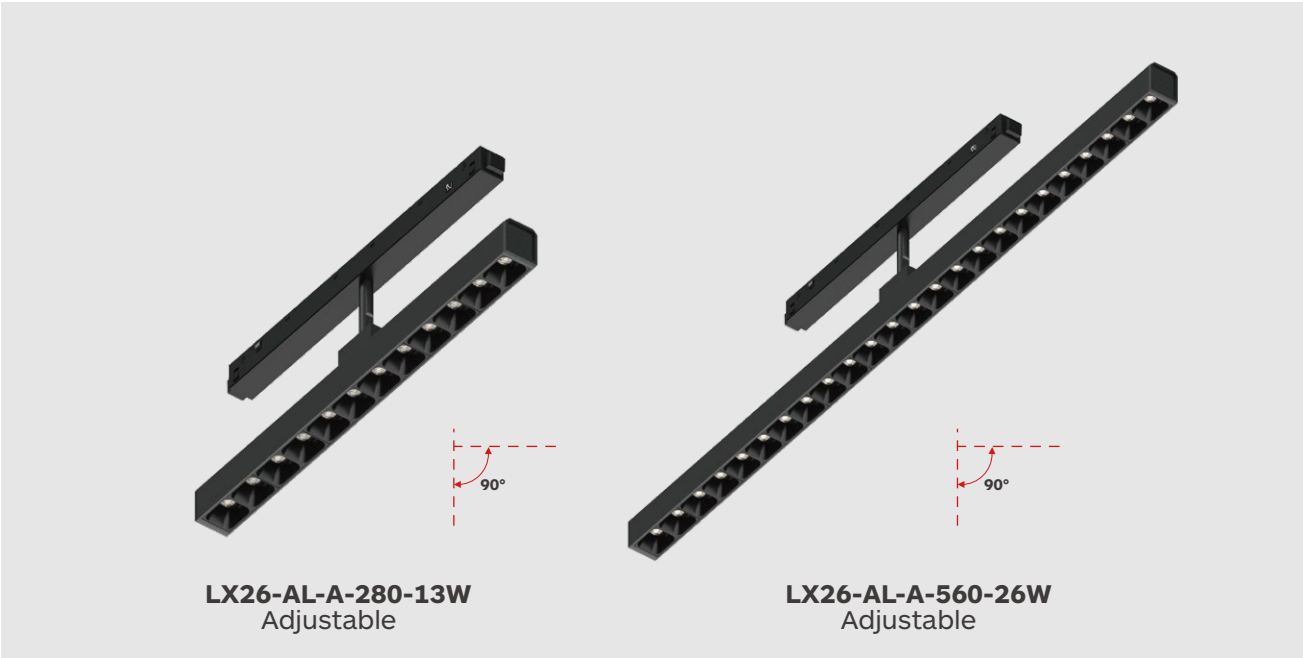

Accent Light Insert



Drawings

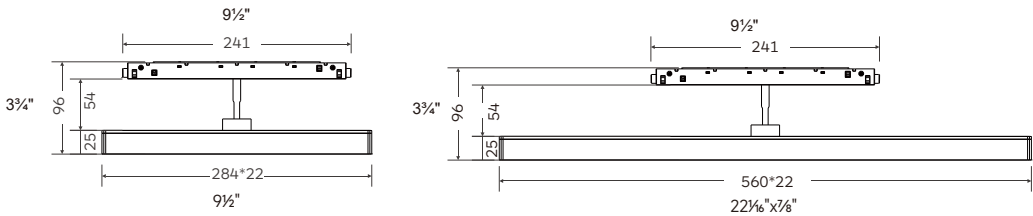

Order Options

LX26-AL-A-280-13W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-AL-A-280-13W-930-20	1100Lm	13W	DC48V	90	3000K	20°
LX26-AL-A-280-13W-940-20	1200Lm				4000K	
LX26-AL-A-280-13W-930-35	1100Lm	13W	DC48V	90	3000K	35°
LX26-AL-A-280-13W-940-35	1200Lm				4000K	
LX26-AL-A-560-26W						
LX26-AL-A-560-26W-930-20	2200Lm	26W	DC48V	90	3000K	20°
LX26-AL-A-560-26W-940-20	2400Lm				4000K	
LX26-AL-A-560-26W-930-35	2200Lm	26W	DC48V	90	3000K	35°
LX26-AL-A-560-26W-940-35	2400Lm				4000K	






General Light Insert



Drawings



Order Options


LX26-GL280-7W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26 -GL280-7W-930-110	400Lm	7W	DC48V	90	3000K	110°
LX26 -GL280-7W-940-110	450Lm				4000K	
LX26-GL560-13W						
LX26 -GL560-13W-930-110	800Lm	13W	DC48V	90	3000K	110°
LX26 -GL560-13W-940-110	850Lm				4000K	
LX26-GL840-19W						
LX26 -GL840-19W-930-110	1200Lm	19W	DC48V	90	3000K	110°
LX26 -GL840-19W-940-110	1300Lm				4000K	
LX26-GL1120-26W						
LX26 -GL1120-26W-930-110	1600Lm	26W	DC48V	90	3000K	110°
LX26 -GL1120-26W-940-110	1700Lm				4000K	



General Light Insert



Drawings

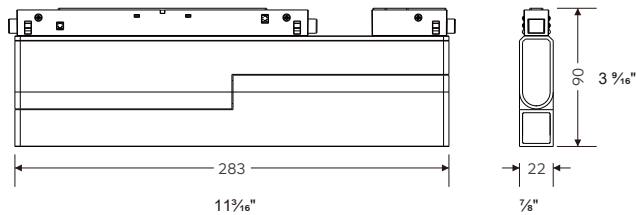

Order Options


LX26-SG280-7W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26 -SG280-7W-930-110	400Lm	7W	DC48V	90	3000K	110°
LX26 -SG280-7W-940-110	450Lm				4000K	



General Light Insert



Drawings

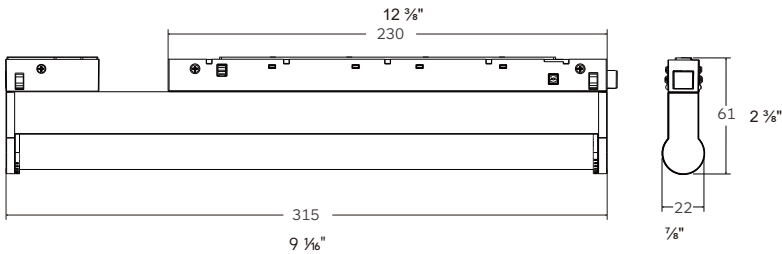

Order Options


LX26-Stella315-8W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-Stella315-8W-930-120	500Lm	8W	DC48V	90	3000K	120°
LX26-Stella315-8W-940-120	550Lm				4000K	120°



General Light Insert



Drawings

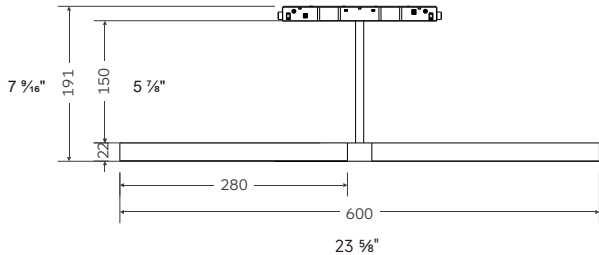


Order Options

LX26-LENA600-GL-13W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-LENA600-GL-13W-930-110	800Lm	13W	DC48V	90	3000K	110°
LX26-LENA600-GL-13W-940-110	900Lm				4000K	

Optional




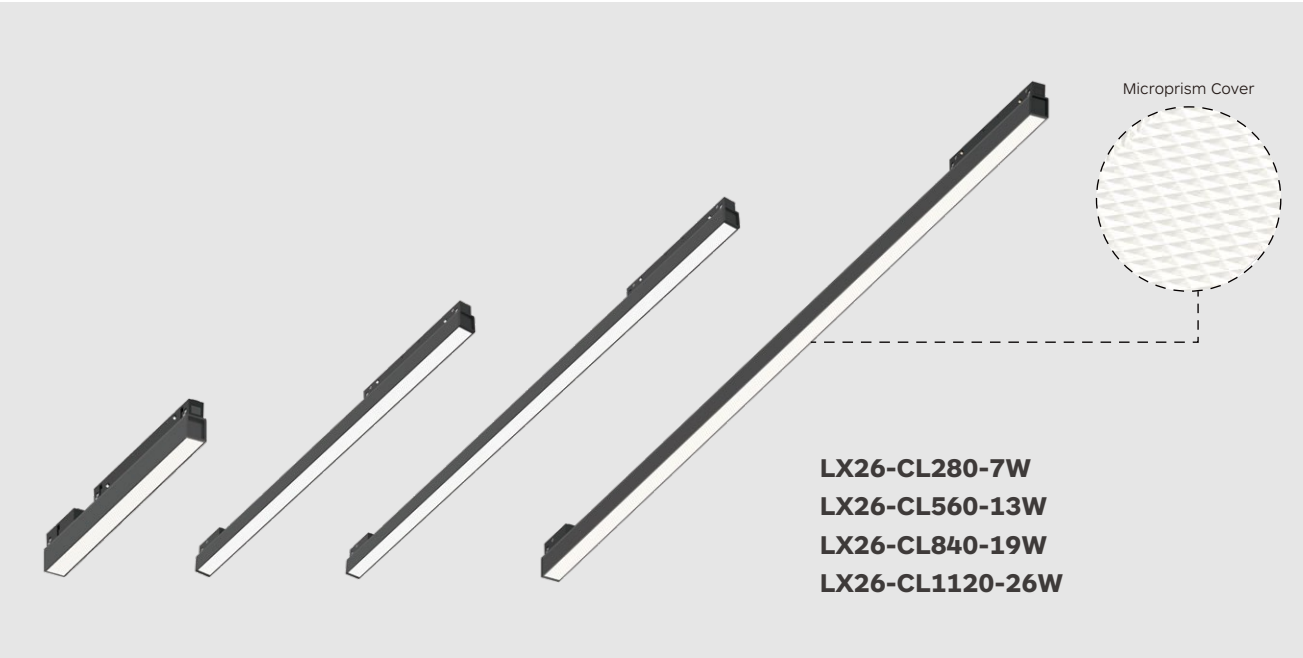

Comfort Light Insert



Drawings

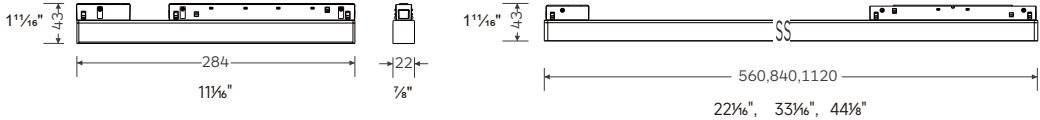

Order Options


LX26-CL280-7W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26 -CL280-7W-930-65	380Lm	7W	DC48V	90	3000K	65°
LX26 -CL280-7W-940-65	420Lm				4000K	
LX26-CL560-13W						
LX26 -CL560-13W-930-65	750Lm	13W	DC48V	90	3000K	65°
LX26 -CL560-13W-940-65	800Lm				4000K	
LX26-CL840-19W						
LX26 -CL840-19W-930-65	1100Lm	19W	DC48V	90	3000K	65°
LX26 -CL840-19W-940-65	1200Lm				4000K	
LX26-CL1120-26W						
LX26 -CL1120-26W-930-65	1500Lm	26W	DC48V	90	3000K	65°
LX26 -CL1120-26W-940-65	1600Lm				4000K	



Wall Washer Insert



Drawings

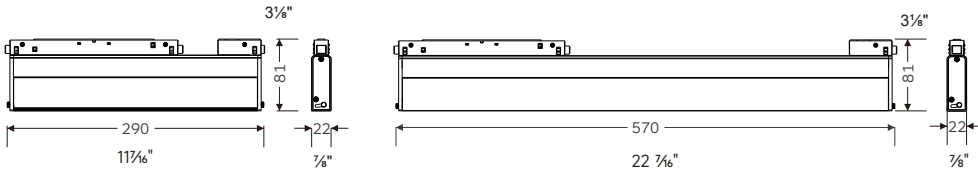

Order Options

LX26-WW280-7W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-WW280-7W-930	350Lm	7W	DC48V	90	3000K	Wall Washer
LX26-WW280-7W-940	380Lm				4000K	Wall Washer
LX26-WW560-13W						
LX26-WW560-13W-930	700Lm	13W	DC48V	90	3000K	Wall Washer
LX26-WW560-13W-940	750Lm				4000K	Wall Washer


LINE X 26 Series
Low Voltage Linear Light



Downlight insert



Drawings

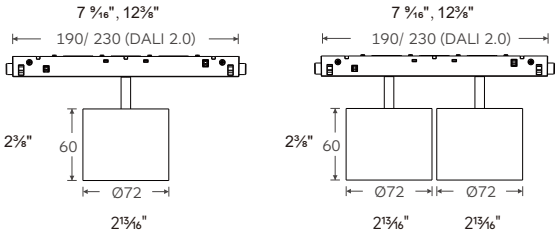

Order Options

LX26-WRD72-10W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-WRD72-10W-930-25	700Lm	10W	DC48V	90	3000K	25°
LX26-WRD72-10W-940-25	750Lm				4000K	
LX26-WRD72-10W-930-36	750Lm	10W	DC48V	90	3000K	36°
LX26-WRD72-10W-940-36	800Lm				4000K	
LX26-WRD72-10W-930-50	750Lm	10W	DC48V	90	3000K	50°
LX26-WRD72-10W-940-50	800Lm				4000K	
LX26-WRD72-T2-20W						
LX26-WRD72-T2-20W-930-25	1400Lm	20W	DC48V	90	3000K	25°
LX26-WRD72-T2-20W-940-25	1500Lm				4000K	
LX26-WRD72-T2-20W-930-36	1500Lm	20W	DC48V	90	3000K	36°
LX26-WRD72-T2-20W-940-36	1600Lm				4000K	
LX26-WRD72-T2-20W-930-50	1500Lm	20W	DC48V	90	3000K	50°
LX26-WRD72-T2-20W-940-50	1600Lm				4000K	

Accessory

Optional

Reflector



Honeycomb



White



Golden



Black



White



specular



Chrome



Champagne-golden





LX26-SPD120-10W

Decorative light insert



Drawings



Order Options

LX26-SPD120-10W

Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-SPD120-10W-930-180	650Lm	10W	DC48V	90	3000K	180°
LX26-SPD120-10W-940-180	700Lm				4000K	

Optional




LX26-PD300-18W

Decorative light insert



Drawings



Order Options

LX26-PD300-B-18W

Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26 -PD300-B-18W-930-60	1100Lm	18W	DC48V	90	3000K	60°
LX26 -PD300-B-18W-940-60	1200Lm				4000K	60°

LX26-PD300-W-18W

LX26 -PD300-W-18W-930-60	1100Lm	18W	DC48V	90	3000K	60°
LX26 -PD300-W-18W-940-60	1200Lm				4000K	60°

Optional




White



Decorative light insert



Drawings



Order Options


LX26-PS40-12W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-PS40-12W-930-18	750Lm	12W	DC48V	90	3000K	18°
LX26-PS40-12W-940-18	800Lm				4000K	
LX26-PS40-12W-930-30	750Lm	12W	DC48V	90	3000K	30°
LX26-PS40-12W-940-30	800Lm				4000K	
LX26-PS40-12W-930-45	600Lm	12W	DC48V	90	3000K	45°
LX26-PS40-12W-940-45	650Lm				4000K	
LX26-PS55-14W						
LX26-PS55-14W-930-18	950Lm	14W	DC48V	90	3000K	18°
LX26-PS55-14W-940-18	1000Lm				4000K	
LX26-PS55-14W-930-24	950Lm	14W	DC48V	90	3000K	24°
LX26-PS55-14W-940-24	1000Lm				4000K	
LX26-PS55-14W-930-36	950Lm	14W	DC48V	90	3000K	36°
LX26-PS55-14W-940-36	1000Lm				4000K	



Decorative light insert



Drawings

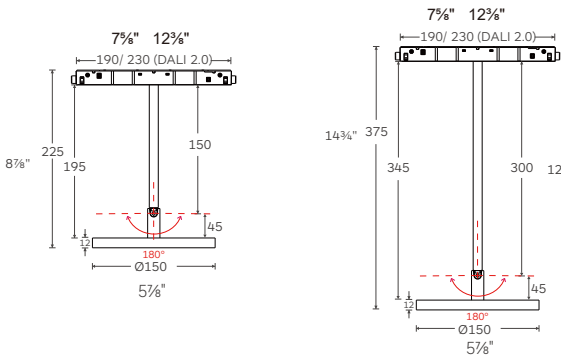

Order Options

LX26-MINNIE150GL-9W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-MINNIE150GL-150-9W-930-110	560Lm	9W	DC48V	90	3000K	110°
LX26-MINNIE150GL-150-9W-940-110	600Lm				4000K	
LX26-MINNIE150GL-300-9W-930-110	560Lm	9W	DC48V	90	3000K	110°
LX26-MINNIE150GL-300-9W-940-110	600Lm				4000K	

Optional




LINE X 26 Series
Low Voltage Linear Light



Decorative light insert



Drawings

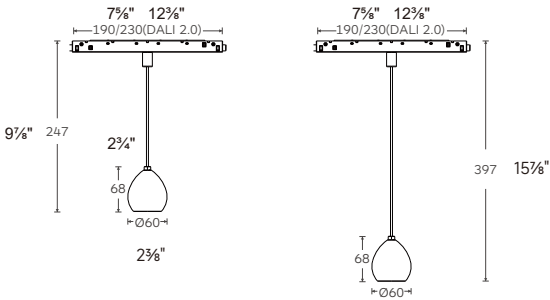

Order Options

LX26-SURI60-5W						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
LX26-SURI60-5W-930-18	500Lm	5W	DC48V	90	3000K	18°
LX26-SURI60-5W-940-18	550Lm				4000K	
LX26-SURI60-5W-930-24	500Lm	5W	DC48V	90	3000K	24°
LX26-SURI60-5W-940-24	550Lm				4000K	
LX26-SURI60-5W-930-36	500Lm	5W	DC48V	90	3000K	36°
LX26-SURI60-5W-940-36	550Lm				4000K	
LX26-SURI60-5W-930-50	500Lm	5W	DC48V	90	3000K	50°
LX26-SURI60-5W-940-50	550Lm				4000K	

Optional



LINK30 Series
High Voltage Linear Light




LINK30

201 E-lite lighting



LINK30

Extremely Compact Linear Light
UGR<16
Surface treatment process of high-quality profiles
The end cap is no visible screws
Pre-wired gear tray for quick installation

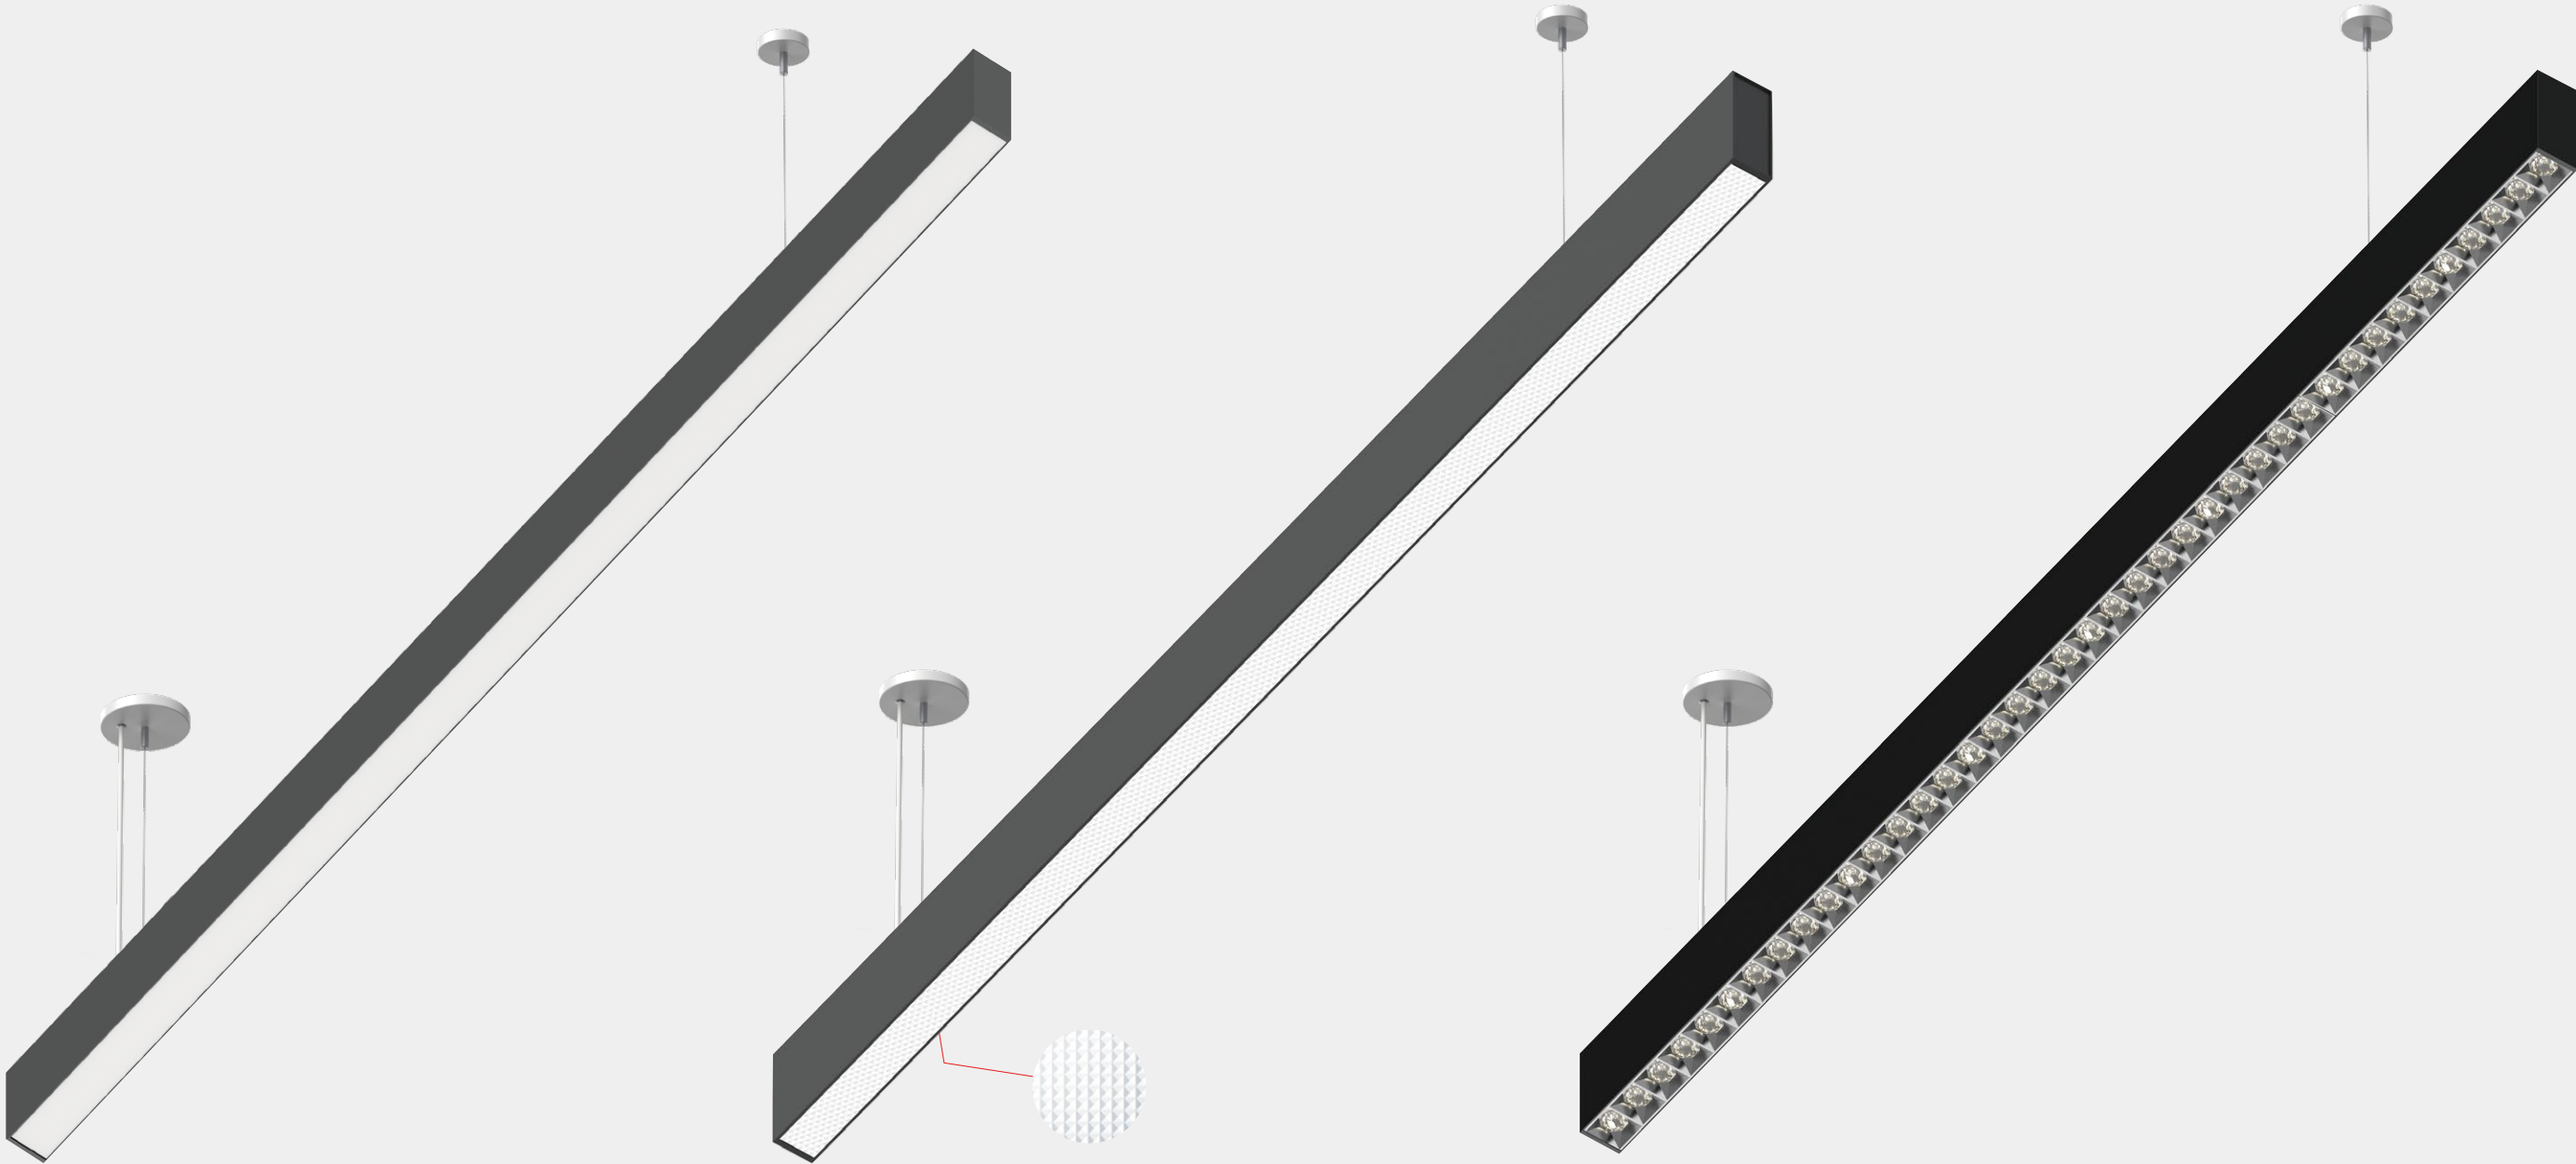


General Light

Comfort Light

Accent Light


Features

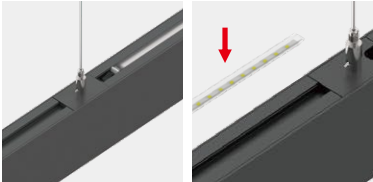


Switch for Uplight Up Light



Opal Cover Easy connection

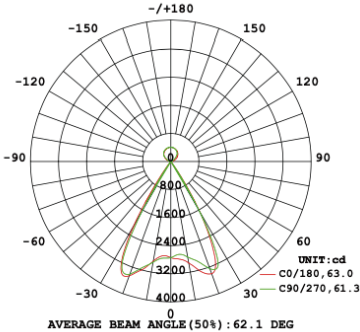

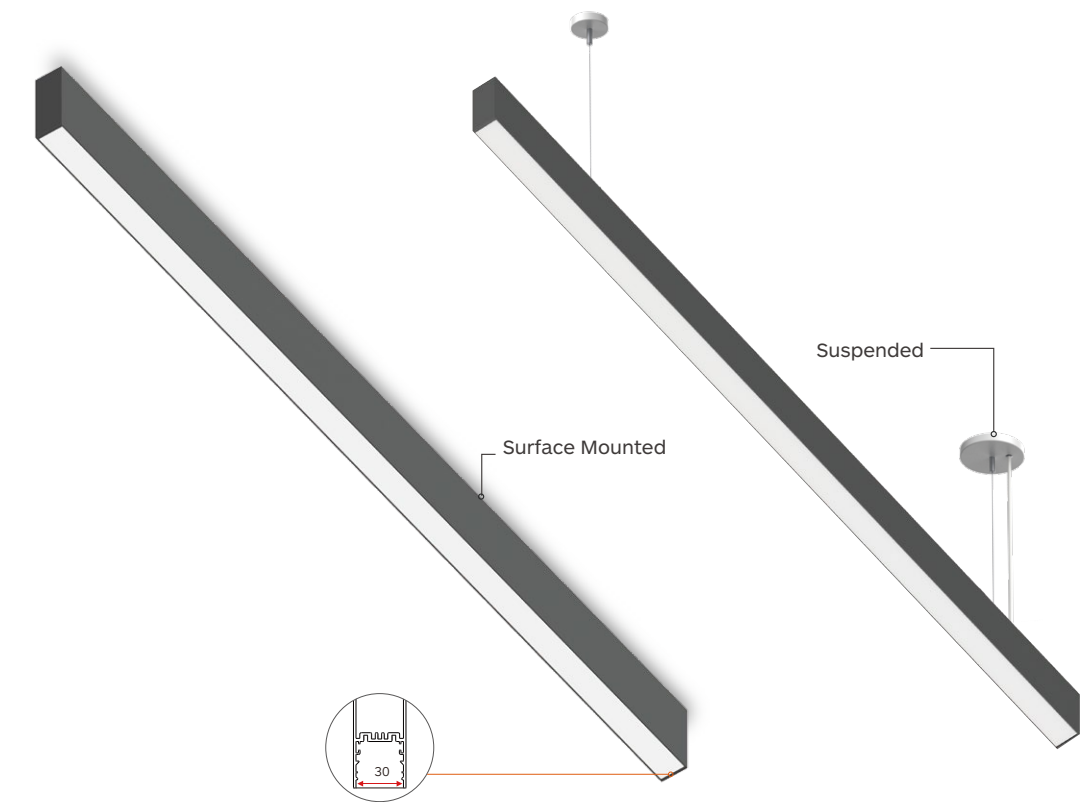

GL Fixture




Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Total system lighting efficiency is up to 100LM/W
- Surface treatment process of high-quality profiles
- The end cap has no visible screws
- Pre-wired gear tray for quick installation



Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: 1-10V,
- Samsung LEDs
- Length options: 41 ¾"(1060mm),62 ⅝"(1590mm)


Type Mountings




Installation type

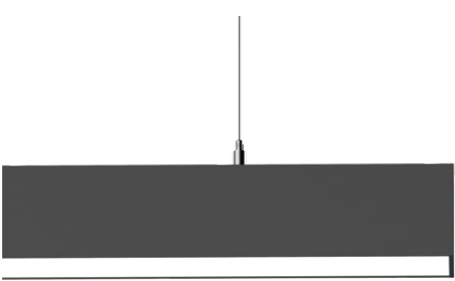

LINK30-GL



Drawing




1060MM
6W 3500-3800 Lm

Code	LED W	System W	Direct output	Indirect output	LED LM	CRI	CCT	Beam	Size
Link30-GL1060U-36W-830	32W	36W	2400lm	1100lm	4400lm	>80	3000K	110°	41 ¾"x1 ⅝" x3 ⅝"
Link30-GL1060U-36W-840	32W	36W	2600lm	1200lm	4600lm		4000K		

1590MM
56W 5600-5900 Lm

Code	LED W	System W	Direct output	Indirect output	LED LM	CRI	CCT	Beam	Size
Link30-GL1590U-54W-830	48W	56W	4000lm	1600lm	6900lm	>80	3000K	110°	62 ⅝"x1 ⅝" x3 ⅝"
Link30-GL1590U-54W-840	48W	56W	4200lm	1700lm	7200lm		4000K		

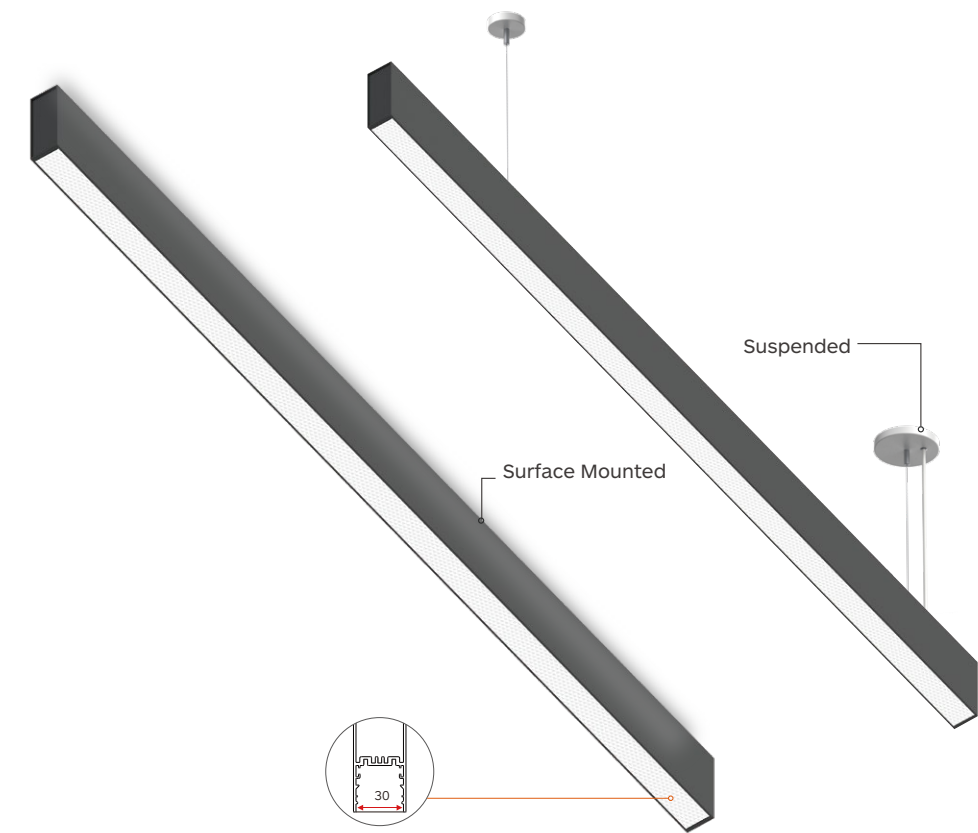

CL Fixture




Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Total system lighting efficiency is up to 100LM/W
- Surface treatment process of high-quality profiles
- The end cap has no visible screws
- Pre-wired gear tray for quick installation



Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: Phase Dim, 1-10V,
- Samsung LEDs
- Length options: 41 3/4"(1060mm),62 5/8"(1590mm)


Type Mountings




Installation type

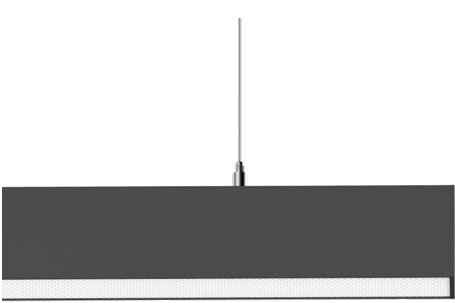

LINK30-CL



Drawing




1060MM
36W 3300-3600 Lm

Code	LED W	System W	Direct output	Indirect output	LED LM	CRI	CCT	Beam	Size
Link30-CL1060U-36W-830	32W	36W	2200lm	1100lm	4400lm	>80	3000K	70°	41 3/4"x1 5/16" x3 1/16"
Link30-CL1060U-36W-840	32W	36W	2400lm	1200lm	4600lm		4000K		

1590MM
54W 5200-5500 Lm

Code	LED W	System W	Direct output	Indirect output	LED LM	CRI	CCT	Beam	Size
Link30-CL1590U-54W-830	48W	56W	3600lm	1600lm	6900lm	>80	3000K	70°	62 5/8"x1 5/16" x3 1/16"
Link30-CL1590U-54W-840	48W	56W	3800lm	1700lm	7200lm		4000K		

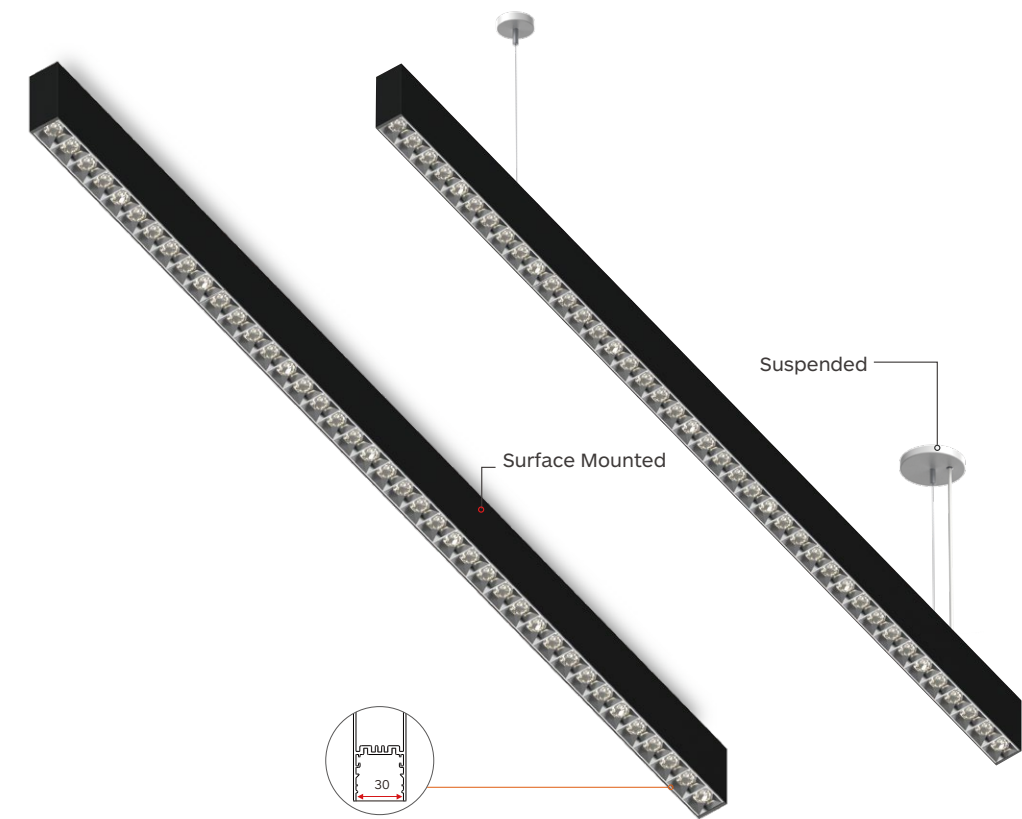

AL Fixture



Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Total system lighting efficiency is up to 100LM/W
- Surface treatment process of high-quality profiles
- The end cap has no visible screws
- Pre-wired gear tray for quick installation

Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: Phase Dim, 1-10V,
- Samsung LEDs
- Length options: 41 3/4"(1060mm),62 5/8"(1590mm)

Type




Mountings



surface

suspended

Installation type

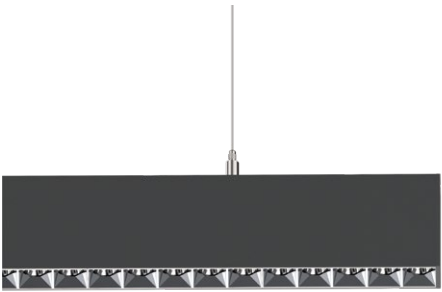

LINK30-AL




White



Black

Drawing



1060MM
36W 3800-4100 Lm

Code	LED W	System W	Direct output	Indirect output	LED LM	CRI	CCT	Beam	Size
Link30-AL1060U-36W-830-15	32W	36W	2700lm	1100lm	4300lm	>80	3000K	15°	41 3/4"x1 5/16" x3 1/16"
Link30-AL1060U-36W-840-15	32W	36W	2900lm	1200lm	4500lm		4000K		
Link30-AL1060U-36W-830-35	32W	36W	2700lm	1100lm	4300lm	>80	3000K	35°	41 3/4"x1 5/16" x3 1/16"
Link30-AL1060U-36W-840-35	32W	36W	2900lm	1200lm	4500lm		4000K		
Link30-AL1060U-36W-830-60	32W	36W	2700lm	1100lm	4300lm	>80	3000K	60°	41 3/4"x1 5/16" x3 1/16"
Link30-AL1060U-36W-840-60	32W	36W	2900lm	1200lm	4500lm		4000K		


1590MM
54W 5700-6000 Lm

Code	LED W	System W	Direct output	Indirect output	LED LM	CRI	CCT	Beam	Size
Link30-AL1590U-54W-830-15	48W	54W	4100lm	1600lm	6400lm	>80	3000K	15°	62 5/8"x1 5/16" x3 1/16"
Link30-AL1590U-54W-840-15	48W	54W	4300lm	1700lm	6700lm		4000K		
Link30-AL1590U-54W-830-35	48W	54W	4100lm	1600lm	6400lm	>80	3000K	35°	62 5/8"x1 5/16" x3 1/16"
Link30-AL1590U-54W-840-35	48W	54W	4300lm	1700lm	6700lm		4000K		
Link30-AL1590U-54W-830-60	48W	54W	4100lm	1600lm	6400lm	>80	3000K	60°	62 5/8"x1 5/16" x3 1/16"
Link30-AL1590U-54W-840-60	48W	54W	4300lm	1700lm	6700lm		4000K		

QUICK 50 Series
High Voltage Linear Light




QUICK50

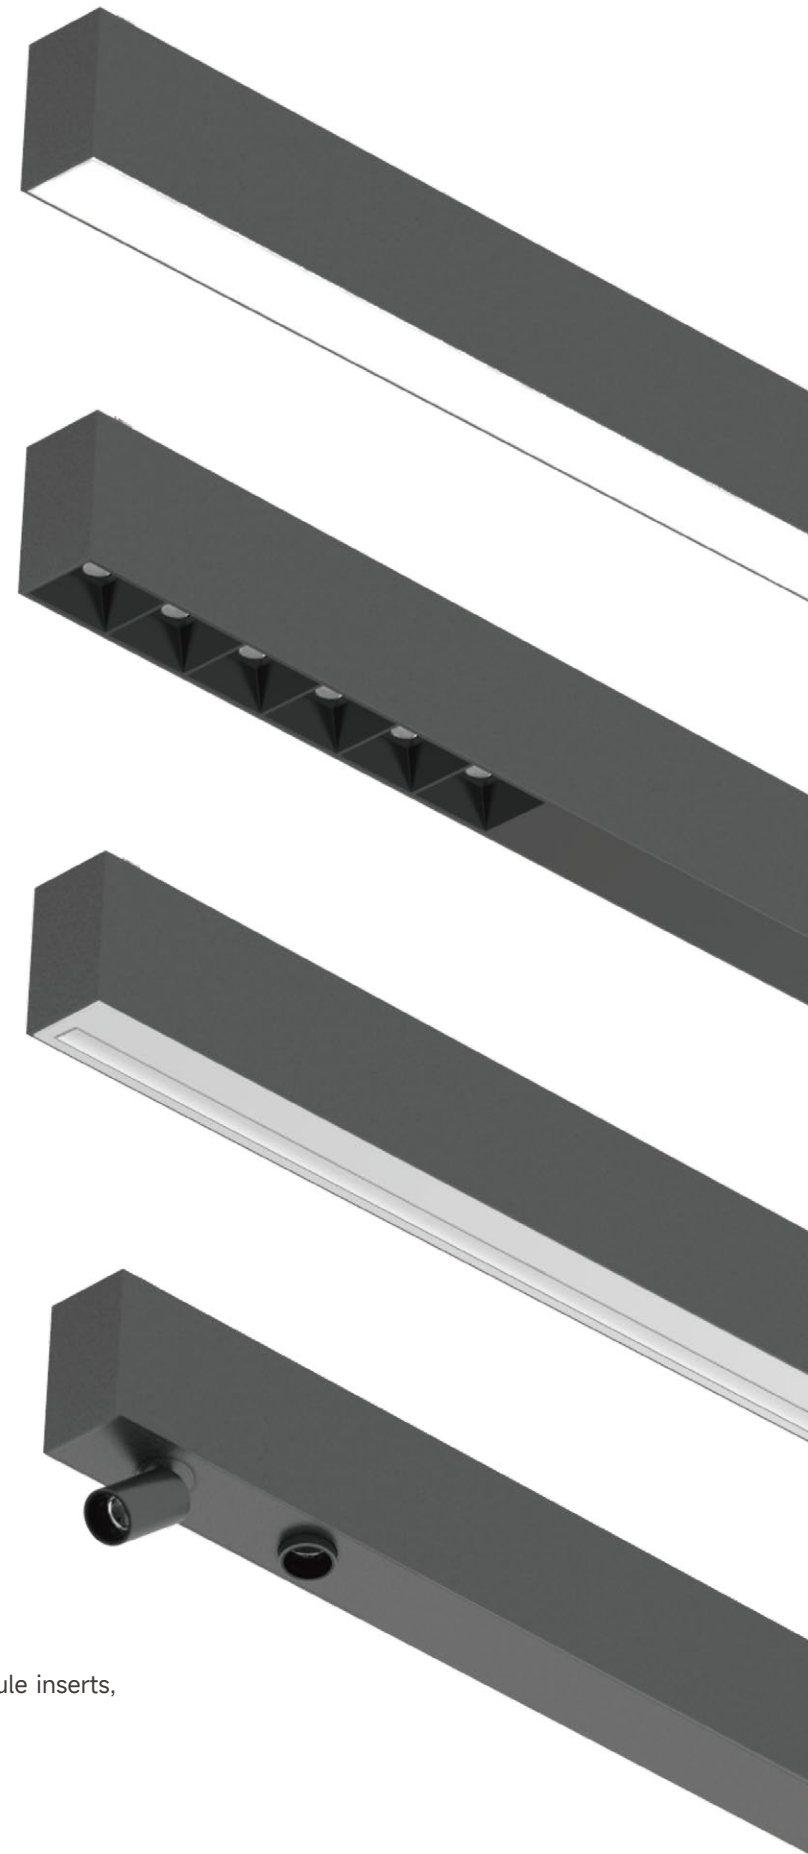

QUICK 50

Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology

Channels

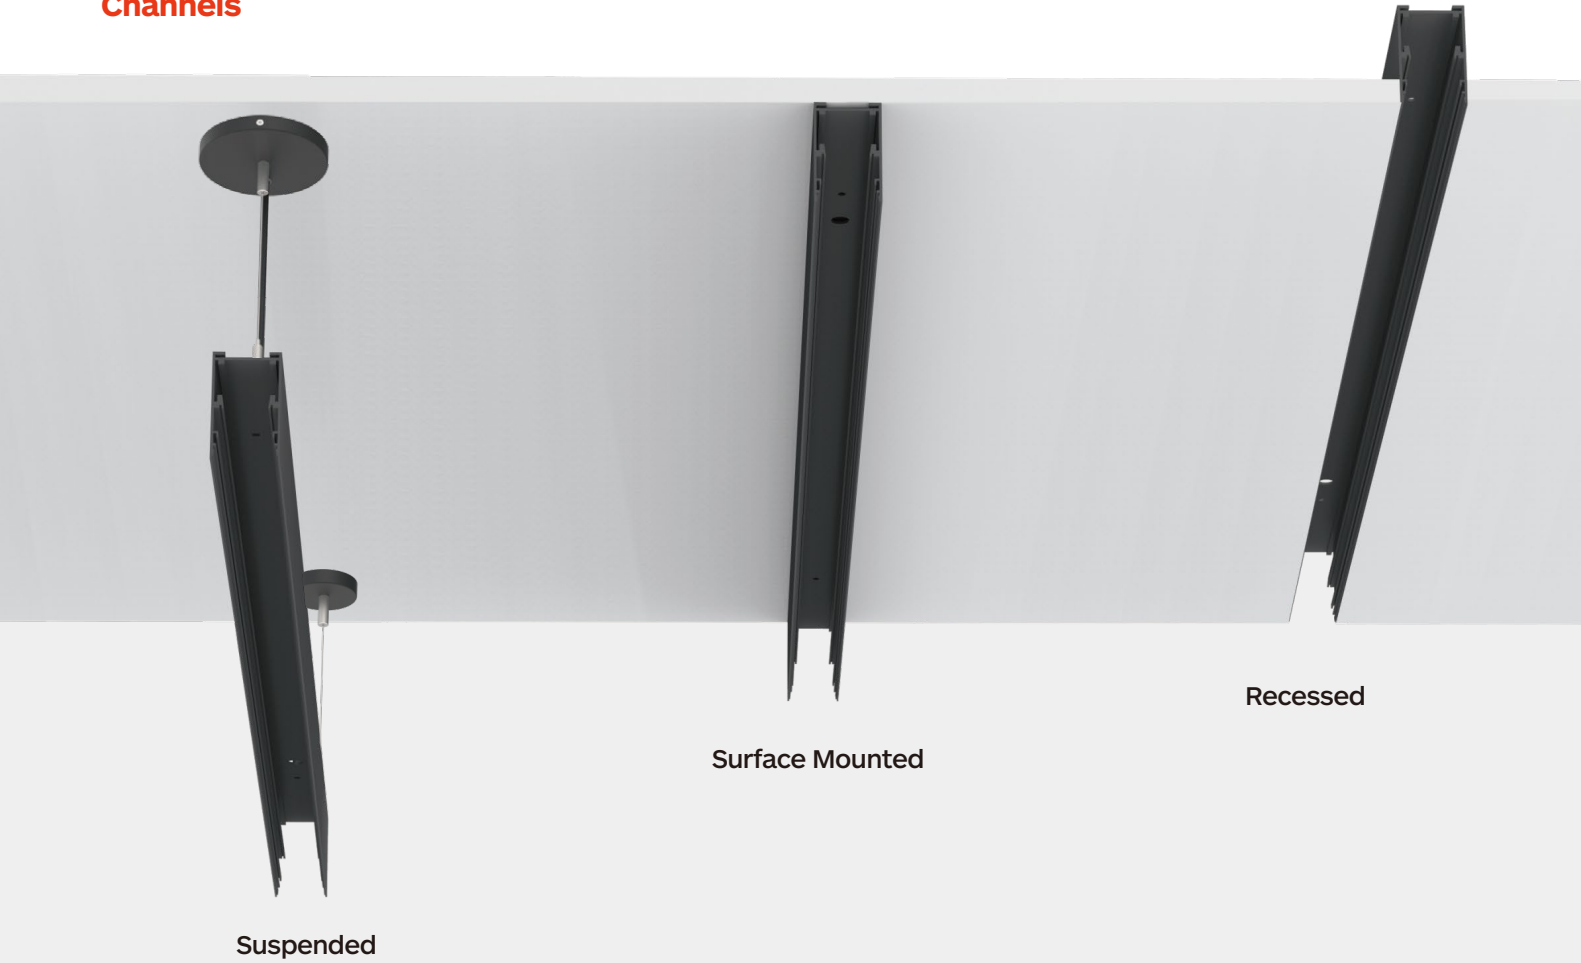


Inserts




Covers




QUICK 50

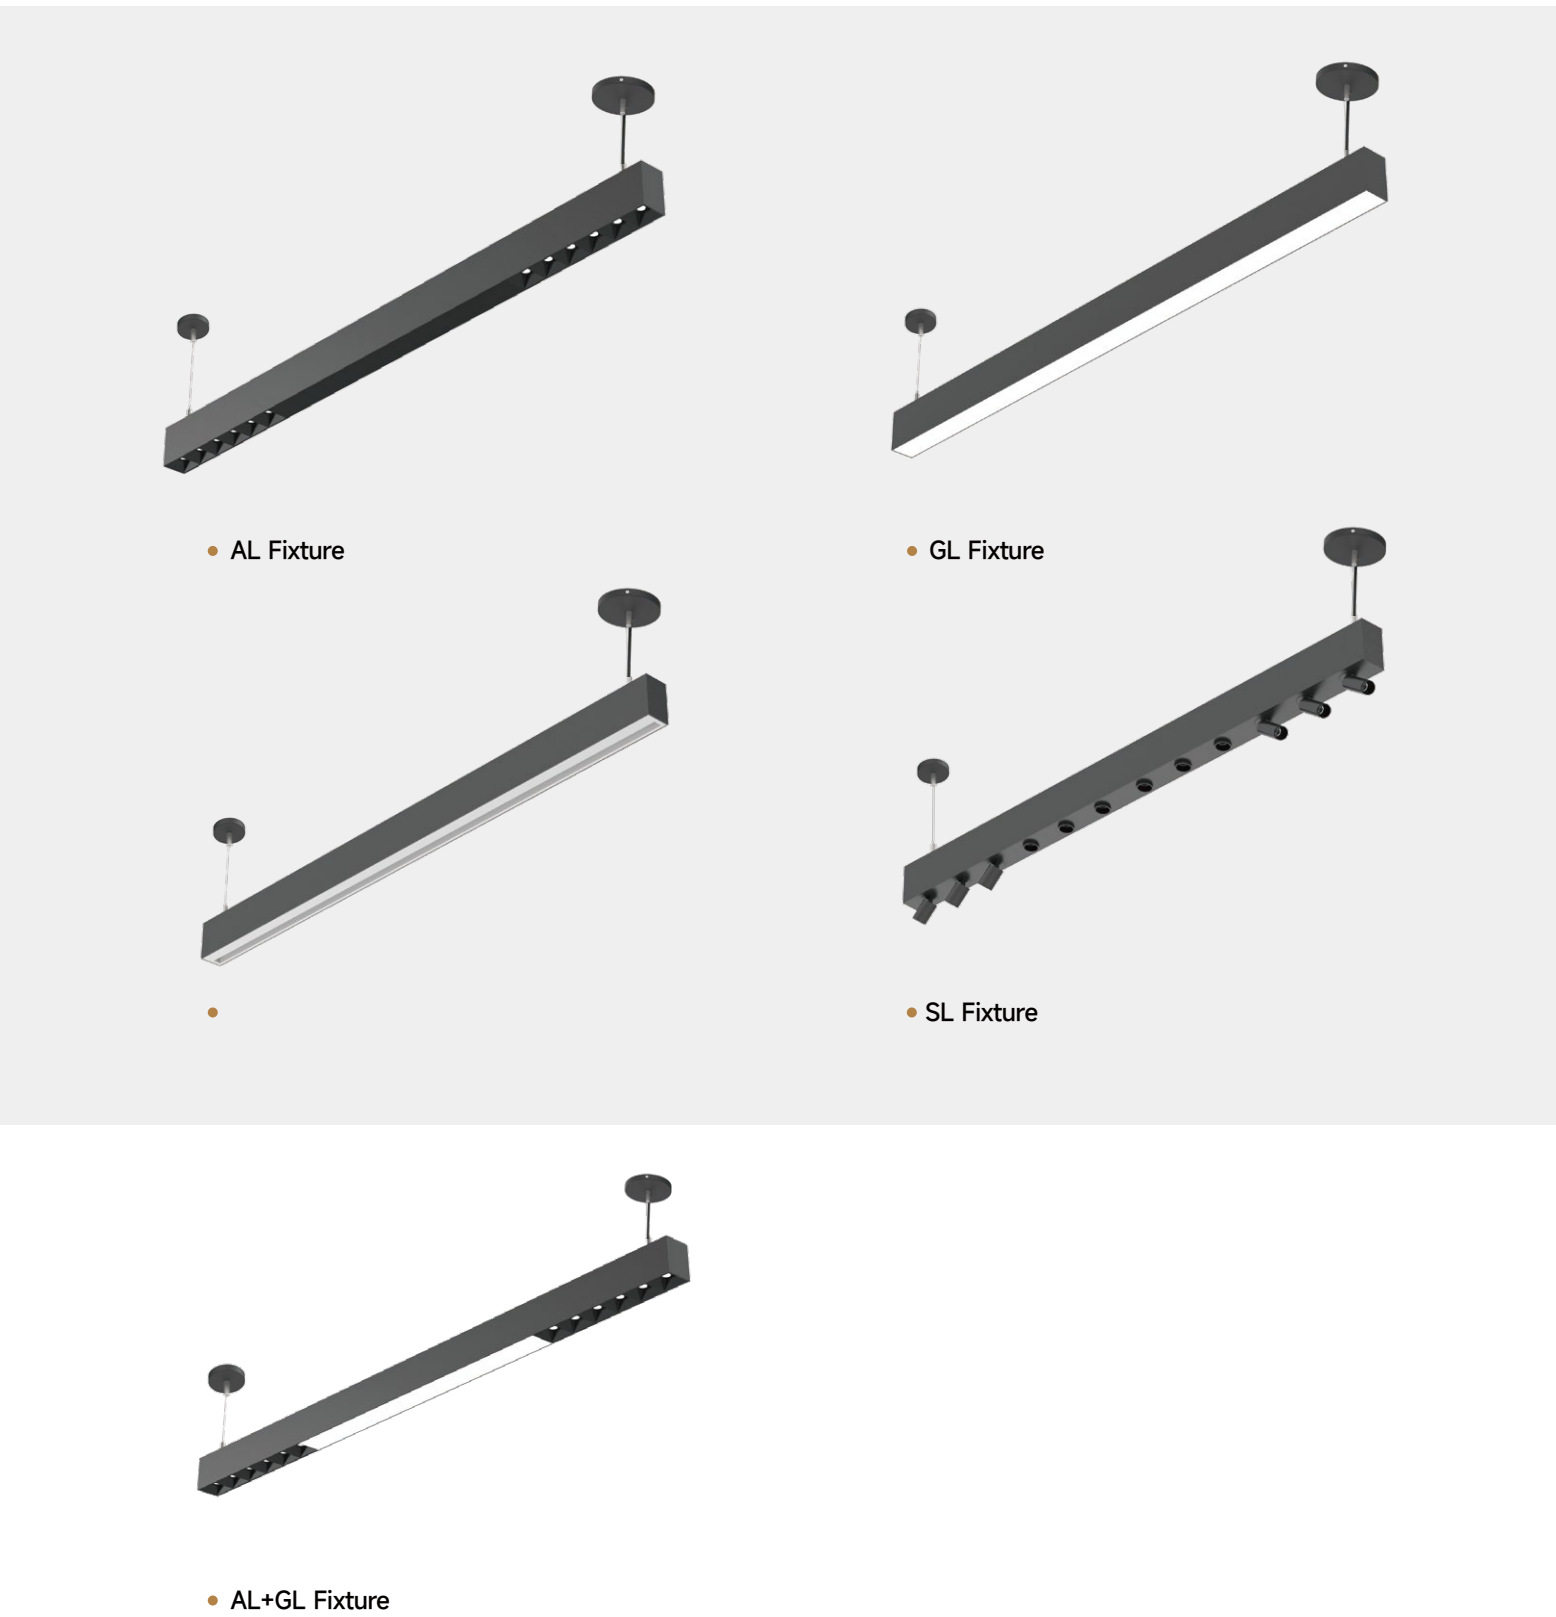

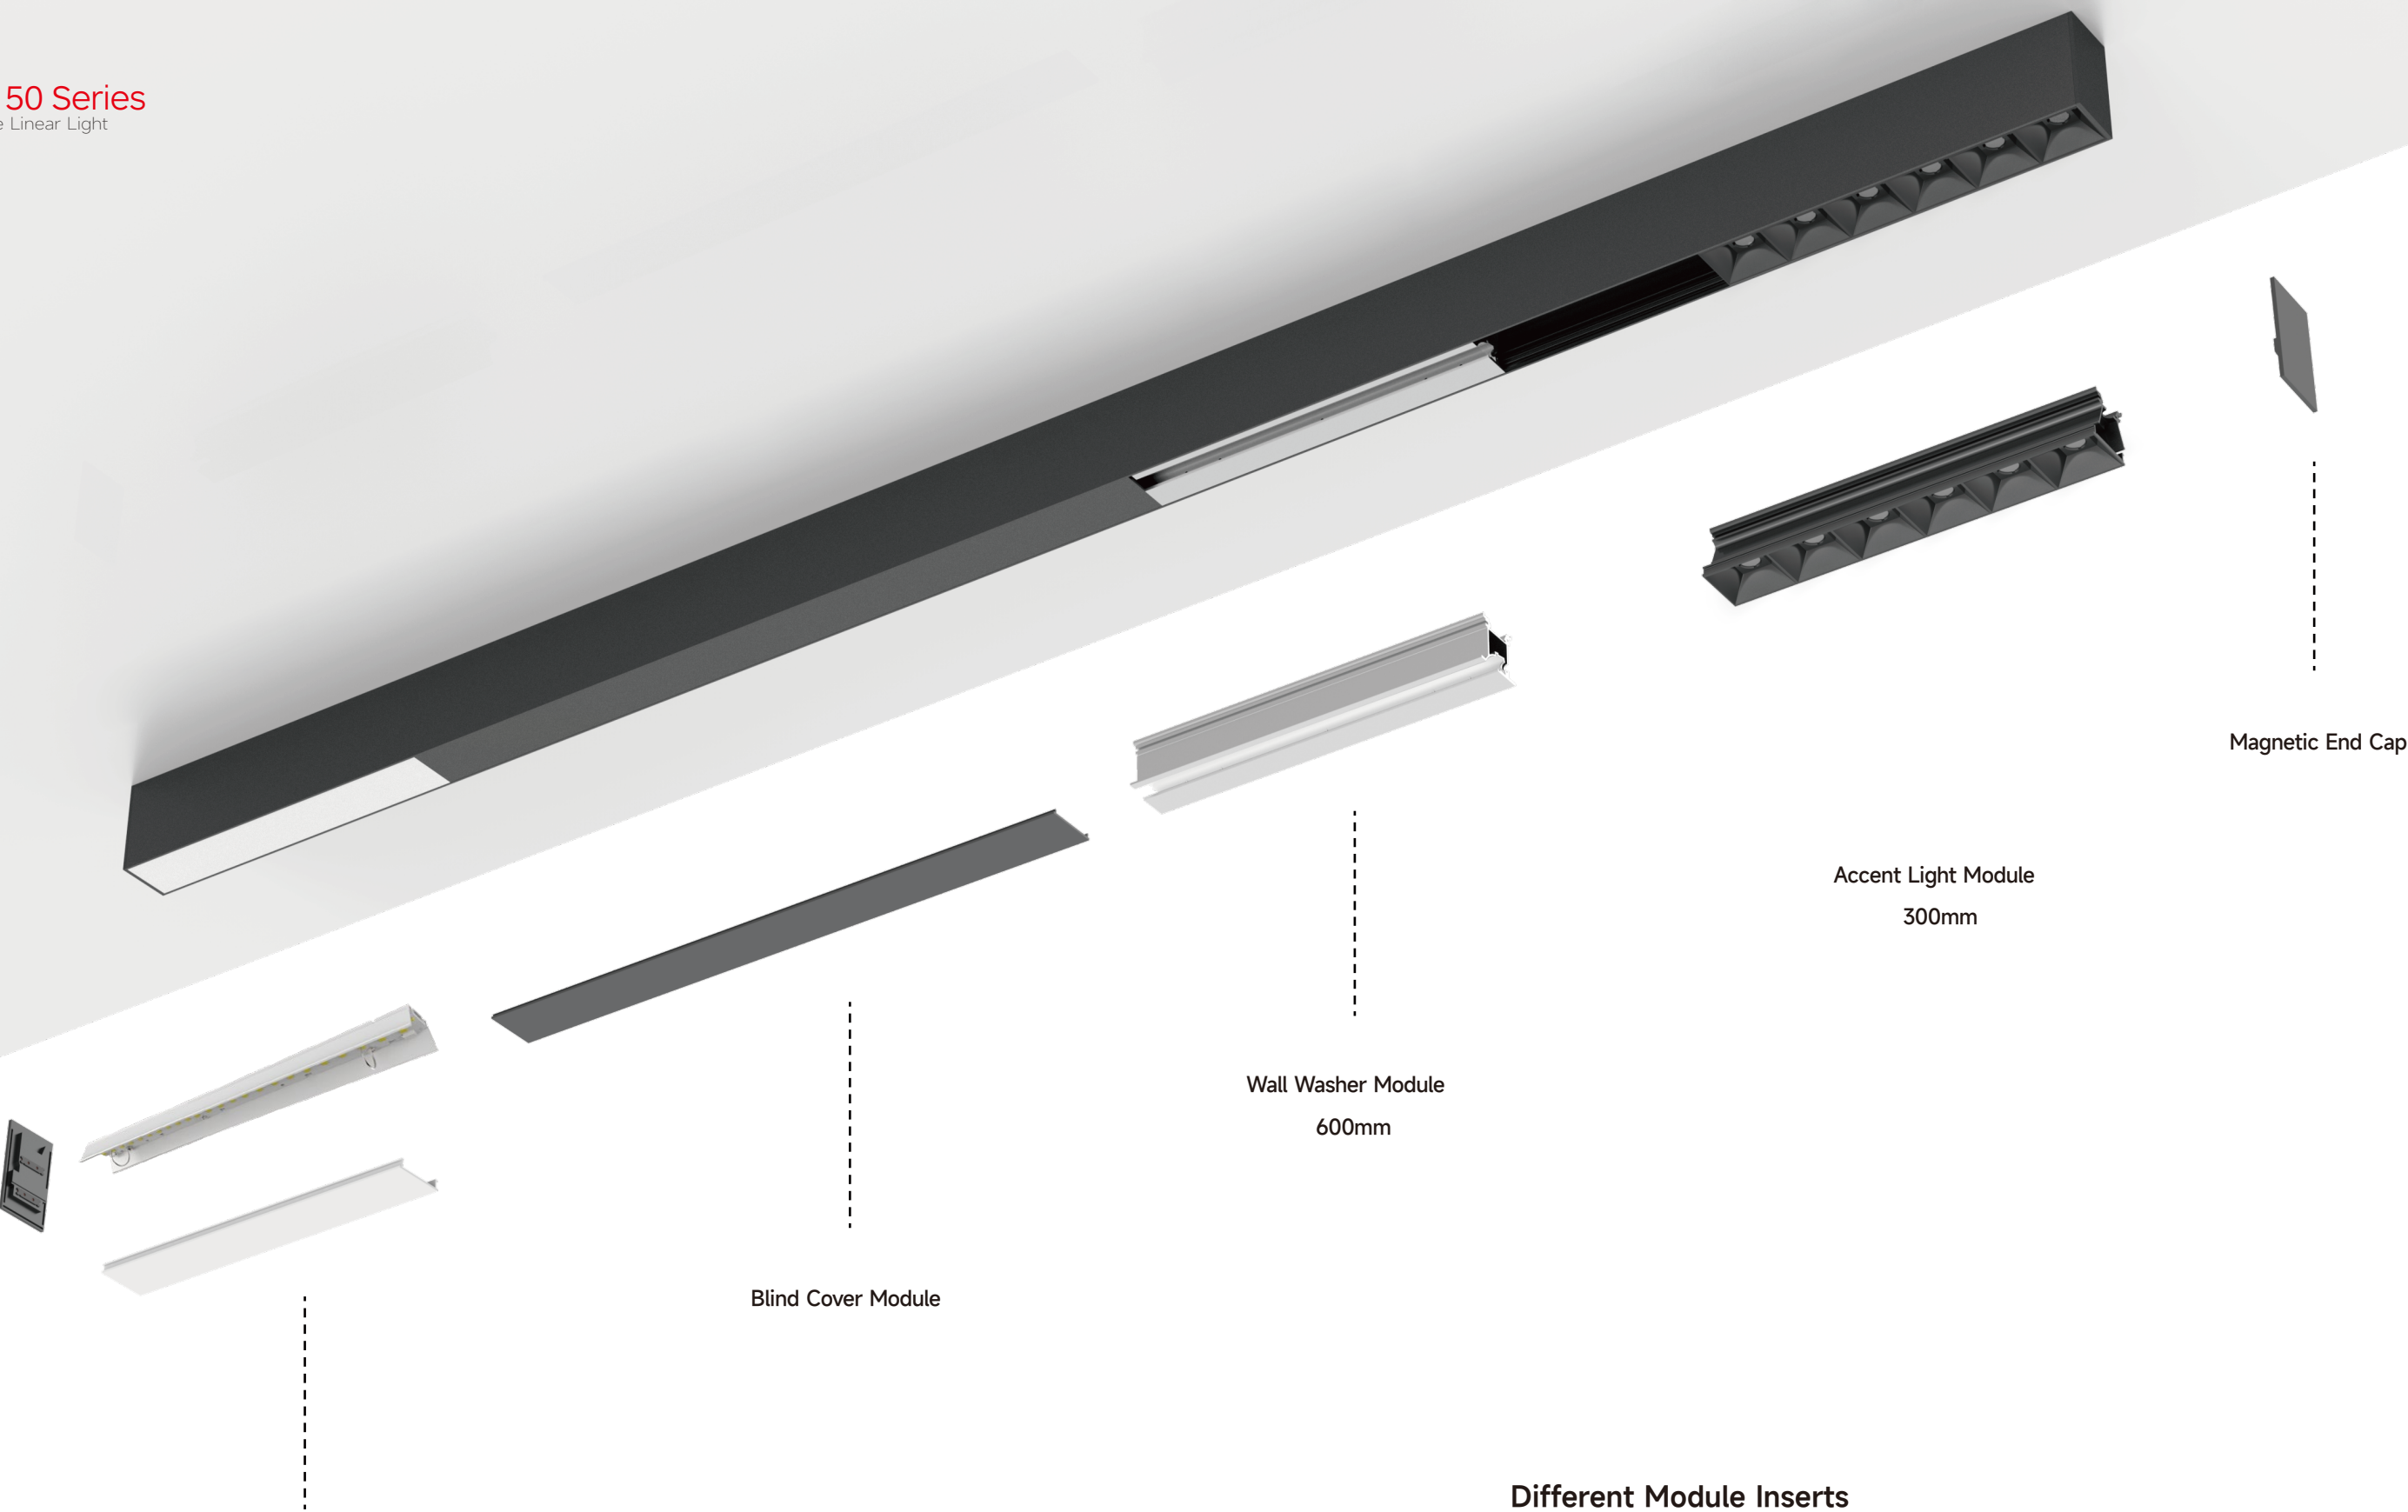

Different Module Inserts

Profile system made of extruded aluminium with 1 ⁵/₁₆" (50mm) width
Various lighting modules suitable for multiple lighting applications
General light, accent light, and wall washer module for choice
Tool-free inserts mounting by clip-in mechanism
Standard ,customized sizes module and cover for high precise system
Magnetic end cap without fixing screws

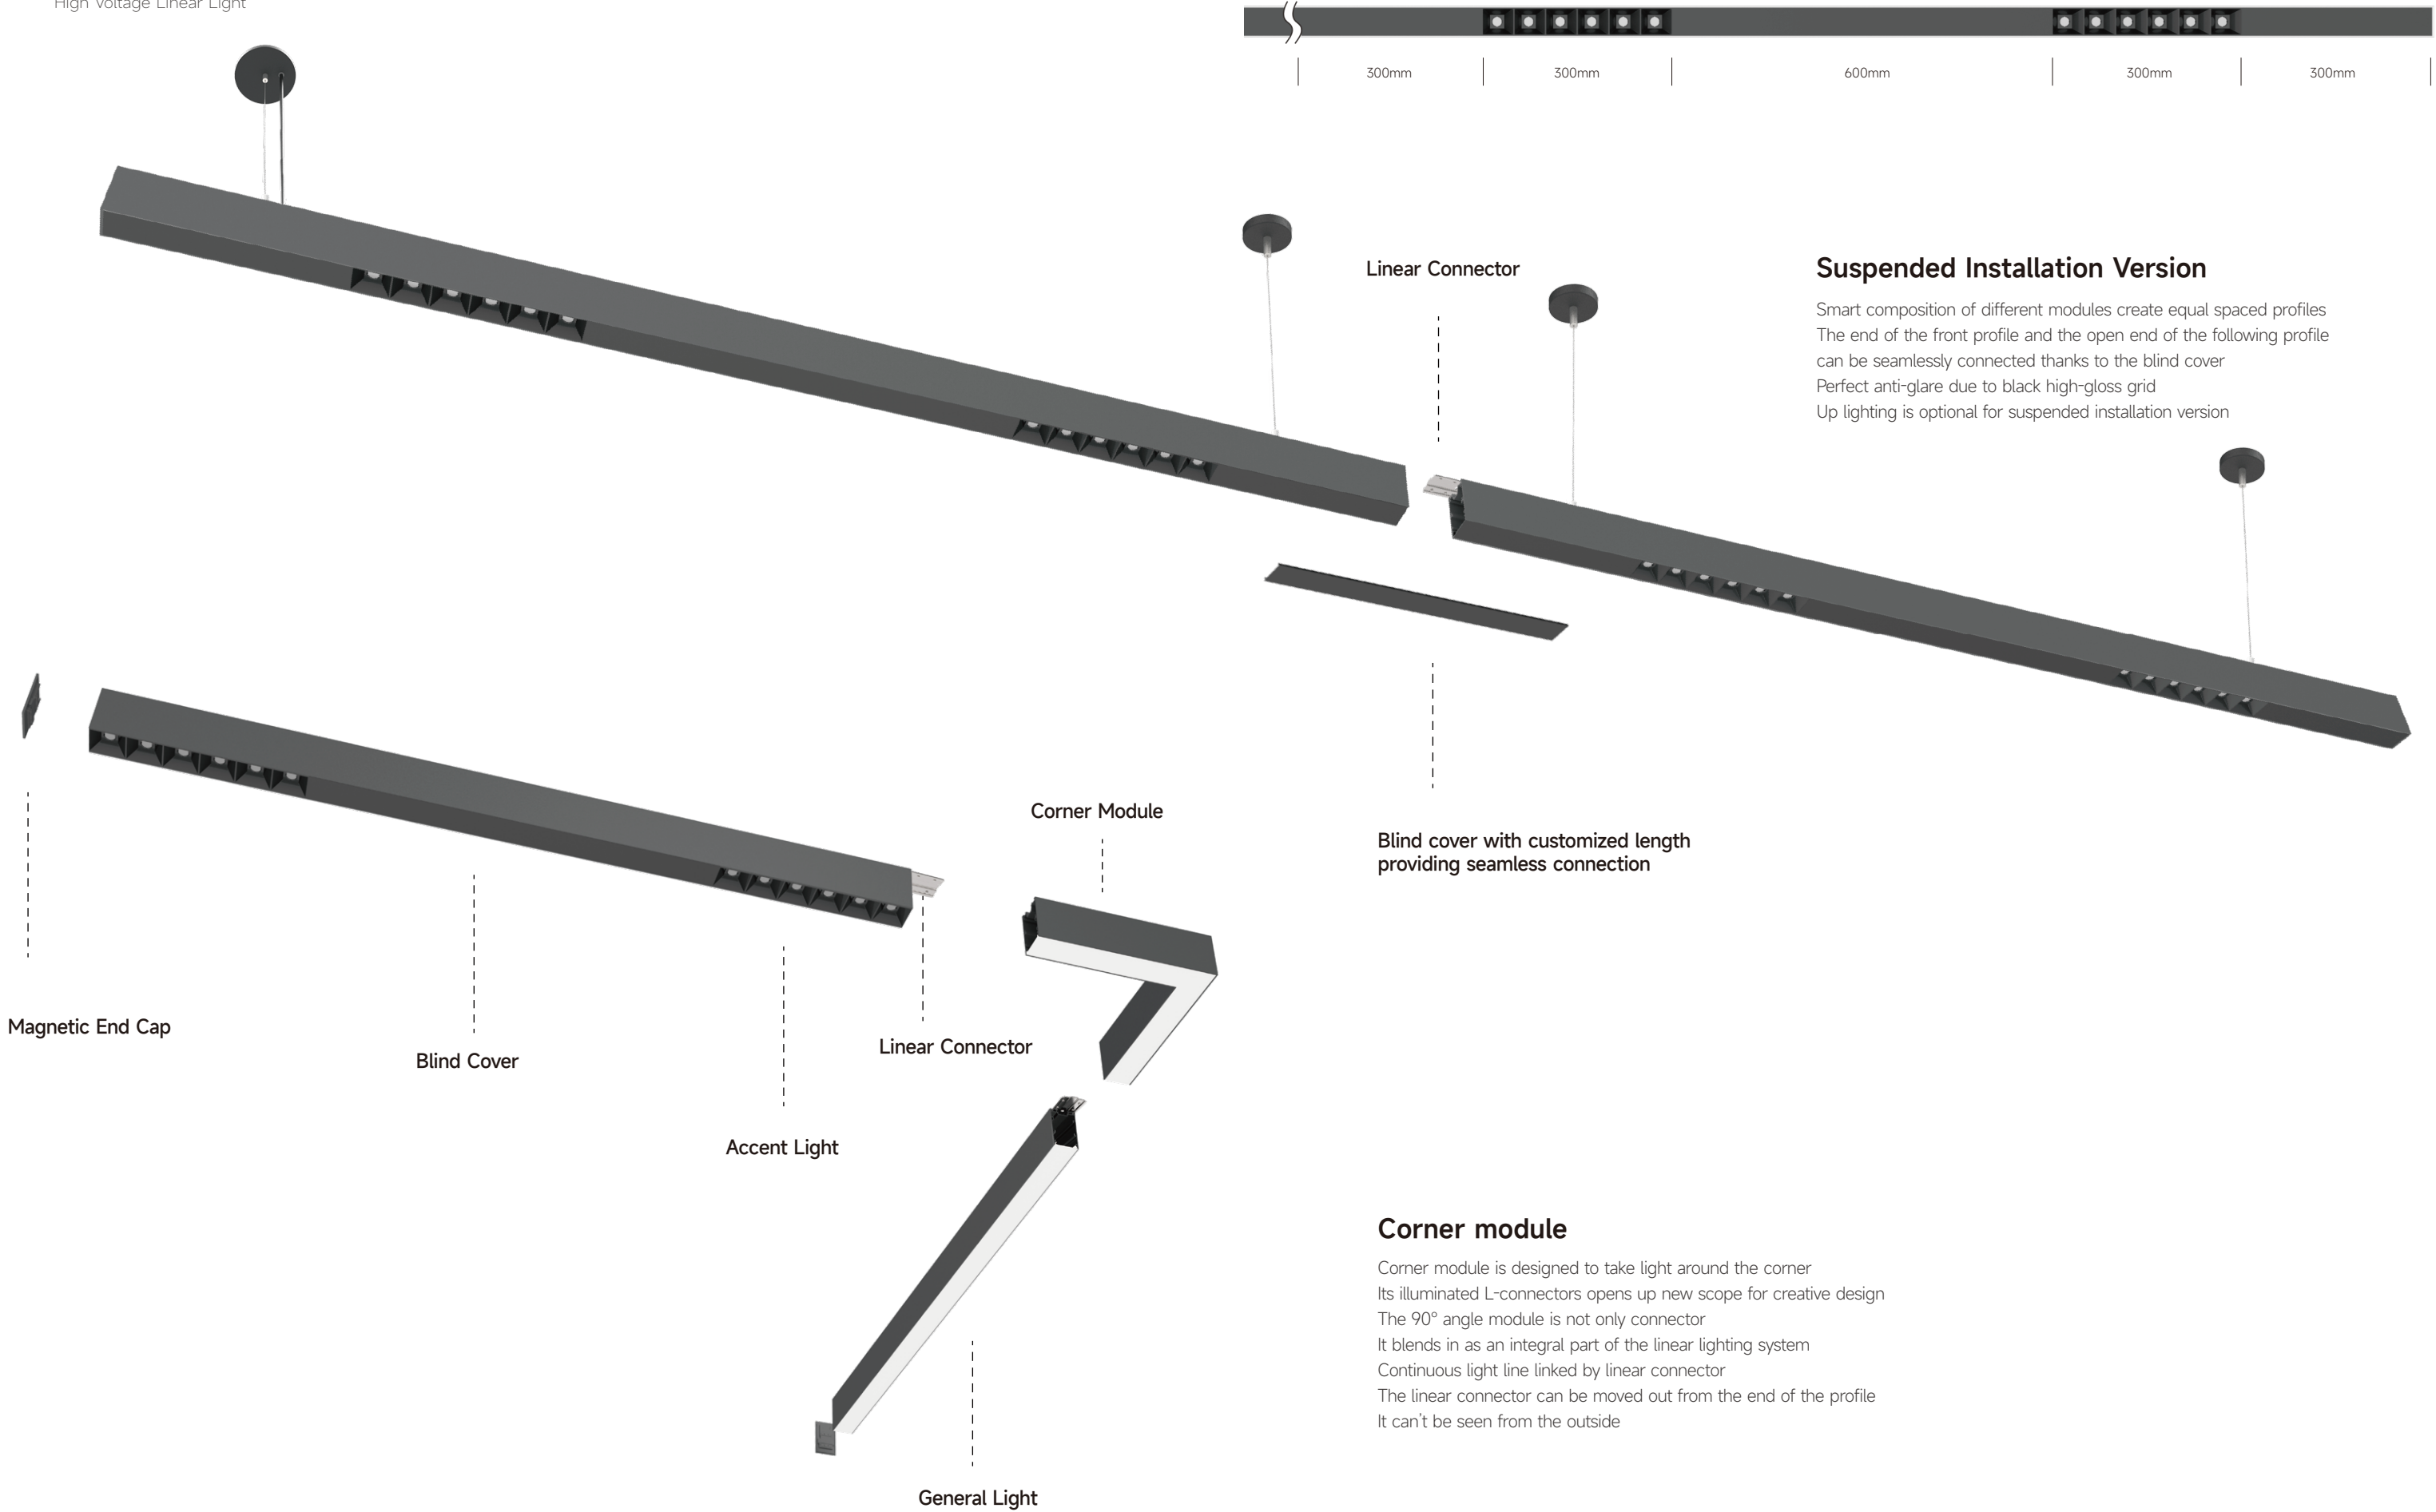

Suspended Installation Version

Smart composition of different modules create equal spaced profiles
The end of the front profile and the open end of the following profile
can be seamlessly connected thanks to the blind cover
Perfect anti-glare due to black high-gloss grid
Up lighting is optional for suspended installation version


Blind cover with customized length
providing seamless connection



Corner module

Corner module is designed to take light around the corner
Its illuminated L-connectors opens up new scope for creative design
The 90° angle module is not only connector
It blends in as an integral part of the linear lighting system
Continuous light line linked by linear connector
The linear connector can be moved out from the end of the profile
It can't be seen from the outside

QUICK 50 different module

Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology

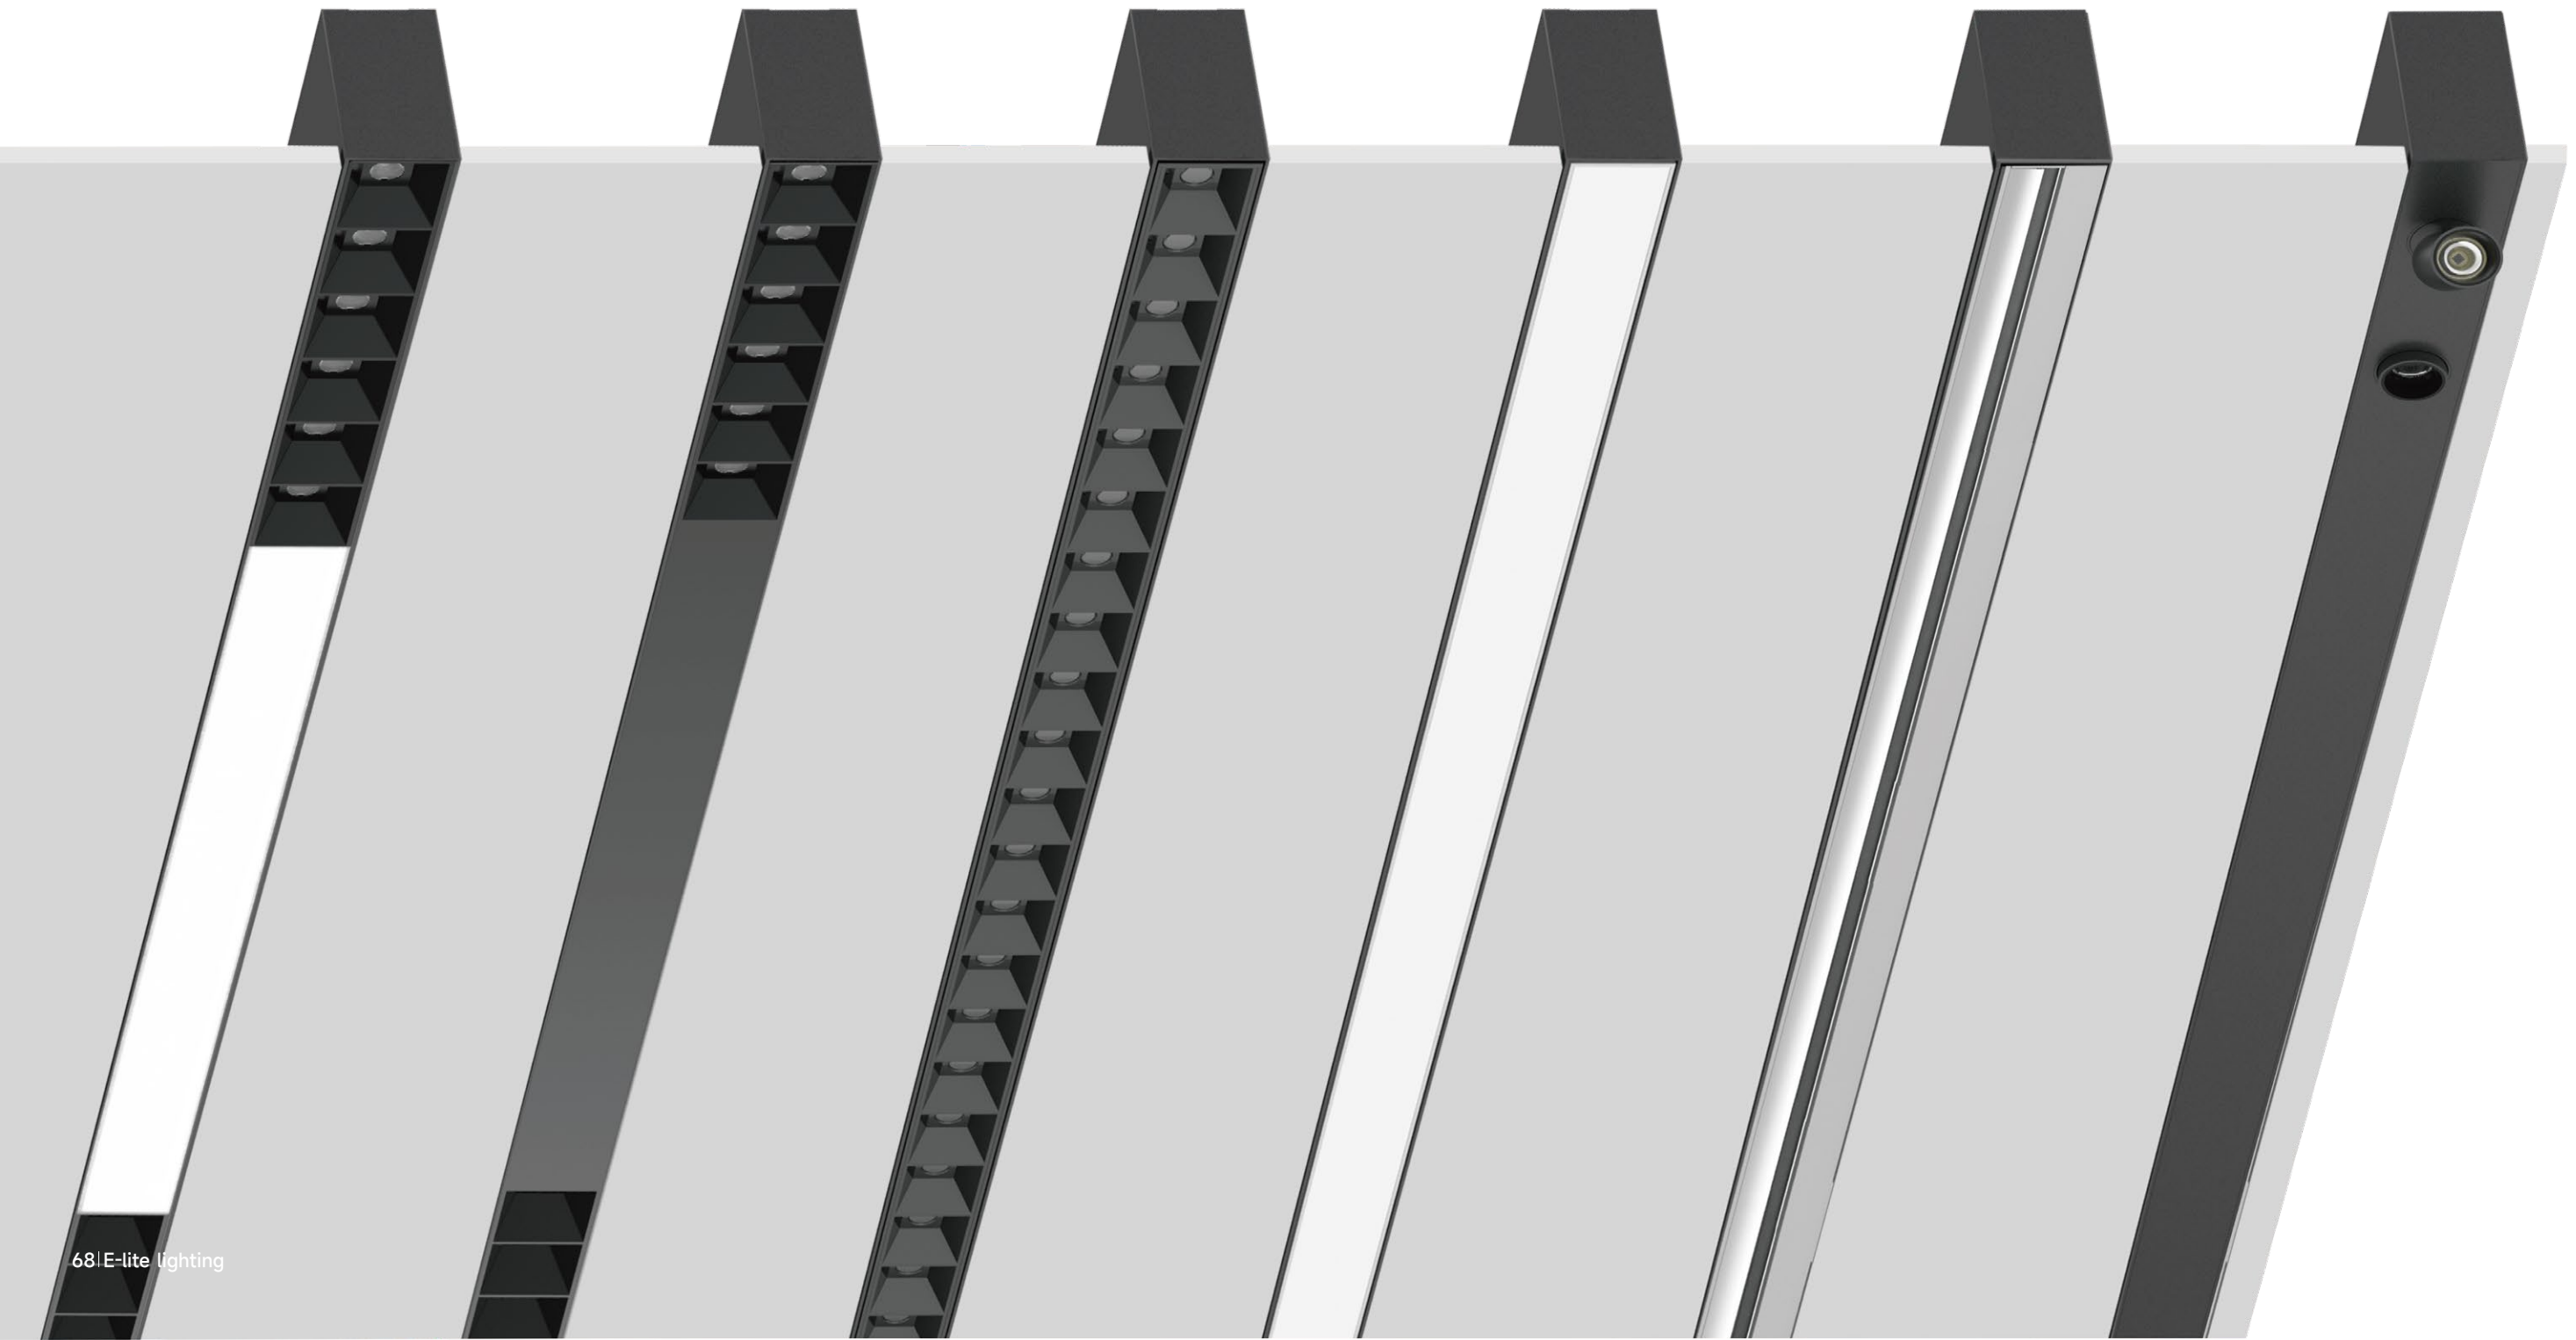

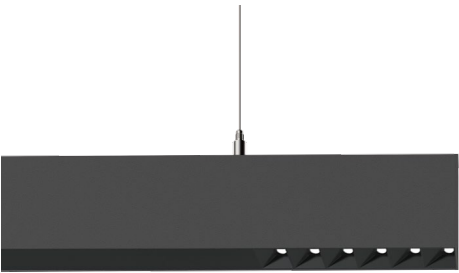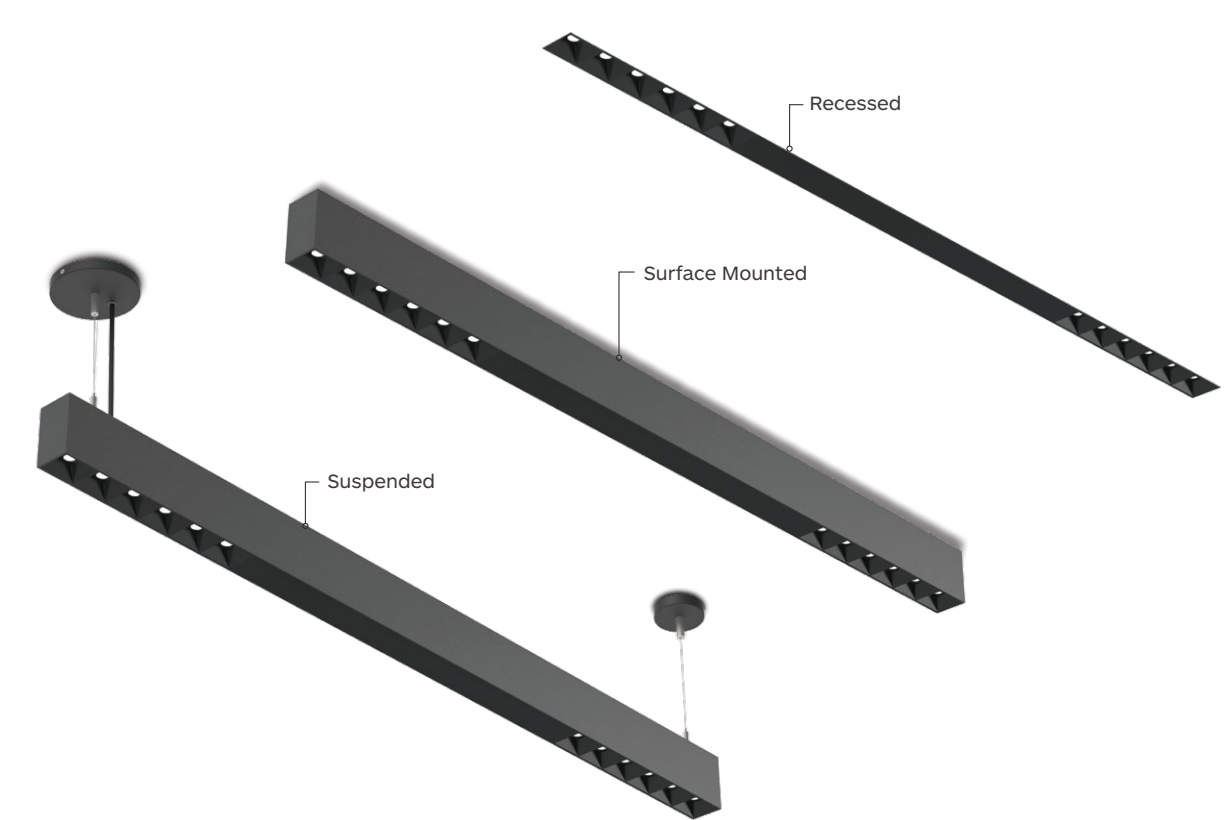

QUICK50-AL




White



Black

Drawing



Accent Light Fixture



Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 1 15/16" (50mm) width Various lighting modules with multiple lighting applications

Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 47 1/4"(1200mm),70 7/8"(1800mm)

1200MM / 1800MM

30W 2200 Lm

Code	LED LM	System LM	CD	LED W	System W	CRI	CCT	Beam
Quick50-2*AL300-30W-830-15	3000lm	2200lm	24024 cd	26W	30W	83	3000K	15°
Quick50-2*AL300-30W-840-15	3200lm	2400lm	26298 cd	26W	30W		4000K	
Quick50-2*AL300-30W-830-30	3000lm	2200lm	7940 cd	26W	30W	83	3000K	30°
Quick50-2*AL300-30W-840-30	3200lm	2400lm	8614 cd	26W	30W		4000K	
Quick50-2*AL300-30W-830-35x15	3000lm	2200lm	9876 cd	26W	30W	83	3000K	35°x15°
Quick50-2*AL300-30W-840-35x15	3200lm	2400lm	10704 cd	26W	30W		4000K	

Type



50

Mountings



recessed




surface



suspended

Installation type



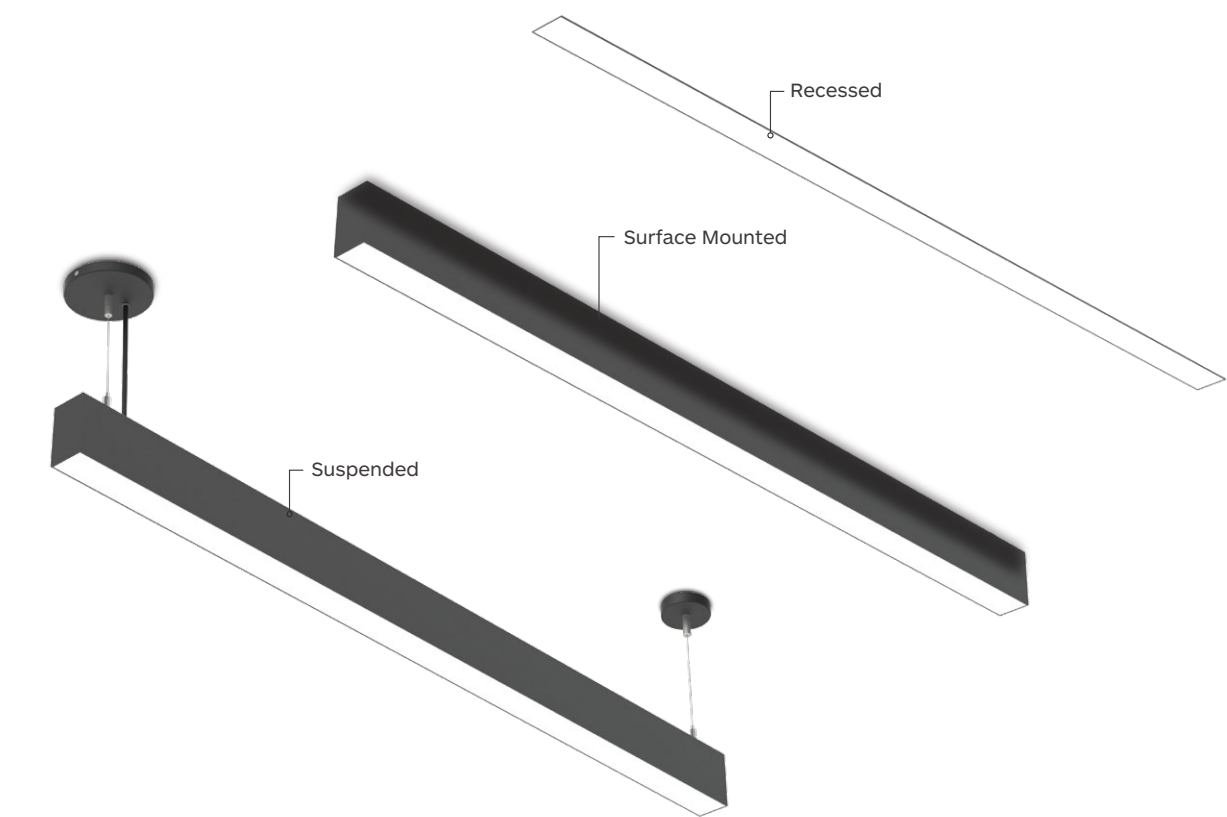

General Light Fixture



Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 1 15⁄16" (50mm) width Various lighting modules with multiple lighting applications

Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 47 3⁄4"(1200mm),70 7⁄8"(1800mm)

Type



50

Mountings



recessed




surface



suspended

Installation type

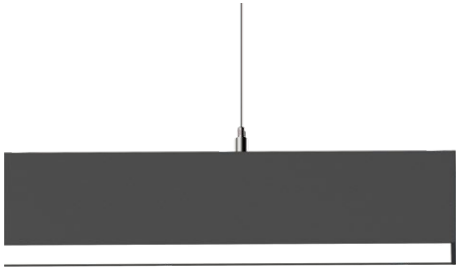

QUICK50-GL




White



Black

Drawing



1200MM


36W 3600-3800Lm

Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Quick50-GL1200-18W-830	4800lm	3600lm	32W	36W	83	3000K	105°
Quick50-GL1200-18W-840	5000lm	3800lm	32W	36W		4000K	

1800MM

54W 5400-5800Lm

Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Quick50-GL1800-54W-830	6600lm	5400lm	48W	54W	83	3000K	105°
Quick50-GL1800-54W-840	7000lm	5800lm	48W	54W		4000K	

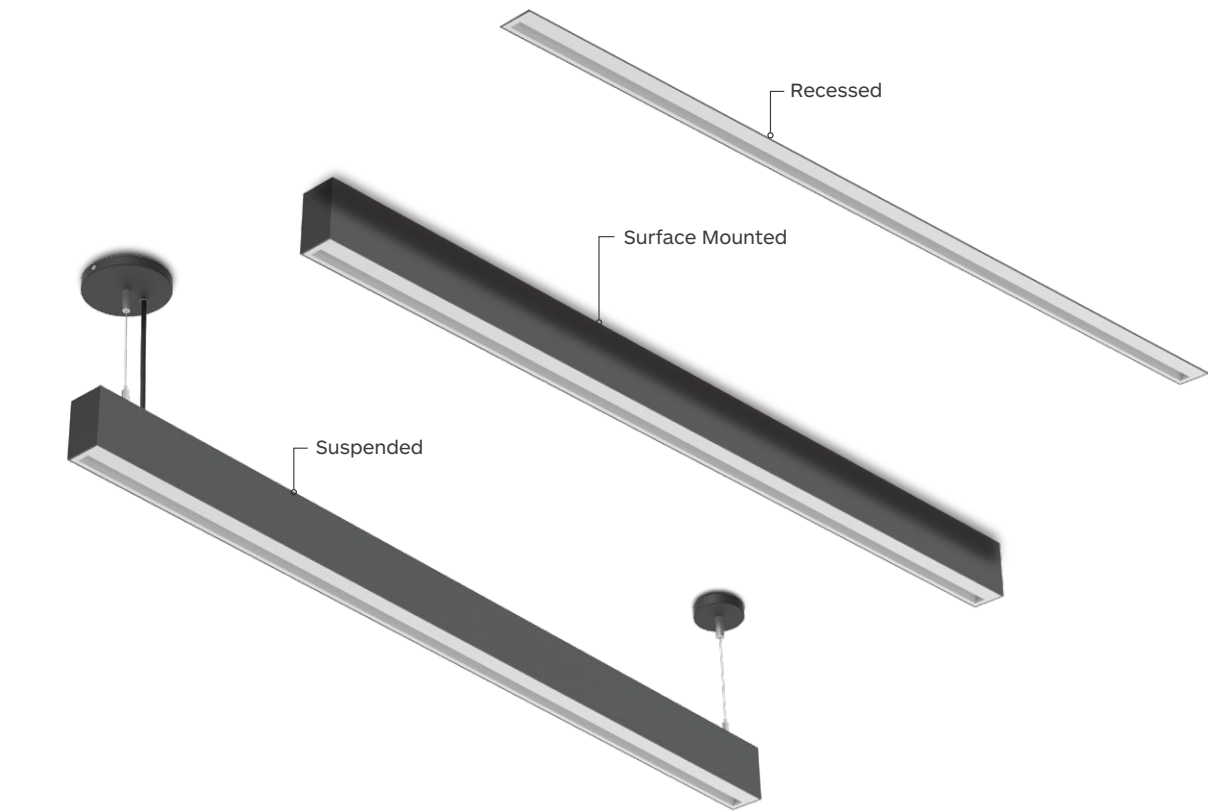

Wall Washer Fixture




Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 1 15⁄16" (50mm) width Various lighting modules with multiple lighting applications



Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 47 3⁄4"(1200mm),70 7⁄8"(1800mm)


Type Mountings




Installation type

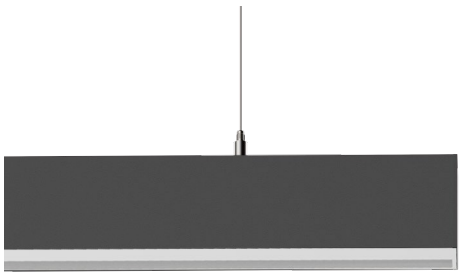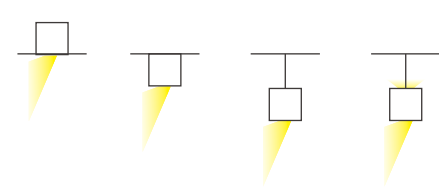

QUICK50-WW



Drawing

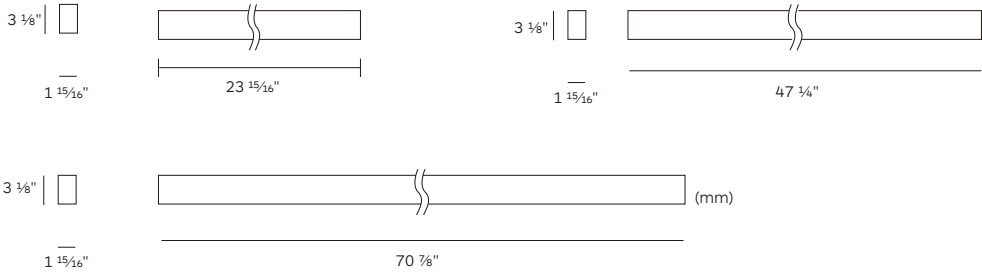

608MM
18W 1300-1400Lm


Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Quick50-WW608-18W-830	2400lm	1300lm	16W	18W	83	3000K	/
Quick50-WW608-18W-840	2500lm	1400lm	16W	18W		4000K	

1200MM
36W 2500-2700Lm

Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Quick50-WW1200-36W-830	4800lm	2500lm	32W	36W	83	3000K	/
Quick50-WW1200-36W-840	5000lm	2700lm	32W	36W		4000K	

1800MM
54W 3700-3900Lm

Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Quick50-WW1800-54W-830	6600lm	3700lm	48W	54W	83	3000K	/
Quick50-WW1800-54W-840	7000lm	3900lm	48W	54W		4000K	

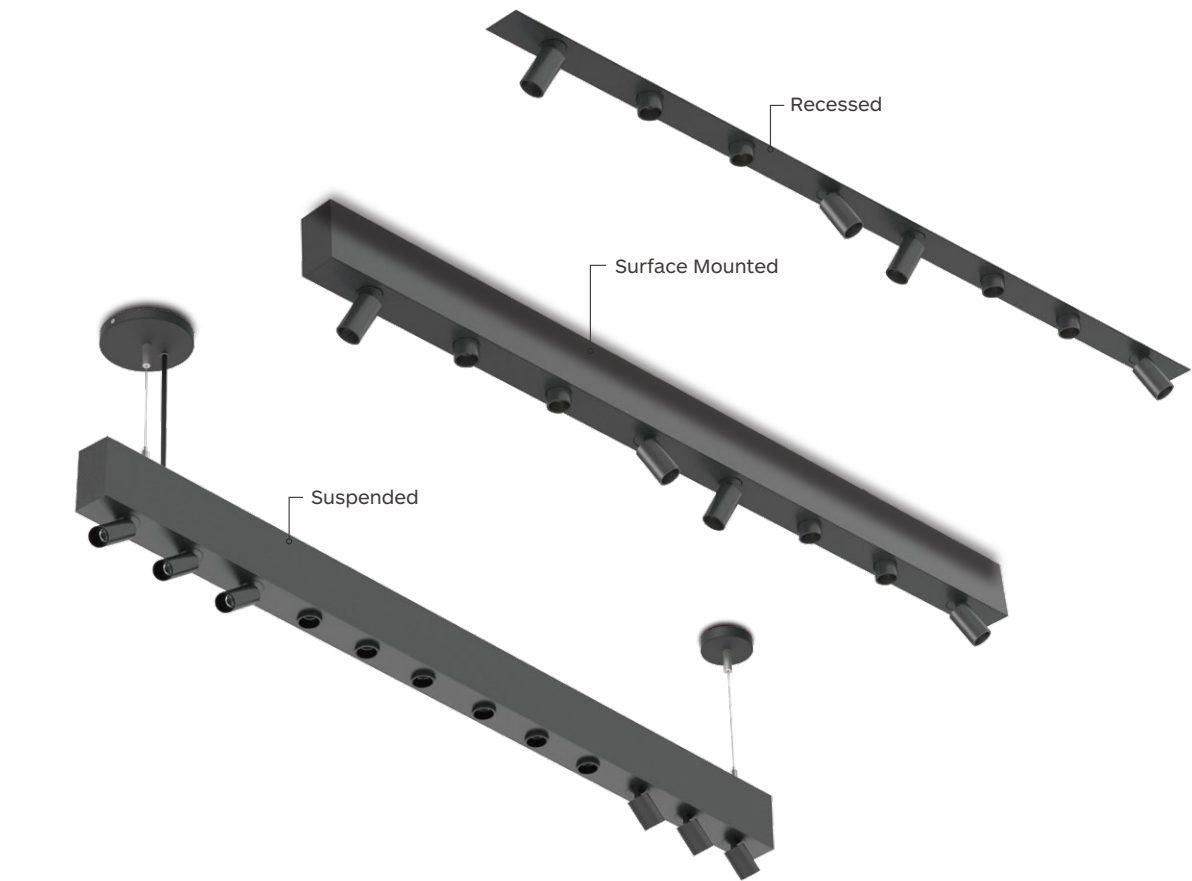

Spot Light




Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 1 15⁄16" (50mm) width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 47 3⁄4"(1200mm),70 7⁄8"(1800mm)


Type Mountings



Installation type

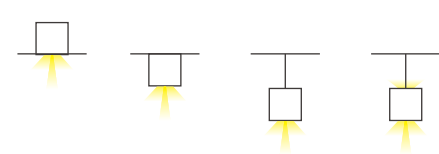

Drawing

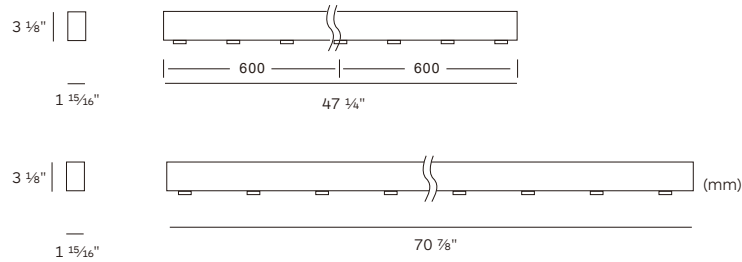

1200MM



40W 2800-3000Lm

Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Quick50-SL1200-40W-830-15	3800lm	2800lm	32W	40W	83	3000K 4000K	15°
Quick50-SL1200-40W-830-30	3800lm	2800lm	32W	40W	83	3000K 4000K	30°
Quick50-SL1200-40W-830-55	3800lm	2800lm	32W	40W	83	3000K 4000K	55°

1800MM

60W 4200-4500Lm


Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Quick50-SL1800-60W-830-15	5700lm	4200lm	48W	60W	83	3000K 4000K	15°
Quick50-SL1800-60W-830-30	5700lm	4200lm	48W	60W	83	3000K 4000K	30°
Quick50-SL1800-60W-830-55	5700lm	4200lm	48W	60W	83	3000K 4000K	55°

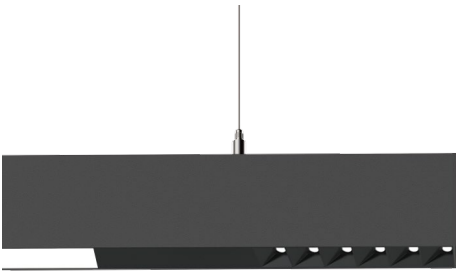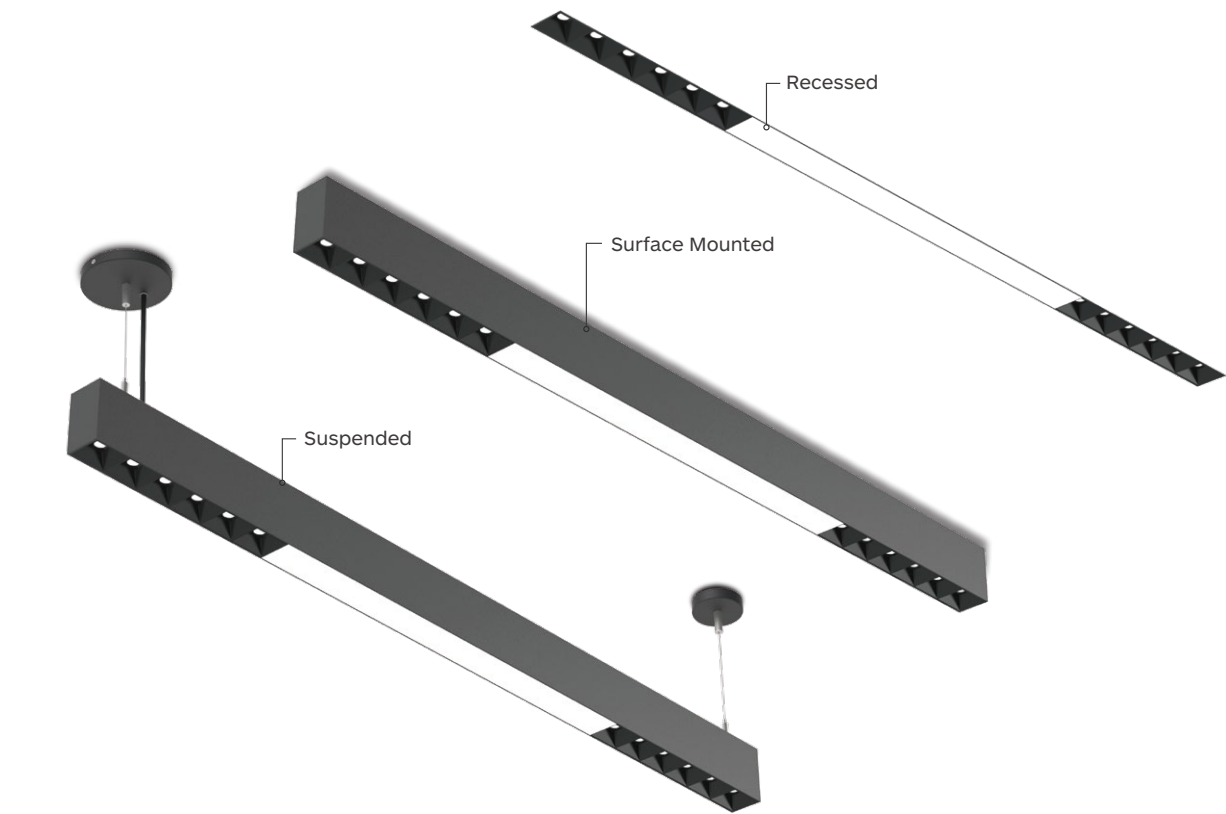

QUICK50-2AL+GL



Drawing

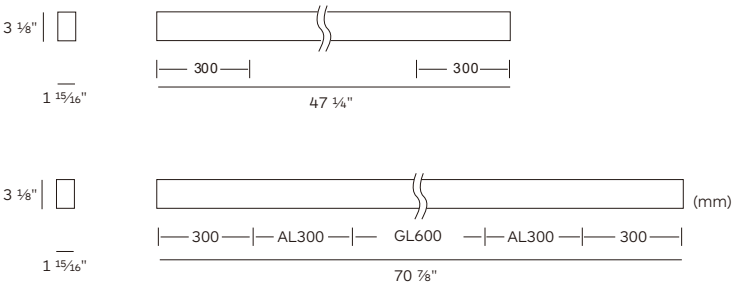

Combination of Accent Light and General Light



Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 1 15/16" (50mm) width Various lighting modules with multiple lighting applications

Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 47 3/4"(1200mm),70 7/8"(1800mm)


1200MM

48W 4000-4200Lm


Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Quick50-2*AL300+GL600-48W-830-15&105	5200lm	4000lm	42W	48W	83	3000K	15° +105°
Quick50-2*AL300+GL600-48W-840-15&105	5400lm	4200lm	42W	40W		4000K	
Quick50-2*AL300+GL600-48W-830-30&105	5200lm	4000lm	42W	48W	83	3000K	30° +105°
Quick50-2*AL300+GL600-48W-840-30&105	5400lm	4200lm	42W	48W		4000K	
Quick50-2*AL300+GL600-48W-830-35*15&105	5200lm	4000lm	42W	48W	83	3000K	35*15° +105°
Quick50-2*AL300+GL600-48W-840-35*15&105	5400lm	4200lm	42W	48W		4000K	

Type

Mountings



Installation type

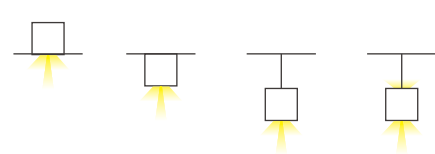

LUCIA & FIATIA Series
Surface Mounted & Pendant Light



LUCIA & FIATIA

80'E-lite lighting



LUCIA & FIATIA Series
Surface Mounted & Pendant Light




LUCIA & FLATIA
Surface & Pendant

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
- 4 diameters for options 13 3/4", 17 1/16", 23 5/8", 35 7/16" (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eye comfort

82IE-lite lighting

Surface-mounted

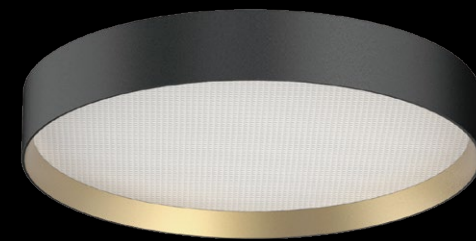


Cable Suspension



Rod Suspension



LUCIA & FIATIA Series
Surface Mounted & Pendant Light

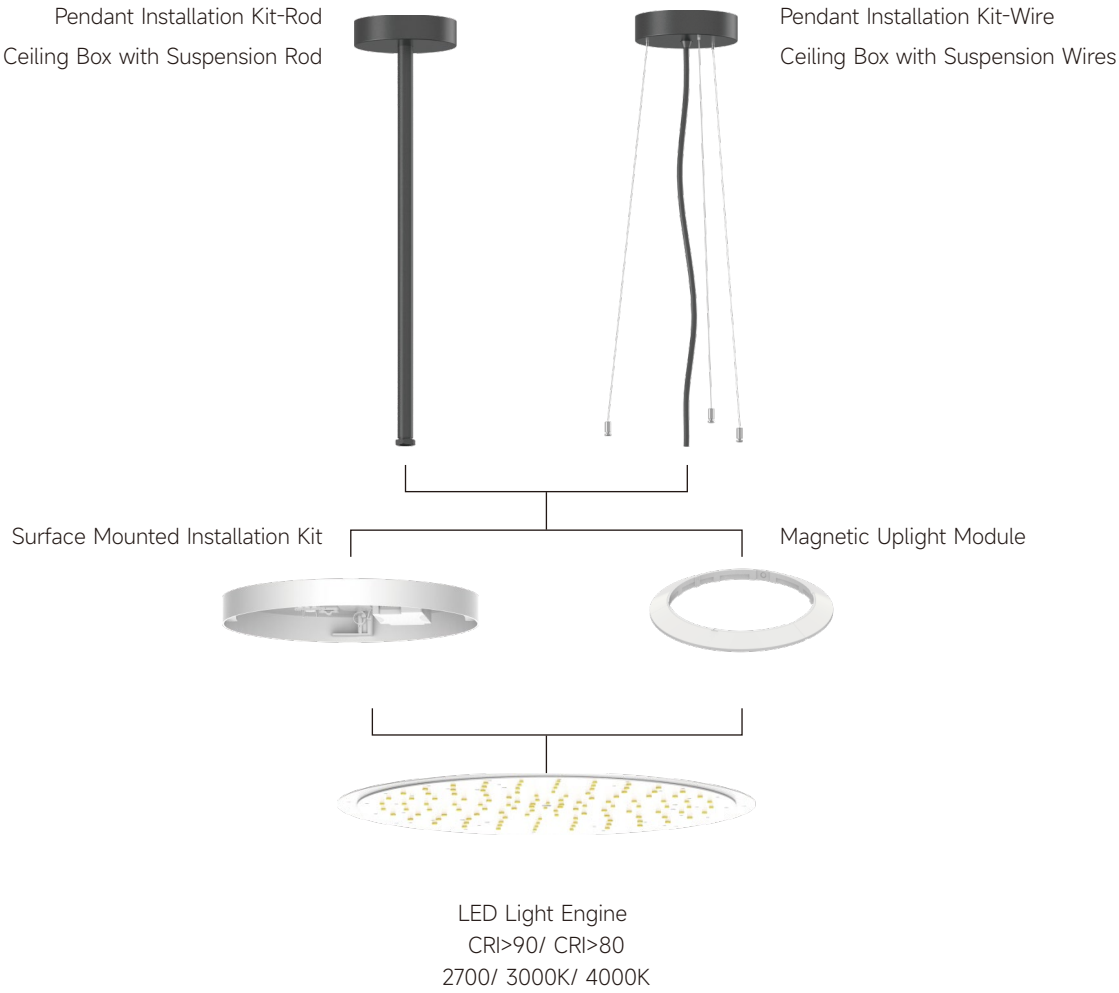


Colour

LUCIA




FLATIA

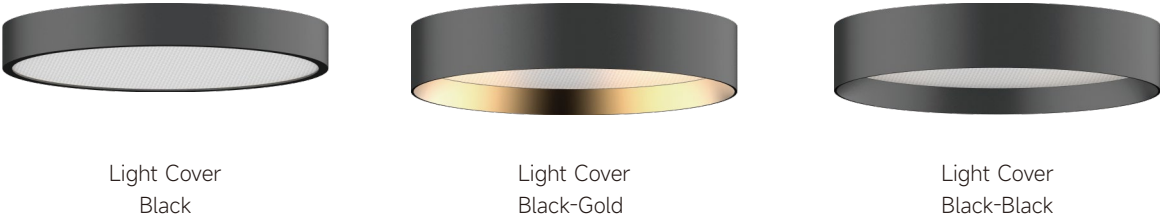


Uplight



Accessory

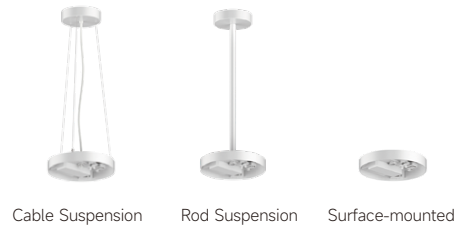


Installation

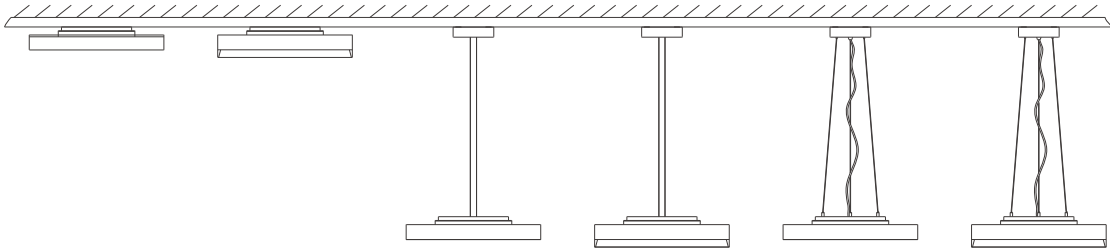

LUCIA
Higher Lumen Output




Decorative Version

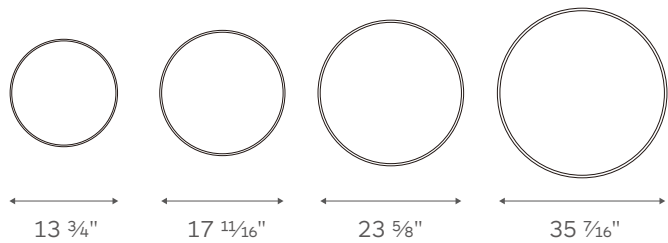

(350 mm, 450 mm, 600 mm, 900 mm)



Classic Version

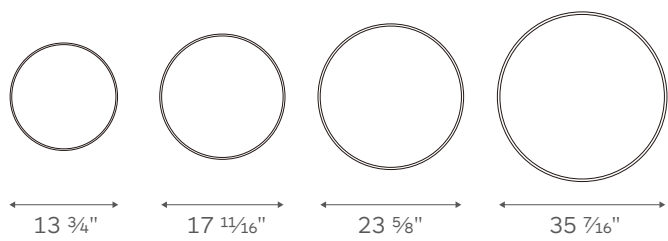


(350 mm, 450 mm, 600 mm, 900 mm)

FLATIA
Super Flat Design




Decorative Version

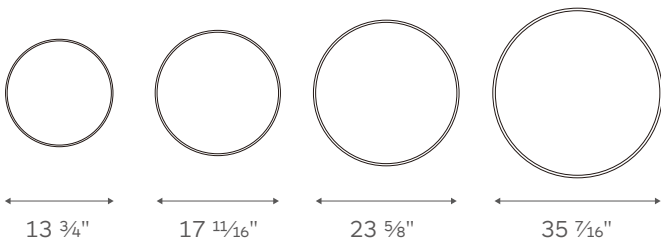

(350 mm, 450 mm, 600 mm, 900 mm)




Classic Version

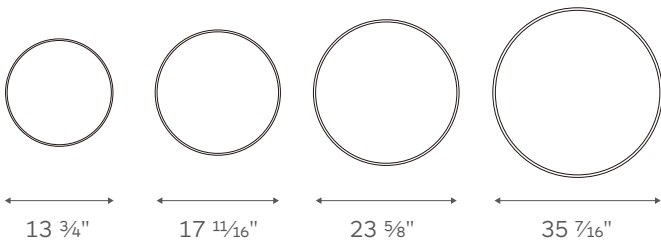


(350 mm, 450 mm, 600 mm, 900 mm)

LUCIA & FIATIA Series
Surface Mounted & Pendant Light




LUCIA 350
Bulit in LED **14W/18W**
CRI 83 3000K/400K
14W 1400Lm-1500Lm
18W 2000Lm-2200Lm
13 ¾"x 1 15/16"

Classic Version: White/Black




LUCIA 450
Bulit in LED **18W/26W**
CRI 83 3000K/400K
18W 2000Lm-2200Lm
26W 2800Lm-3000Lm
17 11/16"x1 15/16"

Classic Version: White/Black

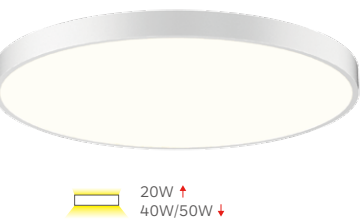


LUCIA 600
Bulit in LED **40W/50W**
CRI 83 3000K/400K
40W 4700Lm-5000Lm
50W 6100Lm-6500Lm
23 5/8"x1 15/16"

Classic Version: White/Black

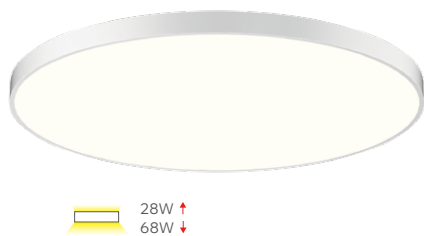

LUCIA 900
Bulit in LED **68W**
CRI 83 3000K/400K
8000Lm-8500Lm
35 7/16"x1 15/16"

Classic Version: White/Black



LUCIA 350
Bulit in LED **14W/18W**
CRI 83 3000K/400K
14W 1400Lm-1500Lm
18W 2000Lm-2200Lm
13 ¾"x2 15/16"

Decorative Version: White/Black/Balck+Gold




LUCIA 450
Bulit in LED **18W/26W**
CRI 83 3000K/400K
18W 2000Lm-2200Lm
26W 2800Lm-3000Lm
17 11/16"x2 15/16"

Decorative Version: White/Black/Balck+Gold



LUCIA 600
Bulit in LED **40W/50W**
CRI 83 3000K/400K
40W 4700Lm-5000Lm
50W 6100Lm-6500Lm
23 5/8"x2 15/16"

Decorative Version: White/Black/Balck+Gold

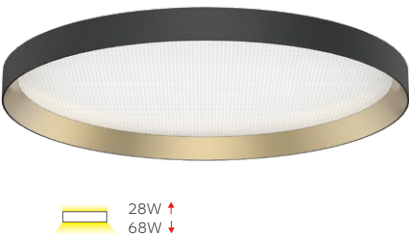

LUCIA 900
Bulit in LED **68W**
CRI 83 3000K/400K
8000Lm-8500Lm
35 7/16"x2 15/16"

Decorative Version: White/Black/Balck+Gold



10W ↑
14W/18W ↓

FLATIA 350

Built in LED **14W/18W**
CRI 83 3000K/400K
14W 1400Lm-1500Lm
18W 2000Lm-2200Lm
13 3/4"x9 1/16"

Classic Version: White/Black



10W ↑
14W/18W ↓

FLATIA 350

Built in LED **14W/18W**
CRI 83 3000K/400K
14W 1400Lm-1500Lm
18W 2000Lm-2200Lm
13 3/4"x1 3/4"

Decorative Version: White/Black/Balck+Gold



13W ↑
18W/26W ↓

FLATIA 450

Built in LED **18W/26W**
CRI 83 3000K/400K
18W 2000Lm-2200Lm
26W 2800Lm-3000Lm
17 11/16"x9 1/16"

Classic Version: White/Black



13W ↑
18W/26W ↓

FLATIA 450

Built in LED **18W/26W**
CRI 83 3000K/400K
18W 2000Lm-2200Lm
26W 2800Lm-3000Lm
17 11/16"x1 3/4"

Decorative Version: White/Black/Balck+Gold



20W ↑
40W/50W ↓

FLATIA 600

Built in LED **40W/50W**
CRI 83 3000K/400K
40W 4700Lm-5000Lm
50W 6100Lm-6500Lm
23 5/8"x9 1/16"

Classic Version: White/Black



20W ↑
40W/50W ↓

FLATIA 600

Built in LED **40W/50W**
CRI 83 3000K/400K
40W 4700Lm-5000Lm
50W 6100Lm-6500Lm
23 5/8"x1 3/4"

Decorative Version: White/Black/Balck+Gold



28W ↑
68W ↓

FLATIA 900

Built in LED **68W**
CRI 83 3000K/400K
8000Lm-8500Lm
35 7/16"x9 1/16"

Classic Version: White/Black



28W ↑
68W ↓

FLATIA 900

Built in LED **68W**
CRI 83 3000K/400K
8000Lm-8500Lm
35 7/16"x1 3/4"

Decorative Version: White/Black/Balck+Gold



START



START

One light engine with various accessories
Easy to specify
Easy to manage stock
Easy to install and adjust
Easy to change reflector

Adjustable



2"



SRA45
4W 350 lm-380 lm




3"



SRA68
7.5W 700 lm-750 lm
11W 900 lm-950 lm



4"



SRA100
18W 1600-1900Lm
25W 2100-2600Lm



5"



SRA125
18W 1400-1700Lm
25W 1900-2400Lm




6"



SRA150
25W 1700-2600Lm
38W 2600-3500Lm



2"



SSA45
4W 350 lm-380 lm



3"



SSA68
7.5W 700 lm-750 lm
11W 900 lm-950 lm



4"




SSA100
18W 1600-1900Lm
25W 2100-2600Lm



5"



SSA125
18W 1400-1700Lm
25W 1900-2400Lm



6"



SSA150
25W 1700-2600Lm
38W 2600-3500Lm

Fixed



4"



SRF100
18W 1600-1900Lm
25W 2100-2600Lm



5"



SRF125
18W 1300-1600Lm
25W 1800-2300Lm




6"




SRF150
25W 1600-2400Lm
38W 2400-3300Lm



4"




SSF100
18W 1600-1900Lm
25W 2100-2600Lm



5"



SSF125
18W 1300-1600Lm
25W 1800-2300Lm



6"



SSF150
25W 1600-2400Lm
38W 2400-3300Lm

Wall washer



4"



SRA100
18W 650-750Lm
25W 870-1000Lm



5"



SRA125
18W 800-900Lm
25W 1100-1300Lm




6"



SRA150
25W 1000-1100Lm
38W 1400-1600Lm




4"



SSF100
18W 650-750Lm
25W 870-1000Lm



5"



SSF125
18W 800-900Lm
25W 1100-1300Lm




6"




SSF150
25W 1000-1100Lm
38W 1400-1600Lm


TRIMS



Adjustable



Fixed



Wall washer

FLANGED

Adjustable


Fixed

Wall washer

Round



Square




FLANGELESS

Adjustable

Fixed

Wall washer

Round



Square



SHAPE




Flangeless-Round



Flanged-Round



Flanged-Square



Flangeless-Square



Round-Adjustable




Round-Fixed



Round-Wall Washer



Square-Adjustable



Square-Fixed



Square-Wall Washer

BAFFLE



Specular





Chrome Black



White











Matt



Black



Gold




Adjustable

Smart mechanical design features precise angle alignment.
Artistical style meets architectural requirement.
Fixing screws can be rotated to match ceiling with different thickness.




Easy to Adjust

Precision engineered adjustment mechanism achieves accurate angle alignment.

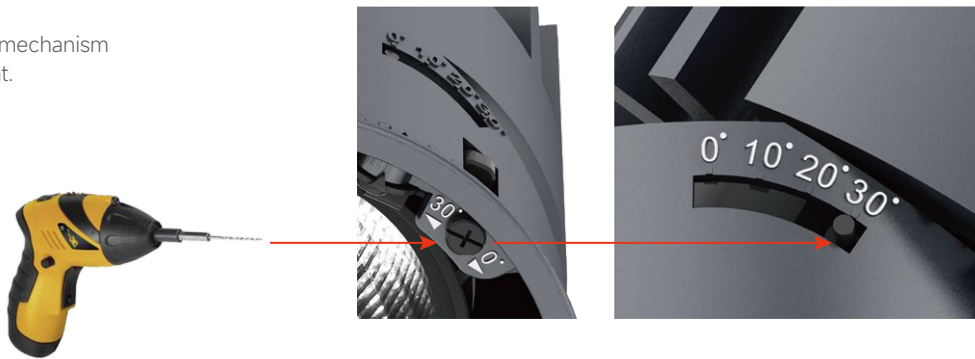

Intelligent mechanical design creates easy adjustment and precise alignment.

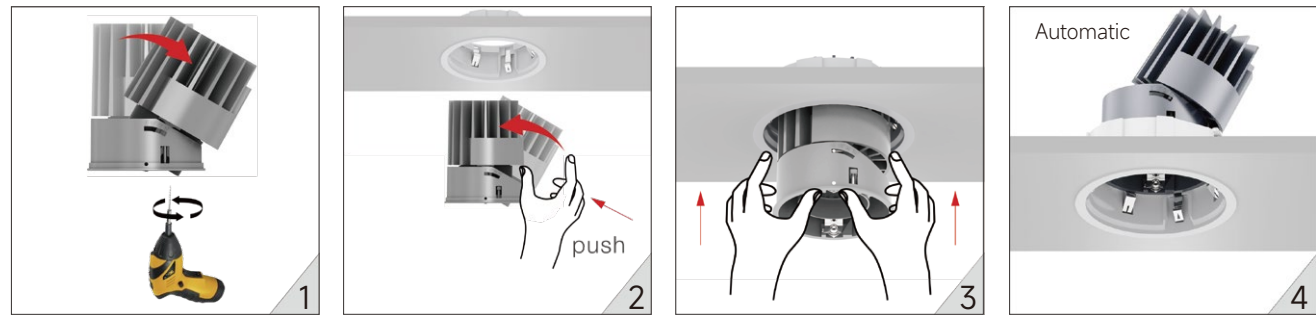

Technology Presents Arts

Ultra-narrow trim design leaves no flange between the secondary reflector and trim, meeting neat ceiling requirement.




Creative Ceiling Treatment

Installed easily and securely in the ceiling, using two screw fixing mechanisms.
Applying to 1/2"-1" (12-25mm) thickness ceiling and to 1/2"-1/2" (1-12mm) thickness ceiling with a fallen clip.



fit for ceiling thickness 1/2" (12mm) to 1" (25mm)



fit for ceiling thickness 1/2" (1mm) to 1/2" (12mm)



Installation



START 100

High luminous efficiency

Increase up to 60% lumen, compared with old version

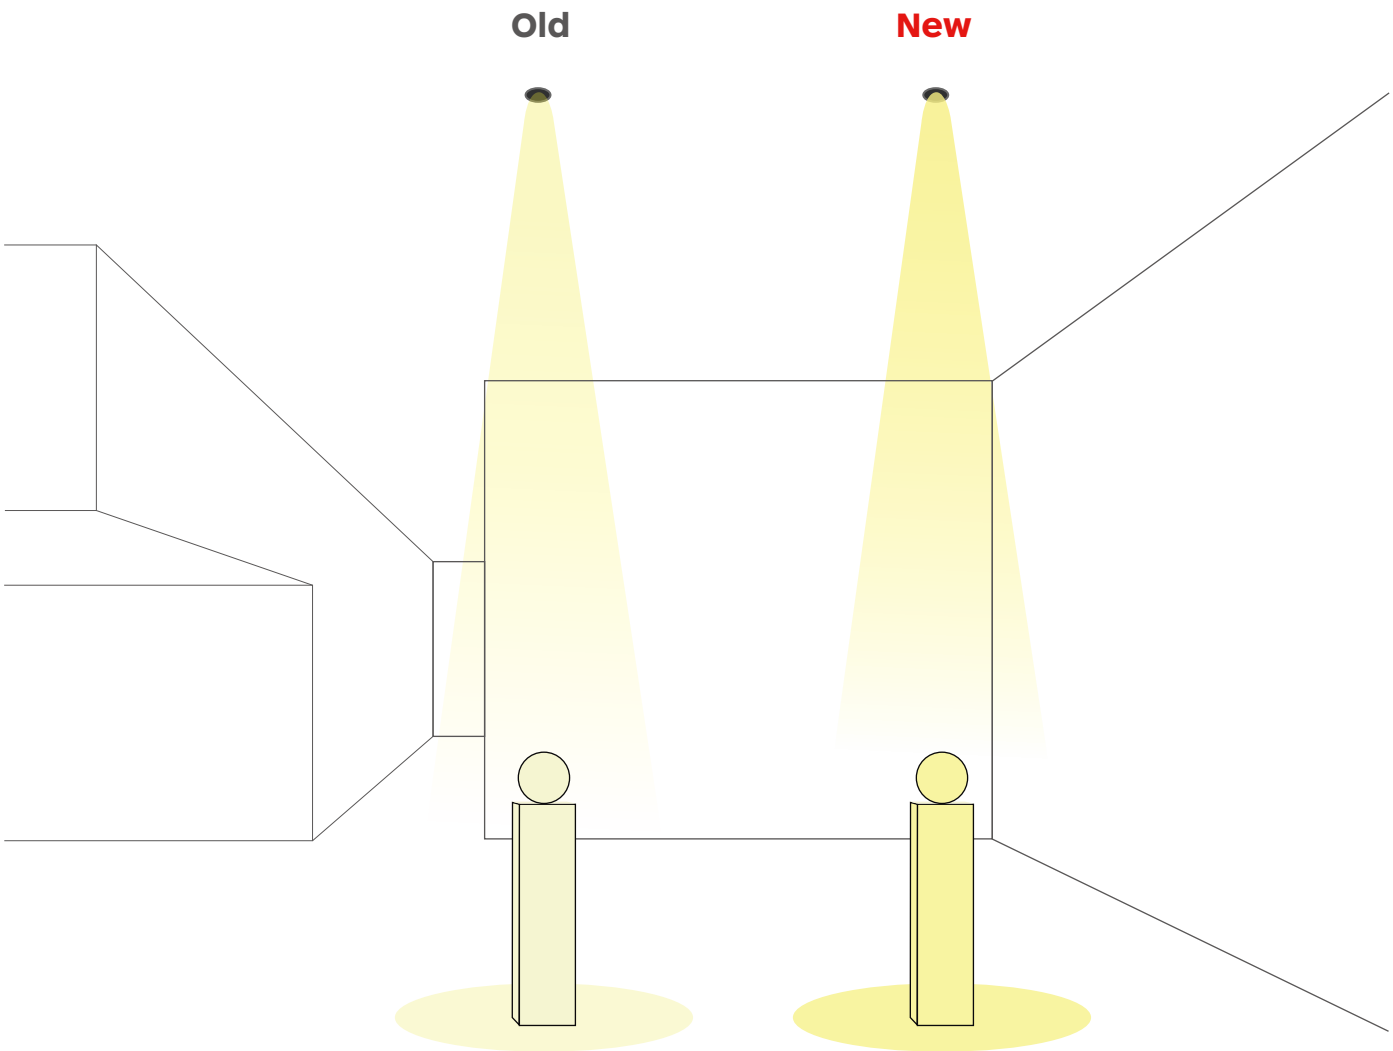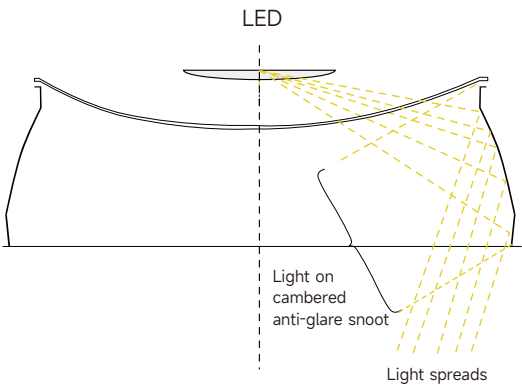


Assembly drawing

SRA100-21W

SRA100-28W

IP44 PC cover
Secondary reflector

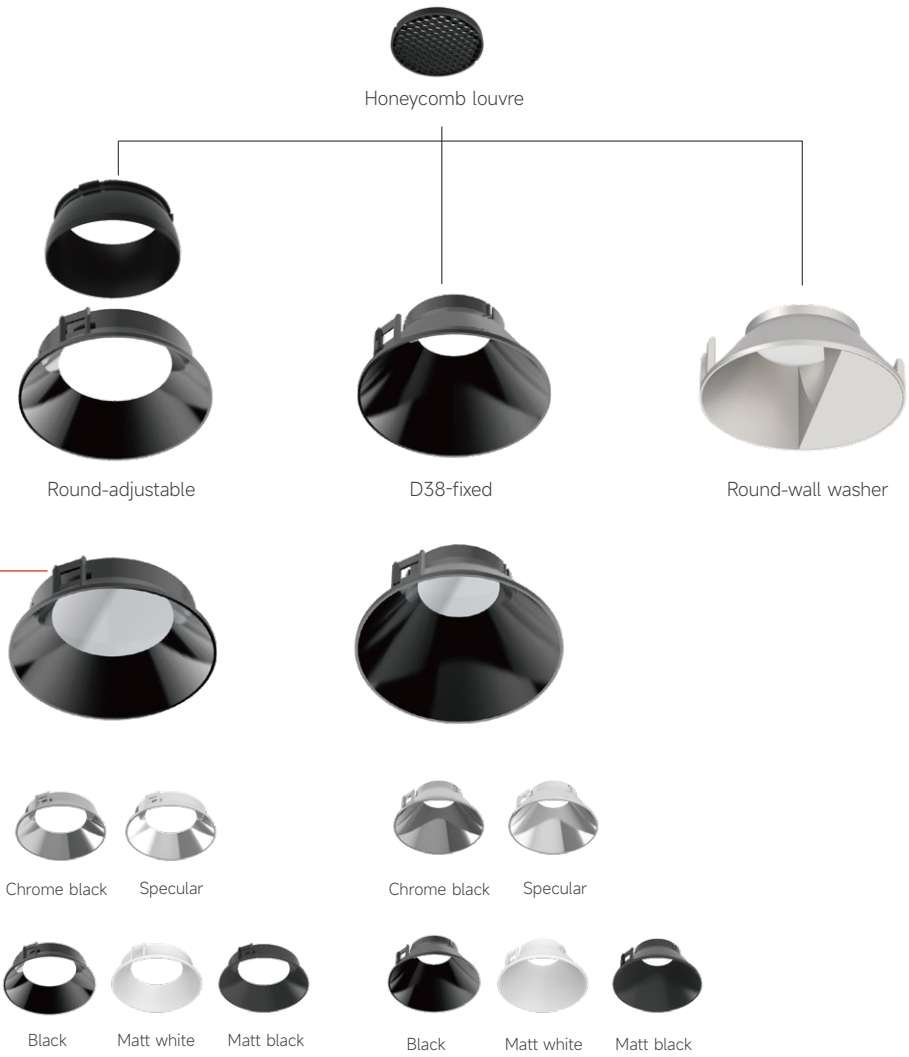

Light engines


SRA

round adjustable/downlight



SSA

square adjustable/downlight

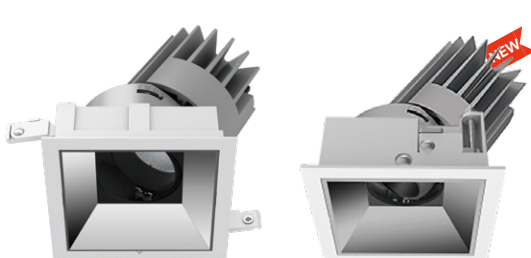


SRF

round fixed/downlight



SSF

square fixed/downlight



SRW

round wallwasher/wallwasher floor



SSW

square wallwasher/wallwasher floor



Cutout Diameter(mm)

Φ2" Φ3" Φ4" Φ5" Φ6"

SRA45 SRA68 SRA100 SRA125 SRA150



H:60 H:98 H:130/157 H:157 H:188



2"x2", 3"x3", 4"x4", 5"x5", 6"x6"

SSA45 SSA68 SSA100 SSA125 SSA150



H:60 H:98 H:130/157 H:157 H:188



Φ4" Φ5" Φ6"

SRF100 RRF125 RRF150



H:130 H:157 H:157 H:188



4"x4", 5"x5", 6"x6"

SSF100 SSF125 SSF150



H:130 H:157 H:157 H:188



Φ4" Φ5" Φ6"

SRW100 SRW125 SRW150



H:130 H:157 H:157 H:188



4"x4", 5"x5", 6"x6"

SSW100 SSW125 SSW150



H:130 H:157 H:157 H:188



Trim Diameter(mm)

Height(mm)

Power

Luminous Flux

4W 350Lm	7.5W 600Lm	18W 1900Lm	18W 1700Lm	25W 2600Lm
	11W 800Lm	25W 2600Lm	25W 2400Lm	38W 3500Lm

4W 350Lm	7.5W 600Lm	18W 1900Lm	18W 1700Lm	25W 2600Lm
	11W 800Lm	25W 2600Lm	25W 2400Lm	38W 3500Lm

18W 1900Lm	18W 1600Lm	25W 2400Lm
25W 2600Lm	25W 2300Lm	38W 3300Lm

(only SRA100)
20°、30°
40°、50°

Standard 3000K 4000K	Standard 3000K 4000K	Option 2700K 5000K
----------------------------	----------------------------	--------------------------

Standard CRI>90	Standard CRI>90	Option CRI>83
--------------------	--------------------	------------------

18W 1900Lm	18W 1600Lm	25W 2400Lm
25W 2600Lm	25W 2300Lm	38W 3300Lm

(only SRA100)
20°、30°
40°、50°

Standard 3000K 4000K	Standard 3000K 4000K	Option 2700K 5000K
----------------------------	----------------------------	--------------------------

Standard CRI>90	Standard CRI>90	Option CRI>83
--------------------	--------------------	------------------

18W 750Lm	18W 900Lm	25W 1100Lm
25W 1000Lm	25W 1300Lm	38W 1600Lm

Asymmetric optical distribution

Standard 3000K 4000K	Standard 3000K 4000K	Option 2700K 5000K
----------------------------	----------------------------	--------------------------

Standard CRI>90	Standard CRI>90	Option CRI>83
--------------------	--------------------	------------------

21W 700Lm	18W 850Lm	25W 1050Lm
28W 900Lm	25W 1200Lm	38W 1500Lm

Asymmetric optical distribution

Standard 3000K 4000K	Standard 3000K 4000K	Option 2700K 5000K
----------------------------	----------------------------	--------------------------

Standard CRI>90	Standard CRI>90	Option CRI>83
--------------------	--------------------	------------------

Beam Angle

Corlour Temperature

CRI

10° 40° 50° 20°、30° 40°、50° (only SRA100)

Standard 3000K 4000K	Option 2700K 5000K
----------------------------	--------------------------

Standard CRI>90	Option CRI>83
--------------------	------------------

10° 40° 50° 20°、30° 40°、50° (only SSA68)

Standard 3000K 4000K	Option 2700K 5000K
----------------------------	--------------------------

Standard CRI>90	Option CRI>83
--------------------	------------------

Phase DIM
1-10V DIM



Specular Chrome Black Matt

Phase DIM
1-10V DIM



White Black Matt Gold

Phase DIM
1-10V DIM



Matt

Phase DIM
1-10V DIM



LED Driver

Trimless Version



Secondary Reflector

Specular Chrome Black Matt White Black Matt Gold

Anti-glare Accessory



honeycomb

Decoration Accessory
Colour film



red blue yellow green

TO MEET EVERY CODE AND ENVIRONMENT


NEW CONSTRUCTION HOUSING & REMODEL VERSION



New construction with housing suitable for insulated ceiling (IC)

Housing with hanger bars system for new construction installations. Suitable for insulated ceiling or applications. Housing and trim can be shipped separately.


Ceiling thickness: 1/2"

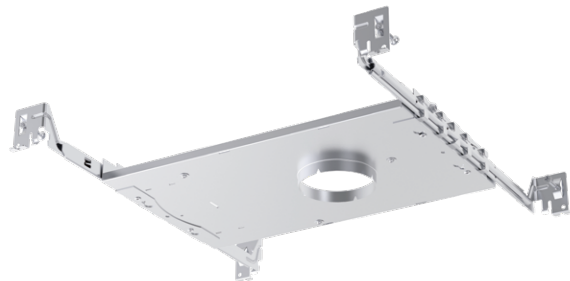

NEW CONSTRUCTION WITH PLASTER FRAME (NC)

Plaster frame with hanger bars system to be installed during rough-in phase. Suitable for non-insulated new construction ceiling assemblies, like sheetrock, acoustic tiles, or paneling. Housing and trim can be shipped separately.

Ceiling thickness: 1/2"

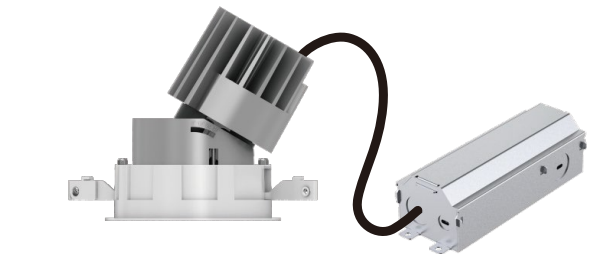


REMODEL(RM)

For new or existing ceiling. Suitable for non-insulated ceiling like sheetrock or paneling. Trimless frame kit can be shipped separately.

Ceiling thickness: 1/8" to 1" (1mm - 25mm)

New construction with housing suitable for insulated ceiling (IC) or chicago plenum (CP)

Housing with hanger bars system for new construction installations. Suitable for insulated ceiling or chicago plenum applications. Housing and trim can be shipped separately.

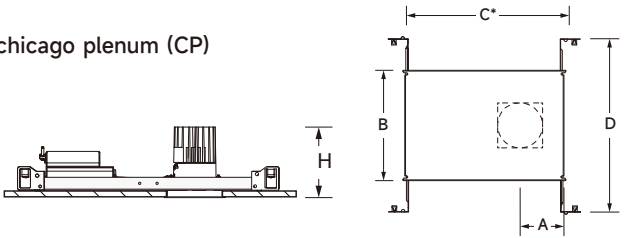

Round Flanged/Flangeless	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	IC-BOX-R70-S	Φ2¾"(70mm)	4½"(115mm)	7 ⅞" x 12 ⅞"(194x307mm)	9½" x 24½ "(241x622mm)	7⅞"(195mm)
	IC-BOX-R100-S	Φ4"(100mm)	4½"(115mm)	7 ⅞" x 12 ⅞"(194x307mm)	9½" x 24½ "(241x622mm)	7⅞"(195mm)
	IC-BOX-R100-B	Φ4"(100mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	7⅞"(195mm)
	IC-BOX-R130-B	Φ5"(130mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	7⅞"(195mm)
	IC-BOX-R150-B	Φ6"(150mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	7⅞"(195mm)

Square Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	IC-BOX-S71-S	2⅝"X2⅝"(71mm*71mm)	4½"(115mm)	7 ⅞" x 12 ⅞"(194x307mm)	9½" x 24½ "(241x622mm)	7⅞"(195mm)
	IC-BOX-S100-S	4"x4"(100x100mm)	4⅝"(126mm)	7 ⅞" x 12 ⅞"(194x307mm)	9½" x 24½ "(241x622mm)	7⅞"(195mm)
	IC-BOX-S100-B	4"x4"(100x100mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	7⅞"(195mm)
	IC-BOX-S126-B	4⅝"x4⅝"(126x126mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	7⅞"(195mm)
	IC-BOX-S151-B	6"x6"(151x151mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	7⅞"(195mm)

Round Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	NCMF-R70-S	Φ2¾"(70mm)	4½"(115mm)	7 ⅞" x 12 ⅞"(194x307mm)	9½" x 24½ "(241x622mm)	7 ⅞"(181mm)
	NCMF-R100-S	Φ4"(100mm)	4½"(115mm)	7 ⅞" x 12 ⅞"(194x307mm)	9 1/2" x 24 1/2"(241x622mm)	5"(127mm)
	NCMF-R100-B	Φ4"(100mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	5"(127mm)
	NCMF-R130-B	Φ5"(130mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	6⅝"(160mm)
	NCMF-R150-B	Φ6"(150mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	6⅞"(190mm)

Square Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	NCMF-S71-S	2⅝"X2⅝"(71mm*71mm)	4½"(115mm)	7 ⅞" x 12 ⅞"(194x307mm)	9½" x 24½ "(241x622mm)	7 ⅞"(181mm)
	NCMF-S100-S	4"x4"(100x100mm)	4½"(115mm)	7 ⅞" x 12 ⅞"(194x307mm)	9½" x 24½ "(241x622mm)	5"(127mm)
	NCMF-S100-B	4"x4"(100x100mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	5"(127mm)
	NCMF-S126-B	4⅝"x4⅝"(126x126mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	6⅝"(160mm)
	NCMF-S151-B	6"x6"(151x151mm)	4⅝"(126mm)	11 ⅝" x 16 ⅝"(288x420mm)	11 ⅞" x 24½ "(299.7x622mm)	7⅞"(190mm)

Ceiling thickness	Model	Dimension	Compatible Trim
	DB46	L6⅞"x W1⅞"x H1⅞" (L175 x W47 x H41mm)	3", 4"
	SMB-1	L6 ⅞"x W2 ⅜"x H1 ⅝" (L164 x W61 x H50mm)	3", 4"
	SMB-2	L9 ⅞"x W3 ⅞"x H2 ⅞" (L230 x W78 x H54mm)	5", 6"

Downlight,
round, square
trim,trimless

Housing

Universal Input 120-277V standard
New Construction,
Frame-In Kit and Remodel available
TRIAC and 0/1-10V (dimming standard)
Driver easily accessible for replacement
Round and Square option

Trim

Round, square, Flanged, Flangeless available
Cut-out: $\Phi 3"$, $\Phi 4"$, $\Phi 5"$, $\Phi 6"$

Light source

Powder coated die-cast aluminum heat sink
CCT: 2700K, 3000K, 4000K
50,000 hours rated life

Optics

Lens and reflector available
Beam: 10°, 18°, 24°, 35°, 50°

Secondary reflector

Adjustable, fixed, wall washed available








START 3" New construction led downlight
With interchangeable trims

Trim	Model	Cut-out	System power	CRI	CCT	Module output	Beam	Reflector	Driver Options
	Adjustable trim	Ø2¾"(70mm)	7.5W 8.5W	9W 10W(10°)	80 3000K	700lm(@830,9W)	10° 24°	Matt Black Matt Gold	Phase Dim
	Adjustable trimless	2⅓¼"X2⅓¼" (71mm*71mm)	11W	13W	90 4000K	950lm (@830,13W)	40° 55°	Specular Chrome Black White	0/1-10v

*Trim (required) - Order Separately From housing

Trim new construction housing & Frame Kit	Model	LED power	System power	IC/Non-IC	Compatible Trim
	IC-BOX-R70-S IC-BOX-S71-S	7.5W	9W	IC	Downlight, round, square trim,trimless
	NCMF-R70-S NCMF-S71-S	7.5W 11W	9W 13W	NON-IC NON-IC	Downlight, round, square trim,trimless

*Housing (required) - Order Separately From Trims

Trim Remodel Housing	Model	LED power	System power	IC/Non-IC	Compatible Trim
	DB46	7.5W/11W	9W/13W	NON-IC	Downlight, round, square trim,trimless
	SMB-1	7.5W/11W	9W/13W	NON-IC	

UPGRADED DOWNLIGHT



START 4"



New construction led downlight
With interchangeable trims

Trim	Model	Cut-out	LED power	System power	CRI	CCT	Module output	Beam	Reflector	Driver Options
	Adjustable trim	Ø4"(100mm) 4"x4"(100x100mm)	13W 18W 25W	15W 21W 28W	80 90	2700K 3000K 4000K	1400lm(@830,15W) 1900lm (@830,21W) 2600lm (@830,28W)	20° 25° 35° 45°	Matt Black Matt Gold Specular Chrome Black White	Phase Dim 0/1-10v
	Fixed trim	Ø4"(100mm) 4"x4"(100x100mm)	13W 18W 25W	15W 21W 28W	80 90	2700K 3000K 4000K	1400lm(@830,15W) 1900lm (@830,21W) 2600lm (@830,28W)	20° 25° 35° 45°		
	Wall washer trim	Ø4"(100mm) 4"x4"(100x100mm)	13W 18W 25W	15W 21W 28W	80 90	2700K 3000K 4000K	550lm(@830,15W) 750lm (@830,21W) 1000lm (@830,28W)	/		
	Adjustable trimless	Ø4¼"(103mm) 4"x4"(100x100mm)	13W 18W 25W	15W 21W 28W	80 90	2700K 3000K 4000K	1400lm(@830,15W) 1900lm (@830,21W) 2600lm (@830,28W)	20° 25° 35° 45°	Matt Black Matt Gold Specular Chrome Black White	Phase Dim 0/1-10v
	Fixed trimless	Ø4¼"(103mm) 4"x4"(100x100mm)	13W 18W 25W	15W 21W 28W	80 90	2700K 3000K 4000K	1400lm(@830,15W) 1900lm (@830,21W) 2600lm (@830,28W)	20° 25° 35° 45°		
	Wall washer trimless	Ø4¼"(103mm) 4"x4"(100x100mm)	13W 18W 25W	15W 21W 28W	80 90	2700K 3000K 4000K	550lm(@830,15W) 750lm (@830,21W) 1000lm (@830,28W)	/		

*Trim (required) - Order Separately From housing

Trim new construction housing & Frame Kit	Model	LED power	System power	IC/Non-IC	Compatible Trim
	IC-BOX-R100-B IC-BOX-S100-B	13W	15W	IC	Downlight, round, square trim,trimless
	NCMF-R100-B NCMF-S100-B	13W 18W	15W 21W	NON-IC NON-IC	Downlight, round, square trim,trimless



*Housing (required) - Order Separately From Trims

Trim Remodel Housing	Model	LED power	System power	IC/Non-IC	Compatible Trim
	DB46	13W/18W/25W	15W/21W/28W	NON-IC	Downlight, round, square trim,trimless
	SMB-1	13W/18W/25W	15W/21W/28W	NON-IC	

START 5" New construction led downlight
With interchangeable trims

Trim	Model	Cut-out	LED power	System power	CRI	CCT	Module output	Beam	Reflector	Driver Options
 	Adjustable trim	Ø5"(130mm) 5"x5"(126x126mm)	18W 25W	21W 28W	80 90	2700K 3000K 4000K	1500lm(@830,21W) 2000lm (@830,28W)	20° 40° 50°	Matt Black Matt Gold Specular Chrome Black White	Phase Dim 0/1-10v
 	Fixed trim	Ø5"(130mm) 5"x5"(126x126mm)	18W 25W	21W 28W	80 90	2700K 3000K 4000K	1600lm(@830,21W) 2100lm (@830,28W)			
 	Wall washer trim	Ø5"(130mm) 5"x5"(126x126mm)	18W 25W	21W 28W	80 90	2700K 3000K 4000K	880lm(@830,21W) 1200lm (@830,28W)	/	Matt Black Matt Gold Specular Chrome Black White	Phase Dim 0/1-10v
 	Adjustable trimless	Ø5"(130mm) 5"x5"(126x126mm)	18W 25W	21W 28W	80 90	2700K 3000K 4000K	1500lm(@830,21W) 2000lm (@830,28W)	20° 40° 50°		
 	Fixed trimless	Ø5"(130mm) 5"x5"(126x126mm)	18W 25W	21W 28W	80 90	2700K 3000K 4000K	1600lm(@830,21W) 2100lm (@830,28W)		Matt Black Matt Gold Specular Chrome Black White	Phase Dim 0/1-10v
 	Wall washer trimless	Ø5"(130mm) 5"x5"(126x126mm)	18W 25W	21W 28W	80 90	2700K 3000K 4000K	880lm(@830,21W) 1200lm (@830,28W)	/		

*Trim (required) - Order Separately From housing

Trim new construction housing & Frame Kit	Model	LED power	System power	IC/Non-IC	Compatible Trim
 	IC-BOX-R130-B IC-BOX-S126-B	18W	21W	IC	Downlight, round, square trim,trimless
 	NCMF-R130-B NCMF-S126-B	18W 25W	21W 28W	NON-IC NON-IC	Downlight, round, square trim,trimless


*Housing (required) - Order Separately From Trims

Trim Remodel Housing	Model	LED power	System power	IC/Non-IC	Compatible Trim
 	SMB-1 SMB-2	18W/25W 18W/25W	21W/28W 21W/28W	NON-IC NON-IC	Downlight, round, square trim,trimless

START 6" New construction led downlight
With interchangeable trims

Trim	Model	Cut-out	LED power	System power	CRI	CCT	Module output	Beam	Reflector	Driver Options
 	Adjustable trim	Ø6"(150mm) 6"x6"(151x151mm)	25W 38W	28W 42W	80 90	2700K 3000K 4000K	2100lm(@830,28W) 3000lm(@830,42W)	20° 35° 50°	Matt Black Matt Gold Specular Chrome Black White	Phase Dim 0/1-10v
 	Fixed trim	Ø6"(150mm) 6"x6"(151x151mm)	25W 38W	28W 42W	80 90	2700K 3000K 4000K	2200lm(@830,28W) 3200lm(@830,42W)			
 	Wall washer trim	Ø6"(150mm) 6"x6"(151x151mm)	25W 38W	28W 42W	80 90	2700K 3000K 4000K	1200lm(@830,28W) 1600lm(@830,42W)	/	Matt Black Matt Gold Specular Chrome Black White	Phase Dim 0/1-10v
 	Adjustable trimless	Ø6¼"(158mm) 6"x6"(151x151mm)	25W 38W	28W 42W	80 90	2700K 3000K 4000K	2100lm(@830,28W) 3000lm(@830,42W)	20° 35° 50°		
 	Fixed trimless	Ø6¼"(158mm) 6"x6"(151x151mm)	25W 38W	28W 42W	80 90	2700K 3000K 4000K	2200lm(@830,28W) 3200lm(@830,42W)		Matt Black Matt Gold Specular Chrome Black White	Phase Dim 0/1-10v
 	Wall washer trimless	Ø6¼"(158 mm) 6"x6"(151x151mm)	25W 38W	28W 42W	80 90	2700K 3000K 4000K	1200lm(@830,28W) 1600lm(@830,42W)	/		

*Trim (required) - Order Separately From housing

Trim new construction housing & Frame Kit	Model	LED power	System power	IC/Non-IC	Compatible Trim
 	IC-BOX-R150-B IC-BOX-S151-B	25W	28W	IC	Downlight, round, square trim,trimless
 	NCMF-R150-B NCMF-S151-B	25W 38W	28W 42W	NON-IC NON-IC	Downlight, round, square trim,trimless

*Housing (required) - Order Separately From Trims

Trim Remodel Housing	Model	Power		IC/Non-IC	Compatible Trim
	SMB-2	25W	28W	NON-IC	Downlight, round, square trim, trimless
		38W	42W	NON-IC	



V68



3"

V68

13W 1200 lm-1300 lm
18W 1600 lm-1700 lm



3"

V68W

13W 820 lm-880 lm

V68

Powerful LED module 13W/18W
Miniature design
Excellent glare control
Precise light distribution with no stray light




V68 Series

Powerful LED engine 13W at 350mA and 18W at 500mA.
Miniaturized LED downlight for high performance accent lighting.
Precise light distribution with no stray light and excellent glare control
thanks to the optimized optic with double reflectors.
Installed easily and securely in the ceiling using two screw fixing mechanisms.

Installation

Installed easily and securely in the ceiling using two screw fixing mechanisms.

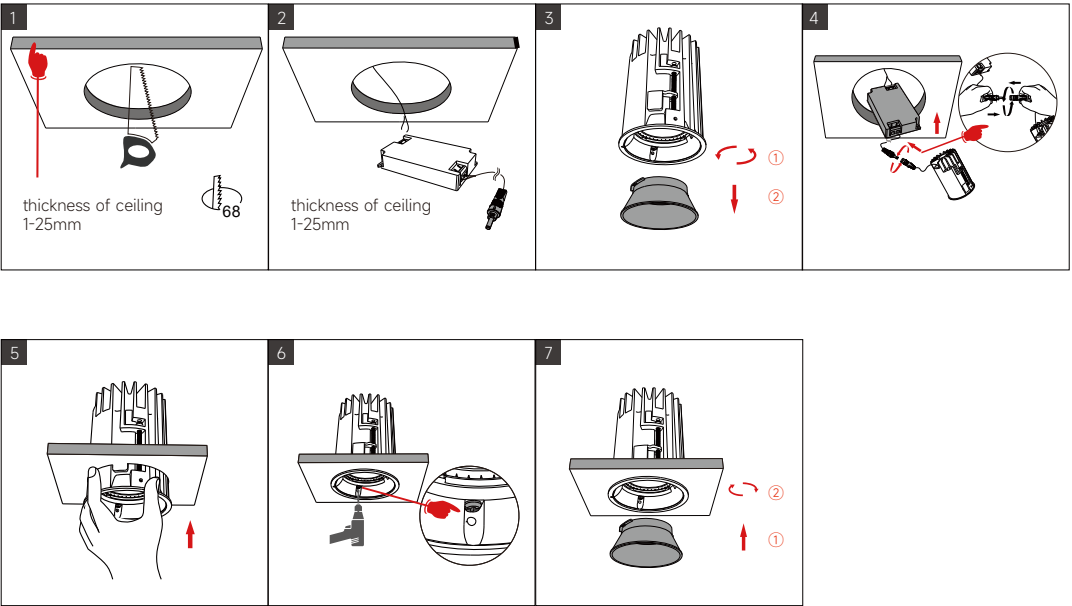


Reflectors

Different secondary reflectors for anti-glare and decorative function



Glare cut-off

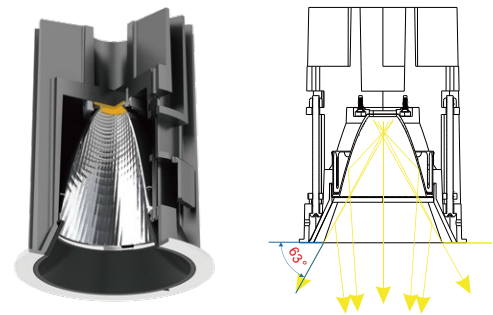

Beam angle





MODULE SERIES
V68/V68W




Features

- Powerful LED engine 13W at 350mA and 18W at 500mA.
- Miniaturized LED downlight for high performance accent lighting.
- Three different beam angles with different primary reflectors.
- Six different colours of secondary reflector for anti-glare and decorative functions.



Specifications

- Dimming modes:PhaseDIM, 1-10V,
- Beam angle:10°, 18°, 40°
- Physical: direct illumination, wet painting
- Accessories: secondary reflector plastic

Type



Light distribution



V68 SERIES

13W 1200lm-1300lm


Code	Size	System LM	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	Beam
V68-CB930R18S-X	3 1/16"x3 1/16" (Φ77*100mm)	1200 lm	36 V	350 mA	13W	15W	90	3000K	18°
V68-CB940R18S-X	3 1/16"x3 1/16" (Φ77*100mm)	1300 lm	36 V	350 mA	13W	15W	90	4000K	18°
V68-CB930R40S-X	3 1/16"x3 1/16" (Φ77*100mm)	1200 lm	36 V	350 mA	13W	15W	90	3000K	40°
V68-CB940R40S-X	3 1/16"x3 1/16" (Φ77*100mm)	1300 lm	36 V	350 mA	13W	15W	90	4000K	40°

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

18W 1600lm-1700lm

Code	Size	System LM	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	Beam
V68-CC930R18S-X	3 1/16"x3 1/16" (Φ77*100mm)	1600 lm	36 V	500 mA	18W	21W	90	3000K	18°
V68-CC940R18S-X	3 1/16"x3 1/16" (Φ77*100mm)	1700 lm	36 V	500 mA	18W	21W	90	4000K	18°
V68-CC930R40S-X	3 1/16"x3 1/16" (Φ77*100mm)	1600 lm	36 V	500 mA	18W	21W	90	3000K	40°
V68-CC940R40S-X	3 1/16"x3 1/16" (Φ77*100mm)	1700 lm	36 V	500 mA	18W	21W	90	4000K	40°

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)



V68W SERIES

13W 820lm-880lm

Code	Size	System LM	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	Beam
V68W-CB930RW1M-X	3 1/16"x3 1/16" (Φ77*100mm)	820 lm	36 V	350 mA	13W	15W	90	3000K	/
V68W-CB940RW1M-X	3 1/16"x3 1/16" (Φ77*100mm)	880 lm	36 V	350 mA	13W	15W	90	4000K	/

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)



DOME



DOME

UGR<19 Super Comfort

Deep recessed design achieves super eye comfort.
Attractive appearance with high efficiency.

ROUND/DOWNLIGHT



3"

DOME D75

7.5W 700 lm-750 lm
11W 900 lm-950 lm



4"

DOME D100

9W 1000-1200Lm
13W 1300-1600Lm



6"

DOME D150


18W 2000-2500Lm
25W 2500-3300Lm




8"

DOME D200

25W 2800-3400Lm
38W 3900-4600Lm
52W 4800-5600Lm

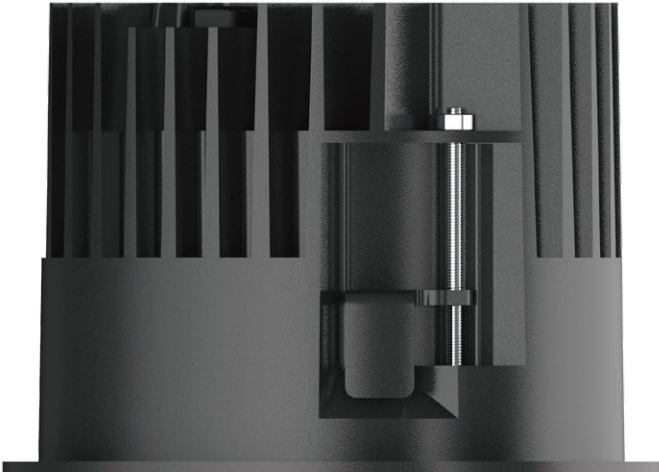


SQUARE/DOWNLIGHT



3"

DOME DS65


7.5W 700 lm-750 lm
11W 900 lm-950 lm



4"

DOME DS100

9W 900-950Lm
13W 1200-1300Lm



6"

DOME DS150

18W 1700-1800Lm
25W 2400-2600Lm



8"

DOME DS200

25W 2200-2400Lm
38W 3200-3400Lm



Deep recessed design achieves super eye comfort.
Attractive appearance with efficiency and functionality.

Passive management ensures durability.

Optimal lens technologies with narrow, medium and flood beam angles guarantee light quality.
Interchangeable reflectors of matt, white and black colours. provide maximum design freedom.

Applicable to all typical downlight contexts.



Housing

Universal Input 120-277V standard
 New Construction, Frame-In Kit and Remodel available
 TRIAC and 0/1-10V (dimming standard)
 Driver easily accessible for replacement
 Round and Square option

Light source

Cut-out: $\Phi 3"$ 、 $\Phi 4"$ 、 $\Phi 6"$ 、 $\Phi 8"$
 Powder coated die-cast aluminum heat sink
 CCT: 2700K、3000K、4000K
 Black and white available
 50,000 hours rated life

Silicone gasket

IP54, suitable for more application


Lens

Lens with medium and flood beam angles



Reflector

Matt, White, Black,
 Magnetic mounting, Interchangeable

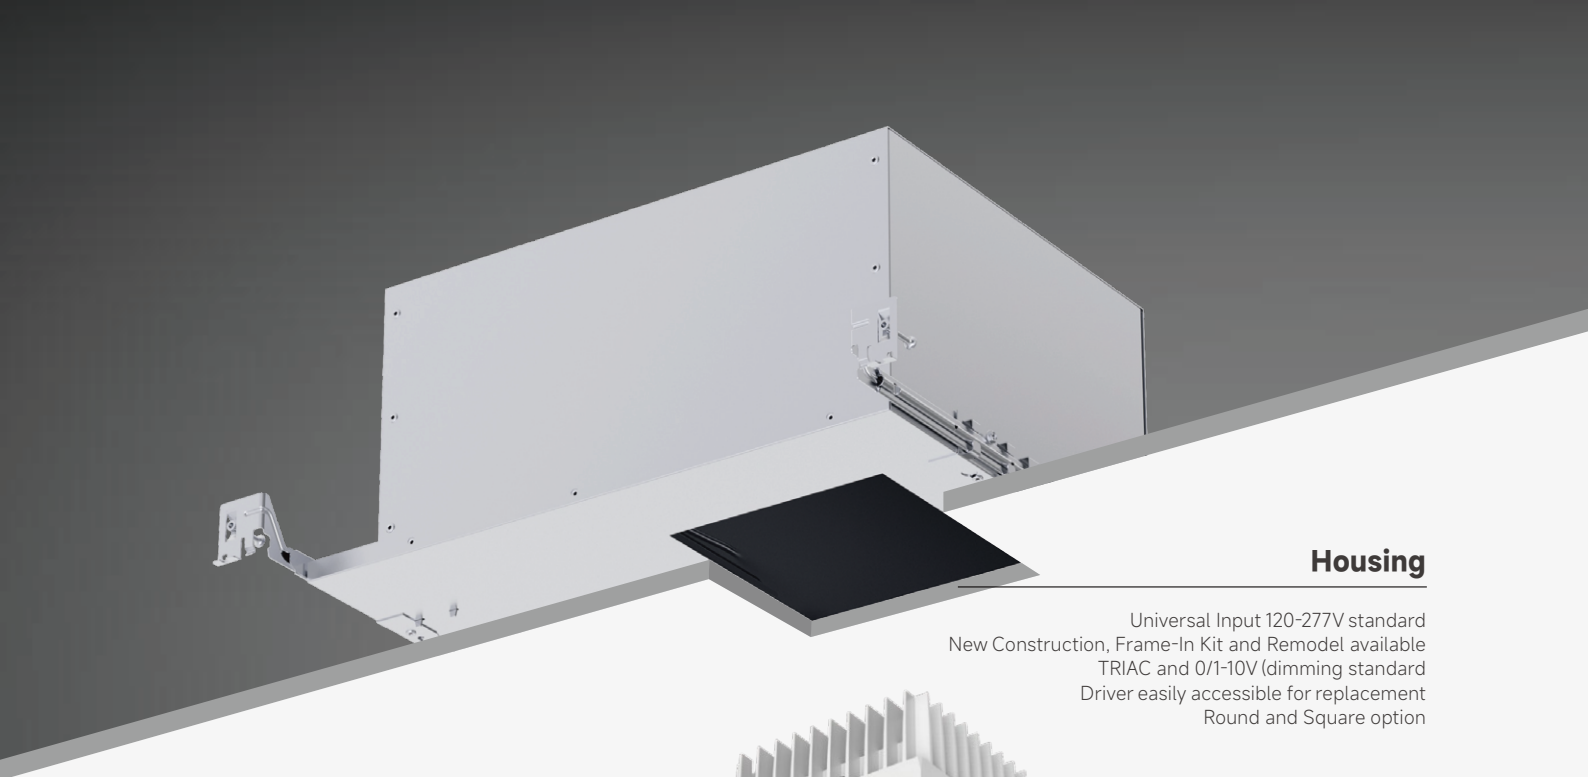

Housing

Universal Input 120-277V standard
 New Construction, Frame-In Kit and Remodel available
 TRIAC and 0/1-10V (dimming standard)
 Driver easily accessible for replacement
 Round and Square option

Light source


Cut-out: $\Phi 3"$ 、 $\Phi 4"$ 、 $\Phi 6"$ 、 $\Phi 8"$
 Powder coated die-cast aluminum heat sink
 CCT: 2700K、3000K、4000K
 Black and white available
 50,000 hours rated life

Silicone gasket

IP54, suitable for more application

Lens

Lens with medium and flood beam angles



Reflector

Matt, White, Black,
 Magnetic mounting, Interchangeable




Installation

Installed easily and securely in the ceiling, using two screw fixing mechanisms.




Creative Ceiling Treatment


Modular design, easy assembly and disassembly



D200 fixture can be taken off from the back of the ceiling, which is easy and convenient for maintenance.




fit for ceiling thickness 1/2" (12mm) to 1" (25mm)



fit for ceiling thickness 1/2" (12mm) to 1" (25mm)






Deep recessed design achieves super eye comfort

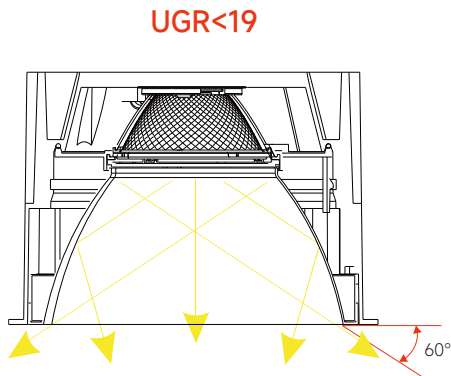





SPECIFICATION SUMMARY



MODEL NO.	D75	D100	D150	D200
PRODUCT PHOTO				
DIMENSION (MM)				
CUTOUT (MM)				
WATTAGE	7.5W/ 11W	9W/ 13W	18W/ 25W	25W/ 38W/ 52W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
CRI	>80/ >90	>80/ >90	>80/ >90	>80/ >90
BEAM ANGLE	25°/ 50°	30°/ 50°	30°/ 60°	18°/30°/ 60°
LUMEN OUTPUT	950lm @CRI80 3000K	1500lm @CRI80 3000K	3100lm @CRI80 3000K	5400lm @CRI80 3000K
REFLECTOR COLOR	 Matt  White  Black			
HOUSING COLOR	White/ Black			
IP	IP54			
DIMMING	Phase Dim, 0/1-10V Dim			

SPECIFICATION SUMMARY



MODEL NO.	DS65	DS100	DS150	DS200
PRODUCT PHOTO				
DIMENSION (MM)				
CUTOUT (MM)				
WATTAGE	7.5W/ 11W	9W/ 13W	18W/ 25W	25W/ 38W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
CRI	>80/ >90	>80/ >90	>80/ >90	>80/ >90
BEAM ANGLE	25°/ 60°	60°	70°	70°
LUMEN OUTPUT	950lm @CRI80 3000K	1500lm @CRI80 3000K	3100lm @CRI80 3000K	5400lm @CRI80 3000K
REFLECTOR COLOR	 Matt  White  Black			
HOUSING COLOR	White/ Black			
IP	IP54			
DIMMING	Phase Dim, 0/1-10V Dim			

TO MEET EVERY CODE AND ENVIRONMENT


NEW CONSTRUCTION HOUSING & REMODEL VERSION



New construction with housing suitable for insulated ceiling (IC)

Housing with hanger bars system for new construction installations. Suitable for insulated ceiling or applications. Housing and trim can be shipped separately.

Ceiling thickness: 1/2"

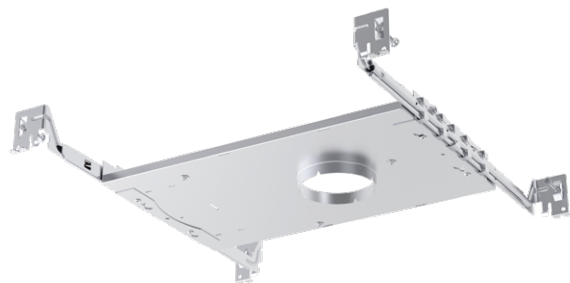

NEW CONSTRUCTION WITH PLASTER FRAME (NC)

Plaster frame with hanger bars system to be installed during rough-in phase. Suitable for non-insulated new construction ceiling assemblies, like sheetrock, acoustic tiles, or paneling. Housing and trim can be shipped separately.

Ceiling thickness: 1/2"




REMODEL(RM)

For new or existing ceiling. Suitable for non-insulated ceiling like sheetrock or paneling. Trimless frame kit can be shipped separately.

Ceiling thickness: 1/25" to 1" (1mm - 25mm)

New construction with housing suitable for insulated ceiling (IC) or chicago plenum (CP)

Housing with hanger bars system for new construction installations. Suitable for insulated ceiling or chicago plenum applications. Housing and trim can be shipped separately.

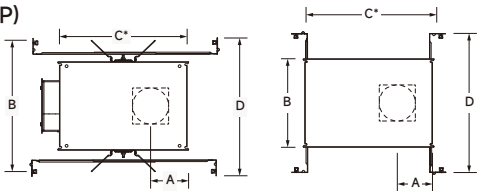


Round Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	IC-BOX-R75-S	Φ3"(75mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (195mm)
	IC-BOX-R100-S	Φ4"(100mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (195mm)
	IC-BOX-R100-B	Φ4"(100mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	7 1/8" (195mm)
	IC-BOX-R150-B	Φ6"(150mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	7 1/8" (195mm)
	IC-BOX-R203-B	Φ8"(203mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	7 1/8" (195mm)

Square Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	IC-BOX-S100-S	4"x4"(100x100mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (195mm)
	IC-BOX-S100-B	4"x4"(100x100mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	7 1/8" (195mm)
	IC-BOX-S151-B	6"x6"(151x151mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	7 1/8" (195mm)
	IC-BOX-S203-B	8"x8"(203x203mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	7 1/8" (195mm)


Round Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	NCMF-R75-S	Φ3"(75mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (181mm)
	NCMF-R100-S	Φ4"(100mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	3 1/4" (83mm)
	NCMF-R100-B	Φ4"(100mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	3 1/4" (83mm)
	NCMF-R150-B	Φ6"(150mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	3 5/8" (100mm)
	NCMF-R203-B	Φ8"(203mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	5 3/8" (131mm)

Square Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	NCMF-S100-S	4"x4"(100x100mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	3 1/4" (83mm)
	NCMF-S100-B	4"x4"(100x100mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	3 1/4" (83mm)
	NCMF-S151-B	6"x6"(151x151mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	3 5/8" (100mm)
	NCMF-S203-B	8"x8"(203x203mm)	4 15/16"(126mm)	11 5/16" x 16 9/16" (288x420mm)	11 1/16" x 24 1/2" (299.7x622mm)	5 3/8" (131mm)

Driver box	Model	Dimension	Compatible Trim
	DB46	L6 7/8" x W1 7/8" x H1 5/8" (L175 x W47 x H41mm)	3", 4"
	SMB-1	L6 7/8" x W2 3/8" x H1 15/16" (L164 x W61 x H50mm)	3", 4"
	SMB-2	L9 1/8" x W3 1/8" x H2 1/8" (L230 x W78 x H54mm)	6", 8"

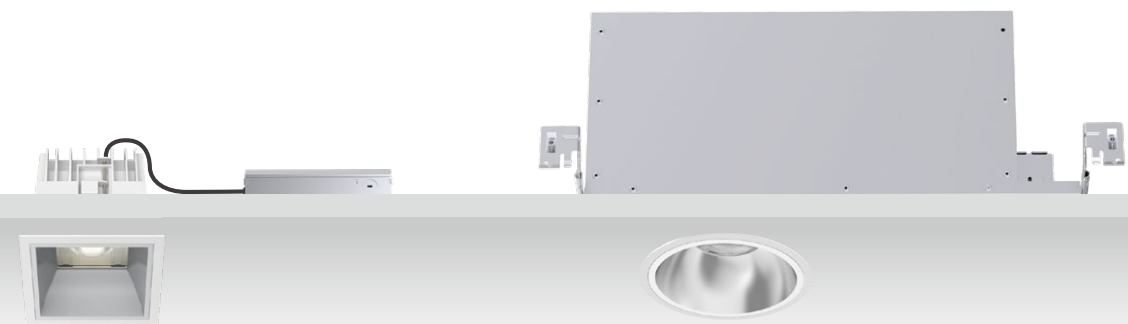


DOME 3" New construction led downlight
With interchangeable trims


Trim	Model	Cut-out	LED power	System power	CRI	CCT	Module output	Beam	Reflector	Driver Options
	Round/downlight	Ø3"(75mm)	7.5W	9W	80	2700K	700lm(@830,9W)	25°	Matt White Black	Phase Dim 0/1-10v
			11W	13W	90	3000K 4000K	950lm(@830,11W)	50°		
	Squire/downlight	3"x3"(68x68mm)	7.5W	9W	80	2700K	700lm(@830,9W)	25°	Matt White Black	Phase Dim 0/1-10v
			11W	13W	90	3000K 4000K	900lm(@830,11W)	60°		

*Trim (required) - Order Separately From housing


DOME 4" New construction led downlight
With interchangeable trims

Trim	Model	Cut-out	LED power	System power	CRI	CCT	Module output	Beam	Reflector	Driver Options
	Round/downlight	Ø4"(100mm)	9W	11W	80	2700K	1100lm(@830,11W)	30°	Matt White Black	Phase Dim 0/1-10v
			13W	15W	90	3000K 4000K	1500lm (@830,15W)	50°		
	Squire/downlight	4"x4"(100x100mm)	9W	11W	80	2700K	900lm(@830,11W)	60°	Matt White Black	Phase Dim 0/1-10v
			13W	15W	90	3000K 4000K	1200lm (@830,15W)			

*Trim (required) - Order Separately From housing

Trim new construction housing & Frame Kit		Model	LED power	System power	IC/Non-IC	Compatible Trim
		IC-BOX-R75-S	7.5W	9W	IC	Downlight, round, square
		IC-BOX-S68-S	11W	13W	IC	Downlight, round, square
		NCMF-R75-S	7.5W	9W	NON-IC	Downlight, round, square
		NCMF-S68-S	11W	13W	NON-IC	Downlight, round, square


*Housing (required) - Order Separately From Trims

Trim new construction housing & Frame Kit		Model	LED power	System power	IC/Non-IC	Compatible Trim
		IC-BOX-R100-S	9W	11W	IC	Downlight, round, square
		IC-BOX-S100-S	13W	15W	IC	Downlight, round, square
		NCMF-R100-S	9W	11W	NON-IC	Downlight, round, square
		NCMF-S100-S	13W	15W	NON-IC	Downlight, round, square

*Housing (required) - Order Separately From Trims


Trim Remodel Housing		Model	LED power	System power	IC/Non-IC	Compatible Trim
		DB46	7.5W	9W	NON-IC	Downlight, round, square
		SMB-1	11W	13W	NON-IC	Downlight, round, square

Trim Remodel Housing		Model	LED power	System power	IC/Non-IC	Compatible Trim
		DB46	9W	11W	NON-IC	Downlight, round, square
		SMB-1	13W	15W	NON-IC	Downlight, round, square


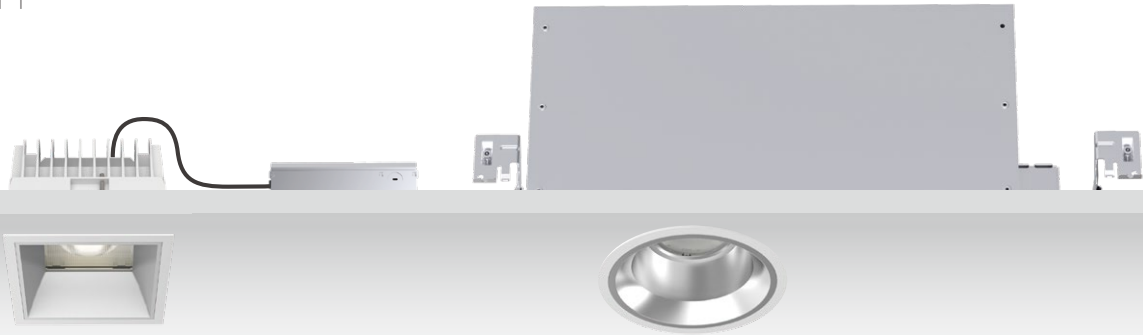


DOME 6"

New construction led downlight
With interchangeable trims


Trim	Model	Cut-out	LED power	System power	CRI	CCT	Module output	Beam	Reflector	Driver Options
	Round/downlight	Ø6"(150mm)	18W	21W	80	2700K	2300lm(@830,21W)	30°	Matt White Black	Phase Dim 0/1-10v
			25W	28W	90	3000K	3100lm (@830,28W)	60°		
						4000K				
	Squire/downlight	6"x6"(151x151mm)	18W	21W	80	2700K	1700lm(@830,21W)	70°	Matt White Black	Phase Dim 0/1-10v
			25W	28W	90	3000K	2400lm(@830,28W)			
						4000K				

*Trim (required) - Order Separately From housing

Trim new construction housing & Frame Kit		Model	LED power	System power	IC/Non-IC	Compatible Trim
		IC-BOX-R150-B	18W	21W	IC	Downlight, round, square
		NCMF-R150-B	18W	21W	NON-IC	Downlight, round, square
		NCMF-S151-B	25W	28W	NON-IC	Downlight, round, square


*Housing (required) - Order Separately From Trims

Trim Remodel Housing		Model	LED power	System power	IC/Non-IC	Compatible Trim
		DB46	18W	21W	NON-IC	Downlight, round, square
		SMB-1	25W	28W	NON-IC	Downlight, round, square

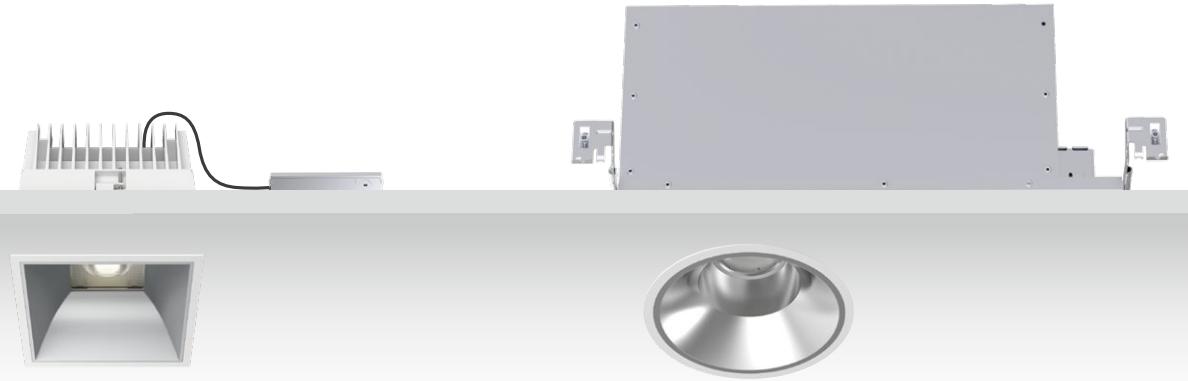


DOME 8"

New construction led downlight
With interchangeable trims

Trim	Model	Cut-out	LED power	System power	CRI	CCT	Module output	Beam	Reflector	Driver Options
	Round/downlight	Ø8"(203mm)	25W	28W	80	2700K	3200lm(@830,28W)	18°	Matt White Black	Phase Dim 0/1-10v
			38W	42W	90	3000K	4400lm(@830,42W)	30°		
			52W	56W		4000K	5400lm(@830,56W)	60°		
	Squire/downlight	8"x8"(203x203mm)	25W	28W	80	2700K	2200lm(@830,28W)	70°	Matt White Black	Phase Dim 0/1-10v
			38W	42W	90	3000K	3200lm(@830,42W)			
						4000K				

*Trim (required) - Order Separately From housing

Trim new construction housing & Frame Kit		Model	LED power	System power	IC/Non-IC	Compatible Trim
		IC-BOX-R203-B	25W	28W	IC	Downlight, round, square
		NCMF-R203-B	25W	28W	NON-IC	Downlight, round, square
		NCMF-S203-B	38W	42W	NON-IC	Downlight, round, square
			52W	56W	NON-IC	Downlight, round, square

*Housing (required) - Order Separately From Trims


Trim Remodel Housing		Model	LED power	System power	IC/Non-IC	Compatible Trim
		SMB-2	25W	28W	NON-IC	Downlight, round, square
			38W	42W	NON-IC	Downlight, round, square
			52W	56W	NON-IC	Downlight, round, square





VTRIM

Perfect choice for specified architectural projects
Compatible with LED Modules
Wide range of design variants for different applications
Available in trimless version
Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)
Magnetic design for changing decorative ring without any tools

Module	L50		L50H		PRO 50			
Ring								
			 Forsted glass		 Diffuser			
Trim	 75 2 15/16"		 75 2 15/16"		 75X75 2 15/16" X 2 15/16"			
	 80X80 3 1/8" X 3 1/8"							
Reflector								
	 Decor Ring		 Decor Ring					
	 VRA4		 VRF5		 VRA1		 VRF2	
	 VRAT4		 VRFT5		 VRAT1		 VRFT2	
	 VRA3		 VSA1		 VSF2		 VSA4	
	 VRAT3		 VSAT1		 VSFT2		 VSAT4	
	 Matt White Black Gold		 Matt White		 Matt White Black Gold		 Matt White Black Gold	
	 Matt Black Gold		 Transparency Yellow Green		 Black White Wood Marble		 Black Gold Black White Wood Marble	
	 Matt Black Gold		 Black Gold		 Black White Wood Marble		 Matt Black Gold	
			 Black glass		 Black glass		 Black glass	



VRA1

VSA1

VRA4

VSA4





VRF5



VRF2



Magnet



VSF2



Magnet



VRA1

VRF2

VRA3











VRA4

VRF5

VSA1

VSF2

VSA4



TO MEET EVERY CODE AND ENVIRONMENT


NEW CONSTRUCTION HOUSING & REMODEL VERSION



New construction with housing suitable for insulated ceiling (IC)

Housing with hanger bars system for new construction installations. Suitable for insulated ceiling or applications. Housing and trim can be shipped separately.


Ceiling thickness: 1/2"

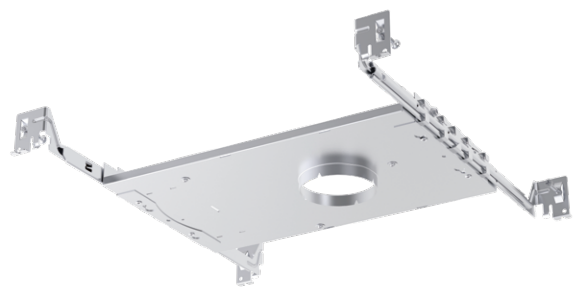

NEW CONSTRUCTION WITH PLASTER FRAME (NC)

Plaster frame with hanger bars system to be installed during rough-in phase. Suitable for non-insulated new construction ceiling assemblies, like sheetrock, acoustic tiles, or paneling. Housing and trim can be shipped separately.

Ceiling thickness: 1/2"

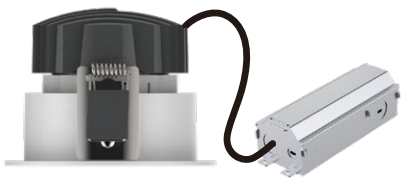


REMODEL(RM)


For new or existing ceiling. Suitable for non-insulated ceiling like sheetrock or paneling. Trimless frame kit can be shipped separately.


Ceiling thickness: 1/8" to 1" (3mm - 25.4mm)

New construction with housing suitable for insulated ceiling (IC)

Housing with hanger bars system for new construction installations. Suitable for insulated ceiling applications. Housing and trim can be shipped separately.

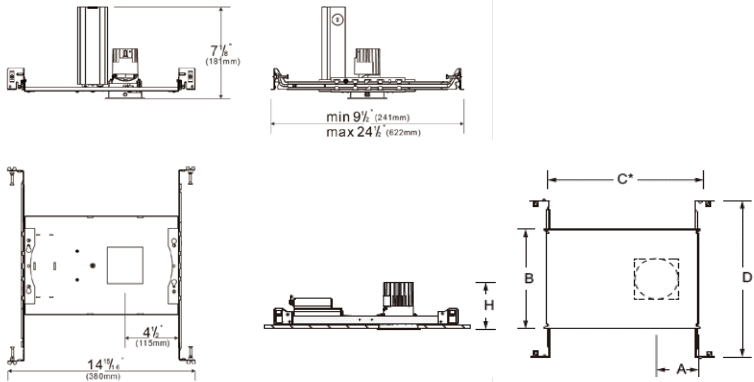

Round Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	IC-BOX-R75-S	Φ3"(75mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (195mm)

Square Flanged	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	IC-BOX-S75-S	3 1/8"x3 1/8" (78X78mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (195mm)

Round	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	Flanged NCMF-R75-S	Φ3"(75mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (181mm)
	Flangeless NCMF-R75-S	Φ3"(75mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (181mm)

Square	Model	Cut-out Dimension	Cut-Out Position (A)	Overall Dimension(BxC)	Hanger Bars(D)	Clearance(H)
	Flanged NCMF-S75-S	3 1/8"x3 1/8" (78X78mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (181mm)
	Flangeless NCMF-S75-S	3 1/8"x3 1/8" (78X78mm)	4 1/2"(115mm)	7 5/8" x 12 1/8" (194x307mm)	9 1/2" x 24 1/2" (241x622mm)	7 1/8" (181mm)

Driver box	Model	Dimension		Compatible Trim		
	DB46	L6 7/8" x W1 7/8" x H1 1/8"	(L175 x W47 x H41mm)	3"	Downlight, round, square trim, trimless	
	SMB-1	L6 7/8" x W2 3/8" x H1 1/8"	(L164 x W61 x H50mm)	3"		



L50



L50H



PRO 50

MODULE SERIES

L50/L50H/PRO 50




Features

- Higher efficiency.
- Compact height design.
- Ultra bright in light.
- Extremely small in size.
- Smart heatsink design with airflow and body radiation.


Specifications

- Dimming modes: PhaseDIM, 1-10V,
- Beam angle:10°, 15°, 25°, 35°, 60°
- Physical: direct illumination, electroplating
- Accessories: Linear Spread glass,Glass,Honeycomb louvre


Type



Light distribution



Compact heatsink consisting of fins generates optimal heat dissipation

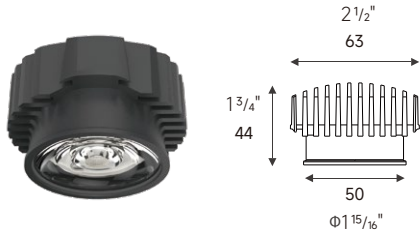


L50 MODULE SERIES

7.5W 700lm-750lm

Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50-7.5W-930-15	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	700 lm	31 V	250 mA	7.5W	9W	90	3000K	15°
L50-7.5W-940-15	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	750 lm	31 V	250 mA	7.5W	9W	90	4000K	15°
L50-7.5W-930-25	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	700 lm	31 V	250 mA	7.5W	9W	90	3000K	25°
L50-7.5W-940-25	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	750 lm	31 V	250 mA	7.5W	9W	90	4000K	25°
L50-7.5W-930-35	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	700 lm	31 V	250 mA	7.5W	9W	90	3000K	35°
L50-7.5W-940-35	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	750 lm	31 V	250 mA	7.5W	9W	90	4000K	35°
L50-7.5W-930-60	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	700 lm	31 V	250 mA	7.5W	9W	90	3000K	60°
L50-7.5W-940-60	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	750 lm	31 V	250 mA	7.5W	9W	90	4000K	60°

11W 950lm-1000lm

Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50-11W-930-15	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	950 lm	31 V	350 mA	11W	13W	90	3000K	15°
L50-11W-940-15	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	1000 lm	31 V	350 mA	11W	13W	90	4000K	15°
L50-11W-930-25	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	950 lm	31 V	350 mA	13W	13W	90	3000K	25°
L50-11W-940-25	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	1000 lm	31 V	350 mA	13W	13W	90	4000K	25°
L50-11W-930-35	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	950 lm	31 V	350 mA	13W	13W	90	3000K	35°
L50-11W-940-35	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	1000 lm	31 V	350 mA	13W	13W	90	4000K	35°
L50-11W-930-60	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	950 lm	31 V	350 mA	13W	13W	90	3000K	60°
L50-11W-940-60	1 ¹⁵ / ₁₆ "*1 ³ / ₄ "(50*44mm)	1000 lm	31 V	350 mA	13W	13W	90	4000K	60°

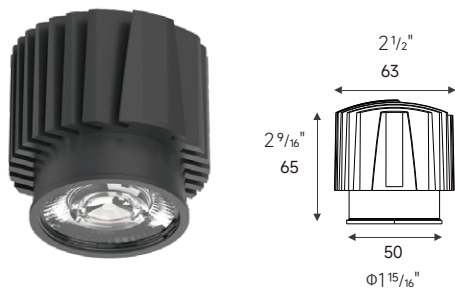


L50H MODULE SERIES

9W 850lm-950lm

Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50H-9W-930-20	1 15/16"×2 9/16" (50*65mm)	850 lm	36 V	250 mA	9W	11W	90	3000K	20°
L50H-9W-940-20	1 15/16"×2 9/16" (50*65mm)	900 lm	36 V	250 mA	9W	11W	90	4000K	20°
L50H-9W-930-35	1 15/16"×2 9/16" (50*65mm)	900 lm	36 V	250 mA	9W	11W	90	3000K	35°
L50H-9W-940-35	1 15/16"×2 9/16" (50*65mm)	950 lm	36 V	250 mA	9W	11W	90	4000K	35°
L50H-9W-930-60	1 15/16"×2 9/16" (50*65mm)	850 lm	36 V	250 mA	9W	11W	90	3000K	60°
L50H-9W-940-60	1 15/16"×2 9/16" (50*65mm)	900 lm	36 V	250 mA	9W	11W	90	4000K	60°

13W 1200lm-1300lm

Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50H-13W-930-20	1 15/16"×2 9/16" (50*65mm)	1200 lm	36 V	350 mA	13W	15W	90	3000K	20°
L50H-13W-940-20	1 15/16"×2 9/16" (50*65mm)	1300 lm	36 V	350 mA	13W	15W	90	4000K	20°
L50H-13W-930-35	1 15/16"×2 9/16" (50*65mm)	1200 lm	36 V	350 mA	13W	15W	90	3000K	35°
L50H-13W-940-35	1 15/16"×2 9/16" (50*65mm)	1300 lm	36 V	350 mA	13W	15W	90	4000K	35°
L50H-13W-930-60	1 15/16"×2 9/16" (50*65mm)	1200 lm	36 V	350 mA	13W	15W	90	3000K	60°
L50H-13W-940-60	1 15/16"×2 9/16" (50*65mm)	1300 lm	36 V	350 mA	13W	15W	90	4000K	60°

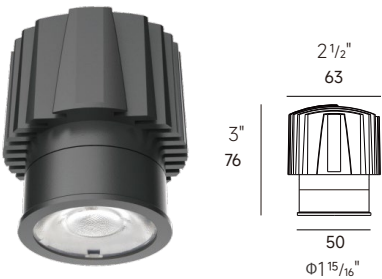

PRO50 MODULE SERIES

7W 500lm-650lm

Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-7W-927	1 15/16"×3" (50*76mm)	500 lm	36 V	200 mA	7W	9W	97	2700K	10°
Pro50-7W-930	1 15/16"×3" (50*76mm)	550 lm	36 V	200 mA	7W	9W	97	3000K	10°
Pro50-7W-935	1 15/16"×3" (50*76mm)	600 lm	36 V	200 mA	7W	9W	97	3500K	10°
Pro50-7W-940	1 15/16"×3" (50*76mm)	650 lm	36 V	200 mA	7W	9W	97	4000K	10°


13W 1050lm-1200lm

Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-13W-927	1 15/16"×3" (50*76mm)	1050 lm	36 V	350 mA	13W	15W	97	2700K	15°/25°/35°/50°
Pro50-13W-930	1 15/16"×3" (50*76mm)	1100 lm	36 V	350 mA	13W	15W	97	3000K	15°/25°/35°/50°
Pro50-13W-935	1 15/16"×3" (50*76mm)	1150 lm	36 V	350 mA	13W	15W	97	3500K	15°/25°/35°/50°
Pro50-13W-940	1 15/16"×3" (50*76mm)	1200 lm	36 V	350 mA	13W	15W	97	4000K	15°/25°/35°/50°


Accessory




Honeycomb Diffusion filter Linear spread filter Single asymmetric filter Double asymmetric filter

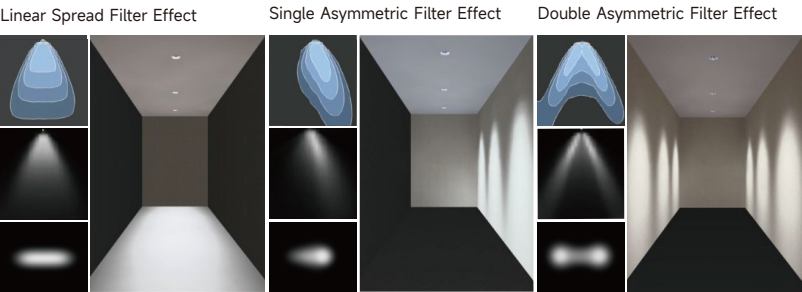


VRA1

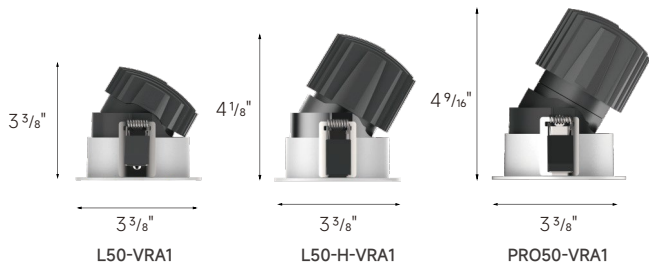


VRF2

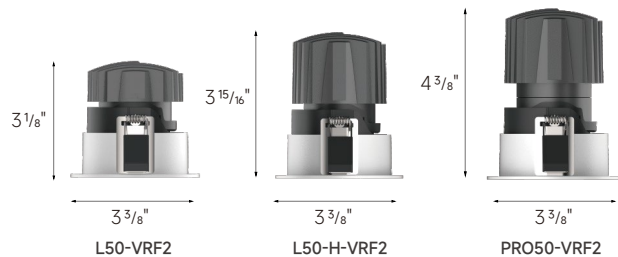


VRA3

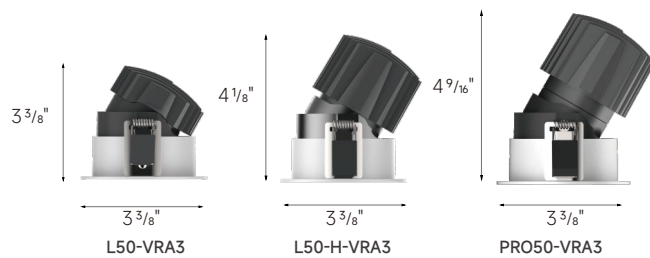



VRA4

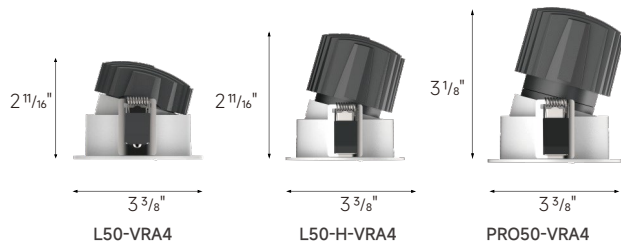



VRF5

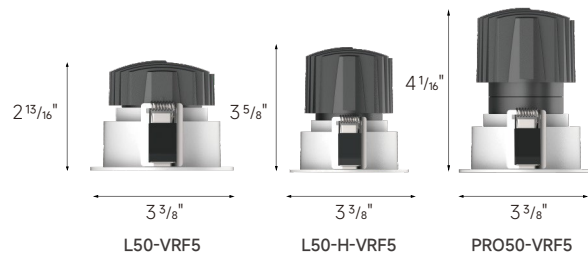


VSA1

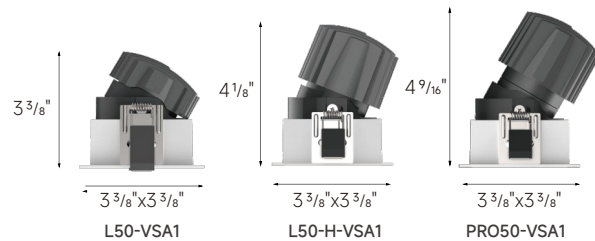


VSF2

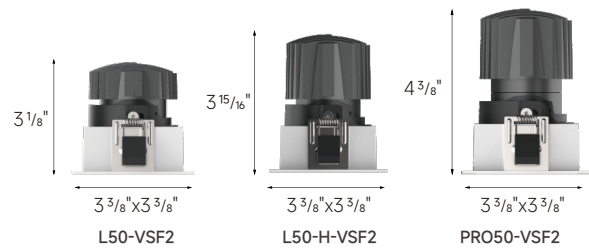


VSA4

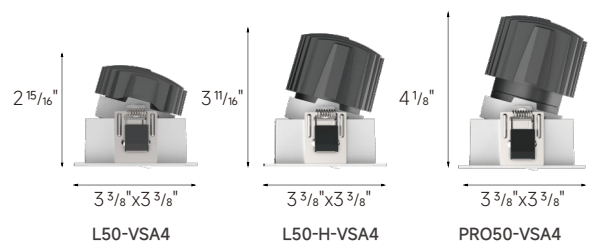


VRAT1

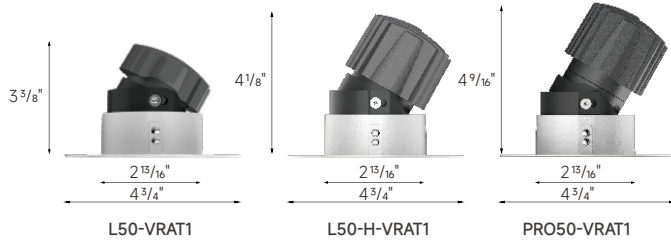


VRFT2

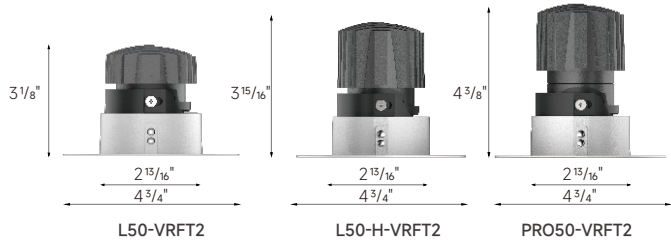


VRAT3

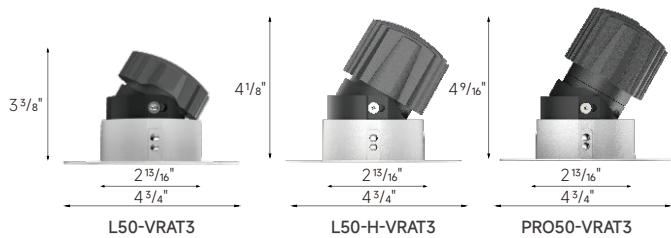



VRAT4

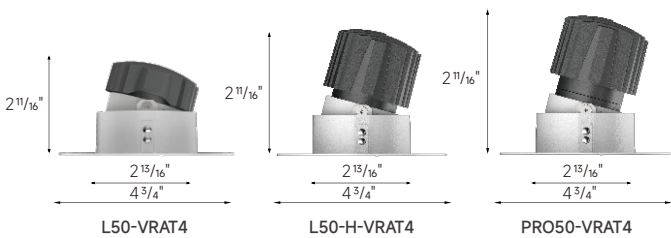


VRFT5

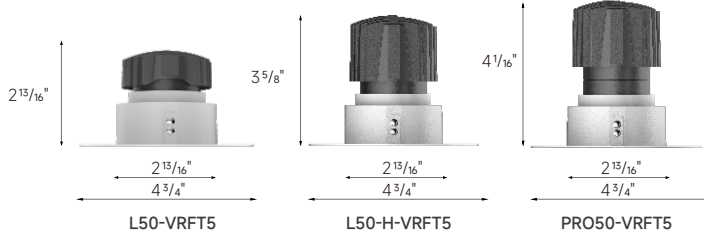


VSAT1

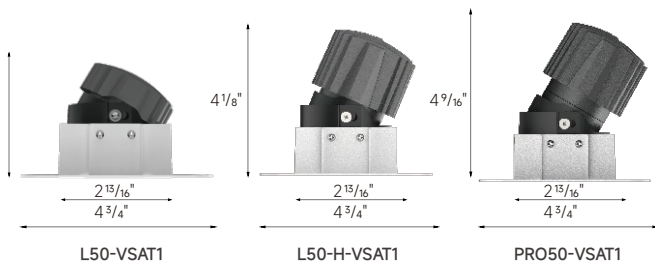

VSFT2

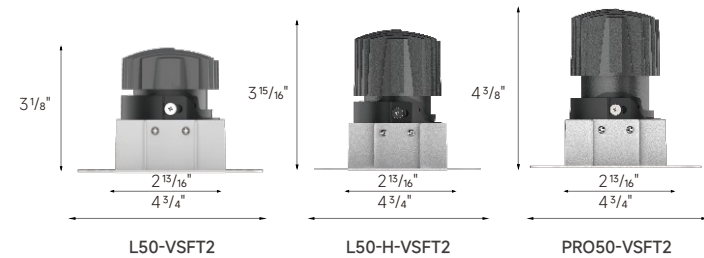

VSAT4

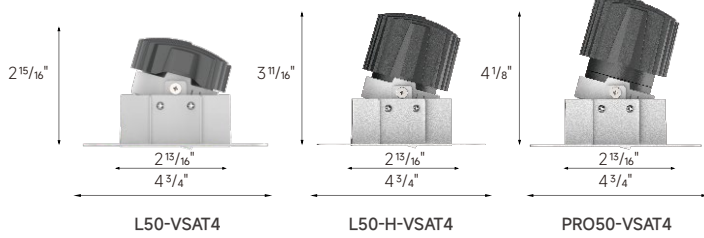




LEDGO

1601E-lite lighting



LEDGO

Ultra Miniature Design
Multiple Spotlight
Super Eye Comfort UGR < 19
Interchangeable Secondary-Reflector with Different Colors
2W-22W, 150lm-1700lm



LF2
2 1/2" x 1 1/2"
4W 300-350Lm



LF3
3 5/8" x 1 1/2"
7W 500-550Lm



LX4
2 5/8" x 2 5/8"
9W 650-700Lm




LF5
5 11/16" x 1 1/2"
13W 800-850Lm



LF10
11 1/8" x 1 1/2"
22W 1600-1700Lm



LF3-LS1
5 11/16" x 1 1/2"
9W 600-650Lm




LF6-LS2
11 1/8" x 1 1/2"
17W 1200-1300Lm



LA5
6 5/16" x 2 1/16"
11W 800-850Lm



LA10
11 3/4" x 2 1/16"
22W 1600-1700Lm



LW5
5 11/16" x 1 1/2"
11W 500-550Lm



LW10
11 1/8" x 1 1/2"
22W 1000-1100Lm



LFT5
6 1/16" x 1 7/8"
13W 800-850Lm



LFT10
11 1/2" x 1 7/8"
22W 1600-1700Lm



LFT3-LS1
6 1/16" x 1 7/8"
9W 600-650Lm



LFT6-LS2
11 1/2" x 1 7/8"
17W 1200-1300Lm



LWT5
6 1/16" x 1 7/8"
11W 500-550Lm



LWT10
11 1/2" x 1 7/8"
22W 1000-1100Lm



LEDGO

Fixed

A combination of deep recessed secondary reflector and soft lens creates visual comfort

Adjustable

Four sizes with LED wattages 9W-22W. 20°, 40°, and 50° beam angles are available 10° beam angle is optional for SRA68. 30° tilt and 355° rotation.

Wall Washer


Asymmetric wall washer reflector evenly illuminates walls

Secondary Reflector



Colour



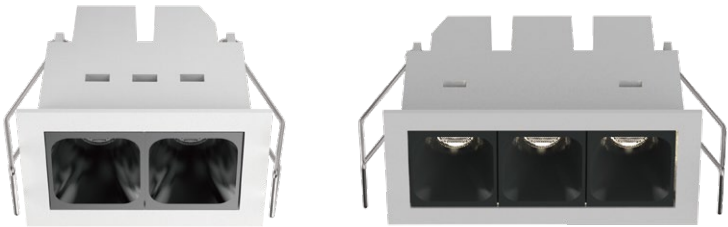

LF2

LF3

Downlight
LF2/LF3



Features

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control

Specifications

- Dimming modes:Non-Dim , Phase, 1-10V
- Beam angle:24°,40°
- Physical: aluminium, wet painting
- Accessories: secondary reflector plastic


Type



Mountings



Light distribution



Secondary Reflector




White

Matt

Gold

Balck

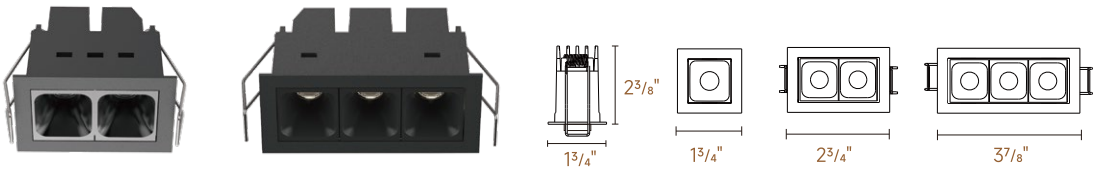

LF2/LF3

4W 300lm-320lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF2-4W-930-24	2 1/2" x 1 1/2"	300 lm	6.5V	700mA	4W	6W	90	3000K	24°
LF2-4W-940-24	2 1/2" x 1 1/2"	320 lm	6.5V	700mA	4W	6W	90	4000K	24°
LF2-4W-930-40	2 1/2" x 1 1/2"	300 lm	6.5V	700mA	4W	6W	90	3000K	40°
LF2-4W-940-40	2 1/2" x 1 1/2"	320 lm	6.5V	700mA	4W	6W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)


6W 500lm-550lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF3-6W-930-24	3 5/8" x 1 1/2"	500 lm	10V	700mA	6W	8W	90	3000K	24°
LF3-6W-940-24	3 5/8" x 1 1/2"	550 lm	10V	700mA	6W	8W	90	4000K	24°
LF3-6W-930-40	3 5/8" x 1 1/2"	500 lm	10V	700mA	6W	8W	90	3000K	40°
LF3-6W-940-40	3 5/8" x 1 1/2"	550 lm	10V	700mA	6W	8W	90	4000K	40°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

Accessories:

Driver box Dimension

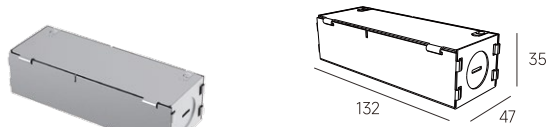

L: 5 3/16" W:1 7/8" H:1 3/8"
For LF1, LF2 and LF3

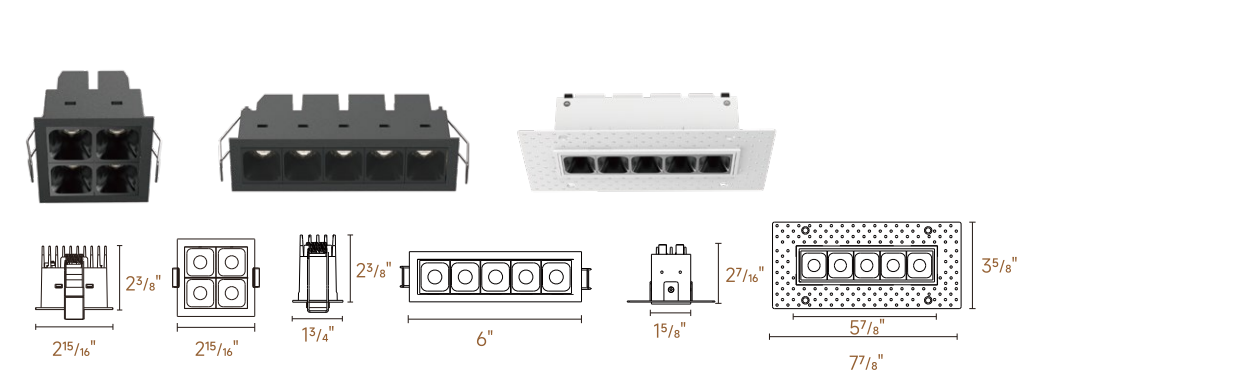

LX4/LF5/LFT5

8W 650 lm-700 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LX4-8W-930-24	2 5/8" x 2 5/8"	650 lm	12 V	500mA	8W	10W	90	3000K	24°
LX4-8W-940-24	2 5/8" x 2 5/8"	700 lm	12 V	500mA	8W	10W	90	4000K	24°
LX4-8W-930-40	2 5/8" x 2 5/8"	650 lm	12 V	500mA	8W	10W	90	3000K	40°
LX4-8W-940-40	2 5/8" x 2 5/8"	700 lm	12 V	500mA	8W	10W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

10W 800 lm-850 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF5-10W-930-24	5 11/16" x 1 1/2"	800 lm	15 V	700mA	10W	12W	90	3000K	24°
LF5-10W-940-24	5 11/16" x 1 1/2"	850 lm	15 V	700mA	10W	12W	90	4000K	24°
LF5-10W-930-40	5 11/16" x 1 1/2"	800 lm	15 V	700mA	10W	12W	90	3000K	40°
LF5-10W-940-40	5 11/16" x 1 1/2"	850 lm	15 V	700mA	10W	12W	90	4000K	40°

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)



10W 800 lm-850 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT5-10W-930-24	6 1/16" x 1 7/8"	800 lm	15 V	700mA	10W	12W	90	3000K	24°
LFT5-10W-940-24	6 1/16" x 1 7/8"	850 lm	15 V	700mA	10W	12W	90	4000K	24°
LFT5-10W-930-40	6 1/16" x 1 7/8"	800 lm	15 V	700mA	10W	12W	90	3000K	40°
LFT5-10W-940-40	6 1/16" x 1 7/8"	850 lm	15 V	700mA	10W	12W	90	4000K	40°

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

Accessories:

Driver box Dimension

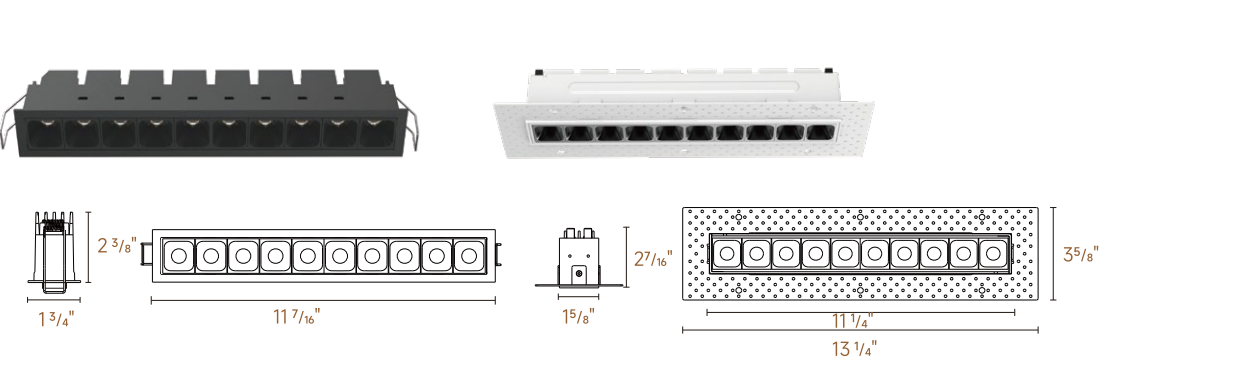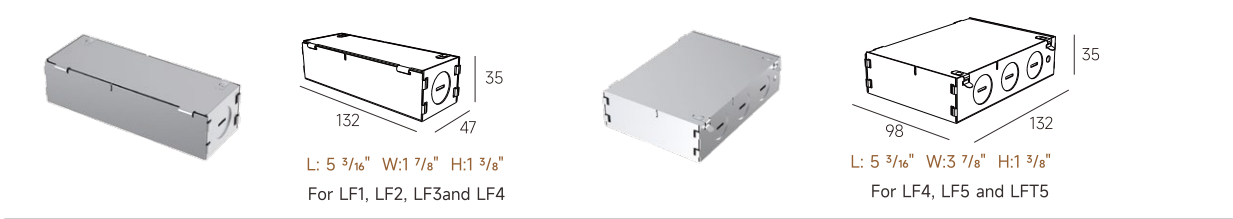

LF10/LFT10

20W 1600 lm-1700 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF10-20W-930-24	11 1/8" x 1 1/2"	1600 lm	30V	700mA	20W	23W	90	3000K	24°
LF10-20W-940-24	11 1/8" x 1 1/2"	1700 lm	30V	700mA	20W	23W	90	4000K	24°
LF10-20W-930-40	11 1/8" x 1 1/2"	1600 lm	30V	700mA	20W	23W	90	3000K	40°
LF10-20W-940-40	11 1/8" x 1 1/2"	1700 lm	30V	700mA	20W	23W	90	4000K	40°

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)


20W 1600 lm-1700 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT10-20W-930-24	11 1/2" x 1 7/8"	1600 lm	30V	700mA	20W	23W	90	3000K	24°
LFT10-20W-940-24	11 1/2" x 1 7/8"	1700 lm	30V	700mA	20W	23W	90	4000K	24°
LFT10-20W-930-40	11 1/2" x 1 7/8"	1600 lm	30V	700mA	20W	23W	90	3000K	40°
LFT10-20W-940-40	11 1/2" x 1 7/8"	1700 lm	30V	700mA	20W	23W	90	4000K	40°


Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

Accessories:

Driver box Dimension

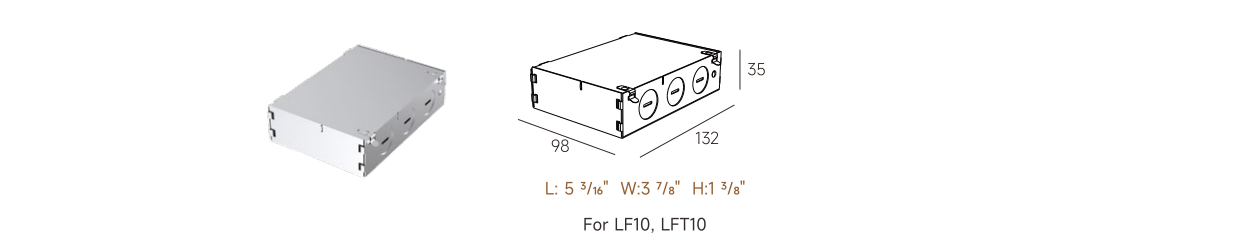

LEDGO Series
DOWNLIGHT/Fixed with spot

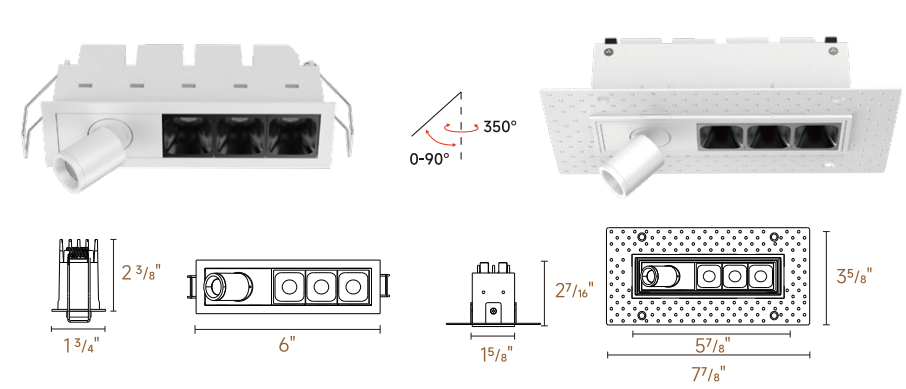

LF3-LS1/LFT3-LS1

8W 600 lm-650 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF3-LS1-8W-930-24	5 ¹¹ / ₁₆ " x 1 ¹ / ₂ "	600 lm	13 V	700mA	8W	10W	90	3000K	24°
LF3-LS1-8W-940-24	5 ¹¹ / ₁₆ " x 1 ¹ / ₂ "	650 lm	13 V	700mA	8W	10W	90	4000K	24°
LF3-LS1-8W-930-40	5 ¹¹ / ₁₆ " x 1 ¹ / ₂ "	600 lm	13 V	700mA	8W	10W	90	3000K	40°
LF3-LS1-8W-940-40	5 ¹¹ / ₁₆ " x 1 ¹ / ₂ "	650 lm	13 V	700mA	8W	10W	90	4000K	40°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)


8W 600 lm-650 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT3-LS1-8W-930-24	6 ¹ / ₁₆ " x 1 ⁷ / ₈ "	600 lm	13 V	700mA	8W	10W	90	3000K	24°
LFT3-LS1-8W-940-24	6 ¹ / ₁₆ " x 1 ⁷ / ₈ "	650 lm	13 V	700mA	8W	10W	90	4000K	24°
LFT3-LS1-8W-930-40	6 ¹ / ₁₆ " x 1 ⁷ / ₈ "	600 lm	13 V	700mA	8W	10W	90	3000K	40°
LFT3-LS1-8W-940-40	6 ¹ / ₁₆ " x 1 ⁷ / ₈ "	650 lm	13 V	700mA	8W	10W	90	4000K	40°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

Accessories:

Driver box	Dimension
------------	-----------

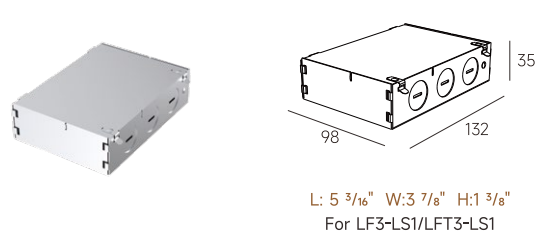

L: 5 3/16" W:3 7/8" H:1 3/8"
For LF3-LS1/LFT3-LS1

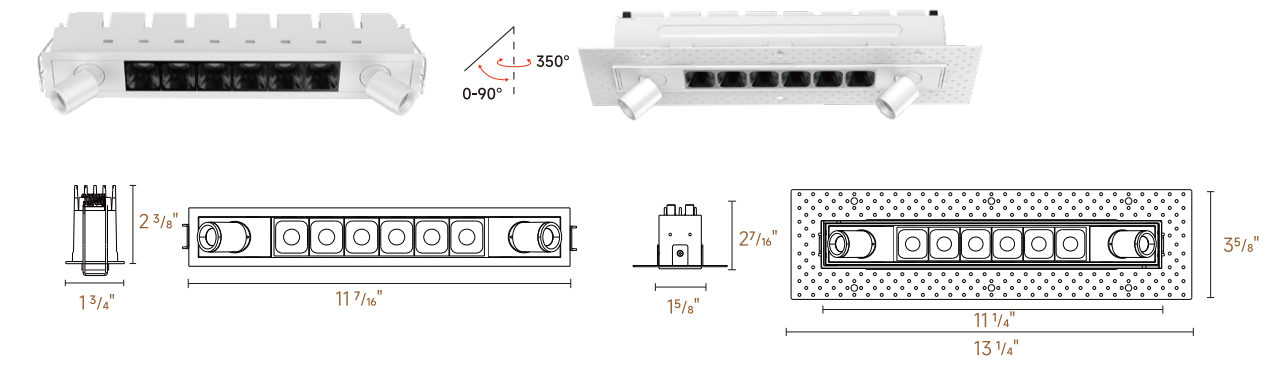

16W 1200 lm-1300 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF6-LS2-16W-930-24	11 ¹ / ₈ " x 1 ¹ / ₂ "	1200 lm	25V	700mA	16W	19W	90	3000K	24°
LF6-LS2-16W-940-24	11 ¹ / ₈ " x 1 ¹ / ₂ "	1300 lm	25V	700mA	16W	19W	90	4000K	24°
LF6-LS2-16W-930-40	11 ¹ / ₈ " x 1 ¹ / ₂ "	1200 lm	25V	700mA	16W	19W	90	3000K	40°
LF6-LS2-16W-940-40	11 ¹ / ₈ " x 1 ¹ / ₂ "	1300 lm	25V	700mA	16W	19W	90	4000K	40°

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)


16W 1200 lm-1300 lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT6-LS2-16W-930-24	11 ¹ / ₂ " x 1 ⁷ / ₈ "	1200 lm	25V	700mA	16W	19W	90	3000K	24°
LFT6-LS2-16W-940-24	11 ¹ / ₂ " x 1 ⁷ / ₈ "	1300 lm	25V	700mA	16W	19W	90	4000K	24°
LFT6-LS2-16W-930-40	11 ¹ / ₂ " x 1 ⁷ / ₈ "	1200 lm	25V	700mA	16W	19W	90	3000K	40°
LFT6-LS2-16W-940-40	11 ¹ / ₂ " x 1 ⁷ / ₈ "	1300 lm	25V	700mA	16W	19W	90	4000K	40°


Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

Accessories:

Driver box	Dimension
------------	-----------

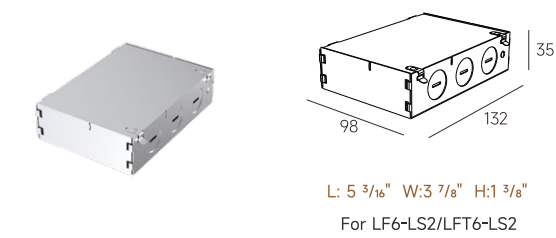

L: 5 3/16" W:3 7/8" H:1 3/8"
For LF6-LS2/LFT6-LS2

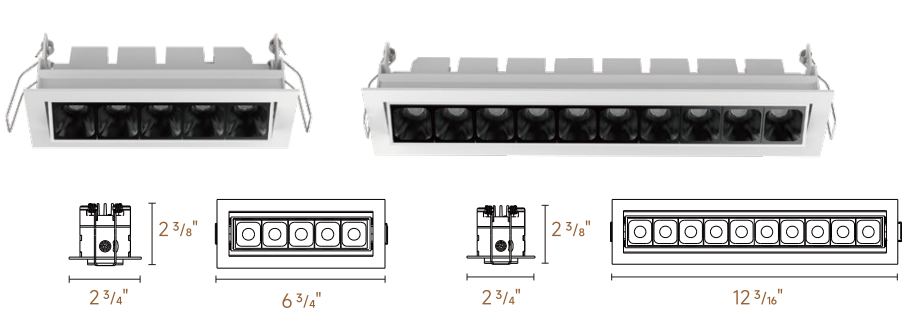

LA5/LA10

10W 800lm-850lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LA5-10W-930-24	6 ⁵ / ₁₆ " x 2 ¹ / ₁₆ "	800 lm	15 V	700mA	10W	12W	90	3000K	24°
LA5-10W-940-24	6 ⁵ / ₁₆ " x 2 ¹ / ₁₆ "	850 lm	15 V	700mA	10W	12W	90	4000K	24°
LA5-10W-930-40	6 ⁵ / ₁₆ " x 2 ¹ / ₁₆ "	800 lm	15 V	700mA	10W	12W	90	3000K	40°
LA5-10W-940-40	6 ⁵ / ₁₆ " x 2 ¹ / ₁₆ "	850 lm	15 V	700mA	10W	12W	90	4000K	40°

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)


20W 1600lm-1700lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LA10-20W-930-24	11 ³ / ₄ " x 2 ¹ / ₁₆ "	1600 lm	30V	700mA	20W	23W	90	3000K	24°
LA10-20W-940-24	11 ³ / ₄ " x 2 ¹ / ₁₆ "	1700 lm	30V	700mA	20W	23W	90	4000K	24°
LA10-20W-930-40	11 ³ / ₄ " x 2 ¹ / ₁₆ "	1600 lm	30V	700mA	20W	23W	90	3000K	40°
LA10-20W-940-40	11 ³ / ₄ " x 2 ¹ / ₁₆ "	1700 lm	30V	700mA	20W	23W	90	4000K	40°


Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

Accessories:

Driver box Dimension

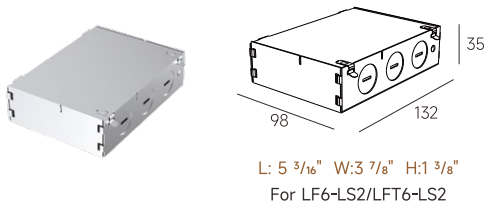

DOWNLIGHT/Wall Washer

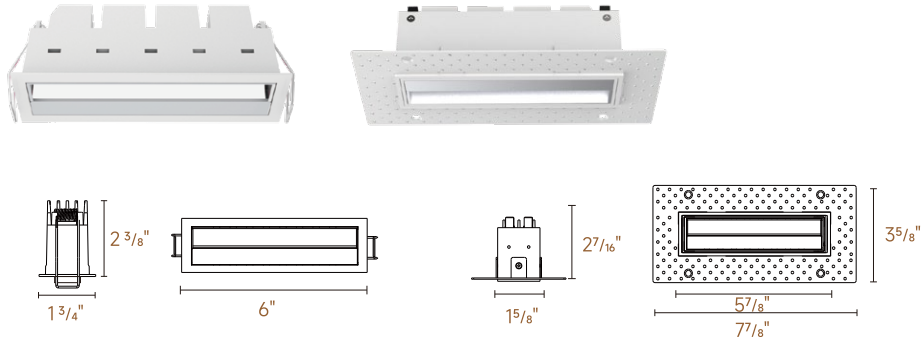

LW5/LWT5

10W 500lm-550lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LW5-10W-930	5 ¹¹ / ₁₆ " x 1 ¹ / ₂ "	500 lm	15V	700mA	10W	12W	90	3000K	↙
LW5-10W-940	5 ¹¹ / ₁₆ " x 1 ¹ / ₂ "	550 lm	15V	700mA	10W	12W	90	4000K	↙

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)


10W 500lm-550lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LWT5-10W-930	6 ¹ / ₁₆ " x 1 ⁷ / ₈ "	500 lm	15V	700mA	10W	12W	90	3000K	↙
LWT5-10W-940	6 ¹ / ₁₆ " x 1 ⁷ / ₈ "	550 lm	15V	700mA	10W	12W	90	4000K	↙


Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

Accessories:

Driver box Dimension

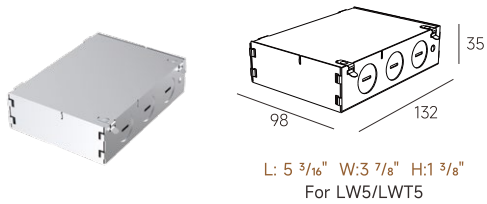

LEDGO Series
DOWNLIGHT/Wall Washer

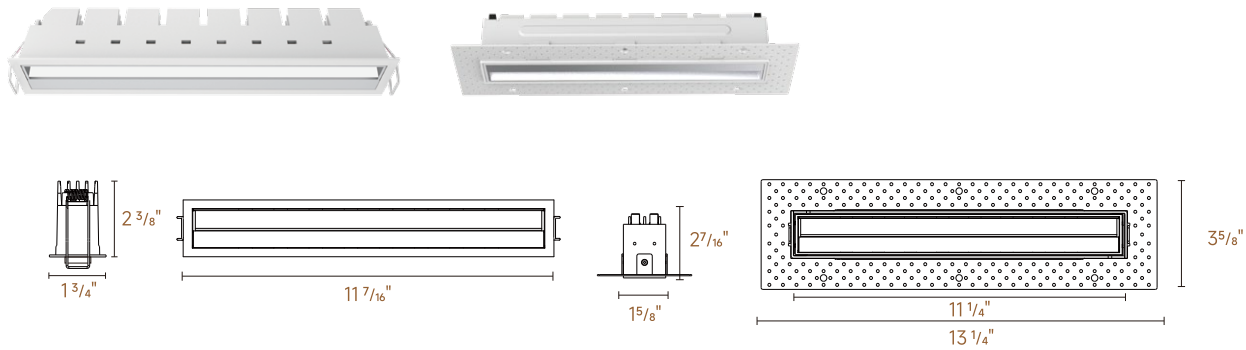

LW10/LWT10

20W 1000lm-1100lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LW10-20W-930	11 1/8" x 1 1/2"	1000 lm	30V	700mA	20W	23W	90	3000K	✓
LW10-20W-940	11 1/8" x 1 1/2"	1100 lm	30V	700mA	20W	23W	90	4000K	✓

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)


20W 1000lm-1100lm

Code	Cut-out	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LWT10-20W-930	11 1/2" x 1 7/8"	1000 lm	30V	700mA	20W	23W	90	3000K	✓
LWT10-20W-940	11 1/2" x 1 7/8"	1100 lm	30V	700mA	20W	23W	90	4000K	✓

Remark: X=P (Phase Dim) X=A (1-10V Dim) X=N (Without Driver)

Accessories:

Driver box Dimension



L: 5 3/16" W:3 7/8" H:1 3/8"
For LW10/LWT10

