




LX26-RS80-SL for Slim Track



LX26-RS80-ST & LX26-SS80-ST for High Track

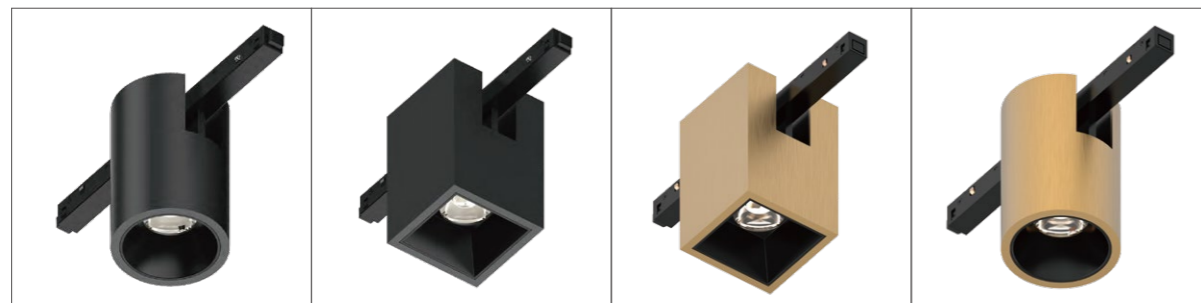


Downlight

LineX 26 DC48V Track

Perfect integration of lighting modules with rails especially when installed on the ceiling ensures the lighting module fits closely to the ceiling



Drawing

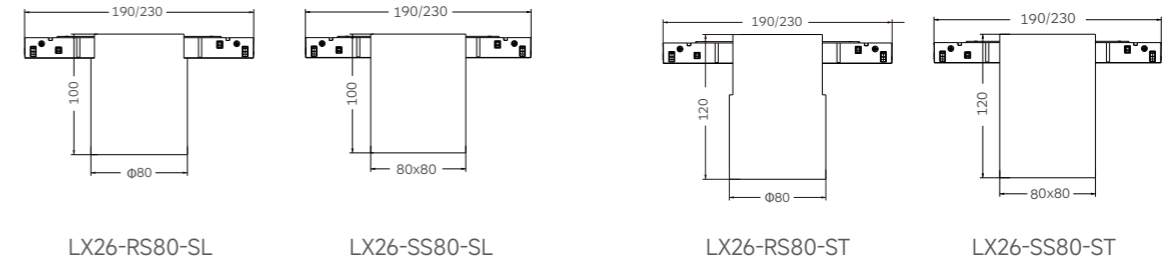

Order Information

LX26-RS80-SL-10W

Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS80-SL-10W-930	900lm	9W	10W	DC48V	90	3000K	30°
LX26-RS80-SL-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°

LX26-SS80-SL-10W

Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SS80-SL-10W-930	1000lm	9W	10W	DC48V	90	3000K	30°
LX26-SS80-SL-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°

LX26-RS80-ST-10W

Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS80-ST-10W-930	900lm	9W	10W	DC48V	90	3000K	30°
LX26-RS80-ST-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°

LX26-SS80-ST-10W

Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SS80-ST-10W-930	1000lm	9W	10W	DC48V	90	3000K	30°
LX26-SS80-ST-10W-940	1100lm	9W	10W	DC48V	90	4000K	30°

Slim Track Modules for Slim Track



LX26-SM LX26-RS80-SL LX26-SS80-SL

High Track Modules for High Track



LX26-SUS LX26-RS80-ST LX26-SS80-ST

LX26-RS80 & SS80

Seamless integration with rails.
 Flush fit for lighting modules on the ceiling installation.
 Non-dimmable, 1-10V dimming, and DALI dimming options available.

Optional color



White White Gold Gold