




NEW RELEASE INSERTS FOR THE 48V LOW VOLTAGE TRACK SYSTEM

STELLA315 / RITA315


150° tiltable
Uniform and even light distribution
Humanized scale indication ensure the accurate direction



LX26-STELLA315 for recessed track

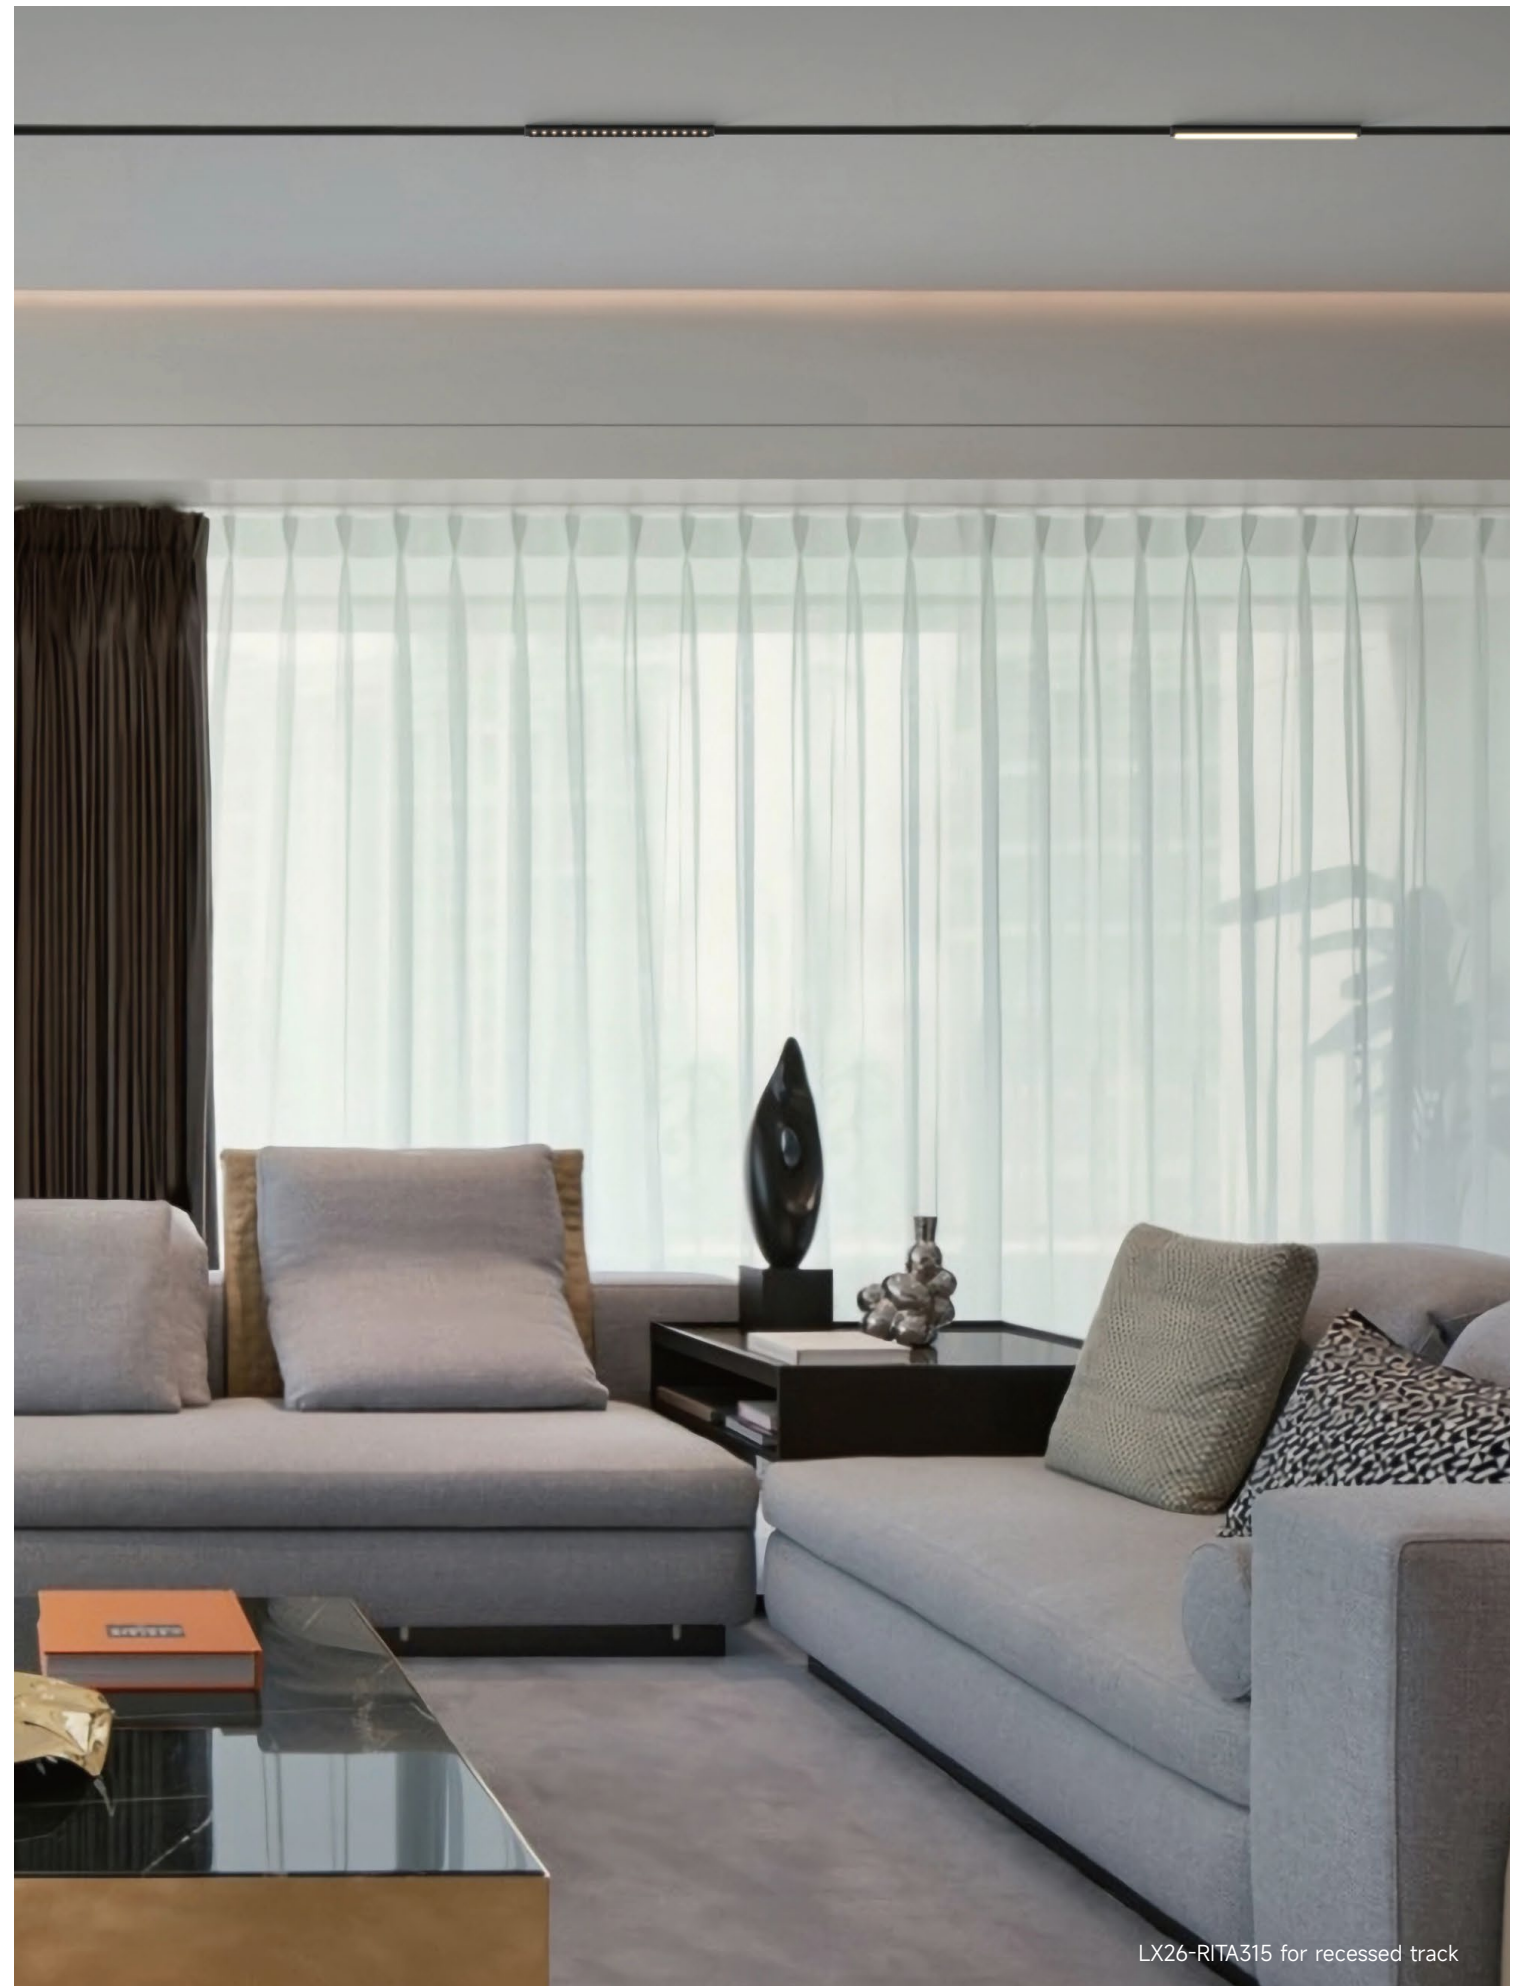

LX26-RITA315 for recessed track



Adjustable range 150°



LX26-Stella315-10W



LX26-Rita315-15W


DC 48V Low Voltage Track Inserts for LX26 System

General Light / Accent Light

STELLA315 / RITA315

- Circular tiltable general/accent light inserts
- 150° tiltable
- Humanized scale indication ensure the accurate direction of each beam of light.
- ON-OFF, 1-10V DIM, DALI DIM optional

Drawing

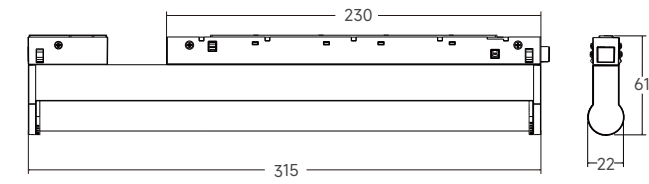

LX26-Rita315-15W / LX26-Stella315-10W

Order Information



LX26-Stella315-10W

Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-Stella315-10W-930-120	500Lm	9W	10W	DC48V	90	3000K	120°
LX26-Stella315-10W-940-120	550Lm	9W	10W	DC48V	90	4000K	120°



LX26-Rita315-15W

Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-Rita315-15W-930-30	1100Lm	13W	15W	DC48V	90	3000K	30°
LX26-Rita315-15W-940-30	1180Lm	13W	15W	DC48V	90	4000K	30°

Optional color



White

White