

Low Voltage System

Low Voltage System

LINE X05	298-307
Coming Soon →	
LINE X11	308-315
Coming Soon →	
LINE X26	316-369
SKYLINE	370-375
Coming Soon →	




LINE X 05



Low Voltage System

Thin extruded aluminum profile with 5mm width groove
24VDC Version
Good application for residential lighting projects
Available for Triac-dimming


LineX 05 DC24V Track

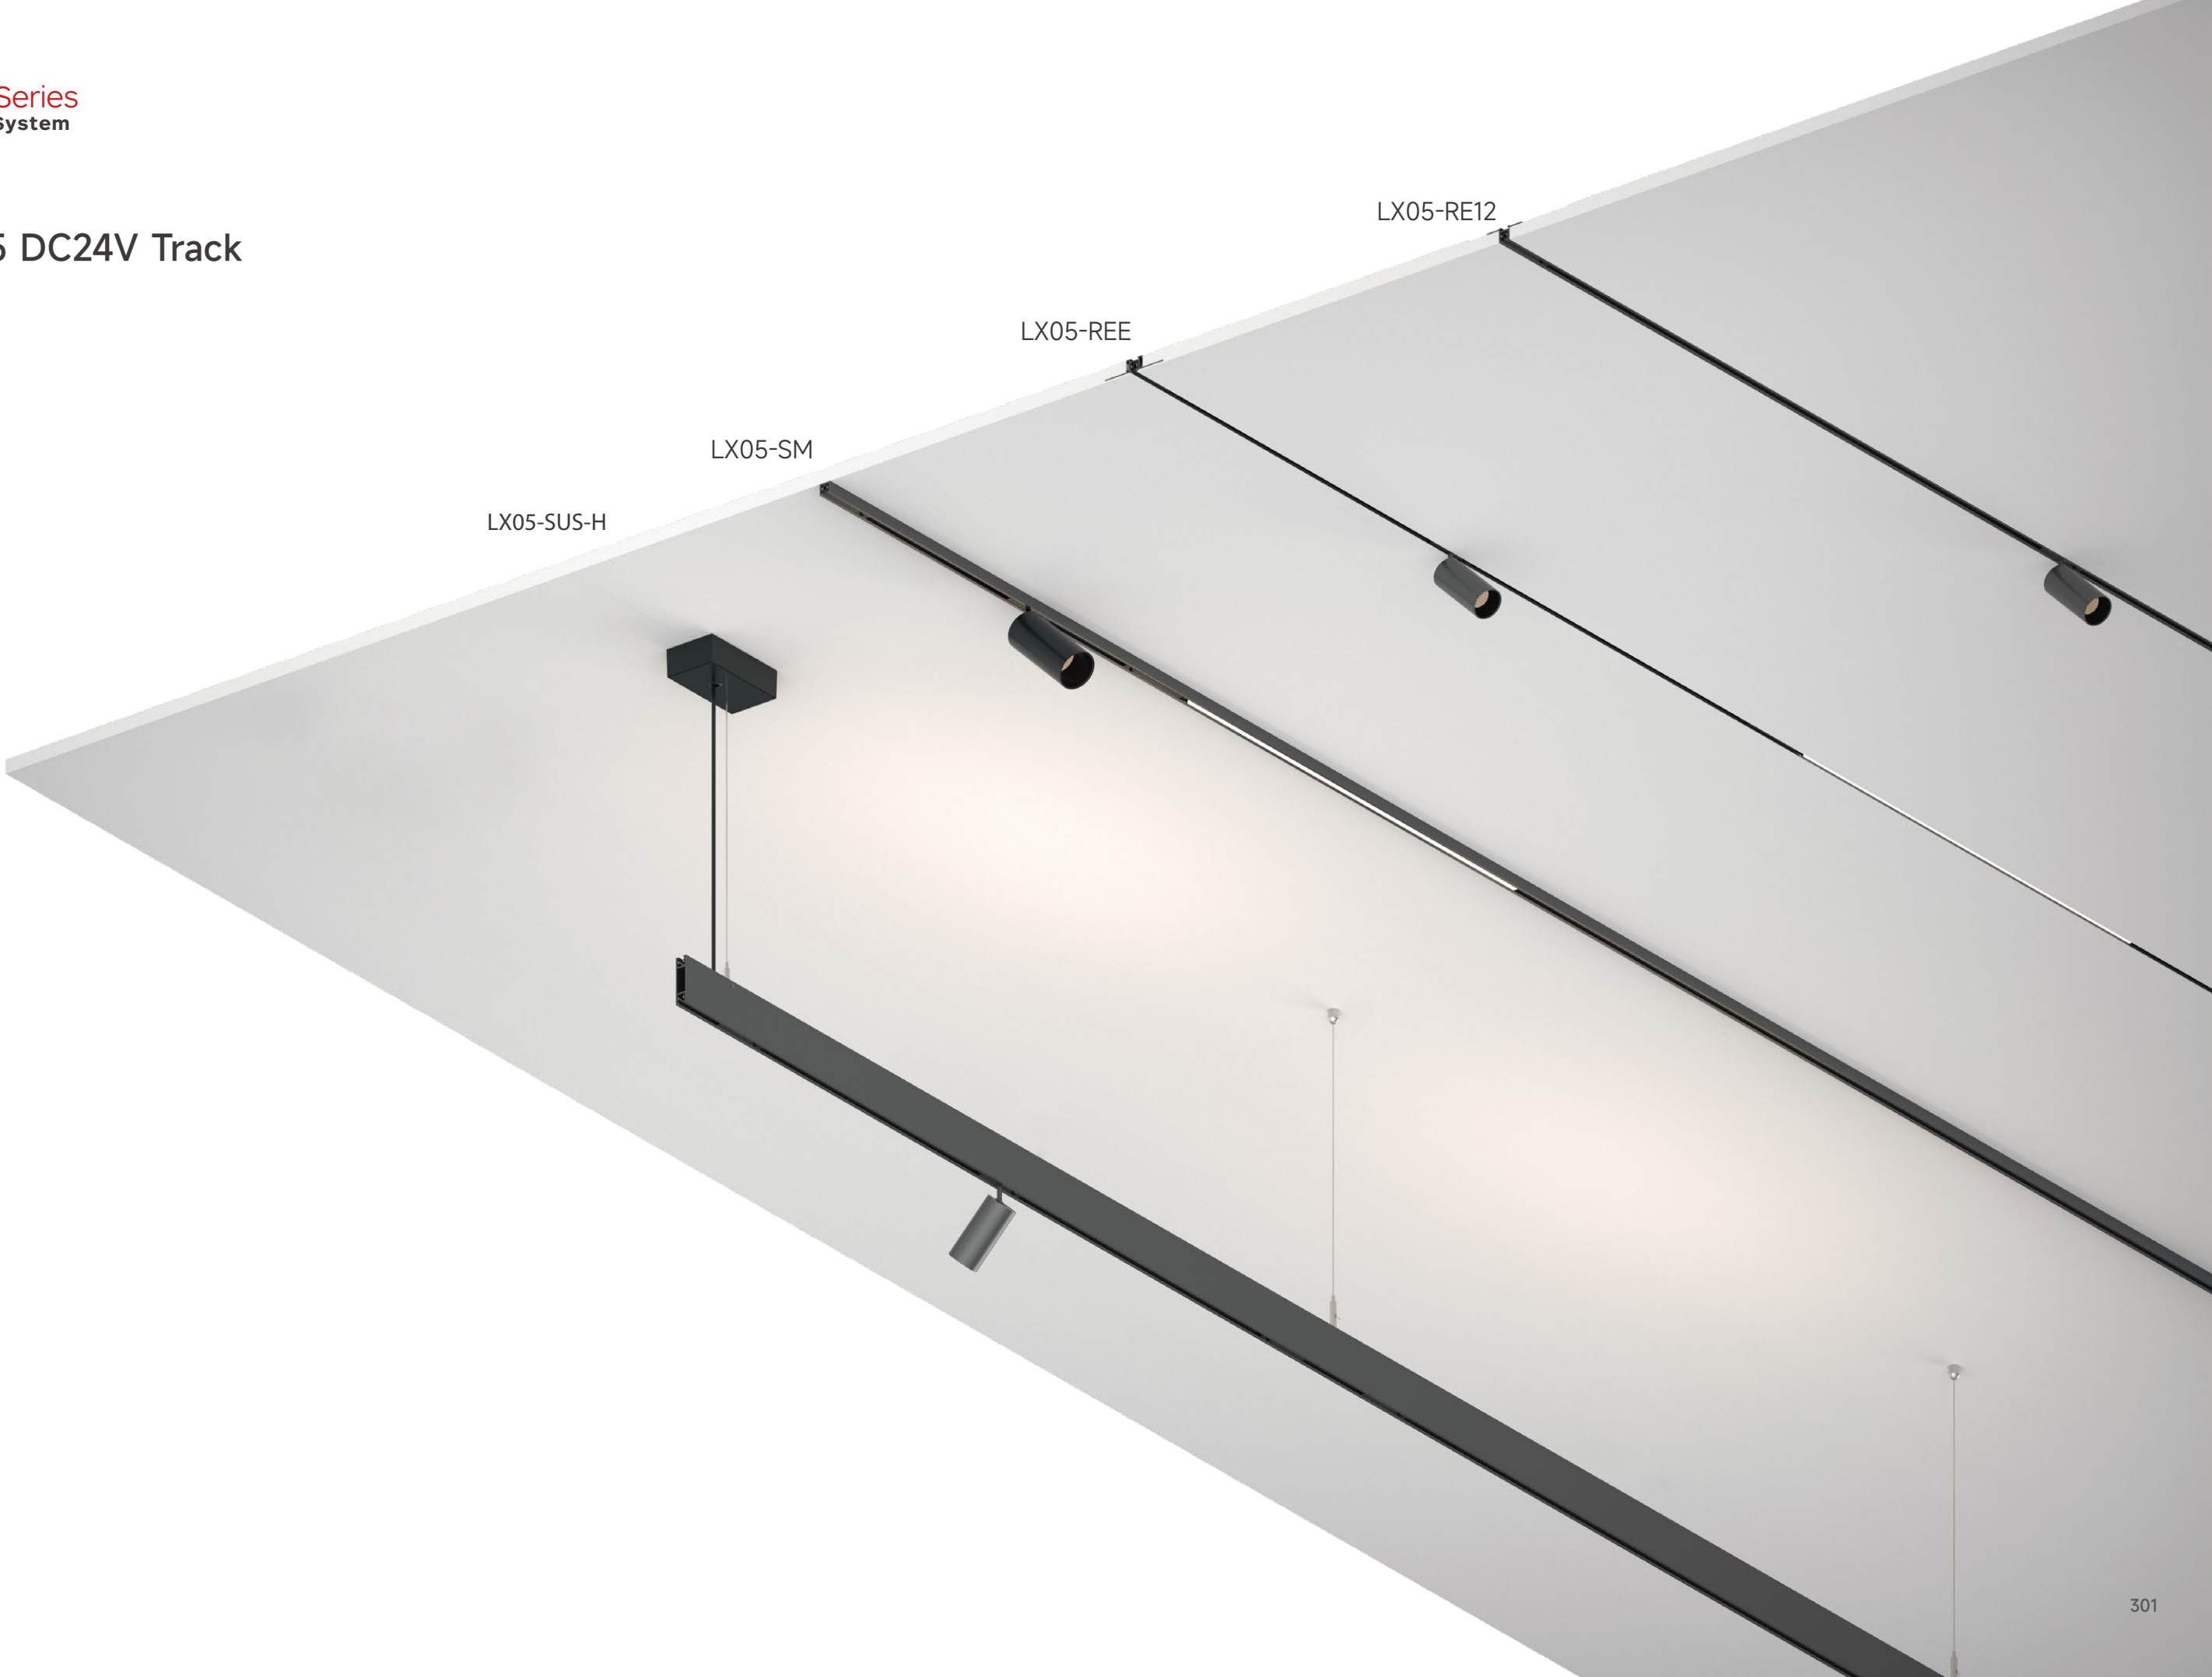


LINE X 05 Series
Low Voltage System

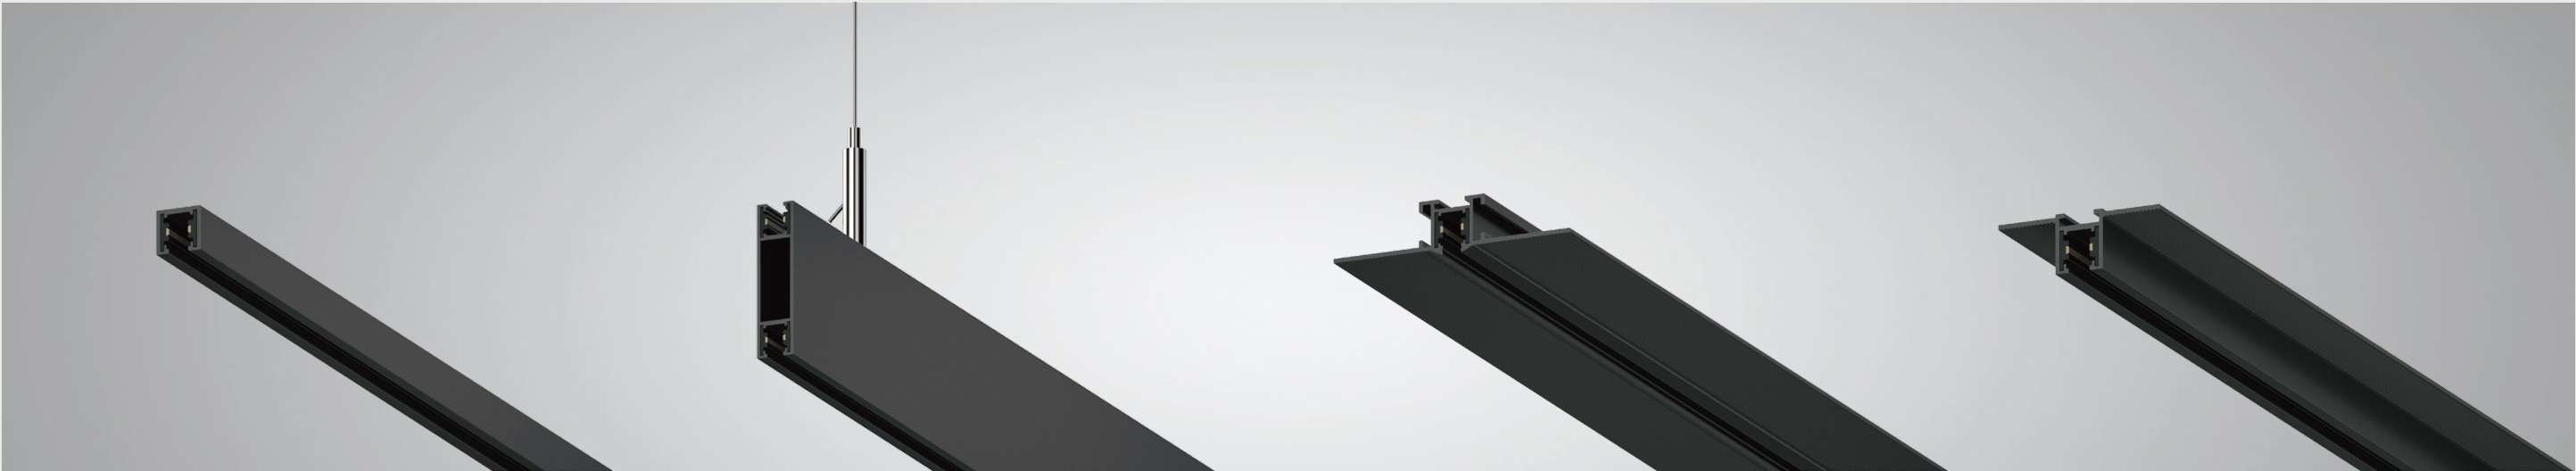


LX05-SM

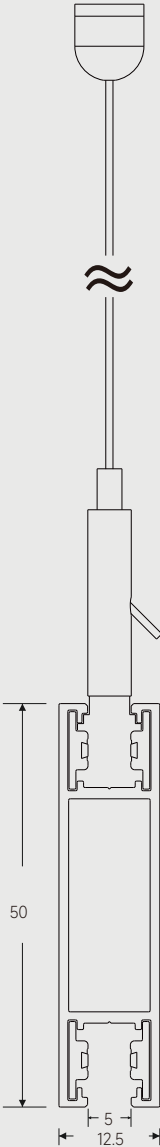

LX05-SUS-H

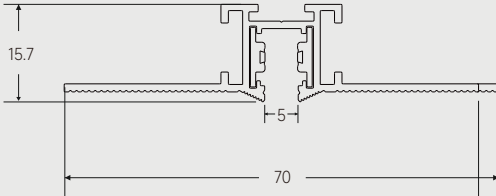


LX05-REE

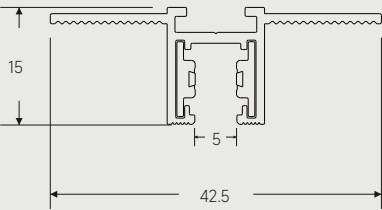

LX05-RE12

Surface-mounted Track

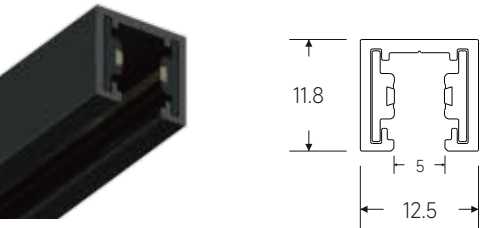

Order Options


Code	Description	Length(mm)	Power supply	Installation
LX05-SM	surface-mounted	1000/2000	built-in available	surface-mounted

Accessories

LX05-SM



Suspended Track

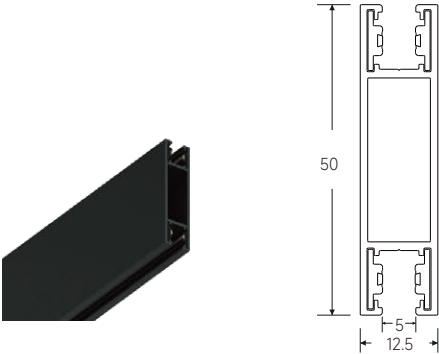


Order Options


Code	Description	Length(mm)	Power supply	Installation
LX05-SUS-H	downward & upward lighting	1000/2000	built-in available	suspended

Accessories

LX05-SUS-H

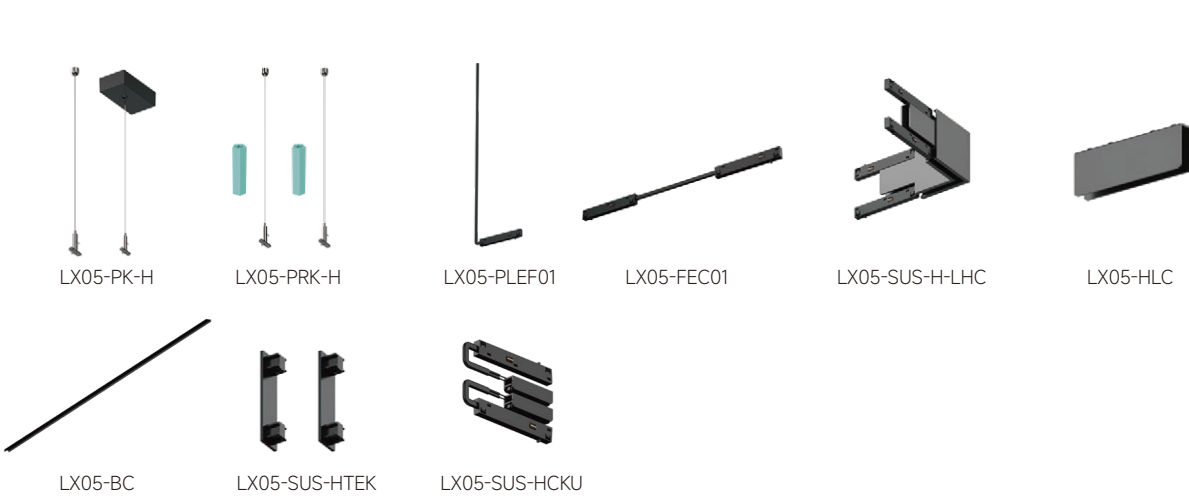

Recessed Track

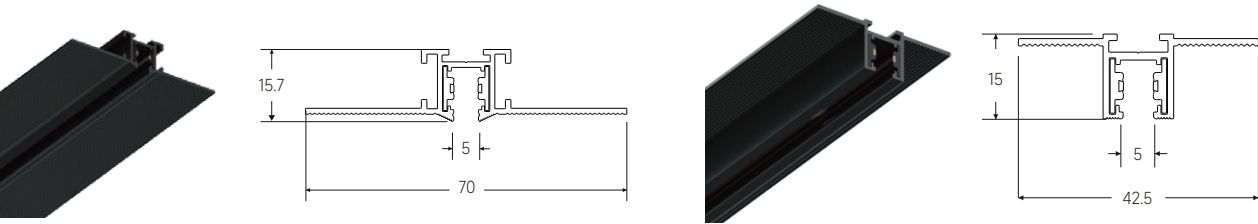

Order Options

Code	Description	Length(mm)	Power supply	Installation
LX05-REE	easy installation	1000/2000	built-in available	trimless recessed
LX05-RE12	compatible with ½" ceiling	1000/2000	built-in available	trimless recessed

Accessories

LX05-REE




LX05-RE12



Inserts for track


Spotlight Insert

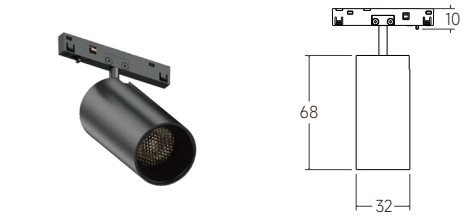

LX05-RS30-4W

Size: 58mm x Φ 32mm
System Lumen Output:250Lm
System Wattage: 4W
Beam Angle:18°/24°/36°/50°
Housing Color: Black/White
CCT: 2700K/3000K/4000K
CRI: >90


Spotlight Insert

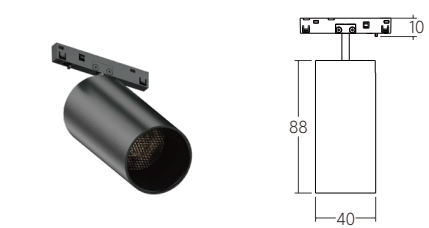

LX05-RS40-8W

Size: 88mm x Φ 40mm
System Lumen Output:600Lm
System Wattage: 8W
Beam Angle:18°/24°/36°
Housing Color: Black/White
CCT: 3000K CRI: >90

GIMI Decorative Pendant

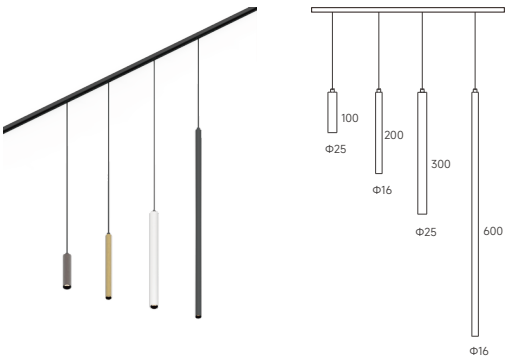

LX05-PS16/PS25

System Lumen Output: 160lm/230 Lm
System Wattage: 3W/4W
Size: Φ 16mm/25mm
CCT: 2700K/3000K/4000K
Color: Black/White/Brushed gold/Brushed bronze

FARA Decorative Pendant



LX05-SCD80

System Lumen Output: 320lm
System Wattage: 4W
Size: Φ 80mm
CCT: 2700K/3000K/4000K
Color: Black/White/Golden

LINE X 05 Series
Low Voltage System


FINO Decorative Pendant



LX05-SPD80

System Lumen Output: 200lm
System Wattage: 2W
Size: Φ80mm
CCT: 2700K/3000K/4000K
CRI: >90
Color: Black/White


Decorative Pendant

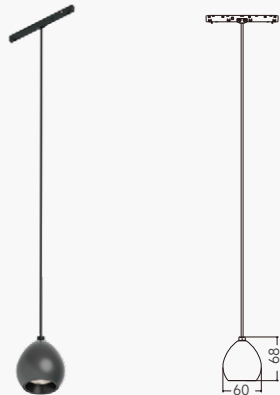

LX05-SURI 60

System Lumen Output: 220lm
System Wattage: 4W
Beam: 18°/24°/30°
CRI: >90
CCT: 2700K/3000K/4000K
Color: White/Black


Accent Light Insert

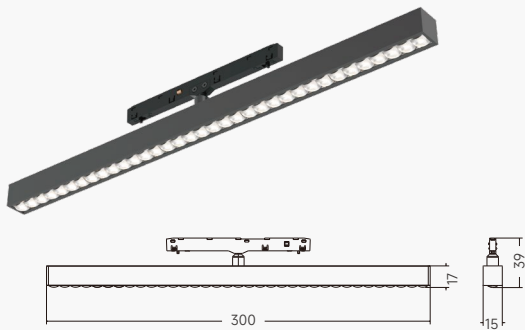

LX05-A-AL300

System Lumen Output: 1350lm
System Wattage: 12W
Beam Angle: 45°/80°
CCT: 2700K/3000K/4000K
CRI: >90
Color: White/Black

General Light LED Strip

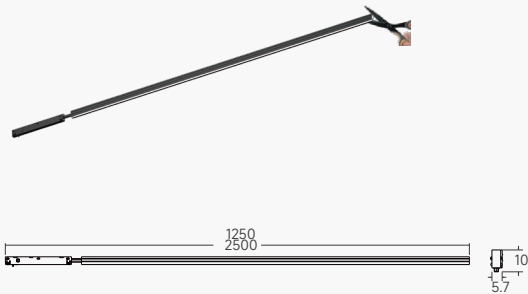

LX05-GL1250-6W
LX05-GL2500-12W

System Lumen Output: 480lm/920 Lm
System Wattage: 6W/12W
Beam Angle: 110°
CCT: 2700K/3000K/4000K
CRI: >90With Opal Cover

Line X System-modular track kit,
easy installation package

The line X is available in a form of modular track kit, which is easy-to-use as a package. Track width options of 5mm and 11mm. Multiple modules can be integrated with the track easily. Available in classic black, white, and trending brushed bronze, brushed gold color. Various inserts, like accent lighting insert, general lighting insert, spotlight insert can be easily mounted to the track. It is ideal for residential lighting, retail shop applications .etc



LINE X 05 Series
Low Voltage System

