



LINE X 11

3081E-lite lighting


LINE X 11

Low Voltage System


Extruded aluminum profile with 11mm width groove.
24VDC Version
Good application for residential lighting projects
Available for Triac-dimming



LineX 11 DC24V Track

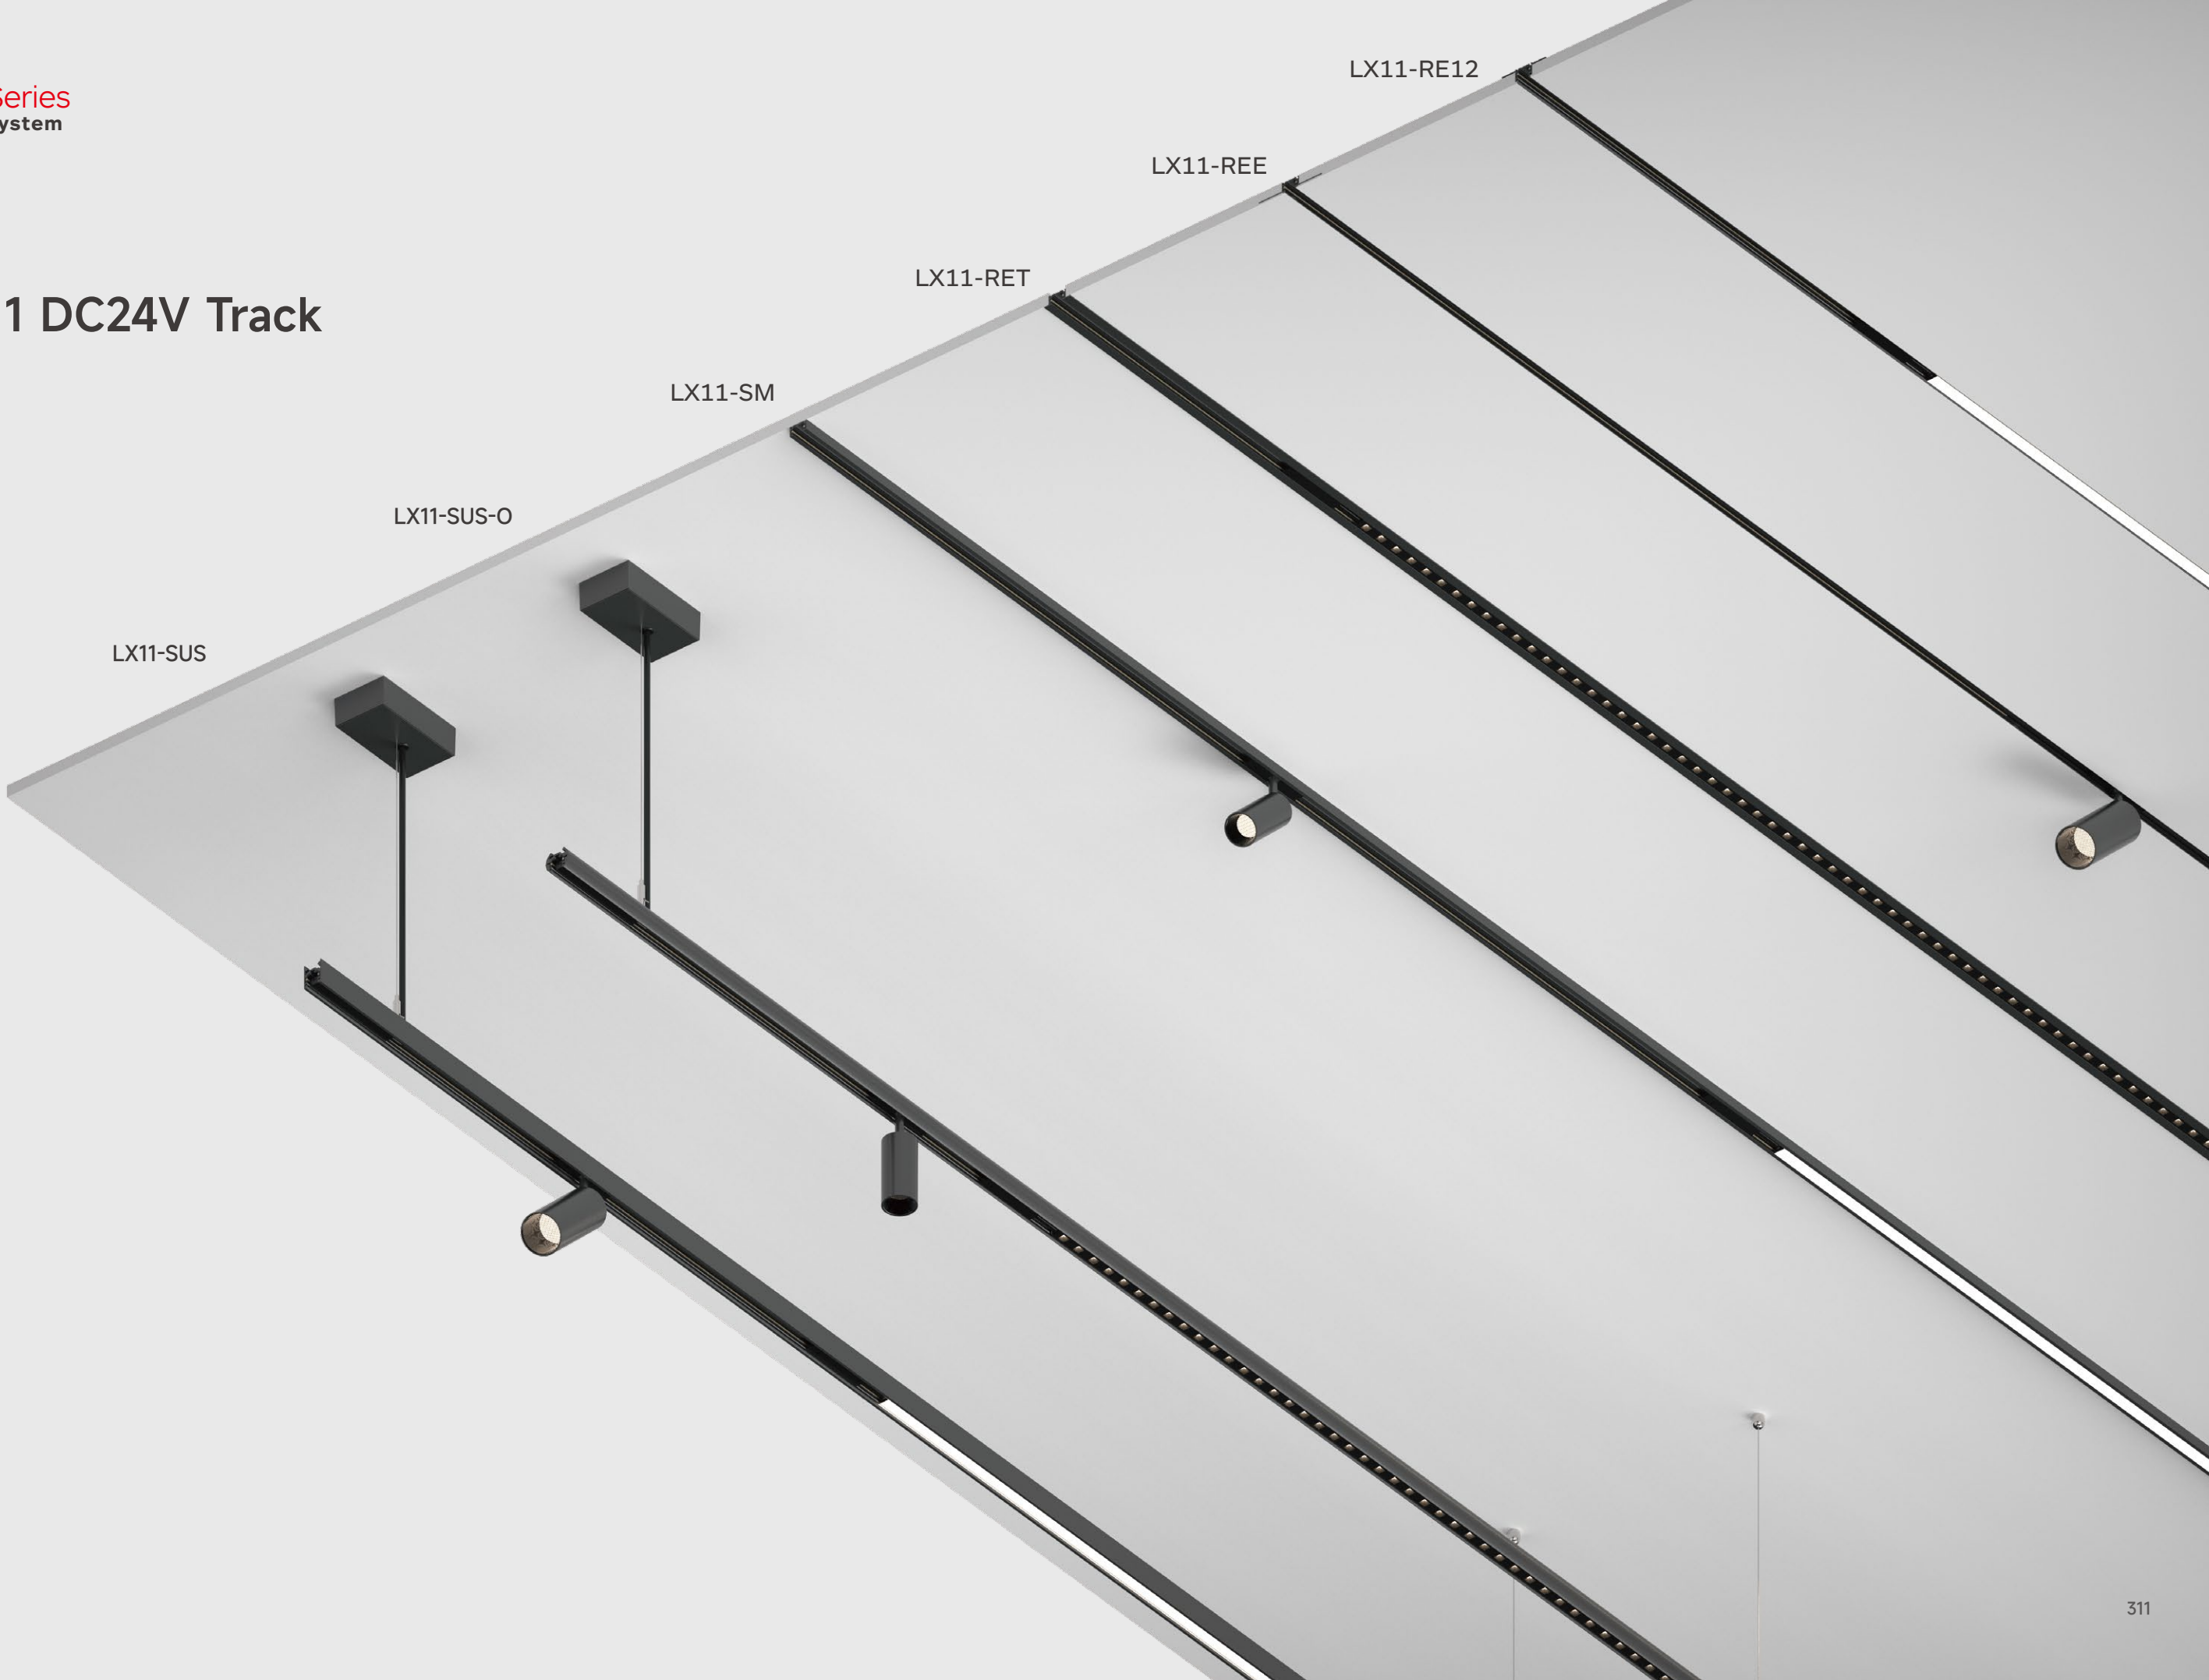

Surface-mounted Track

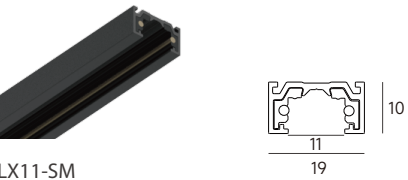

Order Options

Code	Description	Length(mm)	Power supply	Installation
LX11-SM	surface-mounted	1000/2000	built-in available	surface-mounted

Accessories

LX11-SM



Suspended Track



Order Options

Code	Description	Length(mm)	Power supply	Installation
LX11-SUS	standard	1000/2000	built-in available	suspended
LX11-SUS-O		1000/2000	built-in available	suspended

Accessories


LX11-SUS



LX11-SUS-O



Recessed Track

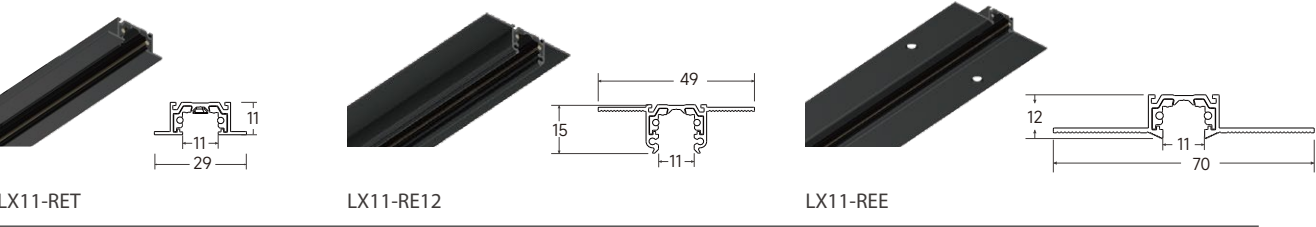


Order Options

Code	Description	Length(mm)	Power supply	Installation
LX11-RET	with trim	1000/2000	built-in available	trimless recessed
LX11-RE12	compatible with ½" ceiling	1000/2000	built-in available	trimless recessed
LX11-REE	easy installation	1000/2000	built-in available	trimless recessed

Accessories

LX11-RET

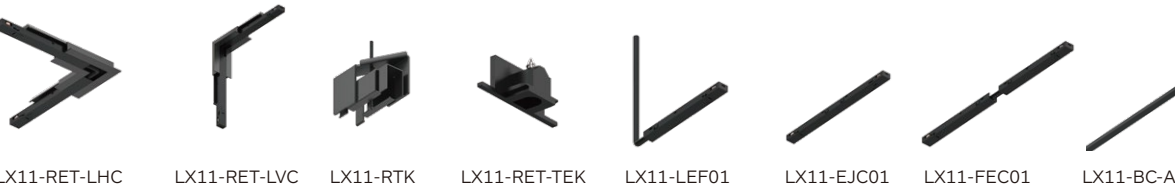

LX11-RE12



LX11-REE



Inserts for track

Spotlight Insert




LX11-RS30-4W

System Lumen Output: 250Lm (3000K)
System Wattage: 4W
Beam Angle:18°/24°/36°/50°
Housing Color: Black/White
CCT: 2700K/3000K/4000K
CRI: >90
Size:Φ32mm

LX11-RS40-8W

System Lumen Output: 600Lm (3000K)
System Wattage: 8W
Beam Angle:18°/24°/36°
Housing Color: Black/White
CCT: 2700K/3000K/4000K
CRI: >90
Size:Φ40mm

GIMI Decorative Pendant

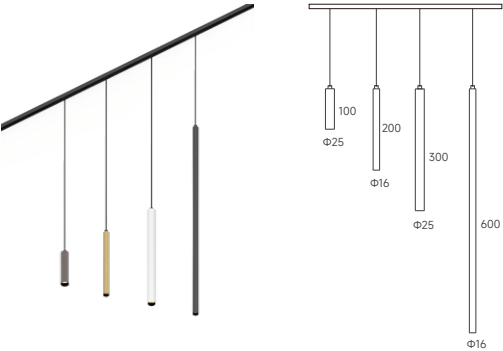

LX11-PS16/PS25

System Lumen Output: 160lm/230 Lm
System Wattage: 3W/4W
Size: Φ16mm/25mm
CCT: 2700K / 3000K / 4000K
CRI: >90
Color: Black/White/Brushed gold/Brushed bronze

FARA Decorative Pendant



LX11-SCD80

System Lumen Output: 320lm
System Wattage: 4W
Size: Φ80mm
CCT: 2700K / 3000K / 4000K
CRI: >90
Color: Black/White/Gold
Beam: 180°


FINO Decorative Pendant



LX11-SPD80/LX11-SPD120

System Lumen Output: 200lm/320lm
System Wattage: 2W/5W
Size: Φ 80mm/ Φ 120mm
Beam: 360°
CRI: >90
CCT: 2700K/3000K/4000K
Color: Black/White


Decorative Pendant

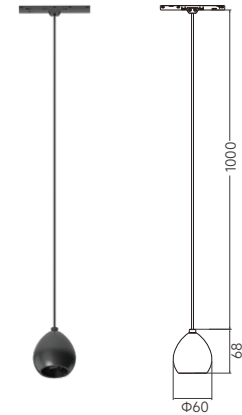

LX11-SURI 60


System W: 4W
Lumen: 220lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 18°/24°/30°
Color: White/Black

Decorative Pendant

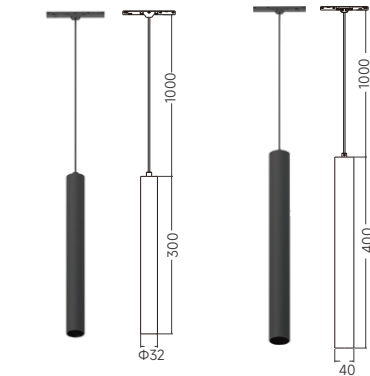

LX11-PS30/LX11-PS40


System: 4W/8W
Lumen: 250lm/600lm
Size: Φ 30mm/ Φ 40mm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 18°/24°/36°
Color: White/Black

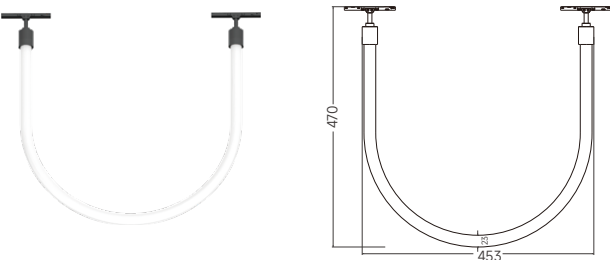

LX11-NHU12


System: 16W
Lumen: 1250lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 360°
Color: White/Black

Accent Light Insert

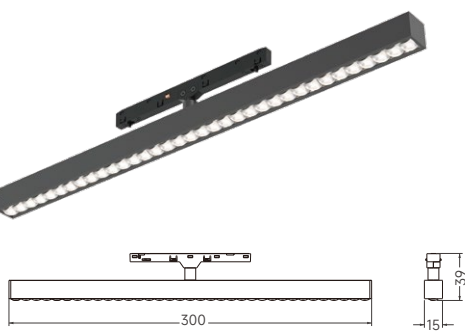


LX11-A-AL300

System W: 12W
Lumen: 1350lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 45°/80°
Color: White/Black

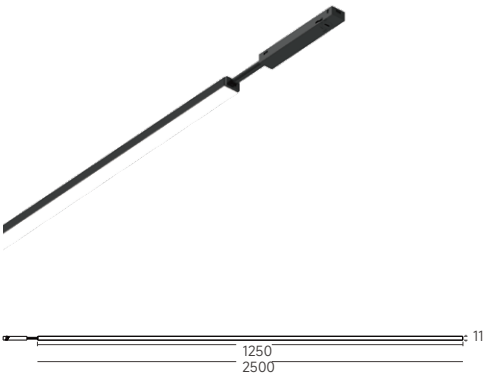


LX11-GL1250-13W
LX11-GL2500-25W

System Lumen Output: 480lm/920lm
System Wattage: 13W/25W
Beam Angle: 110°
CCT: 2700K/3000K/4000K
CRI: >90
With Opal Cover

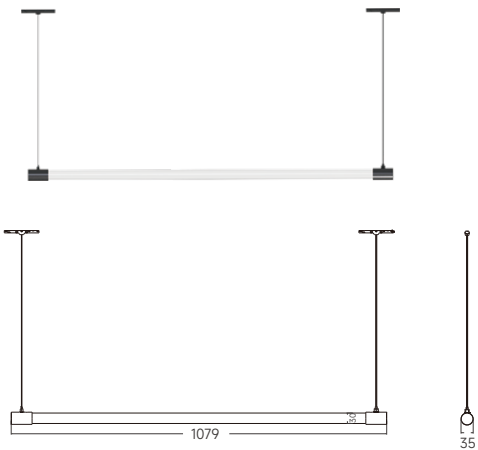

LX11-NHP10

System: 12W
Lumen: 850lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 360°
Color: White/Black



LX11-NVP06

System: 8W
Lumen: 500lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 360°
Color: White/Black

Line X System-modular track kit, easy installation package

The line X is available in a form of modular track kit, which is easy-to-use as a package.
Track width options of 5mm and 11mm. Multiple modules can be integrated with the track easily.
Available in classic black, white, and trending brushed bronze, brushed gold color.
Various inserts, like accent lighting insert, general lighting insert, spotlight insert can be easily mounted to the track.
It is ideal for residential lighting, retail shop applications .etc

