

YOUR OEM/ODM PARTNER

Architectural Lighting

Technical Lighting

Commercial Lighting

Architectural & Decorative Lighting

Headquarters

Office:

10/F, Building A, Sen Yang High-Tech Park,
KeLian Road, GuangMing Hign-Tech Area,
GuangMing District, Shenzhen, China.

Tel: (+86) 755 3669 7711
E-mail: Sales@e-litelighting.com
www.e-litelighting.com

Factory:

Nairui Industrial Park, No.9, Xin Le Wu Road,
Ma'an Town, Huicheng District,
Huizhou, Guangdong, China



GLOBAL MARKET

24

2024

CATALOGUE

YOUR OEM/ODM PARTNER



Huizhou Factory Building **new**



Huizhou Factory Building

Our History

E-Lite Lighting Corporation Ltd is a professional ODM/OEM LED lighting manufacturer, supplier and factory in China, dedicating to designing & manufacturing the high end and high quality lighting fixtures since its establishment in 2007.

Our Factory

E-lite lighting headquarters located in Shenzhen, occupying an area of 1,5000 m² factory building in Huizhou City. The products are mainly exported to America, Canada, United Kingdom, Germany, Italy, Spain, France, Australia, Japan, Southeast Asia, Middle East regions etc.

Our Product

E-Lite lighting focuses on all series of residential, commercial, hotel, office, architectural lighting fixtures development and production, including recessed led spotlight, recessed led downlight, surface-mounted led light, ceiling mounted light, pendant light, wall mounted luminaire, track light, linear light, display light, recessed ground light and underwater light etc which are designed by the experienced experts from China, Canada and Germany. Due to pioneering capability in lighting fixture design, E-Lite Lighting has established partnership relationship with world top lighting brands. We are capable of customizing various LED lighting fixtures base on drawings provided by customers.

Our Certificate

As a leading lighting fixtures designer and manufacturer, E-Lite Lighting has been approved by ETL, cETL, UL, CE, CSA, SAA, TUV, DLC and passed ISO9001 quality management system to ensure products safety and high quality. The quality team has worked in the lighting industry since 1996.

Production Equipment

The laboratory and production line are equipped with complete quality control and testing equipments, including but no limited to light distribution systems, spectrum analysis test systems, temperature test systems, LED driver testers, dielectric strength tester, earth resistance tester etc.

Our Service

In addition, a professional after-sales service support team has been established for lighting fixtures installation guidance and offer lighting solutions for different projects if needed. And all series LED lights are given at least three years warranty time and take the replacement for free. E-Lite Lighting aims to design and manufacture the best quality LED lights for our partners and worldwide customers by constant innovation efforts. We are now trying to be a global top-rank LED lighting solution expert and bring light to each corner of the world.

LUMINAIRES BY FAMILY

1 Surface & Pendant

CREST	022-027
LUCIA&FLATIA	028-045
ORBIT	046-051
NOVA	052-065
FELLOW MINI-C/W	066-071

2 Downlight

DOT	074-081
TESLA	082-087
START	088-141
DOME	142-163
VTRIM	164-191
KIWI	192-200
LEDGO	201-217

3 Spotlight

BINGO	218-241
FELLOW	242-249
GRACE	250-255

4 Linear Profile

LINK30	258-267
LINK50	268-287
LIN60	288-295

5 Low Voltage System

LINE X05 <i>(Coming soon)</i>	298-307
LINE X11 <i>(Coming soon)</i>	308-315
LINE X26	316-369
SKYLINE <i>(Coming soon)</i>	370-375

6 Architectural & Decorative

FLEX	378-399
------	---------

7 Stair Light

ANGEL	402-405
-------	---------

LUMINAIRES BY APPLICATION

CONTENTS

01 CREST



CREST400-SM | 26 CREST400-SUS | 26

02 LUCIA & FLATIA



LUCIA-C 350 | 36 LUCIA-C 450 | 36 LUCIA-C 600 | 36 LUCIA-C 900 | 36



LUCIA-D 350 | 38 LUCIA-D 450 | 38 LUCIA-D 600 | 38 LUCIA-D 900 | 38



FLATIA-C 350 | 42 FLATIA-C 450 | 42 FLATIA-C 600 | 42 FLATIA-C 900 | 42

TW



LUCIA-C 350-TW | 44 LUCIA-C 450-TW | 44 LUCIA-C 600-TW | 44



LUCIA-D 350-TW | 44 LUCIA-D 450-TW | 44 LUCIA-D 600-TW | 44



FLATIA-D 350 | 44 FLATIA-D 450 | 44 FLATIA-D 600 | 44 FLATIA-D 900 | 44

03 ORBIT




ORBIT-S | 50 ORBIT-M | 50

04 NOVA



NOVA-C S | 56 NOVA-C M | 56 NOVA-80 | 56 NOVA-C L | 56

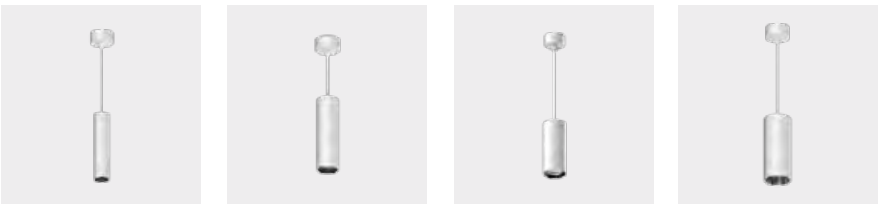

NOVA-P S | 62 NOVA-P M | 62 NOVA-P 80 | 62 NOVA-P L | 62

LUMINAIRES BY APPLICATION

CONTENTS

05

FELLOW MINI



FELLOW MINI-C | 70 FELLOW MINI-W | 70

06


DOT



DOT35-G | 78 DOT45-G | 78 DOT35-H | 80 DOT45-H | 80

07

TESLA

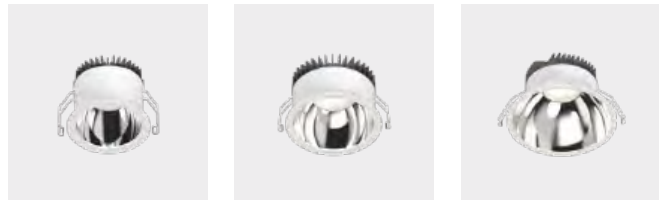


TS4 | 86 TS6 | 86 TS8 | 86


08

START

Adjustable

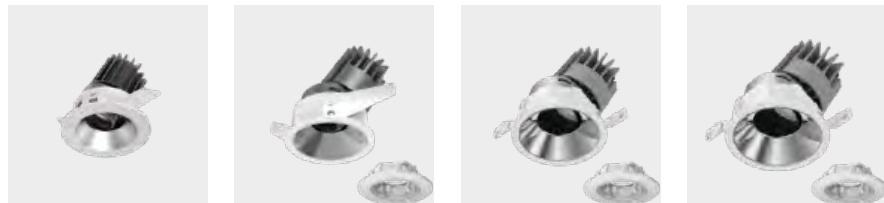

SRA45 | 102 SRA/TRA68 | 104 SRA/TRA100 | 105 SRA/TRA125 | 106

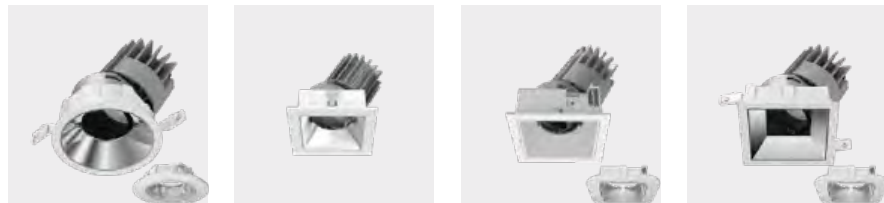


SRA/TRA150 | 107 SSA45 | 108 SSA/TSA68 | 112 SSA/TSA100 | 113




SSA/TSA125 | 116 SSA/TSA150 | 118

Fixed

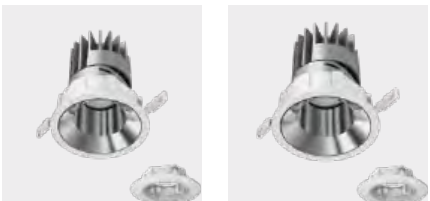

SRF/TRF100 | 122 SRF/TRF125 | 124

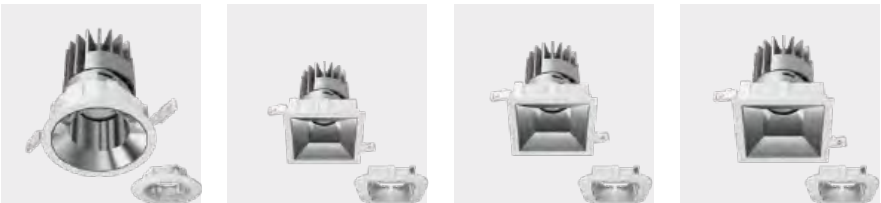


SRF/TRF150 | 125 SSF/TSF100 | 126 SSF/TSF125 | 128 SSF/TSF150 | 129

Wall washer



SRW/TRW100 | 134 SRW/TRW125 | 136 SRW/TRW150 | 137 SSW/TSW100 | 138

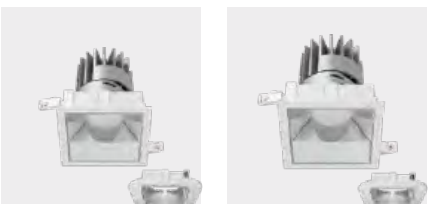

SSW/TSW125 | 140 SSW/TSW150 | 141


LUMINAIRES BY APPLICATION

CONTENTS

09 DOME



D75 | 151 D100 | 151 D150 | 152 D200 | 153

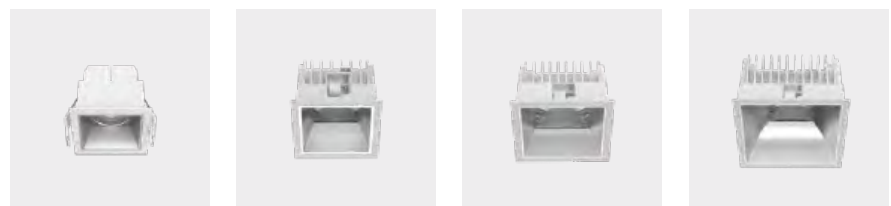

DS65 | 157 DS100 | 157 DS150 | 158 DS200 | 159



DOME D100L | 163 DOME D150L | 163

10 VTRIM



VRA1/VRAT1 | 186 VRF2/VRFT2 | 186 VRA3/VRAT3 | 186 VRA4/VRAT4 | 186



VRF5/VRFT5 | 187 VSA1/VSAT1 | 187 VSF2/VSFT2 | 187 VSA4/VSAT4 | 187

11 KIWI



VSA1/VSAT1 | 190 VSF2/VSFT2 | 190 VSA4/VSAT4 | 190




K1X30 | 199 K1X55 | 199 K1X70 | 200

12 LEDGO



LF1 | 207 LF2 | 207 LF3 | 207 LX4 | 208

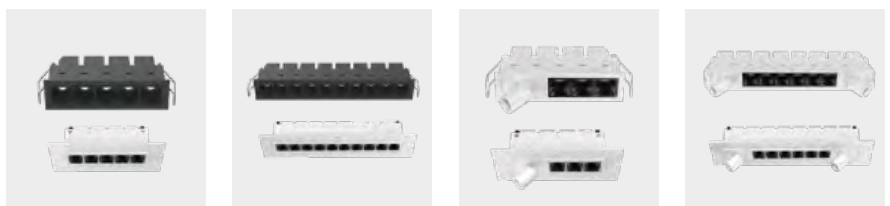

LF/LFT5 | 208 LF/LFT10 | 209 LF3-LS1/LFT3-LS1 | 210 LF6-LS2/LFT6-LS2 | 211



LA5 | 212 LA10 | 212 LW/LWT5 | 213 LW/LWT10 | 214


LUMINAIRES BY APPLICATION

CONTENTS

12 LEDGO



LF2-IP65 | 217



LF3-IP65 | 217



LF5-IP65 | 217



LF10-IP65 | 217

13 BINGO



BINGO S-E-F | 226



BINGO M-E-F | 226




BINGO S-E-Z | 227



BINGO M-E-Z | 227




BINGO K | 229




BINGO PRO | 233



BINGO C S-I-F | 239



BINGO C S-I-F | 239



BINGO C S-I-F | 239



BINGO C M-I-F | 239




BINGO C M-I-F | 239



BINGO C M-I-F | 239



BINGO C S-I-Z | 241




BINGO C S-I-Z | 241



BINGO C S-I-Z | 241

14 FELLOW



BINGO C M-I-Z | 241



BINGO C M-I-Z | 241



BINGO C M-I-Z | 241



FELLOW MINI | 247



FELLOW S | 249



FELLOW M | 249

15 GRACE



GRACE S | 255

16 LINK30



LINK30-GL | 263



LINK30-CL | 265



LINK30-AL | 267

17 LINK50



LINK50-AL | 279



LINK50-GL | 281



LINK50-WW | 283



LINK50-SL | 285

LUMINAIRES BY APPLICATION

CONTENTS

17


LINK50



LINK50-2AL+GL | 287

18

LINK60



LINK60-SUS | 295



LINK60-SM | 295



LINK60-RE | 295

19

LX05
(Coming soon)



LX05-SM | 304



LX05-SUS | 305



LX05-SUS-H | 305



LX05-REE | 306



LX05-RE12 | 306



LX05-RS30-4W | 307



LX05-RS40-8W | 307



LX05-GL1250-13W | 307

20

LX11
(Coming soon)



LX11-SM | 312



LX11-SUS | 313



LX11-SUS-O | 313



LX11-REE | 314

21

LX26



LX11-RE12 | 314




LX11-RET | 314




LX11-RS30 | 315



LX11-RS40 | 315



LX11-AL1250
LX11-AL2500 | 315



LX11-GL1250
LX11-GL2500 | 315



LX26-SM | 322



LX26-SUS | 322



LX26-SUS-H | 324



LX26-RET | 326



LX26-RE12 | 326



LX26-REE | 326



LX26-REA | 326



LX26-REL | 326




LX26-RS25-3W | 336



LX26-RS25-5W | 336



LX26-RS40-8W | 337



LX26-RS40-16W | 337

LUMINAIRES BY APPLICATION

CONTENTS

21

LX26











LX26-RS40-12W | 338

LX26-RS40-24W | 338

LX26-RS55-14W | 339

LX26-RT55-10W | 339









LX26-RS72-19W
LX26-RS72-26W | 340

LX26-WRS96-9W | 341

LX26-AL190-S2-3W | 342

LX26-AL190-S6-7W | 342










LX26-AL280-S8-9W | 343

LX26-AL280-S12-13W | 343

LX26-SA280-13W | 346

LX26-Rita315-15W | 347










LX26-LENA600-AL-26W | 348

LX26-GL280-7W
LX26-GL560-13W
LX26-GL840-19W
LX26-GL1120-26W | 349

LX26-SG280-7W | 350

LX26-Stella315-8W | 351









LX26-LENA600-GL-13W | 352

LX26-CL280-7W
LX26-CL560-13W
LX26-CL840-19W
LX26-CL1120-26W | 353

LX26-WW280-7W
LX26-WW560-14W | 354

LX26-Gloria-12W | 355









LX26-WRD72-10W | 356

LX26-WRD72-T2-20W | 356

LX26-RS-80-SL-10W | 357

LX26-RS-80-ST-10W | 357









LX26-SS-80-SL-10W | 358

LX26-SS-80-ST-10W | 358

LX26-SPD120/150/200 | 359

LX26-PD300 | 362









LX26-SURI60-5W | 366

LX26-MINNIE150GL-9W | 365

LX26-PS40-12W | 363

LX26-PS55-14W | 363









LX26-PDS40-12W | 364

LX26-NHU12 | 368

LX26-NVP12 | 367

LX26-NHP10 | 369

22

SKYLINE
(Coming soon)









Cable | 375

Skyline-RS30 | 374

Skyline-RS40 | 374

Skyline-AL | 374

LUMINAIRES BY APPLICATION

CONTENTS

22
SKYLINE
(Coming soon)



Skyline-GL | 374

23
FLEX



FLEX-SVPC12-SUS | 386



FLEX-SVPC12-SM | 387




FLEX-SH06-SM | 388



FLEX-SV06-SUS | 389




FLEX-SH12-SUS | 390



FLEX-C1A | 392

23
FLEX




FLEX-C5A3 | 394



FLEX-C4A2 | 396



FLEX-C4A1 | 397




FLEX-NHP12 | 398

24
ANGEL



S1 | 405



S2 | 405




S3 | 405

24
ANGEL



S4 | 405



S5 | 405



S6 | 405

1

Surface & Pendant

Surface & Pendant

CREST 022-027

LUCIA&FLATIA 028-045

ORBIT 046-051

NOVA 052-065

FELLOW MINI-C/W 066-071





Pendant



Surface mounted



Easy Installation
Twist and lock design
Loop in & loop out wiring design



Emergency back-up
(optional)



CCT Switchable
CCT:3000K/3500K/4000K



UGR<19
Microprism craftsmanship,
uniform and soft lighting.

▼ Microwave Sensor + CCT



1. If there is enough ambient light, the lights will remain off even if motion is detected.




2. If there is insufficient ambient light, any motion detected by the lights will cause all lights to switch on simultaneously.



3. After a hold time, the lights will switch off if there is no new motion trigger.

▼ Master-slave Sensor +CCT

The Master lights have a blue signal, while the Slave lights do not have any signal.

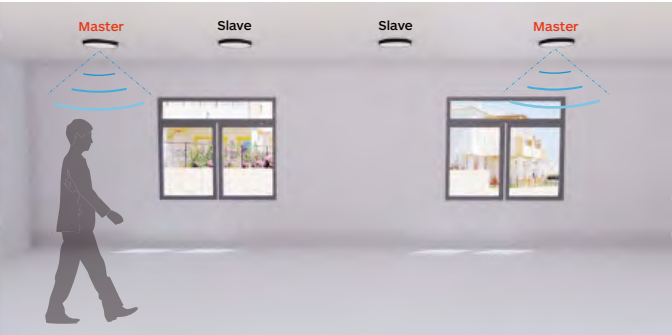

If there is enough ambient light, the lights will remain off even if motion is detected.



After a delay, the Slave lights will dim to a low level if there is no new motion trigger.



If there is insufficient ambient light, any motion detected by the Master lights will cause all lights to switch on simultaneously.



After a hold time, both the Master and Slave lights will switch off if there is no new motion trigger.



Surface Mounted
CREST 400



Features

- Round fixture with a microprismatic diffuser is ideal for workstations.
- CREST's innovative technology make it flat and minimalistic design.
- It integrates multiple installation options and dimming modes.
- The surface mounted and suspended fixture comes with loop in & loop out design and easy installation.


Specifications

- Dimming modes: CCT,ON-OFF, DALI, Bluetooth Dim, phase-dim,1-10V,Mircowave sensor, 3H Emergency, Master-Slave sensor
- Sizes: Ø400mm
- Installation: Surface mounted, Suspended

Installation type



Drawing



Order Options

24W 3120lm-3320lm							
Code	Size	System LM	LED W	System W	CCT	CRI	Dimming Type
CREST400-SM-26W-CCT-F							CCT+ON-OFF
CREST400-SM-26W-CCT-D							CCT+DALI
CREST400-SM-26W-CCT-BT							CCT+Bluetooth
CREST400-SM-26W-CCT-MW-F		3120Lm			3000K		CCT+Microwave sensor
CREST400-SM-26W-CCT-3H-F	Ø400mm	3220Lm	24W	26W	3500K	90	CCT+3H Emergency+ON-OFF
CREST400-SM-26W-CCT-3H-D		3320Lm			4000K		CCT+3H Emergencye+DALI
CREST400-SM-26W-CCT-ML							CCT+Master Slave sensor (Master light)
CREST400-SM-26W-CCT-SL							CCT+Master Slave sensor (Slave light)

Code	Size	System LM	LED W	System W	CCT	CRI	Dimming Type
CREST400-SUS-26W-CCT-F							CCT+ON-OFF
CREST400-SUS-26W-CCT-D							CCT+DALI
CREST400-SUS-26W-CCT-BT							CCT+Bluetooth
CREST400-SUS-26W-CCT-MW-F		3120Lm			3000K		CCT+Microwave sensor
CREST400-SUS-26W-CCT-3H-F	Ø400mm	3220Lm	24W	26W	3500K	90	CCT+3H Emergency+ON-OFF
CREST400-SUS-26W-CCT-3H-D		3320Lm			4000K		CCT+3H Emergencye+DALI
CREST400-SUS-26W-CCT-ML							CCT+Master Slave sensor (Master light)
CREST400-SUS-26W-CCT-SL							CCT+Master Slave sensor (Slave light)

LUCIA & FIATIA Series
SURFACE & PENDANT



LUCIA & FLATIA

28IE-lite lighting



LUCIA & FLATIA Series
SURFACE & PENDANT



LUCIA & FLATIA
Surface & Pendant

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
- 4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eyes'comfort

Surface-mounted



Cable Suspension




Rod Suspension




CCT switch
3000k-3500k-4000k



Microprismatic
super eye comfort
(Diffuser version available)



Uplight optional
easy to install by magnet

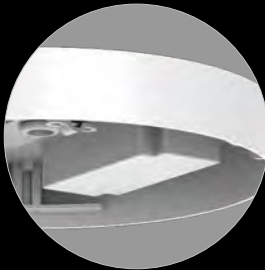


Three in one
1-10V & DALI
Push for 26w&40w


LUCIA
High Lumen Output



Decorative Version

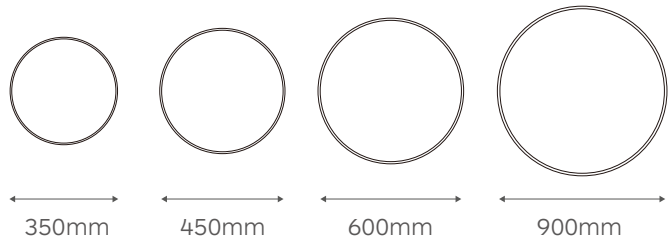


Classic Version

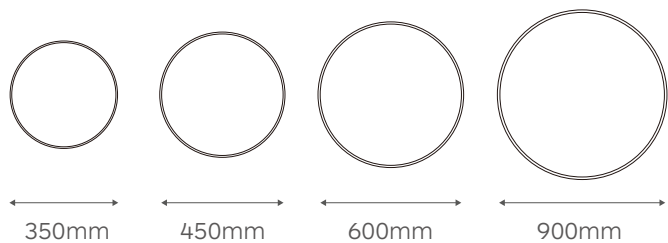


FLATIA
Super Slim Design



Decorative Version

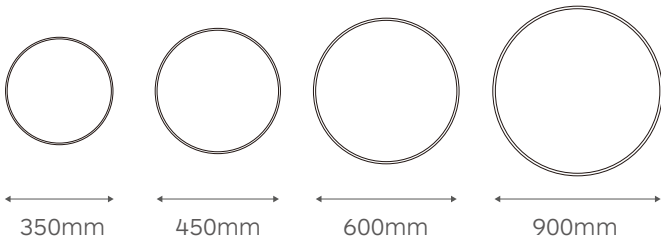

Classic Version

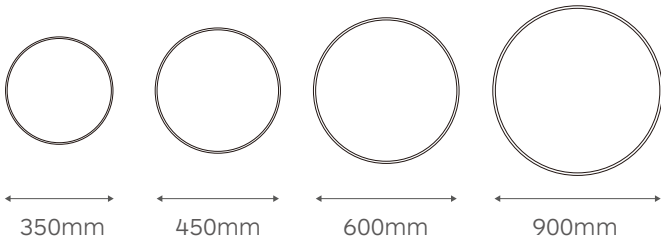

LUCIA & FLATIA Series
SURFACE & PENDANT




Classic Version



Decorative Version



Installation:

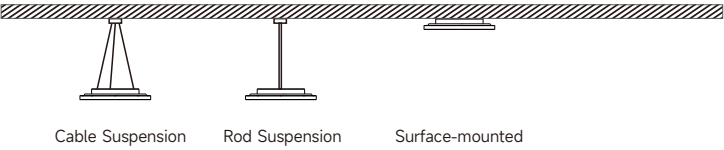

Uplight



LUCIA & FLATIA Series
SURFACE & PENDANT



Classic Version
LUCIA 350/450/600/900



Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
- 4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eyes'comfort

Specifications

- Dimming modes: ON-OFF, Phase dim, DALI, 0/1-10V
- Sizes: Ø350mm, Ø450mm, Ø600mm, Ø900mm,
- Installation: Surface mounted, Suspended

Installation type



HOUSING



Illumination type



LUCIA
Surface & Pendant



Drawing



Order Options

Downward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-14W	Ø350*50mm	1400Lm	12W	14W	83	3000K	90°
LUCIA 350-18W	Ø350*50mm	2200Lm	16W	18W	83	4000K	90°
LUCIA 450-18W	Ø450*50mm	2000Lm	16W	18W	83	3000K	90°
LUCIA 450-26W	Ø450*50mm	3000Lm	24W	26W	83	4000K	90°
LUCIA 600-40W	Ø600*50mm	4700Lm	36W	40W	83	3000K	90°
LUCIA 600-50W	Ø600*50mm	6500Lm	46W	50W	83	4000K	90°
LUCIA 900-68W	Ø900*50mm	8000Lm	65W	68W	83	3000K	90°
LUCIA 900-68W	Ø900*50mm	8500Lm	65W	68W	83	4000K	90°

Remark: Magnetic Uplight Module to be ordered separately

Downward and upward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA-UL-350-14W	Ø350*50mm	1400Lm ↓ 850Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	83	3000K	90°
LUCIA-UL-350-18W	Ø350*50mm	2200Lm ↓ 900Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	83	4000K	90°
LUCIA-UL-450-18W	Ø450*50mm	2000Lm ↓ 1100Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	83	3000K	90°
LUCIA-UL-450-26W	Ø450*50mm	3000Lm ↓ 1180Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	83	4000K	90°
LUCIA-UL-600-40W	Ø600*50mm	4700Lm ↓ 1700Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	83	3000K	90°
LUCIA-UL-600-50W	Ø600*50mm	6500Lm ↓ 1800Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	83	4000K	90°
LUCIA-UL-900-68W	Ø900*50mm	8000Lm ↓ 2700Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	83	3000K	90°
LUCIA-UL-900-68W	Ø900*50mm	8500Lm ↓ 2890Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	83	4000K	90°

Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT



Decorative Version
LUCIA 350/450/600/900




Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
- 4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eyes'comfort

Specifications

- Dimming modes: ON-OFF, Phase dim, DALI, 0/1-10V
- Sizes: Ø350mm, Ø450mm, Ø600mm, Ø900mm,
- Installation: Surface mounted, Suspended


Installation type




HOUSING



Illumination type

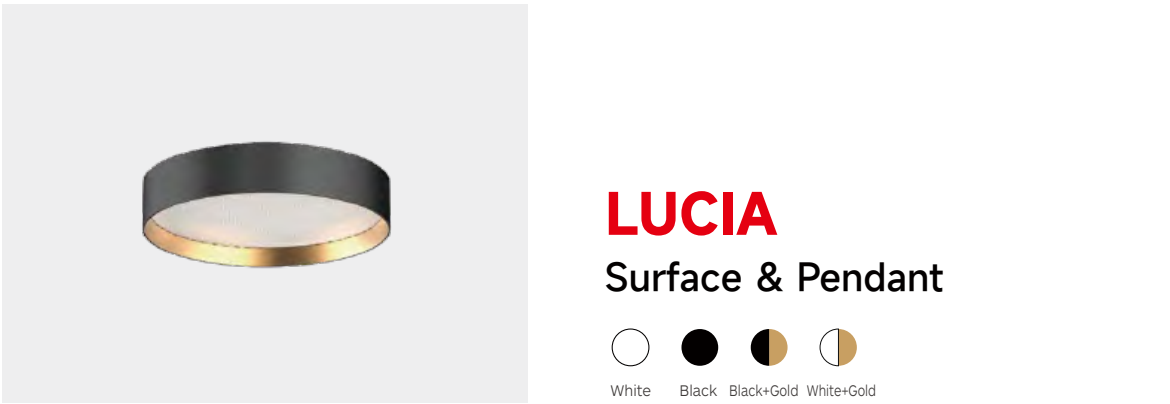

Drawing



Order Options

Downward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-14W	Ø350*50mm	1400Lm	12W	14W	83	3000K	90°
LUCIA 350-18W	Ø350*50mm	2200Lm	16W	18W	83	4000K	90°
LUCIA 450-18W	Ø450*50mm	2000Lm	16W	18W	83	3000K	90°
LUCIA 450-26W	Ø450*50mm	3000Lm	24W	26W	83	4000K	90°
LUCIA 600-40W	Ø600*50mm	4700Lm	36W	40W	83	3000K	90°
LUCIA 600-50W	Ø600*50mm	6500Lm	46W	50W	83	4000K	90°
LUCIA 900-68W	Ø900*50mm	8000Lm	65W	68W	83	3000K	90°
LUCIA 900-68W	Ø900*50mm	8500Lm	65W	68W	83	4000K	90°

Remark: Magnetic Uplight Module to be ordered separately

Downward and upward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA-UL-350-14W	Ø350*50mm	1400Lm ↓ 850Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	83	3000K	90°
LUCIA-UL-350-18W	Ø350*50mm	2200Lm ↓ 900Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	83	4000K	90°
LUCIA-UL-450-18W	Ø450*50mm	2000Lm ↓ 1100Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	83	3000K	90°
LUCIA-UL-450-26W	Ø450*50mm	3000Lm ↓ 1180Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	83	4000K	90°
LUCIA-UL-600-40W	Ø600*50mm	4700Lm ↓ 1700Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	83	3000K	90°
LUCIA-UL-600-50W	Ø600*50mm	6500Lm ↓ 1800Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	83	4000K	90°
LUCIA-UL-900-68W	Ø900*50mm	8000Lm ↓ 2700Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	83	3000K	90°
LUCIA-UL-900-68W	Ø900*50mm	8500Lm ↓ 2890Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	83	4000K	90°

Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT

TW



LUCIA 350



LUCIA 450



LUCIA 600



LUCIA 350



LUCIA 450



LUCIA 600

Decorative Version-TW
LUCIA 350/450/600-TW



Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eyes'comfort

Specifications

- Dimming modes: DALI
- Sizes: Ø350mm, Ø450mm,Ø600mm,
- Installation: Surface mounted, Suspended

Installation type



Surface-mounted



Rod Suspension



Cable Suspension

HOUSING



white



black



black+ gold



white+ gold

Illumination type



Direct



Indirect



LUCIA
Surface & Pendant



White



Black




Black+Gold




White+Gold


Drawing




LUCIA 350



LUCIA 600



LUCIA 450



LUCIA 900

Order Options

Downward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-14W-TW	Ø350*50mm	1300-1600Lm	12W	14W	83	2700K-6500K	90°
LUCIA 350-18W-TW	Ø350*50mm	1900-2300Lm	16W	18W	83		90°
LUCIA 450-18W-TW	Ø450*50mm	1900-2300Lm	16W	18W	83	2700K-6500K	90°
LUCIA 450-26W-TW	Ø450*50mm	2700-3200Lm	24W	26W	83		90°
LUCIA 600-40W-TW	Ø600*50mm	4500-5000Lm	36W	40W	83	2700K-6500K	90°
LUCIA 600-50W-TW	Ø600*50mm	5900-6500Lm	46W	50W	83		90°

Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT



Classic Version
FLATIA 350/450/600/900




Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended and recessed installation
4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eye comfort

Specifications

- Dimming modes: ON-OFF, Phase cut, DALI, 0/1-10V
- Sizes: Ø350mm, Ø450mm, Ø600mm, Ø900mm,
- Installation: Surface mounted, Suspended


Installation type




HOUSING



Illumination type

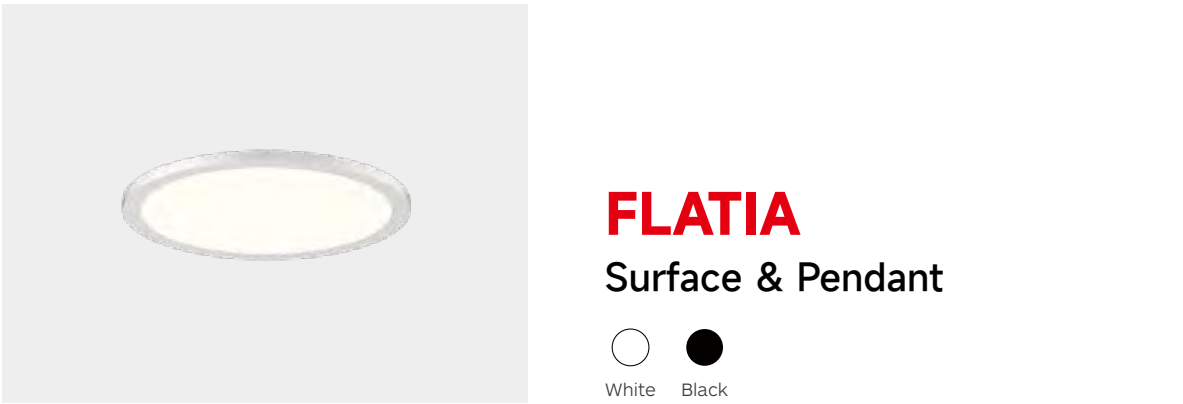

Drawing



Order Options

Downward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA 350-14W	Ø350*50mm	1400Lm	12W	14W	83	3000K	90°
FLATIA 350-18W	Ø350*50mm	2200Lm	16W	18W	83	4000K	90°
FLATIA 450-18W	Ø450*50mm	2200Lm	16W	18W	83	3000K	90°
FLATIA 450-26W	Ø450*50mm	3200Lm	24W	26W	83	4000K	90°
FLATIA 600-40W	Ø600*50mm	4200Lm	36W	40W	83	3000K	90°
FLATIA 600-50W	Ø600*50mm	5700Lm	46W	50W	83	4000K	90°
FLATIA 900-68W	Ø900*50mm	7000Lm	65W	68W	83	3000K	90°
FLATIA 900-68W	Ø900*50mm	7500Lm	65W	68W	83	4000K	90°

Remark: Magnetic Uplight Module to be ordered separately

Downward and upward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA 350-14W	Ø350*50mm	1400Lm ↓ 850Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	83	3000K	90°
FLATIA 350-18W	Ø350*50mm	2200Lm ↓ 900Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	83	4000K	90°
FLATIA 450-18W	Ø450*50mm	2200Lm ↓ 1100Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	83	3000K	90°
FLATIA 450-26W	Ø450*50mm	3200Lm ↓ 1180Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	83	4000K	90°
FLATIA 600-40W	Ø600*50mm	4200Lm ↓ 1700Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	83	3000K	90°
FLATIA 600-50W	Ø600*50mm	5700Lm ↓ 1800Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	83	4000K	90°
FLATIA 900-68W	Ø900*50mm	7000Lm ↓ 2700Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	83	3000K	90°
FLATIA 900-68W	Ø900*50mm	7500Lm ↓ 2890Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	83	4000K	90°

Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT



Decorative Version
FLATIA 350/450/600/900




Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended and recessed installation
- 4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eye comfort

Specifications

- Dimming modes: ON-OFF, Phase cut, DALI, 0/1-10V
- Sizes: Ø350mm, Ø450mm, Ø600mm, Ø900mm,
- Installation: Surface mounted, Suspended

Installation type




HOUSING



FLATIA
Surface & Pendant



Drawing



Order Options

Downward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA 350-14W	Ø350*50mm	1400Lm	12W	14W	83	3000K	90°
FLATIA 350-18W	Ø350*50mm	2200Lm	16W	18W	83	4000K	90°
FLATIA 450-18W	Ø450*50mm	2200Lm	16W	18W	83	3000K	90°
FLATIA 450-26W	Ø450*50mm	3200Lm	24W	26W	83	4000K	90°
FLATIA 600-40W	Ø600*50mm	4200Lm	36W	40W	83	3000K	90°
FLATIA 600-50W	Ø600*50mm	5700Lm	46W	50W	83	4000K	90°
FLATIA 900-68W	Ø900*50mm	7000Lm	65W	68W	83	3000K	90°
FLATIA 900-68W	Ø900*50mm	7500Lm	65W	68W	83	4000K	90°

Remark: Magnetic Uplight Module to be ordered separately

Downward and upward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA 350-14W	Ø350*50mm	1400Lm ↓ 850Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	83	3000K	90°
FLATIA 350-18W	Ø350*50mm	2200Lm ↓ 900Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	83	4000K	90°
FLATIA 450-18W	Ø450*50mm	2200Lm ↓ 1100Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	83	3000K	90°
FLATIA 450-26W	Ø450*50mm	3200Lm ↓ 1180Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	83	4000K	90°
FLATIA 600-40W	Ø600*50mm	4200Lm ↓ 1700Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	83	3000K	90°
FLATIA 600-50W	Ø600*50mm	5700Lm ↓ 1800Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	83	4000K	90°
FLATIA 900-68W	Ø900*50mm	7000Lm ↓ 2700Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	83	3000K	90°
FLATIA 900-68W	Ø900*50mm	7500Lm ↓ 2890Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	83	4000K	90°

Remark: Magnetic Uplight Module to be ordered separately



ORBIT


461E-lite lighting



SMALL & POWERFUL


Minimum Design, Maximum Comfort

A variety of color options
Fashionable and changeable

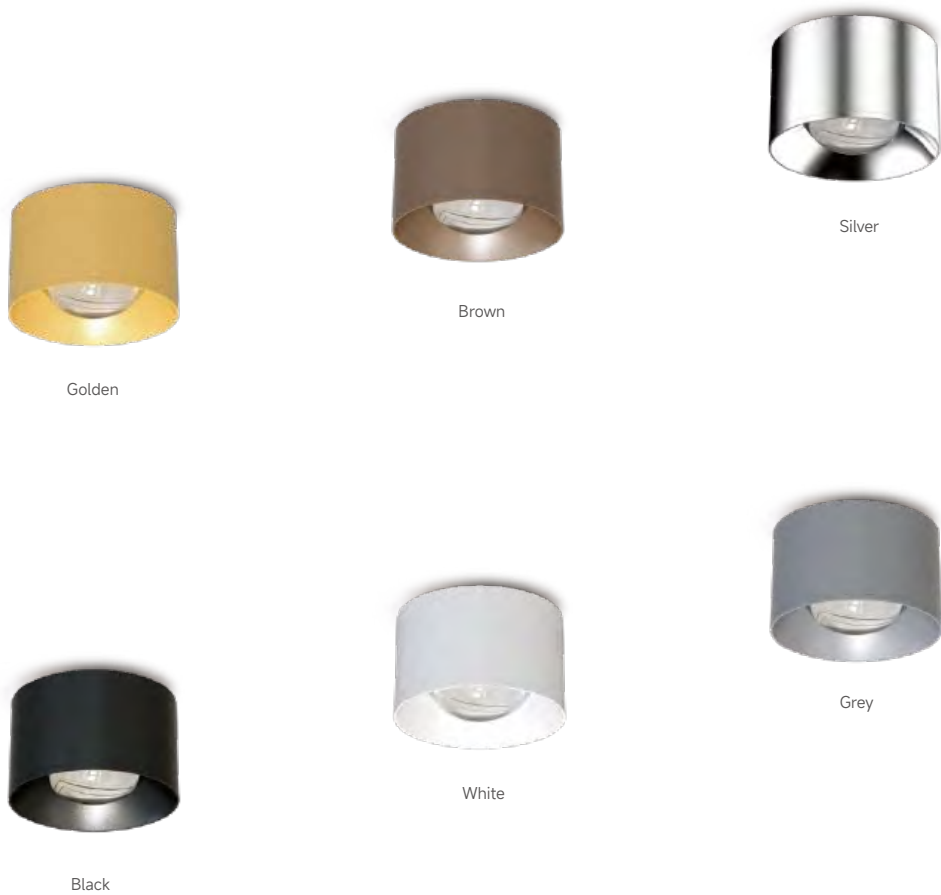

Benefits of using LUMENS brand
AC LED board

No additional power supply is required,
making the structure as compact as possible.

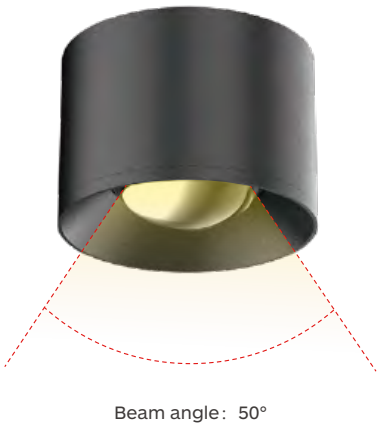

Easy Installation

Split structure design



Plano-convex lens design

No multiple shadows,
with larger beam angle and better lighting effect.



ORBIT Series
SURFACE



ORBIT-S



ORBIT-M

Surface Mounted
ORBIT-S / ORBIT-M

CE

5

5 Years Warranty

AC

220-240V

IP

20

UGR

<19

CRI

>90

LUMENS

Leading World Headlamps


Features

- ORBIT Surface-mounted luminaire made of aluminium, available in 2 sizes;
- luminaire heatsink can be attached to mounting plate, easy to be mounted.

Specifications

- Dimming modes: Phase Dim
- Sizes: Ø65mm,Ø80mm
- Installation: Surface mounted


Type



Housing




Light distribution



downlight




ORBIT
Surface
& Pendant



White Black

Drawing



Order Options

Downward lighting						
Code	Size	System LM	System W	CRI	CCT	Beam
ORBIT-S-4W-P	Ø65*57mm	210Lm	4W	90	3000K	40°
		250Lm			4000K	
ORBIT-M-8W-P	Ø80*59mm	490Lm	8W	90	3000K	50°
		540Lm			4000K	



NOVA



NOVA-C L



NOVA-80



NOVA-C M



NOVA-C S





NOVA

Surface-mounted Luminaire

Modern aesthetic Ceiling & Pendant light
Engineering to combine maximum
performance with a sleek style



Important safety Notes

- 1.Switch off the electricity at the mains before commencing installation or lampchange and (if a fuse box is used) remove the appropriate circuit fuse to avoidaccidental switching on of the mains supply.
- 2.Connect to a 220V-240V supply in accordance with IEE regulations.
- 3.Make sure all connections are tight with no loose strands.
4. Ensure fire regulations are not breached when installing your lights.
5. If you are in any doubt regarding these instructions, consult a qualified electrician.

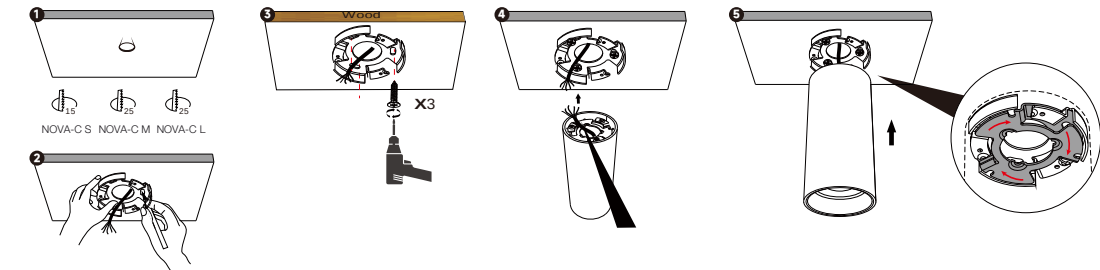

Very easy to change lens (twist and lock)

Spot, narrow and medium beam angles are available for different lighting applications

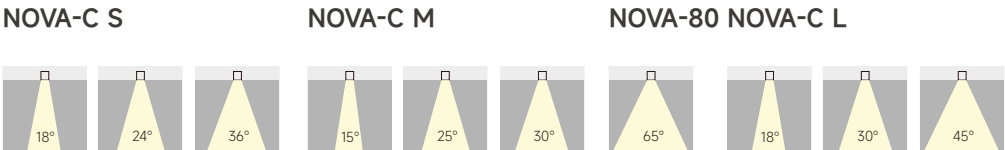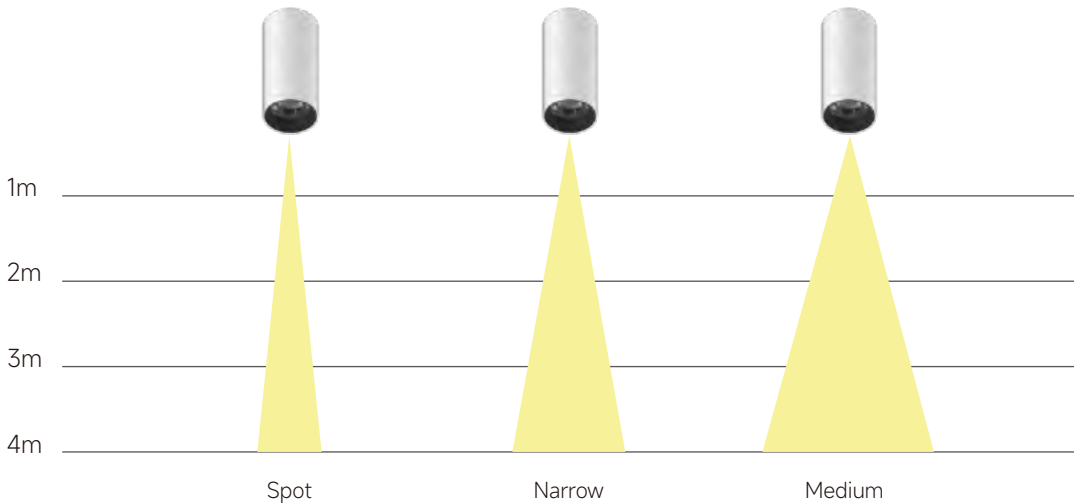

NOVA Series
SURFACE



NOVA-C S



NOVA-C M



NOVA-80



NOVA-C L

Surface Mounted
NOVA-C S /NOVA-C M /NOVA-80 /NOVA-C L




Features

- Cylindrical surface mounted light made of aluminum.
- Ultra-slim housing design with LED driver inside.
- Optimized passive cooling system
- Interchangeable decoration ring for various lighting application.
- Adopt of lens guarantees high luminous efficiency and uniform distribution.
- Easy to change lens (twist and lock) to choose spot, narrow and medium beam angle.


Specifications

- Dimming modes: ON-OFF
- Sizes: Φ55mm,Φ72mm,Φ90mm
- Installation: Surface mounted

Type



Decoration ring




Light distribution



NOVA-C S/M
Surface



Drawing



Order Options

11W 720lm-800lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA-C S-11W-930-18	Φ55*150mm	380 lm	9W	11W	90	3000K	18°
NOVA-C S-11W-940-18	Φ55*150mm	400 lm	9W	11W		4000K	
NOVA-C S-11W-930-24	Φ55*150mm	380 lm	9W	11W	90	3000K	24°
NOVA-C S-11W-940-24	Φ55*150mm	400 lm	9W	11W		4000K	
NOVA-C S-11W-930-36	Φ55*150mm	380 lm	9W	11W	90	3000K	36°
NOVA-C S-11W-940-36	Φ55*150mm	400 lm	9W	11W		4000K	
15W 1200lm-1300lm							
NOVA-C M-15W-930-15	Φ72*160mm	1200 lm	13W	15W	90	3000K	15°
NOVA-C M-15W-940-15	Φ72*160mm	1300 lm	13W	15W		4000K	
NOVA-C M-15W-930-25	Φ72*160mm	1200 lm	13W	15W	90	3000K	25°
NOVA-C M-15W-940-25	Φ72*160mm	1300 lm	13W	15W		4000K	
NOVA-C M-15W-930-30	Φ72*160mm	1200 lm	13W	15W	90	3000K	30°
NOVA-C M-15W-940-30	Φ72*160mm	1300 lm	13W	15W		4000K	
21W 1600lm-1700lm							
NOVA-C M-21W-930-15	Φ72*160mm	1600 lm	18W	21W	90	3000K	15°
NOVA-C M-21W-940-15	Φ72*160mm	1700 lm	18W	21W		4000K	
NOVA-C M-21W-930-25	Φ72*160mm	1600 lm	18W	21W	90	3000K	25°
NOVA-C M-21W-940-25	Φ72*160mm	1700 lm	18W	21W		4000K	
NOVA-C M-21W-930-30	Φ72*160mm	1600 lm	18W	21W	90	3000K	30°
NOVA-C M-21W-940-30	Φ72*160mm	1700 lm	18W	21W		4000K	

NOVA Series
SURFACE




NOVA-80/NOVA-C L
Surface



White Black

Drawing



Order Options

21W 1400lm-1600lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA80-C-21W-CCT-60	Ø80*200mm	1400lm-1600lm	18W	21W	90	3000K 4000K 5000K	60°
28W 2700lm-2900lm							
NOVA-C L-28W-930-18	Ø90*230mm	2700 lm	25W	28W	90	3000K	18°
NOVA-C L-28W-940-18	Ø90*230mm	2900 lm	25W	28W		4000K	
NOVA-C L-28W-930-30	Ø90*230mm	2700 lm	25W	28W	90	3000K	30°
NOVA-C L-28W-940-30	Ø90*230mm	2900 lm	25W	28W		4000K	
NOVA-C L-28W-930-45	Ø90*230mm	2700 lm	25W	28W	90	3000K	45°
NOVA-C L-28W-940-45	Ø90*230mm	2900 lm	25W	28W		4000K	



NOVA Series
PENDANT




Pendant

Modern aesthetic Ceiling & Pendant light
Engineering to combine maximum
performance with a sleek style



Important safety Notes

1. Switch off the electricity at the mains before commencing installation or lampchange and (if a fuse box is used) remove the appropriate circuit fuse to avoid accidental switching on of the mains supply.
2. Connect to a 220V-240V supply in accordance with IEE regulations.
3. Make sure all connections are tight with no loose strands.
4. Ensure fire regulations are not breached when installing your lights.
5. If you are in any doubt regarding these instructions, consult a qualified electrician.

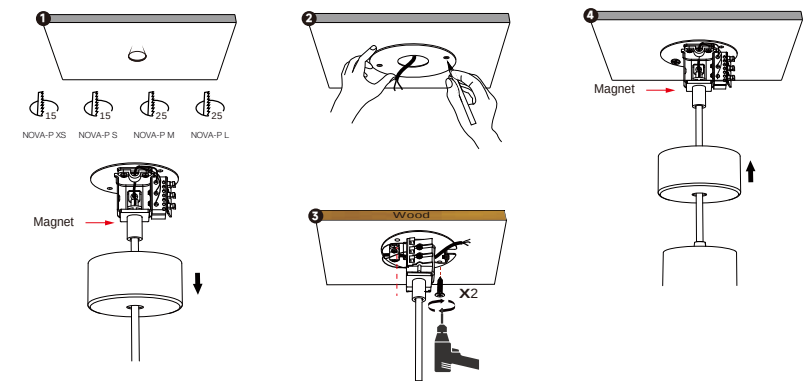

Very easy to change lens (twist and lock)

Spot, narrow and medium beam angles are available for different lighting applications

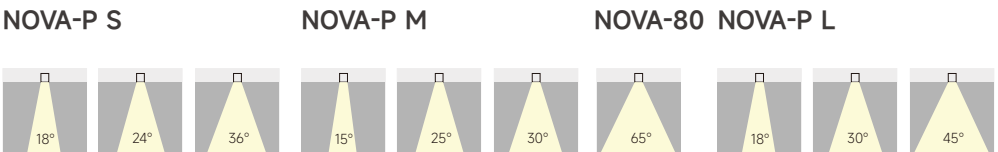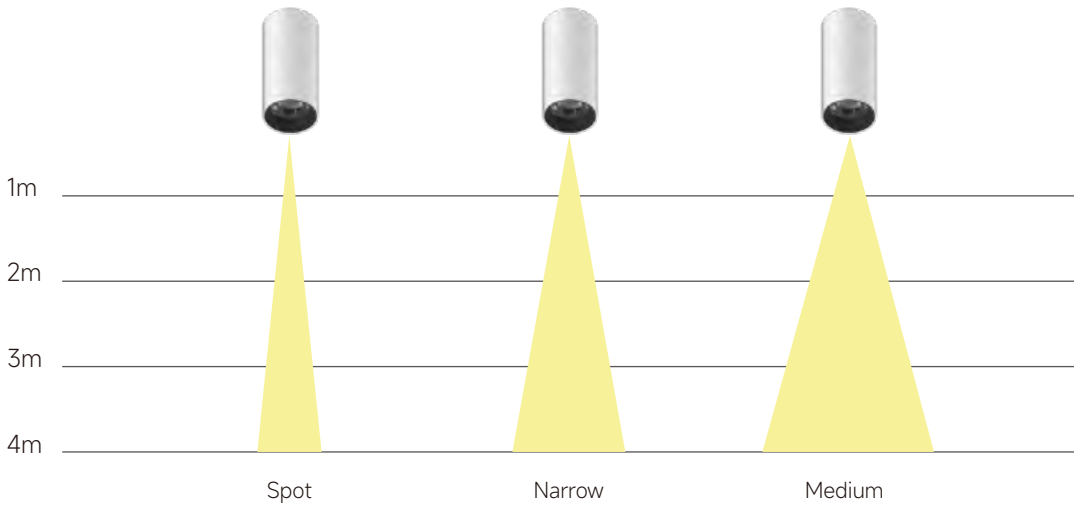

NOVA Series
PENDANT



Pendant
NOVA-P S /NOVA-P M /NOVA 80/NOVA-P L




Features

- Cylindrical surface mounted light made of aluminum.
- Ultra-slim housing design with LED driver inside.
- Optimized passive cooling system
- Interchangeable decoration ring for various lighting application.
- Adopt of lens guarantees high luminous efficiency and uniform distribution.
- Easy to change lens (twist and lock) to choose spot, narrow and medium beam angle.


Specifications

- Dimming modes: ON-OFF
- Sizes: $\Phi 55\text{mm}$, $\Phi 72\text{mm}$, $\Phi 90\text{mm}$
- Installation: Pendant



Type




Decoration ring




Light distribution

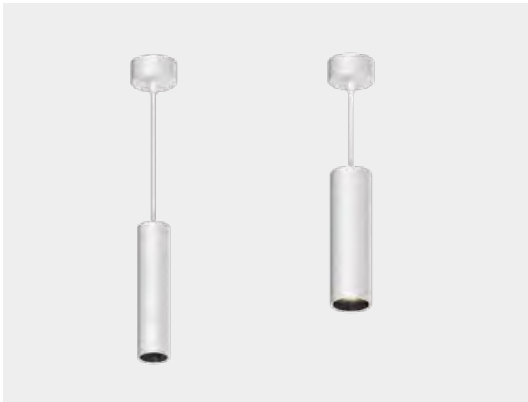

NOVA-P S/M
Pendant



Drawing



Order Options

11W 720lm-800lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA-P S-11W-930-18	Φ55*250mm	380 lm	9W	11W	90	3000K	18°
NOVA-P S-11W-940-18	Φ55*250mm	400 lm	9W	11W		4000K	
NOVA-P S-11W-930-24	Φ55*250mm	380 lm	9W	11W	90	3000K	24°
NOVA-P S-11W-940-24	Φ55*250mm	400 lm	9W	11W		4000K	
NOVA-P S-11W-930-36	Φ55*250mm	380 lm	9W	11W	90	3000K	36°
NOVA-P S-11W-940-36	Φ55*250mm	400 lm	9W	11W		4000K	
15W 1200lm-1300lm							
NOVA-P M-15W-930-15	Φ72*250mm	1200 lm	13W	15W	90	3000K	15°
NOVA-P M-15W-940-15	Φ72*250mm	1300 lm	13W	15W		4000K	
NOVA-P M-15W-930-25	Φ72*250mm	1200 lm	13W	15W	90	3000K	25°
NOVA-P M-15W-940-25	Φ72*250mm	1300 lm	13W	15W		4000K	
NOVA-P M-15W-930-30	Φ72*250mm	1200 lm	13W	15W	90	3000K	30°
NOVA-P M-15W-940-30	Φ72*250mm	1300 lm	13W	15W		4000K	
21W 1600lm-1700lm							
NOVA-P M-21W-930-15	Φ72*250mm	1600 lm	18W	21W	90	3000K	15°
NOVA-P M-21W-940-15	Φ72*250mm	1700 lm	18W	21W		4000K	
NOVA-P M-21W-930-25	Φ72*250mm	1600 lm	18W	21W	90	3000K	25°
NOVA-P M-21W-940-25	Φ72*250mm	1700 lm	18W	21W		4000K	
NOVA-P M-21W-930-30	Φ72*250mm	1600 lm	18W	21W	90	3000K	30°
NOVA-P M-21W-940-30	Φ72*250mm	1700 lm	18W	21W		4000K	


NOVA Series
PENDANT



NOVA-80/NOVA-P L
Pendant



Drawing




Order Options

21W 1400lm-1600lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA80-P-21W-CCT-60	Φ80*200mm	1400lm-1600lm	18W	21W	90	3000K 4000K 5000K	60°

28W 2700lm-2900lm							
NOVA-P L-28W-930-18	Φ90*230mm	2700 lm	25W	28W	90	3000K	18°
NOVA-P L-28W-940-18	Φ90*230mm	2900 lm	25W	28W		4000K	
NOVA-P L-28W-930-30	Φ90*230mm	2700 lm	25W	28W	90	3000K	30°
NOVA-P L-28W-940-30	Φ90*230mm	2900 lm	25W	28W		4000K	
NOVA-P L-28W-930-45	Φ90*230mm	2700 lm	25W	28W	90	3000K	45°
NOVA-P L-28W-940-45	Φ90*230mm	2900 lm	25W	28W		4000K	




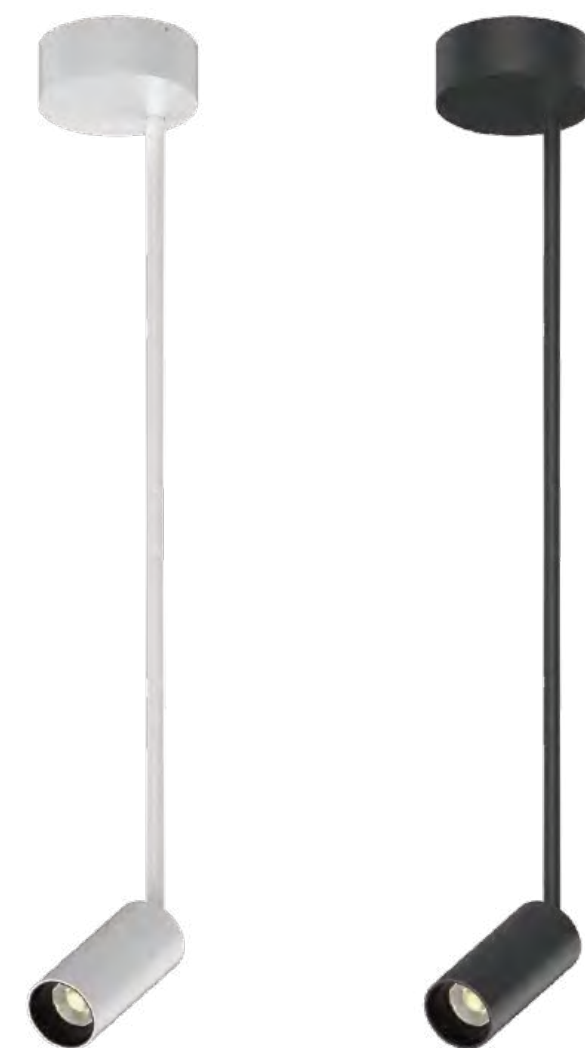


FELLOW MINI

FELLOW MINI Series
SPOTLIGHT

FELLOW MINI-Ceiling Lighting

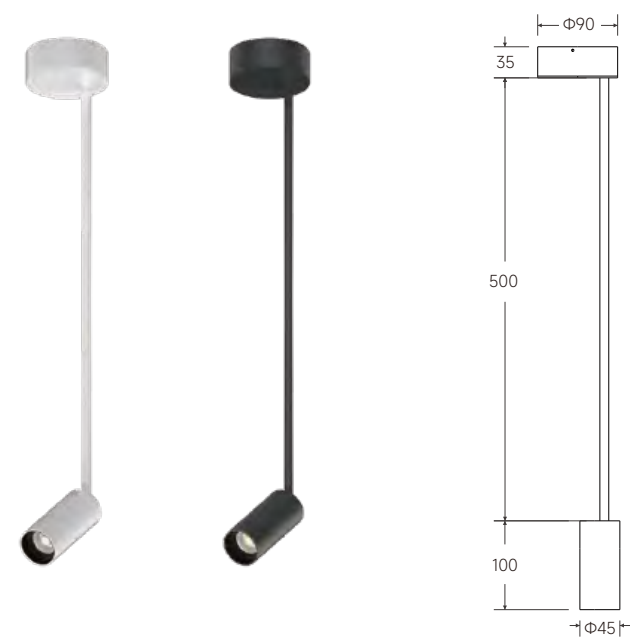

FELLOW MINI-Wall Lighting

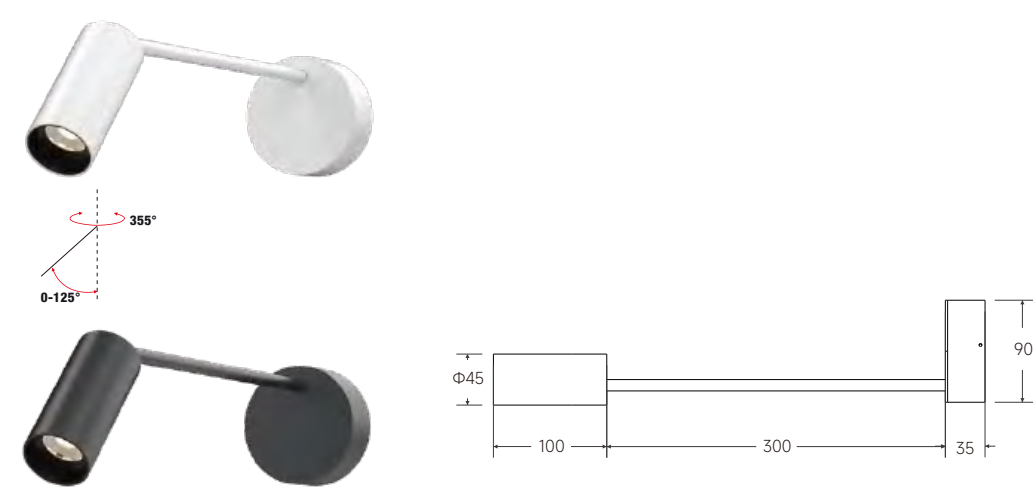

FELLOW MINI Series

SPOTLIGHT



FELLOW MINI-C



FELLOW MINI-W

Surface Mounted

FELLOW MINI-C/W




Features

- FELLOW Mini perfectly combines functionality and esthetics.
- Elegant design with LED driver inside housing
- The head rotates through 355° and pivots through 90°.
- Optimized passive cooling system ensures low temperature and long lifetime of LED.


Specifications

- Dimming modes: Non-Dim, TRIAC DIM
- Beam angle: 15°, 24°, 36°, 45°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Light distribution



Drawing



FELLOW MINI

Spotlight



Order Options

FELLOW MINI-C

7W 450lm-480lm		CITIZEN						
Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
FELLOW Mini-C-7W-500-930-15	Φ45*635mm	550 lm	450 lm	5W	7W	90	3000K	15°
FELLOW Mini-C-7W-500-930-24	Φ45*635mm	550 lm	480 lm	5W	7W	90	3000K	24°
FELLOW Mini-C-7W-500-930-36	Φ45*635mm	550 lm	450 lm	5W	7W	90	3000K	36°
FELLOW Mini-C-7W-500-930-45	Φ45*635mm	550 lm	450 lm	5W	7W	90	3000K	45°

8W 550lm-650lm

FELLOW Mini-C-8W-500-930-15	Φ45*635mm	650 lm	550 lm	6W	8W	90	3000K	15°
FELLOW Mini-C-8W-500-930-25	Φ45*635mm	650 lm	600 lm	6W	8W	90	3000K	24°
FELLOW Mini-C-8W-500-930-36	Φ45*635mm	650 lm	550 lm	6W	8W	90	3000K	36°
FELLOW Mini-C-8W-500-930-45	Φ45*635mm	650 lm	550 lm	6W	8W	90	3000K	45°

FELLOW MINI-W

7W 450lm-480lm

Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
FELLOW Mini-W-7W-300-930-15	Φ45*435mm	550 lm	450 lm	5W	7W	90	3000K	15°
FELLOW Mini-W-7W-300-930-24	Φ45*435mm	550 lm	480 lm	5W	7W	90	3000K	24°
FELLOW Mini-W-7W-300-930-36	Φ45*435mm	550 lm	450 lm	5W	7W	90	3000K	36°
FELLOW Mini-W-7W-300-930-45	Φ45*435mm	550 lm	450 lm	5W	7W	90	3000K	45°

8W 550lm-650lm

FELLOW Mini-W-8W-300-930-15	Φ45*435mm	650 lm	550 lm	6W	8W	90	3000K	15°
FELLOW Mini-W-8W-300-930-24	Φ45*435mm	650 lm	600 lm	6W	8W	90	3000K	24°
FELLOW Mini-W-8W-300-930-36	Φ45*435mm	650 lm	550 lm	6W	8W	90	3000K	36°
FELLOW Mini-W-8W-300-930-45	Φ45*435mm	650 lm	550 lm	6W	8W	90	3000K	45°


2 Downlight

Downlight

DOT	074-081
TESLA	082-087
START	088-141
DOME	142-163
VTRIM	164-191
KIWI	192-200
LEDGO	201-217







DOT

Exquisite and minimal aesthetic recessed light
Maximum visual comfort with low UGR
Tool free change different decorative reflectors

DOT-G

Economic Version



DOT-H


Premium Version



Colour



Decoration Reflector

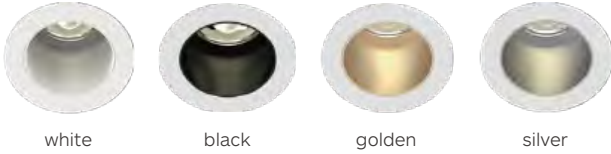

DOT Series
DOWNLIGHT



DOT35-G



DOT45-G

Minimal LED Downlight
DOT35,45-G

CE

5

5 Years Warranty

AC

220-240V

IP

20

UGR

<19

CRI

>90

OSRAM

CITIZEN


Features

- Minimalistic design with cutoutof 35mm, 45mm.
- Deep recessed LED Soft curved design
- With complete glare control and visual comfort
- Broad choices of different beam angle lens by tool free change.


Specifications

- Dimming modes:ON-OFF, Phase, 1-10V, DALI
- Beam angle: 18°, 30°
- Physical: heatsink-cold forging, Trim-die casting

Type



Light distribution





DOT
Downlight

White

Black

Drawing



Order Options

1.5W 110lm-120lm								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
DOT35-G-830-18	Φ40.5*52mm	110 lm	3.2V	1.5W	2.5W	83	3000K	18°
DOT35-G-840-18	Φ40.5*52mm	120 lm	3.2V	1.5W	2.5W	83	4000K	18°
DOT35-G-830-30	Φ40.5*52mm	110 lm	3.2V	1.5W	2.5W	83	3000K	30°
DOT35-G-840-30	Φ40.5*52mm	120 lm	3.2V	1.5W	2.5W	83	4000K	30°
6W 450lm-480lm								
DOT45-G-830-30	Φ50.5*62mm	450 lm	18V	6W	8W	83	3000K	30°
DOT45-G-840-30	Φ50.5*62mm	480 lm	18V	6W	8W	83	4000K	30°



DOT35-H



DOT45-H

Minimal LED Downlight
DOT35,45-H

CE

5

5 Years Warranty

AC

220-240V

IP

20

UGR

<19

CRI

>90

OSRAM

CITIZEN


Features

- Minimalistic design with cutout of 35mm, 45mm.
- Deep recessed LEDSoft curved design
- With complete glare control and visual comfort
- Broad choices of different beam angle lens by tool free change.


Specifications

- Dimming modes: ON-OFF, Phase, 1-10V, DALI
- Beam angle: 18°, 30°
- Physical: heatsink-cold forging, Trim-die casting

Type



Light distribution




DOT
Downlight

White

Black

Drawing

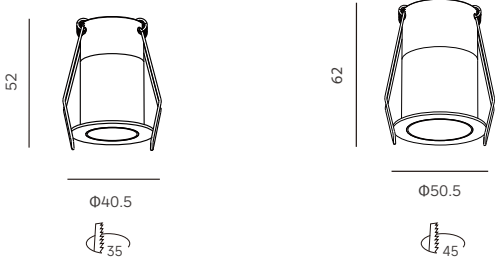


Order Options

1.5W 110lm-120lm								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
DOT35-H-830-18	Φ40.5*52mm	110 lm	3.2V	1.5W	2.5W	83	3000K	18°
DOT35-H-840-18	Φ40.5*52mm	120 lm	3.2V	1.5W	2.5W	83	4000K	18°
DOT35-H-830-30	Φ40.5*52mm	110 lm	3.2V	1.5W	2.5W	83	3000K	30°
DOT35-H-840-30	Φ40.5*52mm	120 lm	3.2V	1.5W	2.5W	83	4000K	30°
6W 450lm-480lm								
DOT45-H-830-30	Φ50.5*62mm	450 lm	18V	6W	8W	83	3000K	30°
DOT45-H-840-30	Φ50.5*62mm	480 lm	18V	6W	8W	83	4000K	30°



TESLA Series
DOWNLIGHT


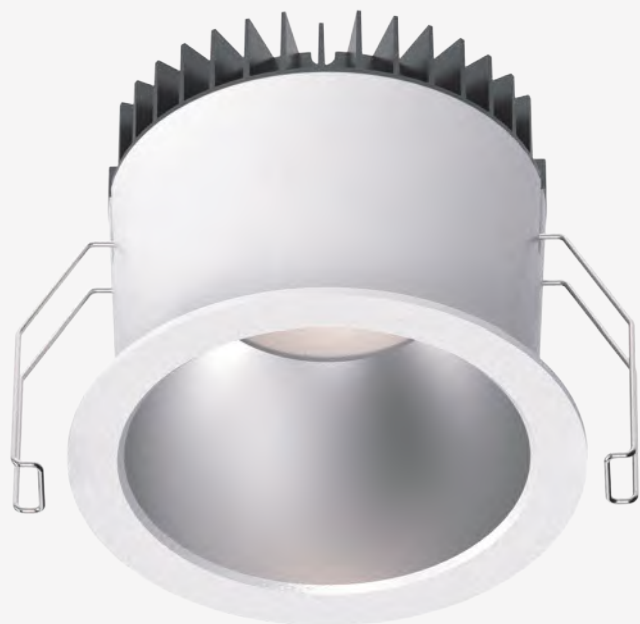


TESLA
Downlight

TESLA is a series of compact downlight, which keeps an excellent balance between super light comfort and high efficiency.

TESLA

High-flux PCB LED modules, mid-power SMD LED.
High quality diffuser reaches the higher efficiency and less glare value.
Polycarbonate body with vacuum plated inner reflector surface and die-cast aluminium heat sink.
The light source is deeply integrated for glare control with 30° shielding angle.

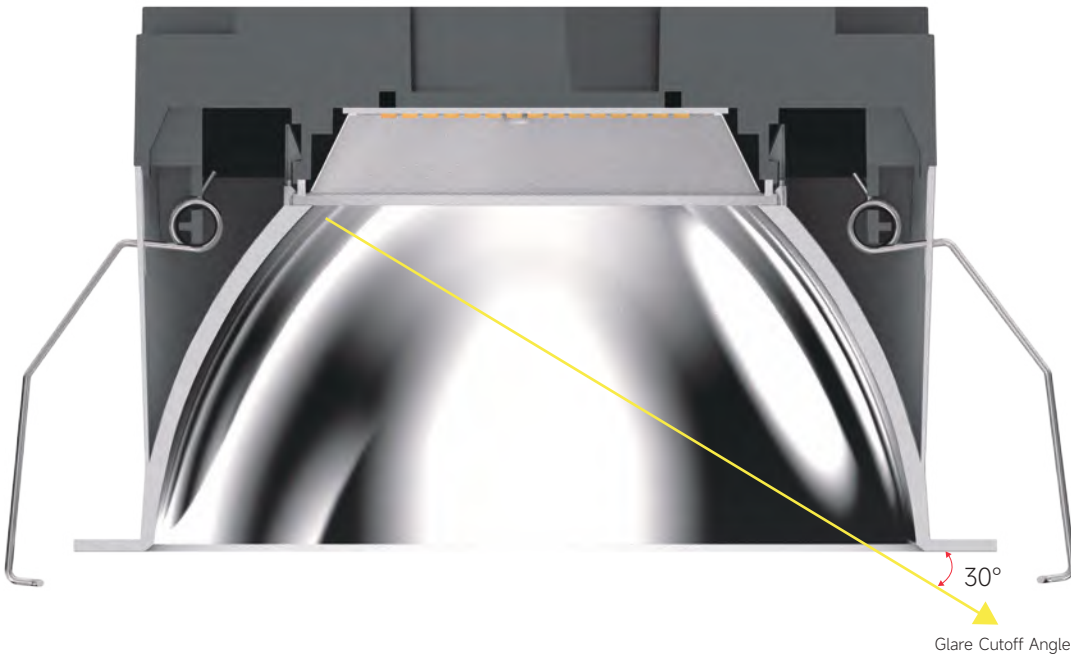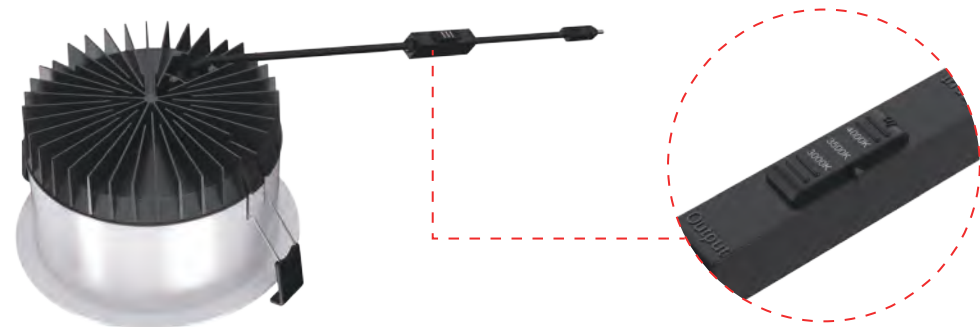

Inner Reflector Surface



Specular Silver White Black

TESLA Series
DOWNLIGHT



TS4

TS6

TS8

Downlight
TS4/TS6/TS8

CE

5
5 Years Warranty

AC
220-240V

IP
54

UGR
<19

CRI
>80


Features

- UGR <19
- Efficiency up to 140Lm/W
- IP54
- The product is efficient at various heights, available with different lumen packages and beam angles.


Specifications

- Dimming modes:ON-OFF, Phase, 1-10V, Dali
- Beam angle:60°
- Physical: Die-casting, Powder coating


Type




Light distribution



TS4/TS6/TS8
Downlight



Drawing

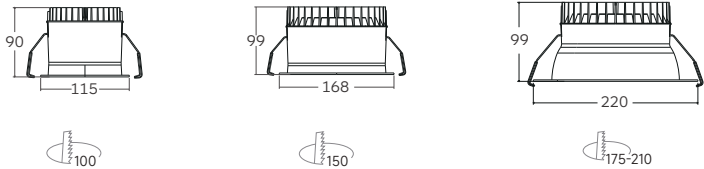

Order Options

Standard Version							
Code	LED Power	System Wattage	System Output	System Efficacy	CRI	CCT	BEAM
TS4-8W-830	8W	10W	1130 lm	113 lm/W	Ra>80	3000K	60°
TS4-8W-840	8W	10W	1180 lm	118 lm/W	Ra>80	4000K	60°
TS4-12W-830	12W	14W	1680 lm	120 lm/W	Ra>80	3000K	60°
TS4-12W-840	12W	14W	1750 lm	125 lm/W	Ra>80	4000K	60°
TS6-12W-830	12W	14W	1750 lm	125 lm/W	Ra>80	3000K	60°
TS6-12W-840	12W	14W	1920 lm	137 lm/W	Ra>80	4000K	60°
TS6-16W-830	16W	18W	2430 lm	135 lm/W	Ra>80	3000K	60°
TS6-16W-840	16W	18W	2550 lm	141 lm/W	Ra>80	4000K	60°
TS6-23W-830	23W	26W	3500 lm	135 lm/W	Ra>80	3000K	60°
TS6-23W-840	23W	26W	3650 lm	140 lm/W	Ra>80	4000K	60°
TS8-23W-830	23W	26W	3500 lm	135 lm/W	Ra>80	3000K	60°
TS8-23W-840	23W	26W	3650 lm	140 lm/W	Ra>80	4000K	60°
TS8-30W-830	30W	33W	4300 lm	131 lm/W	Ra>80	3000K	60°
TS8-30W-840	30W	33W	4500 lm	136 lm/W	Ra>80	4000K	60°

CCT Switchable Version

Code	LED Power	System Wattage	System Output	System Efficacy	CRI	CCT	BEAM
TESLA4-8W-CCT-830	8W	10W	1100lm	110lm/W	Ra>80	3000K	60°
TESLA4-8W-CCT-835	8W	10W	1180lm	118lm/W	Ra>80	3500K	60°
TESLA4-8W-CCT-840	8W	10W	1160lm	116lm/W	Ra>80	4000K	60°
TESLA4-12W-CCT-830	12W	15W	1550lm	104lm/W	Ra>80	3000K	60°
TESLA4-12W-CCT-835	12W	15W	1650lm	110lm/W	Ra>80	3500K	60°
TESLA4-12W-CCT-840	12W	15W	1600lm	107lm/W	Ra>80	4000K	60°
TESLA6-12W-CCT-830	12W	15W	1700lm	115lm/W	Ra>80	3000K	60°
TESLA6-12W-CCT-835	12W	15W	1830lm	122lm/W	Ra>80	3500K	60°
TESLA6-12W-CCT-840	12W	15W	1800lm	120lm/W	Ra>80	4000K	60°
TESLA6-18W-CCT-830	18W	21W	2450lm	116lm/W	Ra>80	3000K	60°
TESLA6-18W-CCT-835	18W	21W	2580lm	123lm/W	Ra>80	3500K	60°
TESLA6-18W-CCT-840	18W	21W	2550lm	121lm/W	Ra>80	4000K	60°
TESLA6-25W-CCT-830	25W	28W	3200lm	114lm/W	Ra>80	3000K	60°
TESLA6-25W-CCT-835	25W	28W	3450lm	123lm/W	Ra>80	3500K	60°
TESLA6-25W-CCT-840	25W	28W	3360lm	120lm/W	Ra>80	4000K	60°
TESLA8-25W-CCT-830	25W	28W	3400lm	121lm/W	Ra>80	3000K	60°
TESLA8-25W-CCT-835	25W	28W	3600lm	129lm/W	Ra>80	3500K	60°
TESLA8-25W-CCT-840	25W	28W	3560lm	127lm/W	Ra>80	4000K	60°
TESLA8-32W-CCT-830	32W	35W	4250lm	122lm/W	Ra>80	3000K	60°
TESLA8-32W-CCT-835	32W	35W	4450lm	127lm/W	Ra>80	3500K	60°
TESLA8-32W-CCT-840	32W	35W	4380lm	125lm/W	Ra>80	4000K	60°

START



Adjustable

SQUARE
Downlight



Fixed



Wall Washer



ROUND
Downlight



START

Downlight

One light engine with various accessories
Easy to specify, Easy to manage stock
Easy to install and adjust, Easy to change reflector

Light engines

SRA

round adjustable/ downlight



SSA

square adjustable/ downlight



SRF

round fixed/ downlight



SSF

square fixed/ downlight




SRW

round wallwasher/ wallwasher floor



SSW

square wallwasher/ wallwasher floor



Cutout Diameter(mm)

Φ45 Φ68 Φ100 Φ125 Φ150

45x45 68x68 100x100 122x122 147x147

Φ100 Φ125 Φ150

100x100 122x122 147x147

Φ100 Φ125 Φ150

100x100 122x122 147x147

Trim Diameter(mm)

SRA45 SRA68 SRA100 SRA125 SRA150

SSA45 SSA68 SSA100 SSA125 SSA150

SRF100 SRF125 SRF150

SSF100 SSF125 SSF150

SRW100 SRW125 SRW150

SSW100 SSW125 SSW150



H:60 H:98 H:130/157 H:157 H:188

H:60 H:98 H:130/157 H:157 H:188

H:130/157 H:157 H:188

H:130/157 H:157 H:188

H:130/157 H:157 H:188

H:130/157 H:157 H:188



Height(mm)

Power

Luminous Flux

4W	7.5W	13W/18W	18W	25W
350Lm	600Lm	1200Lm 1700Lm	1600Lm	2400Lm
	11W	25W	25W	38W
	800Lm	2200Lm	2200Lm	3200Lm

4W	7.5W	13W/18W	18W	25W
350Lm	600Lm	1200Lm 1700Lm	1600Lm	2400Lm
	11W	25W	25W	38W
	800Lm	2200Lm	2200Lm	3200Lm

13W/18W	18W	25W
1100Lm/1500Lm	1500Lm	2100Lm
25W	25W	38W
1900Lm	2100Lm	2900Lm

13W/18W	18W	25W
1100Lm/1500Lm	1500Lm	2100Lm
25W	25W	38W
1900Lm	2100Lm	2900Lm

13W/18W	18W	25W
750Lm	800Lm	1000Lm
25W	25W	38W
1000Lm	1100Lm	1400Lm

13W/18W	18W	25W
750Lm	800Lm	1000Lm
25W	25W	38W
1000Lm	1100Lm	1400Lm

Beam Angle

Corlour Temperature

CRI

LED Driver

Trimless Version

Secondary Reflector

Anti-glare Accessory

Decoration Accessory
Colour film

10° 40° 50°
(only SRA68)

Standard	Option
3000K	2700K
4000K	5000K

Standard	Option
CRI>90	CRI>83

Standard	Option
ON-OFF	Phase DIM 1-10V DIM DALI DIM



Specular Chrome Black Matt White Black Gold



honeycomb

10° 40° 50°
(only SRA68)

Standard	Option
3000K	2700K
4000K	5000K

Standard	Option
CRI>90	CRI>83

Standard	Option
ON-OFF	Phase DIM 1-10V DIM DALI DIM



35° 50°

Standard	Option
3000K	2700K
4000K	5000K

Standard	Option
CRI>90	CRI>83

Standard	Option
ON-OFF	Phase DIM 1-10V DIM DALI DIM



Specular Chrome Black Matt

35° 50°

Standard	Option
3000K	2700K
4000K	5000K

Standard	Option
CRI>90	CRI>83

Standard	Option
ON-OFF	Phase DIM 1-10V DIM DALI DIM




White Black Gold

Asymmetric optical distribution

Standard	Option
3000K	2700K
4000K	5000K

Standard	Option
CRI>90	CRI>83

Standard	Option
ON-OFF	Phase DIM 1-10V DIM DALI DIM



Asymmetric optical distribution

Standard	Option
3000K	2700K
4000K	5000K

Standard	Option
CRI>90	CRI>83

Standard	Option
ON-OFF	Phase DIM 1-10V DIM DALI DIM



Matt

Adjustable



Fixed

Wall Washer

Adjustable

Fixed

Wall Washer



Trimless



Trimless

START

Adjustable

Five sizes with LED wattages 4W-38W.
20°, 40°, and 50° beam angles are available
10° beam angle is optional for SRA68.
30° tilt and 355° rotation.

Fixed

A combination of deep recessed
secondary reflector and soft
lens creates visual comfort

Wall Washer

Asymmetric wall washer reflector
evenly illuminates walls

START Series
DOWNLIGHT


Adjustable

Smart mechanical design features precise angle alignment.
Artistical style meets architectural requirement.
Fixing screws can be rotated to match ceiling with different thickness.




Easy to Adjust

Precision engineered adjustment mechanism achieves accurate angle alignment.

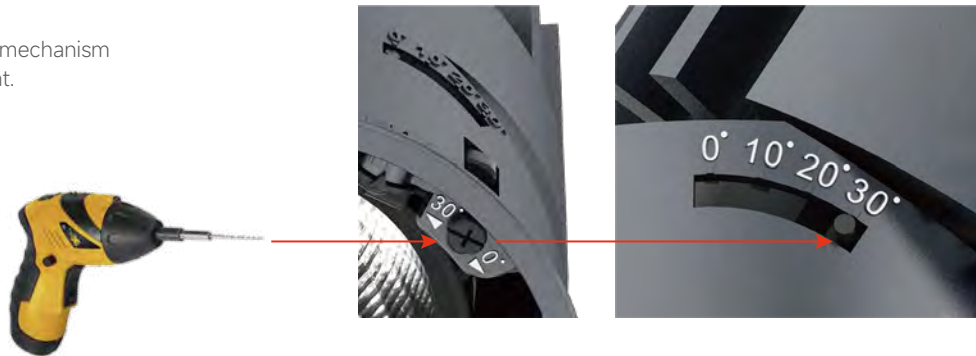

Intelligent mechanical design creates easy adjustment and precise alignment.

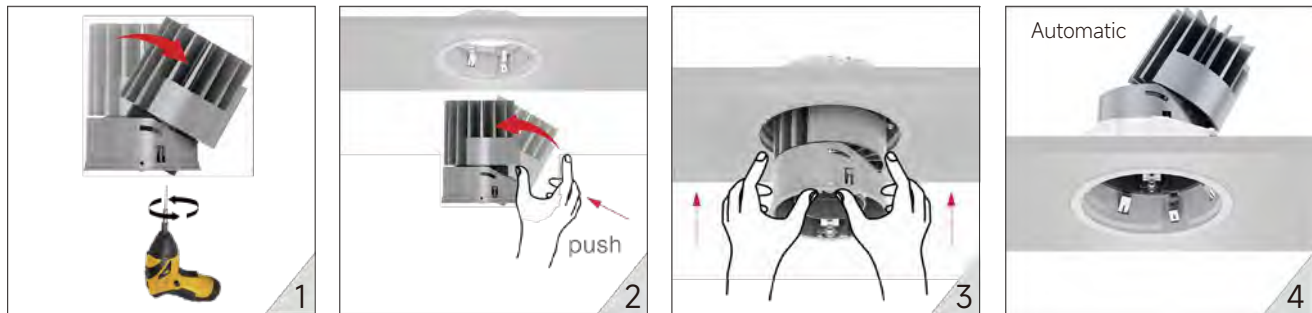

Technology Presents Arts

Ultra-narrow trim design leaves no flange between the secondary reflector and trim, meeting neat ceiling requirement.




Creative Ceiling Treatment

Installed easily and securely in the ceiling, using two screw fixing mechanisms.
Applying to 12-25mm thickness ceiling and to 1-12mm thickness ceiling with a fallen clip.



fit for ceiling thickness
12mm to 25mm

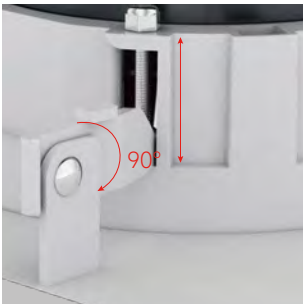

fit for ceiling thickness
1mm to 12mm

Installation





One light engine with various accessories



SRA | round adjustable/
downlight



SSA | square adjustable/
downlight

Trimless



Round-Adjustable



Square-Adjustable

Standard



Round-Adjustable



Square-Adjustable



Round-Fixed



Square-Fixed



Round-Fixed



Square-Fixed



(Only of Strat 100 Round)

Round-Wall Washer



Square-Wall Washer



Round-Wall Washer



Square-Wall Washer



Secondary Reflector



Specular



Chrome Black



White



Matt



Black



Gold

Trimless Round




Trimless Square



START Series
DOWNLIGHT / Adjustable

Meticulous to detail
Interchangeable design
Best optics control
Guarantee maximal eye comfort

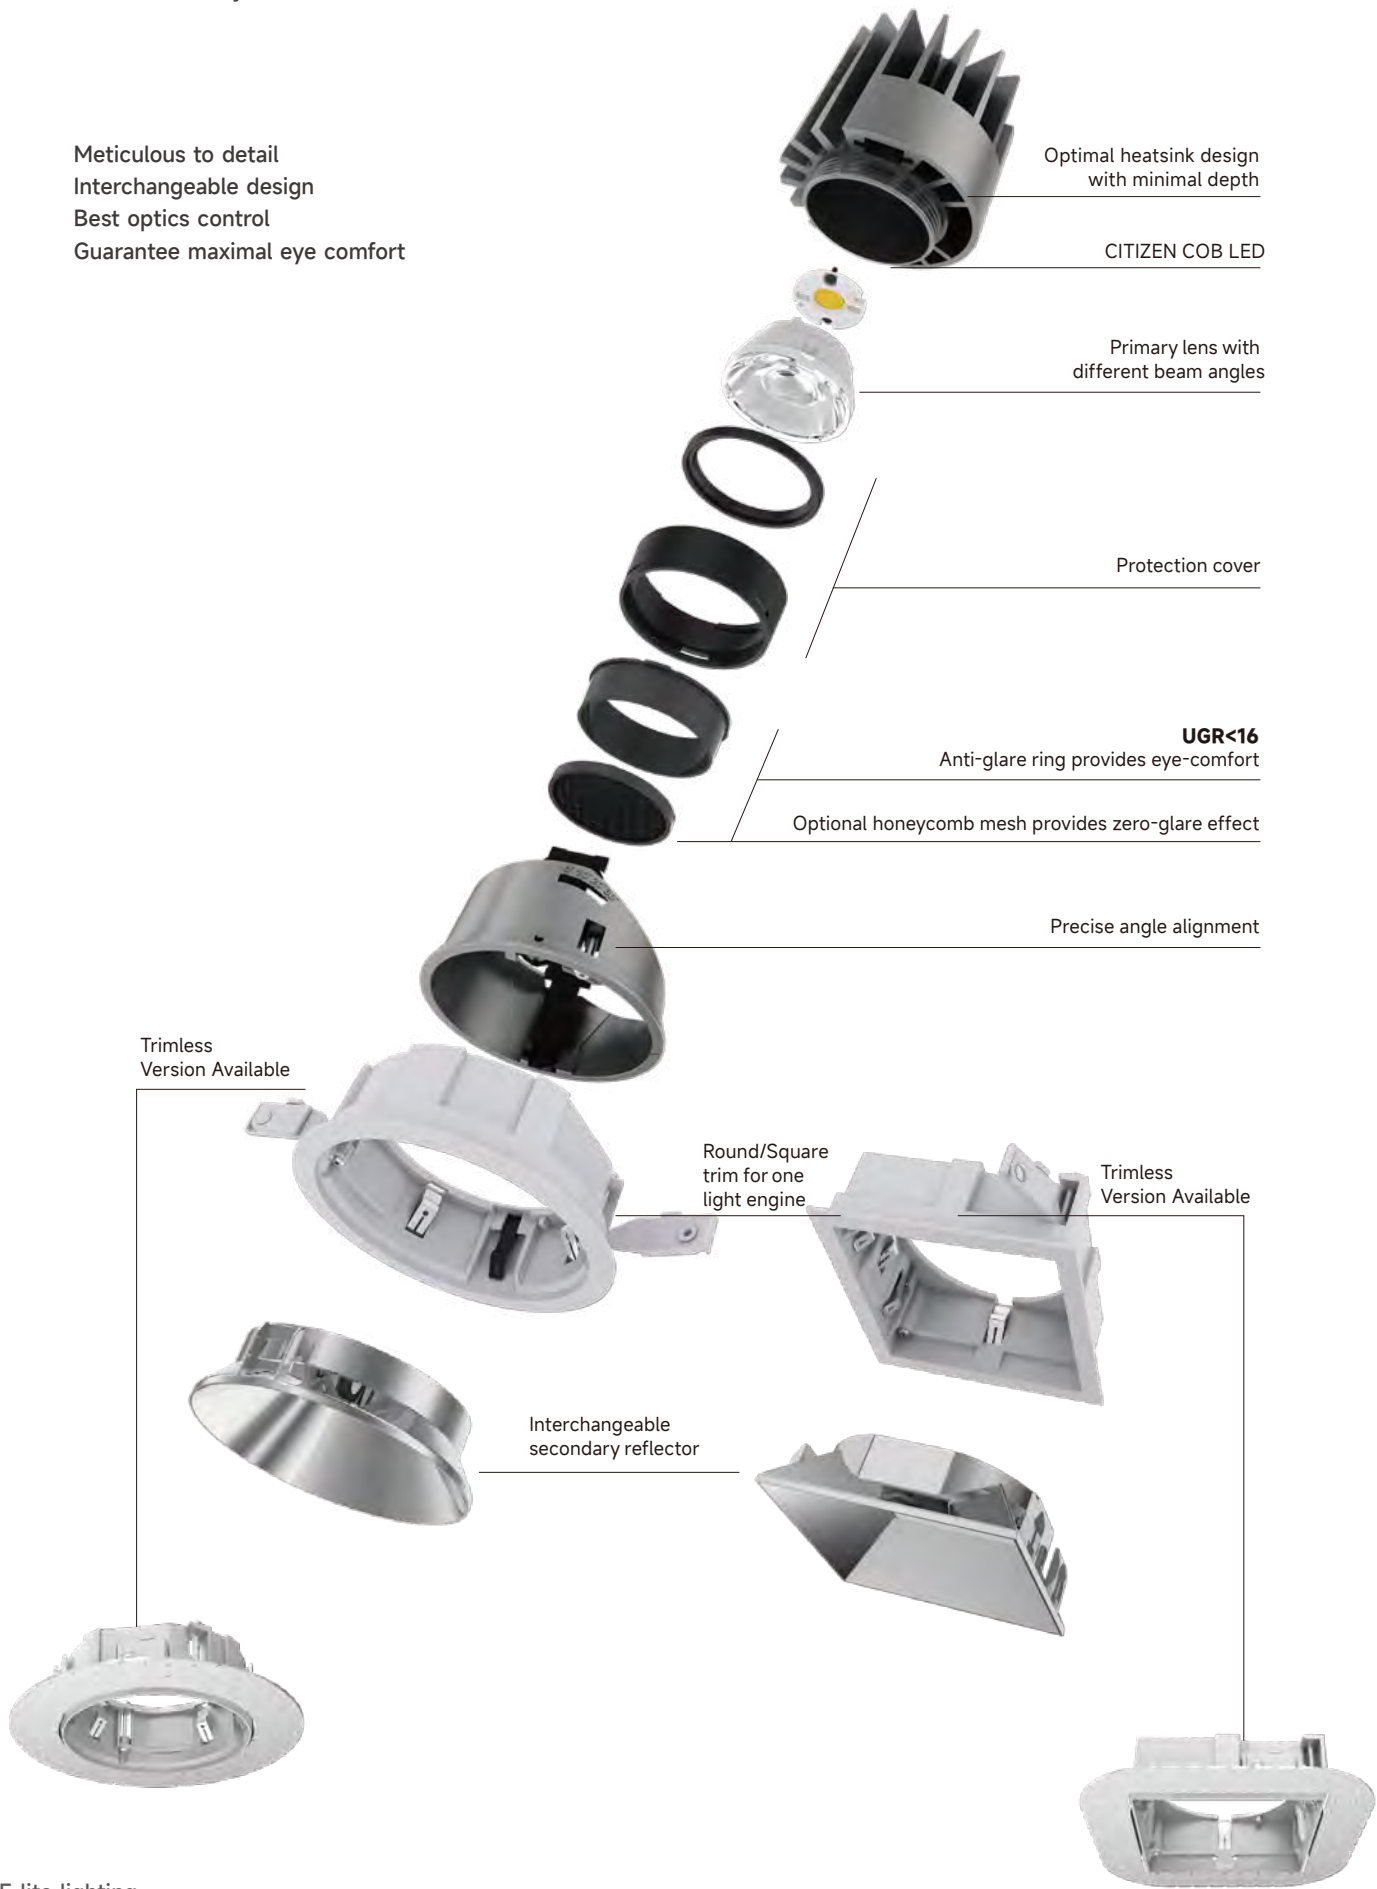

Adjustable

Aesthetic design trim available in round or square shape.
Five sizes with LED wattages 4W-38W.
30° tilt and 355° rotation.
Smart mechanical design ensures precise alignment.

START Series
DOWNLIGHT / Adjustable



Downlight
SRA45/68/100/125/150




Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:ON-OFF, Phase, 1-10V, Dali
- Beam angle:20°, 40°, 50°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Type



Light distribution



Anti-glare Accessory



Secondary Reflector




Specular Chrome Black White Matt Balck Gold



SRA45
Downlight

White Black Gold Specular Chrome Black Matt

Drawing



Order Options


4W 350lm-380lm CREE								
Code	Size	System LM	LED Voltage	LED Current	System W	CRI	CCT	Beam
SRA45-EY930L18M-X	Φ55*60mm	350 lm	12 V	350mA	6 W	90	3000K	18°
SRA45-EY940L18M-X	Φ55*60mm	380 lm	12 V	350mA	6 W	90	4000K	18°
SRA45-EY930L24M-X	Φ55*60mm	350 lm	12 V	350mA	6 W	90	3000K	24°
SRA45-EY940L24M-X	Φ55*60mm	380 lm	12 V	350mA	6 W	90	4000K	24°
SRA45-EY930L35M-X	Φ55*60mm	350 lm	12 V	350mA	6 W	90	3000K	35°
SRA45-EY940L35M-X	Φ55*60mm	380 lm	12 V	350mA	6 W	90	4000K	35°
SRA45-EY930L50M-X	Φ55*60mm	350 lm	12 V	350mA	6 W	90	3000K	50°
SRA45-EY940L50M-X	Φ55*60mm	380 lm	12 V	350mA	6 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


START Series
DOWNLIGHT / Adjustable



SRA68/TRA68
Downlight



Drawing

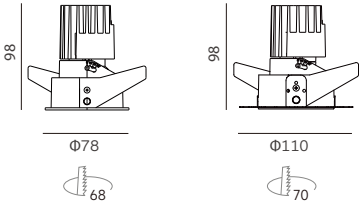

7.5 W 600lm-650lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA68-CA930L20S-X	Ø78*98mm	600 lm	31 V	7.5W	9 W	90	3000K	24°
SRA68-CA940L20S-X	Ø78*98mm	650 lm	31 V	7.5W	9 W	90	4000K	24°
SRA68-CA930L40S-X	Ø78*98mm	600 lm	31 V	7.5W	9 W	90	3000K	40°
SRA68-CA940L40S-X	Ø78*98mm	650 lm	31 V	7.5W	9 W	90	4000K	40°
SRA68-CA930R55S-X	Ø78*98mm	500 lm	31 V	7.5W	9 W	90	3000K	55°
SRA68-CA940R55S-X	Ø78*98mm	550 lm	31 V	7.5W	9 W	90	4000K	55°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

11 W 800lm-850lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA68-CB930L20S-X	Ø78*98mm	800 lm	31 V	11 W	13 W	90	3000K	24°
SRA68-CB940L20S-X	Ø78*98mm	850 lm	31 V	11 W	13 W	90	4000K	24°
SRA68-CB930L40S-X	Ø78*98mm	800 lm	31 V	11 W	13 W	90	3000K	40°
SRA68-CB940L40S-X	Ø78*98mm	850 lm	31 V	11 W	13 W	90	4000K	40°
SRA68-CB930R55S-X	Ø78*98mm	650 lm	31 V	11 W	13 W	90	3000K	55°
SRA68-CB940R55S-X	Ø78*98mm	700 lm	31 V	11 W	13 W	90	4000K	55°



Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

8.5 W 480lm-500lm		CREE						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA68-EA930L10S-X	Ø78*98mm	480 lm	12V	8.5 W	10W	90	3000K	10°
SRA68-EA940L10S-X	Ø78*98mm	500 lm	12V	8.5 W	10W	90	4000K	10°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



SRA100/TRA100
Downlight

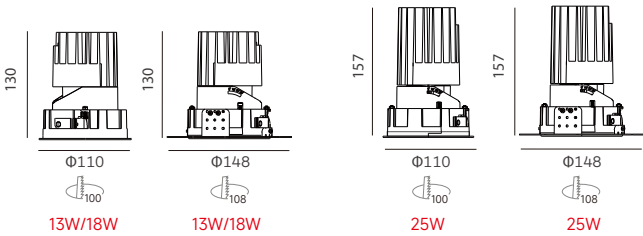

13W 1100Lm-1300Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA100-CB930L20S-X	Ø110*130mm	1100 lm	36 V	13 W	15 W	90	3000K	20°
SRA100-CB940L20S-X	Ø110*130mm	1200 lm	36 V	13 W	15 W	90	4000K	20°
SRA100-CB930L30S-X	Ø110*130mm	1200 lm	36 V	13 W	15 W	90	3000K	30°
SRA100-CB940L30S-X	Ø110*130mm	1300 lm	36 V	13 W	15 W	90	4000K	30°
SRA100-CB930L40S-X	Ø110*130mm	1200 lm	36 V	13 W	15 W	90	3000K	40°
SRA100-CB940L40S-X	Ø110*130mm	1300 lm	36V	13 W	15 W	90	4000K	40°
SRA100-CB930L45S-X	Ø110*130mm	1100 lm	36 V	13 W	15 W	90	3000K	45°
SRA100-CB940L45S-X	Ø110*130mm	1200 lm	36 V	13 W	15 W	90	4000K	45°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

18W 1600Lm-1800Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA100-CC930L20S-X	Ø110*130mm	1600 lm	36 V	18 W	21 W	90	3000K	20°
SRA100-CC940L20S-X	Ø110*130mm	1700 lm	36 V	18 W	21 W	90	4000K	20°
SRA100-CC930L30S-X	Ø110*130mm	1700 lm	36 V	18 W	21 W	90	3000K	30°
SRA100-CC940L30S-X	Ø110*130mm	1800 lm	36 V	18 W	21 W	90	4000K	30°
SRA100-CC930L40S-X	Ø110*130mm	1700 lm	36 V	18 W	21 W	90	3000K	40°
SRA100-CC940L40S-X	Ø110*130mm	1800 lm	36 V	18 W	21 W	90	4000K	40°
SRA100-CC930L45S-X	Ø110*130mm	1600 lm	36 V	18 W	21 W	90	3000K	45°
SRA100-CC940L45S-X	Ø110*130mm	1700 lm	36 V	18 W	21 W	90	4000K	45°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

7W 500Lm-550Lm		CREE						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA100-CA930L10S-X	Ø110*130mm	500 lm	36 V	7 W	9 W	90	3000K	10°
SRA100-CA940L10S-X	Ø110*130mm	550 lm	36 V	7 W	9 W	90	4000K	10°


25W 2100Lm-2300Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA100-CD930L20S-X	Ø110*157mm	2100 lm	36V	25W	28W	90	3000K	20°
SRA100-CD940L20S-X	Ø110*157mm	2200 lm	36V	25W	28W	90	4000K	20°
SRA100-CD930L36S-X	Ø110*157mm	2200 lm	36V	25W	28W	90	3000K	36°
SRA100-CD940L36S-X	Ø110*157mm	2300 lm	36V	25W	28W	90	4000K	36°
SRA100-CD930L50S-X	Ø110*157mm	2200 lm	36V	25W	28W	90	3000K	50°
SRA100-CD940L50S-X	Ø110*157mm	2300 lm	36V	25W	28W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


START Series
DOWNLIGHT / Adjustable



SRA125/TRA125
Downlight



Drawing

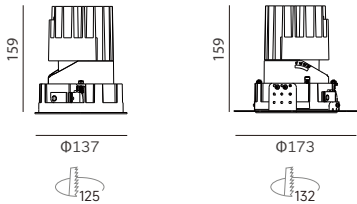

Order Options

18W 1400Lm-1700Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA125-CC930L20S-X	Φ137*159mm	1600 lm	36 V	18 W	21 W	90	3000K	20°
SRA125-CC940L20S-X	Φ137*159mm	1700 lm	36 V	18 W	21 W	90	4000K	20°
SRA125-CC930L35S-X	Φ137*159mm	1600 lm	36 V	18 W	21 W	90	3000K	35°
SRA125-CC940L35S-X	Φ137*159mm	1700 lm	36 V	18 W	21 W	90	4000K	35°
SRA125-CC930L50S-X	Φ137*159mm	1400 lm	36 V	18 W	21 W	90	3000K	50°
SRA125-CC940L50S-X	Φ137*159mm	1500 lm	36 V	18 W	21 W	90	4000K	50°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

25W 1900Lm-2300Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA125-CD930L20S-X	Φ137*159mm	2200 lm	36 V	25 W	28 W	90	3000K	20°
SRA125-CD940L20S-X	Φ137*159mm	2300 lm	36 V	25 W	28 W	90	4000K	20°
SRA125-CD930L35S-X	Φ137*159mm	2200 lm	36 V	25 W	28 W	90	3000K	35°
SRA125-CD940L35S-X	Φ137*159mm	2300 lm	36 V	25 W	28 W	90	4000K	35°
SRA125-CD930L50S-X	Φ137*159mm	1900 lm	36 V	25 W	28 W	90	3000K	50°
SRA125-CD940L50S-X	Φ137*159mm	2000 lm	36 V	25 W	28 W	90	4000K	50°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



SRA150/TRA150
Downlight



Drawing

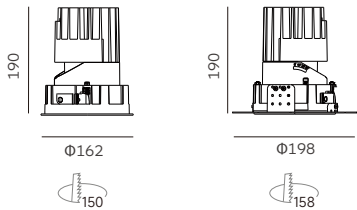

Order Options

25W 1700Lm-2500Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA150-CD930L20S-X	162*190mm	2400 lm	36 V	25 W	28 W	90	3000K	20°
SRA150-CD940L20S-X	162*190mm	2500 lm	36 V	25 W	28 W	90	4000K	20°
SRA150-CD930L35S-X	162*190mm	2400 lm	36 V	25 W	28 W	90	3000K	35°
SRA150-CD940L35S-X	162*190mm	2500 lm	36 V	25 W	28 W	90	4000K	35°
SRA150-CD930L50S-X	162*190mm	1700 lm	36 V	25 W	28 W	90	3000K	50°
SRA150-CD940L50S-X	162*190mm	1800 lm	36 V	25 W	28 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

38W 2600Lm-3300Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRA150-CF930L20S-X	162*190mm	3200 lm	36 V	38 W	42 W	90	3000K	20°
SRA150-CF940L20S-X	162*190mm	3300 lm	36 V	38 W	42 W	90	4000K	20°
SRA150-CF930L35S-X	162*190mm	3200 lm	36 V	38 W	42 W	90	3000K	35°
SRA150-CF940L35S-X	162*190mm	3300 lm	36 V	38 W	42 W	90	4000K	35°
SRA150-CF930L50S-X	162*190mm	2600 lm	36 V	38 W	42 W	90	3000K	50°
SRA150-CF940L50S-X	162*190mm	2700 lm	36 V	38 W	42 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

START Series
DOWNLIGHT / Adjustable



Downlight
SSA45/68/100/125/150




Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:ON-OFF, Phase, 1-10V, Dali
- Beam angle:20°, 40°, 50°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Type




Light distribution




Anti-glare Accessory



Secondary Reflector


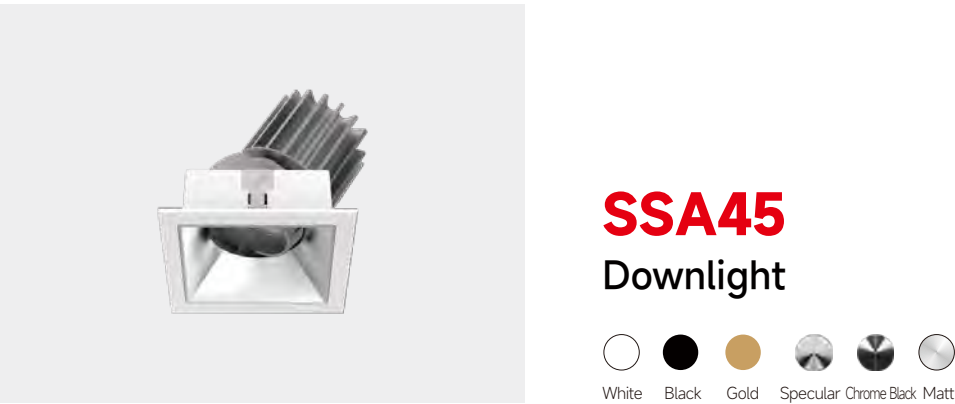


Drawing



Order Options

4 W 350lm-380lm								
Code	Size	System LM	LED Voltage	LED Current	System W	CRI	CCT	Beam
SSA45-EY930L18M-X	55*60mm	350 lm	12 V	350mA	6 W	90	3000K	18°
SSA45-EY940L18M-X	55*60mm	380 lm	12 V	350mA	6 W	90	4000K	18°
SSA45-EY930L24M-X	55*60mm	350 lm	12 V	350mA	6 W	90	3000K	24°
SSA45-EY940L24M-X	55*60mm	380 lm	12 V	350mA	6 W	90	4000K	24°
SSA45-EY930L35M-X	55*60mm	350 lm	12 V	350mA	6 W	90	3000K	35°
SSA45-EY940L35M-X	55*60mm	380 lm	12 V	350mA	6 W	90	4000K	35°
SSA45-EY930L50M-X	55*60mm	350 lm	12 V	350mA	6 W	90	3000K	50°
SSA45-EY940L50M-X	55*60mm	380 lm	12 V	350mA	6 W	90	4000K	50°
		Remark:	X=F (ON-OFF)	X=P (Phase Dim)	X=A (1-10V Dim)	X=D (DALI Dim)	X=N (Without Driver)	

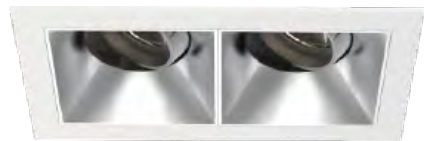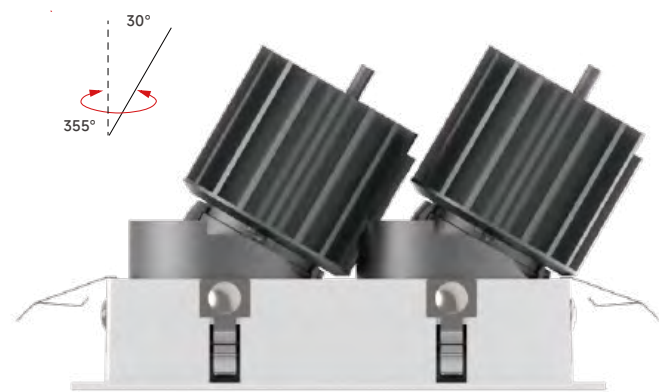

Secondary Reflector



White



Matt



Black



Twin SSA45




Trip SSA45




Quadri SSA45




86*45



126*45




86*86




START Series
DOWNLIGHT / Adjustable



SSA68/TSA68
Downlight



Drawing

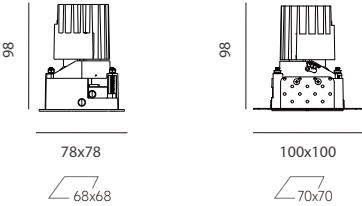

Order Options



7.5 W 600lm-650lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA68-CA930L20S-X	78*98mm	600 lm	31 V	7.5 W	9 W	90	3000K	24°
SSA68-CA940L20S-X	78*98mm	650 lm	31 V	7.5 W	9 W	90	4000K	24°
SSA68-CA930L40S-X	78*98mm	600 lm	31 V	7.5 W	9 W	90	3000K	40°
SSA68-CA940L40S-X	78*98mm	650 lm	31 V	7.5 W	9 W	90	4000K	40°
SSA68-CA930R55S-X	78*98mm	500 lm	31 V	7.5 W	9 W	90	3000K	55°
SSA68-CA940R55S-X	78*98mm	550 lm	31 V	7.5 W	9 W	90	4000K	55°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)								

11 W 800lm-850lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA68-CB930L20S-X	78*98mm	800 lm	31 V	11 W	13 W	90	3000K	24°
SSA68-CB940L20S-X	78*98mm	850 lm	31 V	11 W	13 W	90	4000K	24°
SSA68-CB930L40S-X	78*98mm	800 lm	31 V	11 W	13 W	90	3000K	40°
SSA68-CB940L40S-X	78*98mm	850 lm	31 V	11 W	13 W	90	4000K	40°
SSA68-CB930R55S-X	78*98mm	650 lm	31 V	11 W	13 W	90	3000K	55°
SSA68-CB940R55S-X	78*98mm	700 lm	31 V	11 W	13 W	90	4000K	55°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)								

8.5 W 480lm-500lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED Current	System W	CRI	CCT	Beam
SSA68-EA930L10S-X	78*98mm	480 lm	12 V	700mA	10 W	90	3000K	10°
SSA68-EA940L10S-X	78*98mm	500 lm	12 V	700mA	10 W	90	4000K	10°



SSA100/TSA100
Downlight

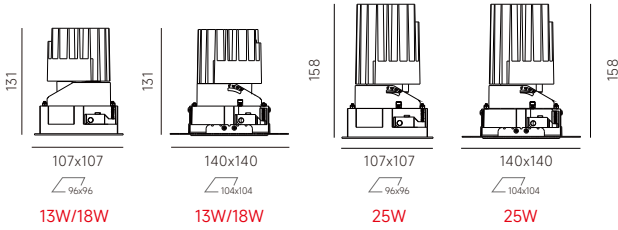

13W 1100Lm-1300Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA100-CB930L20S-X	Φ107*131mm	1100 lm	36 V	13 W	15 W	90	3000K	20°
SSA100-CB940L20S-X	Φ107*131mm	1200 lm	36 V	13 W	15 W	90	4000K	20°
SSA100-CB930L30S-X	Φ107*131mm	1200 lm	36 V	13 W	15 W	90	3000K	30°
SSA100-CB940L30S-X	Φ107*131mm	1300 lm	36 V	13 W	15 W	90	4000K	30°
SSA100-CB930L40S-X	Φ107*131mm	1200 lm	36 V	13 W	15 W	90	3000K	40°
SSA100-CB940L40S-X	Φ107*131mm	1300 lm	36V	13 W	15 W	90	4000K	40°
SSA100-CB930L45S-X	Φ107*131mm	1100 lm	36 V	13 W	15 W	90	3000K	45°
SSA100-CB940L45S-X	Φ107*131mm	1200 lm	36 V	13 W	15 W	90	4000K	45°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

18W 1600Lm-1800Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA100-CC930L20S-X	Φ107*131mm	1600 lm	36 V	18 W	21 W	90	3000K	20°
SSA100-CC940L20S-X	Φ107*131mm	1700 lm	36 V	18 W	21 W	90	4000K	20°
SSA100-CC930L30S-X	Φ107*131mm	1700 lm	36 V	18 W	21 W	90	3000K	30°
SSA100-CC940L30S-X	Φ107*131mm	1800 lm	36 V	18 W	21 W	90	4000K	30°
SSA100-CC930L40S-X	Φ107*131mm	1700 lm	36 V	18 W	21 W	90	3000K	40°
SSA100-CC940L40S-X	Φ107*131mm	1800 lm	36 V	18 W	21 W	90	4000K	40°
SSA100-CC930L45S-X	Φ107*131mm	1600 lm	36 V	18 W	21 W	90	3000K	45°
SSA100-CC940L45S-X	Φ107*131mm	1700 lm	36 V	18 W	21 W	90	4000K	45°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

7W 500Lm-550Lm		CREE						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA100-CA930L10S-X	Φ107*131mm	500 lm	36 V	7 W	9 W	90	3000K	10°
SSA100-CA940L10S-X	Φ107*131mm	550 lm	36 V	7 W	9 W	90	4000K	10°

25W 2100Lm-2300Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA100-CD930L20S-X	Φ107*158mm	2100 lm	36V	25W	28W	90	3000K	20°
SSA100-CD940L20S-X	Φ107*158mm	2200 lm	36V	25W	28W	90	4000K	20°
SSA100-CD930L36S-X	Φ107*158mm	2200 lm	36V	25W	28W	90	3000K	36°
SSA100-CD940L36S-X	Φ107*158mm	2300 lm	36V	25W	28W	90	4000K	36°
SSA100-CD930L50S-X	Φ107*158mm	2200 lm	36V	25W	28W	90	3000K	50°
SSA100-CD940L50S-X	Φ107*158mm	2300 lm	36V	25W	28W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



Secondary Reflector



Specular



Chrome Black



White



Matt




Black




Gold


Twin SSA68 134*68




Trip SSA68 198*68




Quadri SSA68 134*134




Twin TSA68 136*70



Trip TSA6 200*70




Quadri TSA68 136*136




START Series
DOWNLIGHT / Adjustable



SSA125/TSA125
Downlight



Drawing

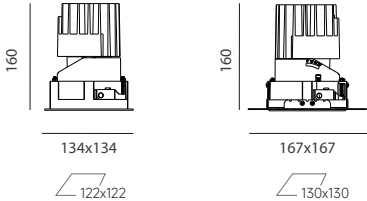

Order Options

18W 1400Lm-1700Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA125-CC930L20S-X	134*160mm	1600 lm	36 V	18 W	21 W	90	3000K	20°
SSA125-CC940L20S-X	134*160mm	1700 lm	36 V	18 W	21 W	90	4000K	20°
SSA125-CC930L35S-X	134*160mm	1600 lm	36 V	18 W	21 W	90	3000K	35°
SSA125-CC940L35S-X	134*160mm	1700 lm	36 V	18 W	21 W	90	4000K	35°
SSA125-CC930L50S-X	134*160mm	1400 lm	36 V	18 W	21 W	90	3000K	50°
SSA125-CC940L50S-X	134*160mm	1500 lm	36 V	18 W	21 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

25W 1900Lm-2300Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA125-CD930L20S-X	134*160mm	2200 lm	36 V	25 W	28 W	90	3000K	20°
SSA125-CD940L20S-X	134*160mm	2300 lm	36 V	25 W	28 W	90	4000K	20°
SSA125-CD930L35S-X	134*160mm	2200 lm	36 V	25 W	28 W	90	3000K	35°
SSA125-CD940L35S-X	134*160mm	2300 lm	36 V	25 W	28 W	90	4000K	35°
SSA125-CD930L50S-X	134*160mm	1900 lm	36 V	25 W	28 W	90	3000K	50°
SSA125-CD940L50S-X	134*160mm	2000 lm	36 V	25 W	28 W	90	4000K	50°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)




START Series
DOWNLIGHT / Adjustable



SSA150/TSA150
Downlight



Drawing

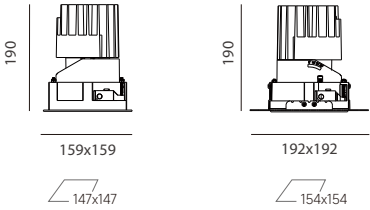

Order Options


25W 1700Lm-2500Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA150-CD930L20S-X	162*190mm	2400 lm	36 V	25 W	28 W	90	3000K	20°
SSA150-CD940L20S-X	162*190mm	2500 lm	36 V	25 W	28 W	90	4000K	20°
SSA150-CD930L35S-X	162*190mm	2400 lm	36 V	25 W	28 W	90	3000K	35°
SSA150-CD940L35S-X	162*190mm	2500 lm	36 V	25 W	28 W	90	4000K	35°
SSA150-CD930L50S-X	162*190mm	1700 lm	36 V	25 W	28 W	90	3000K	50°
SSA150-CD940L50S-X	162*190mm	1800 lm	36 V	25 W	28 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

38W 2600Lm-3300Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA150-CF930L20S-X	162*190mm	3200 lm	36 V	38 W	42 W	90	3000K	20°
SSA150-CF940L20S-X	162*190mm	3300 lm	36 V	38 W	42 W	90	4000K	20°
SSA150-CF930L35S-X	162*190mm	3200 lm	36 V	38 W	42 W	90	3000K	35°
SSA150-CF940L35S-X	162*190mm	3300 lm	36 V	38 W	42 W	90	4000K	35°
SSA150-CF930L50S-X	162*190mm	2600 lm	36 V	38 W	42 W	90	3000K	50°
SSA150-CF940L50S-X	162*190mm	2700 lm	36 V	38 W	42 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



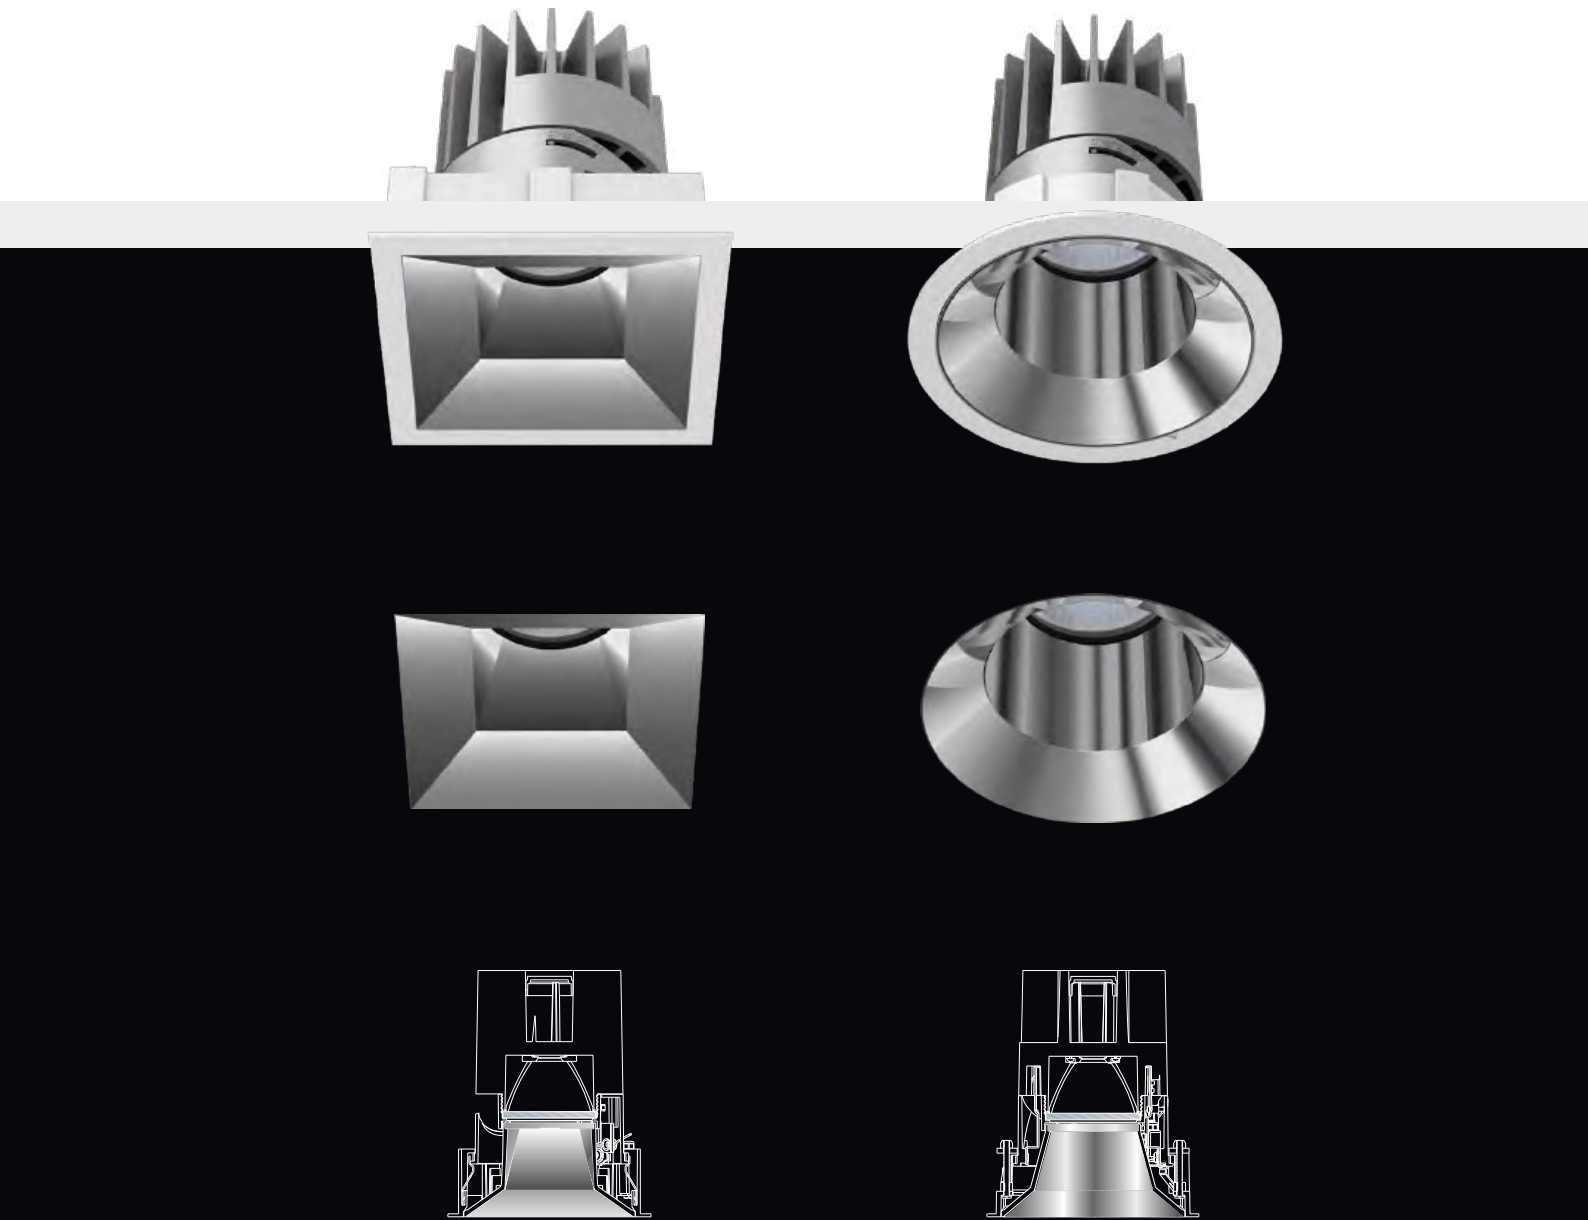


Fixed





Aesthetic design trim available in round or square shape.
Three sizes with LED wattages 13W-38W.
Deep recessed secondary reflector generates visual comfort

Fixed

Meticulous to detail
Interchangeable design
Best optics control
Guarantee maximal eye comfort

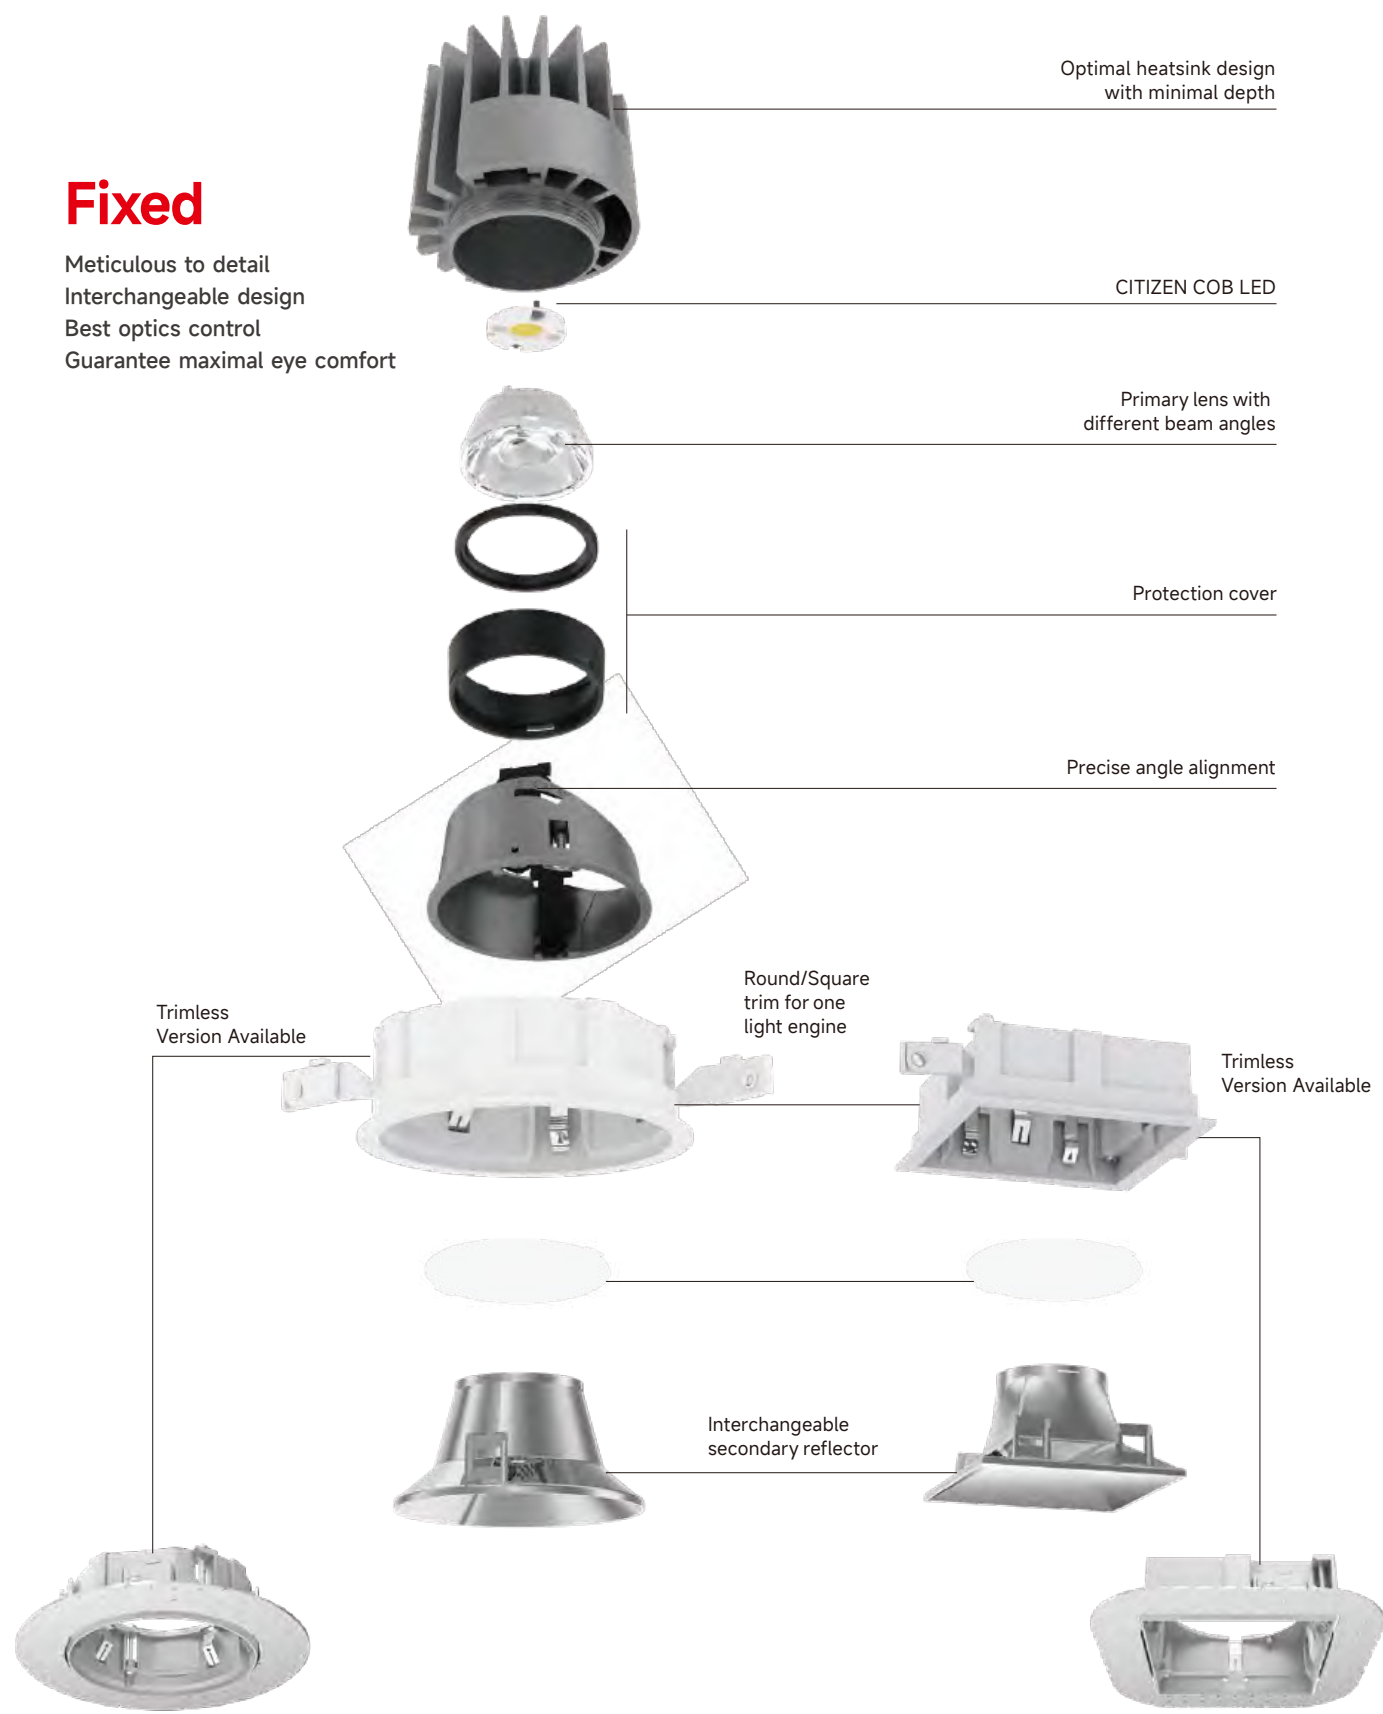

FIXED

					
SRF100	TRF100	SRF125	TRF125	SRF150	TRF150
					
					
SSF100	TSF100	SSF125	TSF125	SSF150	TSF150
					



Downlight
SRF100/125/150




Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:ON-OFF, Phase, 1-10V, Dali
- Beam angle:20°, 40°, 50°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Type



Light distribution



TRIM




TRIMLESS




Secondary Reflector



SRF100/TRF100
Downlight



Drawing

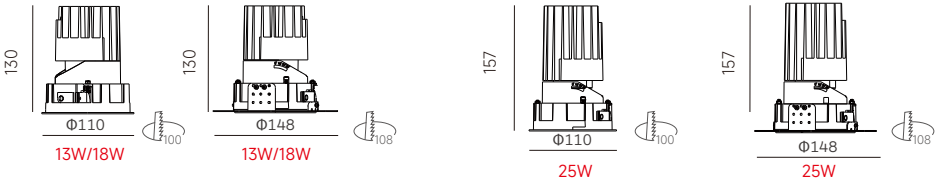

13W 1050Lm-1200Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRF100-CB930L25S-X	Φ110*130mm	1050 lm	36 V	13 W	15 W	90	3000K	25°
SRF100-CB940L25S-X	Φ110*130mm	1100 lm	36 V	13 W	15 W	90	4000K	25°
SRF100-CB930L30S-X	Φ110*130mm	1100 lm	36 V	13 W	15 W	90	3000K	30°
SRF100-CB940L30S-X	Φ110*130mm	1200 lm	36 V	13 W	15 W	90	4000K	30°
SRF100-CB930L40S-X	Φ110*130mm	1100 lm	36 V	13 W	15 W	90	3000K	40°
SRF100-CB940L40S-X	Φ110*130mm	1200 lm	36V	13 W	15 W	90	4000K	40°
SRF100-CB930L45S-X	Φ110*130mm	1050 lm	36 V	13 W	15 W	90	3000K	45°
SRF100-CB940L45S-X	Φ110*130mm	1100 lm	36 V	13 W	15 W	90	4000K	45°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

18W 1500Lm-1600Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRF100-CC930L20S-X	Φ110*130mm	1400 lm	36 V	18 W	21 W	90	3000K	20°
SRF100-CC940L20S-X	Φ110*130mm	1500 lm	36 V	18 W	21 W	90	4000K	20°
SRF100-CC930L30S-X	Φ110*130mm	1500 lm	36 V	18 W	21 W	90	3000K	30°
SRF100-CC940L30S-X	Φ110*130mm	1600 lm	36 V	18 W	21 W	90	4000K	30°
SRF100-CC930L40S-X	Φ110*130mm	1500 lm	36 V	18 W	21 W	90	3000K	40°
SRF100-CC940L40S-X	Φ110*130mm	1600 lm	36 V	18 W	21 W	90	4000K	40°
SRF100-CC930L45S-X	Φ110*130mm	1500 lm	36 V	18 W	21 W	90	3000K	45°
SRF100-CC940L45S-X	Φ110*130mm	1600 lm	36 V	18 W	21 W	90	4000K	45°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

25W 1800Lm-2000Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRF100-CD930L20S-X	Φ110*157mm	1800 lm	36V	25W	28W	90	3000K	20°
SRF100-CD940L20S-X	Φ110*157mm	1900 lm	36V	25W	28W	90	4000K	20°
SRF100-CD930L36S-X	Φ110*157mm	1900 lm	36V	25W	28W	90	3000K	36°
SRF100-CD940L36S-X	Φ110*157mm	2000 lm	36V	25W	28W	90	4000K	36°
SRF100-CD930L50S-X	Φ110*157mm	1800 lm	36V	25W	28W	90	3000K	50°
SRF100-CD940L50S-X	Φ110*157mm	1900 lm	36V	25W	28W	90	4000K	50°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



SRF125/TRF125
Downlight



Drawing

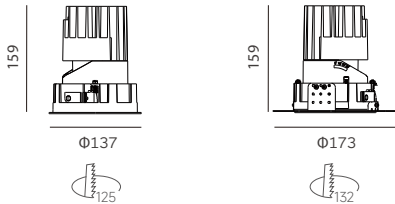


Order Options

18 W 1300lm-1600mCITIZEN								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRF125-CC930L28S-X	Φ137*159mm	1500 lm	36 V	18 W	21W	90	3000K	28°
SRF125-CC940L28S-X	Φ137*159mm	1600 lm	36 V	18 W	21W	90	4000K	28°
SRF125-CC930L35S-X	Φ137*159mm	1500 lm	36 V	18 W	21W	90	3000K	35°
SRF125-CC940L35S-X	Φ137*159mm	1600 lm	36 V	18 W	21W	90	4000K	35°
SRF125-CC930L45S-X	Φ137*159mm	1300 lm	36 V	18 W	21W	90	3000K	45°
SRF125-CC940L45S-X	Φ137*159mm	1400 lm	36 V	18 W	21W	90	4000K	45°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)								


25 W 1800lm-2200lmCITIZEN								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SRF125-CD930L28S-X	Φ137*159mm	2100 lm	36 V	25W	28W	90	3000K	28°
SRF125-CD940L28S-X	Φ137*159mm	2200 lm	36 V	25W	28W	90	4000K	28°
SRF125-CD930L35S-X	Φ137*159mm	2100 lm	36 V	25W	28W	90	3000K	35°
SRF125-CD940L35S-X	Φ137*159mm	2200 lm	36 V	25W	28W	90	4000K	35°
SRF125-CD930L45S-X	Φ137*159mm	1800 lm	36 V	25W	28W	90	3000K	45°
SRF125-CD940L45S-X	Φ137*159mm	1900 lm	36 V	25W	28W	90	4000K	45°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)								



SRF150/TRF150
Downlight



Drawing



Order Options

25 W 1900lm-2000lmCITIZEN								
Code	Size	System LM	LED Voltage	LED Current	System W	CRI	CCT	Beam
SRF150-CD930R28S-X	Φ162*190mm	1900 lm	36 V	700mA	28W	90	3000K	28°
SRF150-CD940R28S-X	Φ162*190mm	2000 lm	36 V	700mA	28W	90	4000K	28°
SRF150-CD930R32S-X	Φ162*190mm	1900 lm	36 V	700mA	28W	90	3000K	32°
SRF150-CD940R32S-X	Φ162*190mm	2000 lm	36 V	700mA	28W	90	4000K	32°
SRF150-CD930R50S-X	Φ162*190mm	1900 lm	36 V	700mA	28W	90	3000K	50°
SRF150-CD940R50S-X	Φ162*190mm	2000 lm	36 V	700mA	28W	90	4000K	50°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)								

38 W 2700lm-2900lmCITIZEN								
Code	Size	System LM	LED Voltage	LED Current	System W	CRI	CCT	Beam
SRF150-CF930R28S-X	Φ78*98mm	2700 lm	36 V	1050mA	42W	90	3000K	28°
SRF150-CF940R28S-X	Φ78*98mm	2900 lm	36 V	1050mA	42W	90	4000K	28°
SRF150-CF930R32S-X	Φ78*98mm	2700 lm	36 V	1050mA	42W	90	3000K	32°
SRF150-CF940R32S-X	Φ78*98mm	2900 lm	36 V	1050mA	42W	90	4000K	32°
SRF150-CF930R50S-X	Φ78*98mm	2700 lm	36 V	1050mA	42W	90	3000K	50°
SRF150-CF940R50S-X	Φ78*98mm	2900 lm	36 V	1050mA	42W	90	4000K	50°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)								



Downlight
SSF100/125/150




Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:ON-OFF, Phase, 1-10V, Dali
- Beam angle:20°, 40°, 50°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Type



Light distribution




TRIM




TRIMLESS




Secondary Reflector

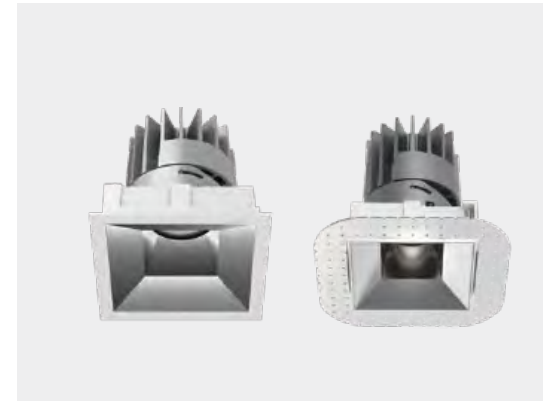

SSF100/TSF100
Downlight



Drawing

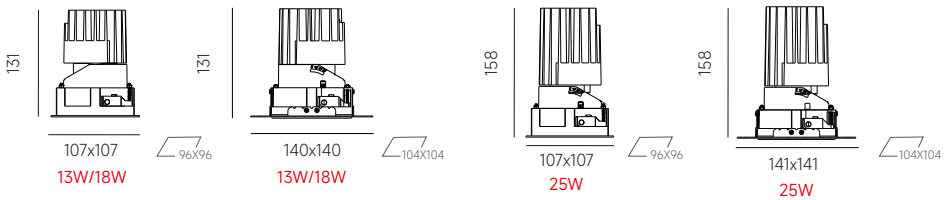

Order Options

13W 1050Lm-1200Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSF100-CB930L25S-X	107*131mm	1050 lm	36 V	13 W	15 W	90	3000K	25°
SSF100-CB940L25S-X	107*131mm	1100 lm	36 V	13 W	15 W	90	4000K	25°
SSF100-CB930L30S-X	107*131mm	1100 lm	36 V	13 W	15 W	90	3000K	30°
SSF100-CB940L30S-X	107*131mm	1200 lm	36 V	13 W	15 W	90	4000K	30°
SSF100-CB930L40S-X	107*131mm	1100 lm	36 V	13 W	15 W	90	3000K	40°
SSF100-CB940L40S-X	107*131mm	1200 lm	36V	13 W	15 W	90	4000K	40°
SSF100-CB930L45S-X	107*131mm	1050 lm	36 V	13 W	15 W	90	3000K	45°
SSF100-CB940L45S-X	107*131mm	1100 lm	36 V	13 W	15 W	90	4000K	45°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

18W 1500Lm-1600Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSF100-CC930L20S-X	107*131mm	1400 lm	36 V	18 W	21 W	90	3000K	20°
SSF100-CC940L20S-X	107*131mm	1500 lm	36 V	18 W	21 W	90	4000K	20°
SSF100-CC930L30S-X	107*131mm	1500 lm	36 V	18 W	21 W	90	3000K	30°
SSF100-CC940L30S-X	107*131mm	1600 lm	36 V	18 W	21 W	90	4000K	30°
SSF100-CC930L40S-X	107*131mm	1500 lm	36 V	18 W	21 W	90	3000K	40°
SSF100-CC940L40S-X	107*131mm	1600 lm	36 V	18 W	21 W	90	4000K	40°
SSF100-CC930L45S-X	107*131mm	1500 lm	36 V	18 W	21 W	90	3000K	45°
SSF100-CC940L45S-X	107*131mm	1600 lm	36 V	18 W	21 W	90	4000K	45°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

25W 1800Lm-2000Lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSF100-CD930L20S-X	107*158mm	1800 lm	36V	25W	28W	90	3000K	20°
SSF100-CD940L20S-X	107*158mm	1900 lm	36V	25W	28W	90	4000K	20°
SSF100-CD930L36S-X	107*158mm	1900 lm	36V	25W	28W	90	3000K	36°
SSF100-CD940L36S-X	107*158mm	2000 lm	36V	25W	28W	90	4000K	36°
SSF100-CD930L50S-X	107*158mm	1800 lm	36V	25W	28W	90	3000K	50°
SSF100-CD940L50S-X	107*158mm	1900 lm	36V	25W	28W	90	4000K	50°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



SSF125/TSF125
Downlight



Drawing

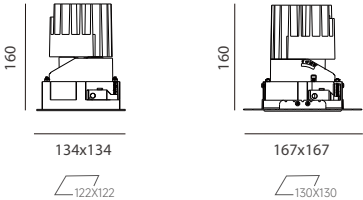

Order Options

18 W 1300lm-1600m								
CITIZEN								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSF125-CC930L28S-X	134*160mm	1500 lm	36 V	18 W	21W	90	3000K	28°
SSF125-CC940L28S-X	134*160mm	1600 lm	36 V	18 W	21W	90	4000K	28°
SSF125-CC930L35S-X	134*160mm	1500 lm	36 V	18 W	21W	90	3000K	35°
SSF125-CC940L35S-X	134*160mm	1600 lm	36 V	18 W	21W	90	4000K	35°
SSF125-CC930L45S-X	134*160mm	1300 lm	36 V	18 W	21W	90	3000K	45°
SSF125-CC940L45S-X	134*160mm	1400 lm	36 V	18 W	21W	90	4000K	45°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

25 W 1800lm-2200lm								
CITIZEN								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSF125-CD930L28S-X	134*160mm	2100 lm	36 V	25W	28W	90	3000K	28°
SSF125-CD940L28S-X	134*160mm	2200 lm	36 V	25W	28W	90	4000K	28°
SSF125-CD930L35S-X	134*160mm	2100 lm	36 V	25W	28W	90	3000K	35°
SSF125-CD940L35S-X	134*160mm	2200 lm	36 V	25W	28W	90	4000K	35°
SSF125-CD930L45S-X	134*160mm	1800 lm	36 V	25W	28W	90	3000K	45°
SSF125-CD940L45S-X	134*160mm	1900 lm	36 V	25W	28W	90	4000K	45°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



SSF150/TSF150
Downlight



Drawing

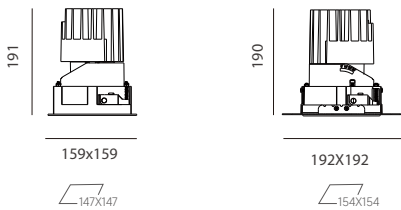

Order Options

25 W 1900lm-2000lm								
CITIZEN								
Code	Size	System LM	LED Voltage	LED Current	System W	CRI	CCT	Beam
SSF150-CD930R28S-X	159x191mm	1900 lm	36 V	700mA	28W	90	3000K	28°
SSF150-CD940R28S-X	159x191mm	2000 lm	36 V	700mA	28W	90	4000K	28°
SSF150-CD930R32S-X	159x191mm	1900 lm	36 V	700mA	28W	90	3000K	32°
SSF150-CD940R32S-X	159x191mm	2000 lm	36 V	700mA	28W	90	4000K	32°
SSF150-CD930R50S-X	159x191mm	1900 lm	36 V	700mA	28W	90	3000K	50°
SSF150-CD940R50S-X	159x191mm	2000 lm	36 V	700mA	28W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

38 W 2700lm-2900lm								
CITIZEN								
Code	Size	System LM	LED Voltage	LED Current	System W	CRI	CCT	Beam
SSF150-CF930R28S-X	159x191mm	2700 lm	36 V	1050mA	42W	90	3000K	28°
SSF150-CF940R28S-X	159x191mm	2900 lm	36 V	1050mA	42W	90	4000K	28°
SSF150-CF930R32S-X	159x191mm	2700 lm	36 V	1050mA	42W	90	3000K	32°
SSF150-CF940R32S-X	159x191mm	2900 lm	36 V	1050mA	42W	90	4000K	32°
SSF150-CF930R50S-X	159x191mm	2700 lm	36 V	1050mA	42W	90	3000K	50°
SSF150-CF940R50S-X	159x191mm	2900 lm	36 V	1050mA	42W	90	4000K	50°




Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)




WALL WASHER


Meticulous to detail
Interchangeable design
Best optics control
Guarantee maximal eye comfort

WALL WASHER


					
SRW100	TRW100	SRW125	TRW125	SRW150	TRW150
					
					
SSW100	TSW100	SSW125	TSW125	SSW150	TSW150
					

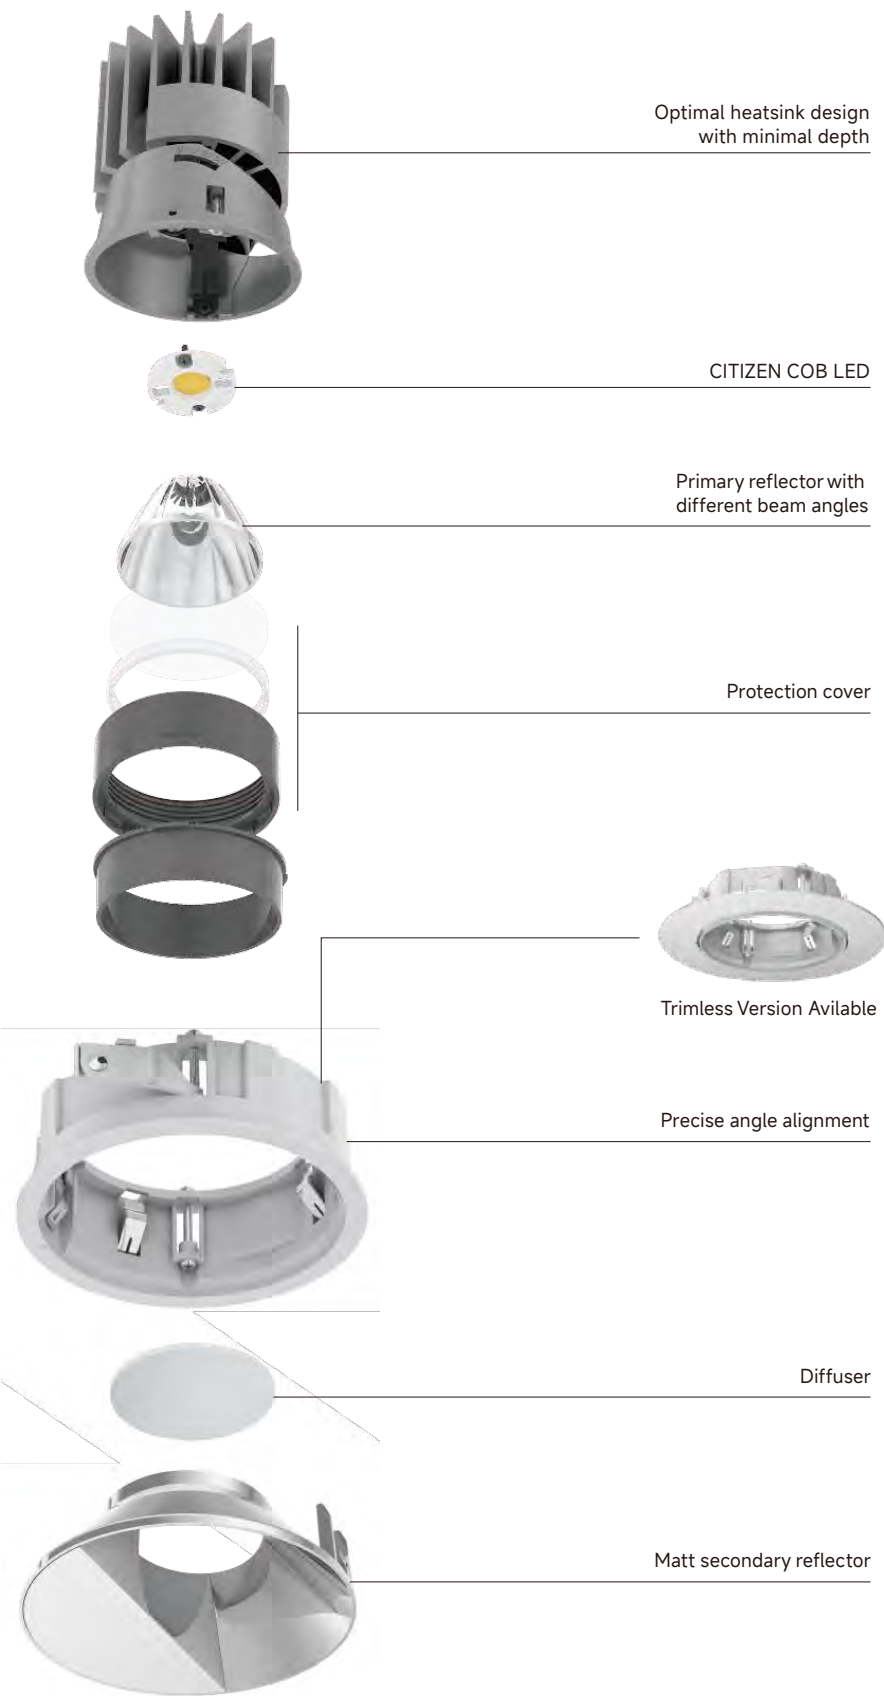

The installation is based on 3M height wall
Evenly illuminated wall without dark shadow at the corner

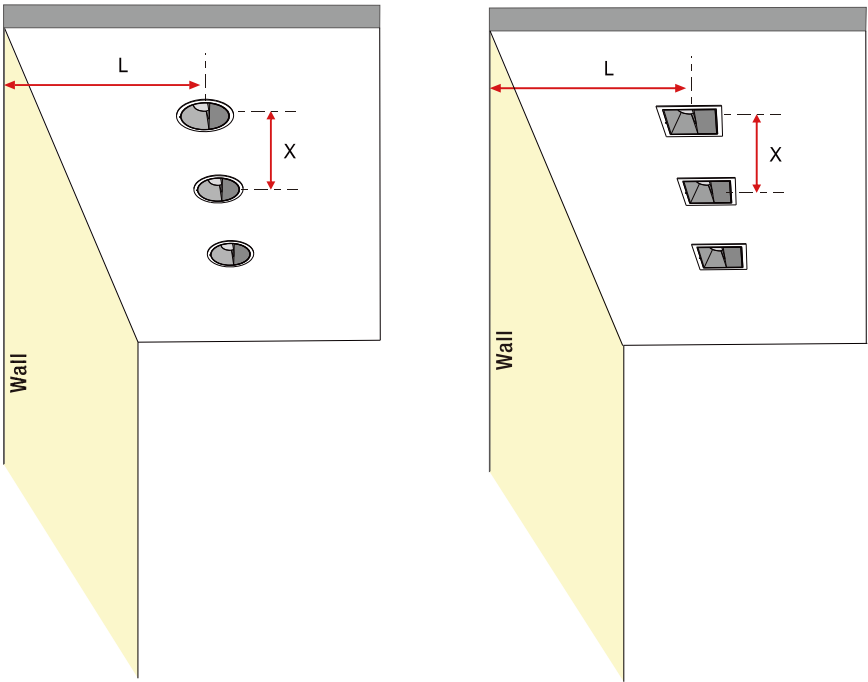


Suggestions on Installation Distance for Uniform Lighting Effects

		X(mm) L(mm) MODEL	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
		SRW100	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
		SRW125	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
		SRW150	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm

		X(mm) L(mm) MODEL	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
		SSW100	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm	1250 mm
		SSW125	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm	1250 mm
		SSW150	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm	1250 mm

START Series
DOWNLIGHT / WALL WASHER

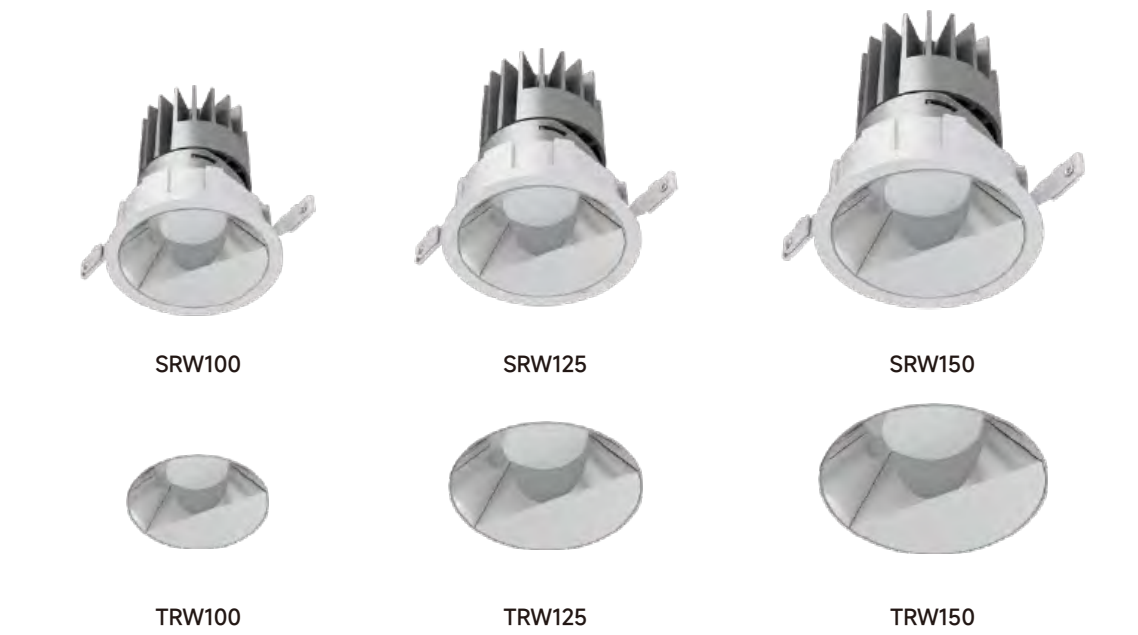

Downlight
SRW100/125/150

CE

5
5 Years Warranty

AC
220-240V

IP
20

UGR
<19

CRI
>90

CITIZEN


Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:ON-OFF, Phase, 1-10V, Dali
- Beam angle:20°, 40°, 50°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Type



Light distribution



TRIM




TRIMLESS



SRW100/TRW100
Downlight / Wall Washer



Drawing

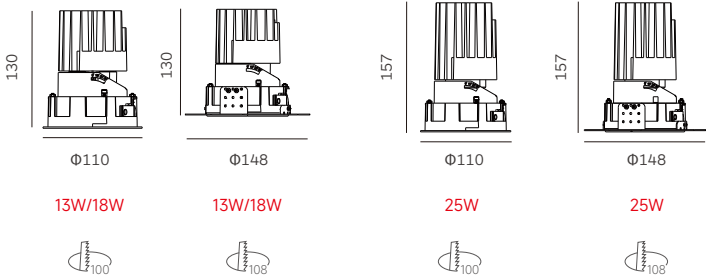

Order Options

13W 600lm-650lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SRW100-CB930LW1M-X	Φ110*130mm	600 lm	36 V	13W	15W	90	3000K
SRW100-CB940LW1M-X	Φ110*130mm	650 lm	36 V	13W	15W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							

18W 800lm-850lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SRW100-CC930LW1M-X	Φ110*130mm	800 lm	36 V	18W	21W	90	3000K
SRW100-CC940LW1M-X	Φ110*130mm	850 lm	36 V	18W	21W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							


25W 1000lm-1100lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SRW100-CD930LW1M-X	Φ110*157mm	1000 lm	36 V	25W	28W	90	3000K
SRW100-CD940LW1M-X	Φ110*157mm	1100 lm	36 V	25W	28W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							



SRW125/TRW125
Downlight / Wall Washer



Drawing

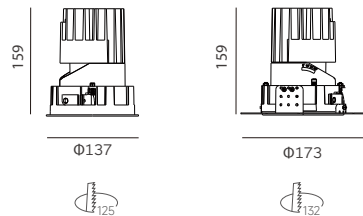

Order Options

18W 800lm-900lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SRW125-CC930LW1M-X	Φ137*159mm	800 lm	36 V	18W	21W	90	3000K
SRW125-CC940LW1M-X	Φ137*159mm	900 lm	36 V	18W	21W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							


25W 1100lm-1200lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SRW125-CD930LW1M-X	Φ137*159mm	1100 lm	36 V	25W	28W	90	3000K
SRW125-CD940LW1M-X	Φ137*159mm	1200 lm	36 V	25W	28W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							



SRW150/TRW150
Downlight / Wall Washer



Drawing

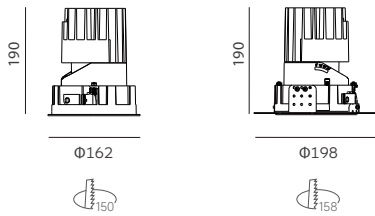

Order Options

25W 1000lm-1100lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SRW150-CD930LW1M-X	Φ162*190mm	1000 lm	36 V	25W	28W	90	3000K
SRW150-CD940LW1M-X	Φ162*190mm	1100 lm	36 V	25W	28W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							

38W 1400lm-1500lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SRW150-CF930LW1M-X	Φ162*190mm	1400 lm	36 V	38W	42W	90	3000K
SRW150-CF940LW1M-X	Φ162*190mm	1500 lm	36 V	38W	42W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							



Downlight
SSW100/125/150

CE

5
5 Years Warranty

AC
220-240V

IP
20

UGR
<19

CRI
>90

CITIZEN


Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:ON-OFF, Phase, 1-10V, Dali
- Beam angle:20°, 40°, 50°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Type



Light distribution



TRIM



TRIMLESS



SSW100/TSW100

Downlight / Wall Washer

Matt

White

Black

Drawing

131

107x107

96x96

13W/18W

131

140x140

104x104

13W/18W

158

107x107

96x96

25W

158

141x141

104x104

25W

Order Options

13W 800lm-900lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SSW100-CB930LW1M-X	107*131mm	800 lm	36 V	13W	15W	90	3000K
SSW100-CB940LW1M-X	107*131mm	900 lm	36 V	13W	15W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							

18W 1100lm-1200lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SSW100-CC930LW1M-X	107*131mm	1100 lm	36 V	18W	21W	90	3000K
SSW100-CC940LW1M-X	107*131mm	1200 lm	36 V	18W	21W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							

25W 1100lm-1200lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SSW100-CD930LW1M-X	107*158mm	1100 lm	36 V	25W	28W	90	3000K
SSW100-CD940LW1M-X	107*158mm	1200 lm	36 V	25W	28W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							




SSW125/TSW125

Downlight / Wall Washer




Drawing



Order Options

18W 800lm-900lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SSW125-CC930LW1M-X	134*160mm	800 lm	36 V	18W	21W	90	3000K
SSW125-CC940LW1M-X	134*160mm	900 lm	36 V	18W	21W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							

25W 1100lm-1200lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SSW125-CD930LW1M-X	134*160mm	1100 lm	36 V	25W	28W	90	3000K
SSW125-CD940LW1M-X	134*160mm	1200 lm	36 V	25W	28W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							

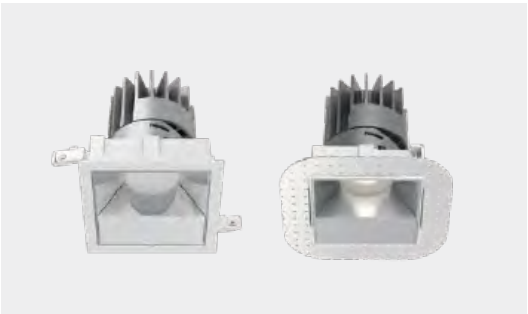


SSW150/TSW150

Downlight / Wall Washer



Drawing




Order Options

25W 1000lm-1100lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SSW150-CD930LW1M-X	159*191mm	1000 lm	36 V	25W	28W	90	3000K
SSW150-CD940LW1M-X	159*191mm	1100 lm	36 V	25W	28W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							

38W 1400lm-1500lm		CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT
SSW150-CF930LW1M-X	192*190mm	1400 lm	36 V	38W	42W	90	3000K
SSW150-CF940LW1M-X	192*190mm	1500 lm	36 V	38W	42W	90	4000K
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)							



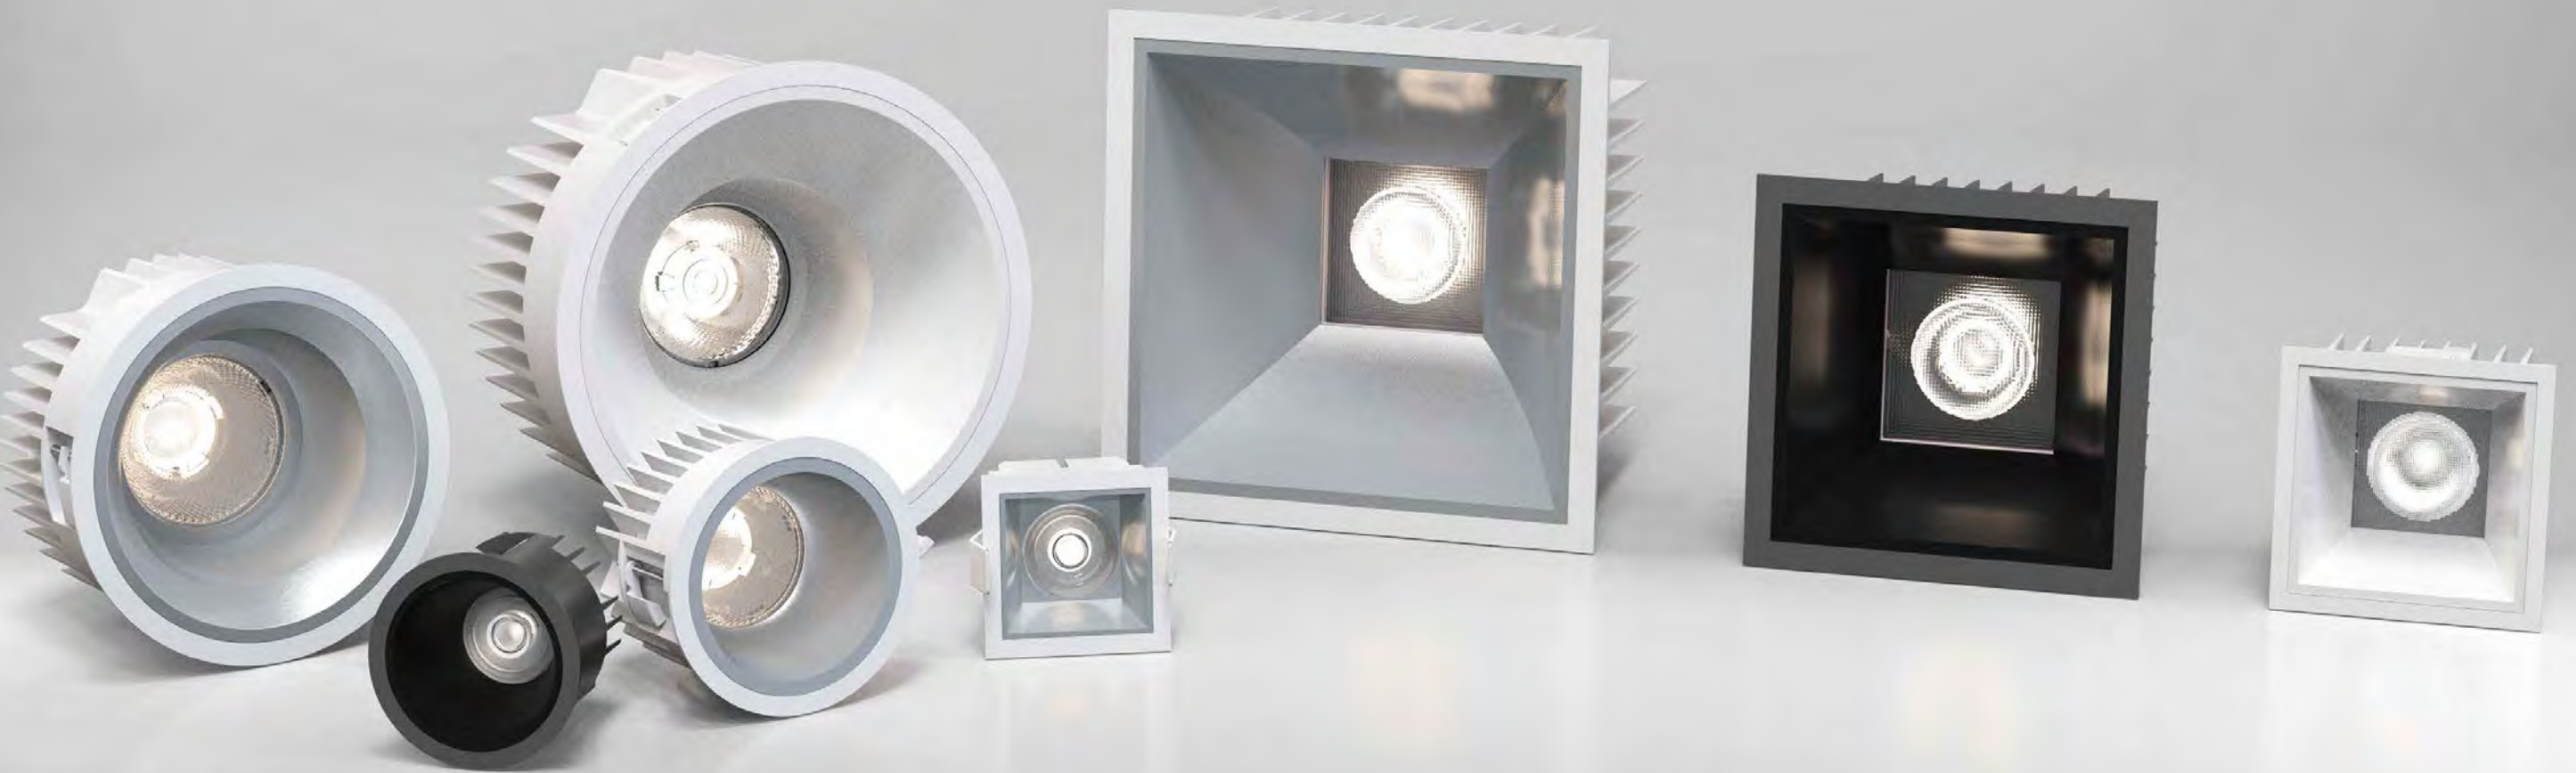

DOME

UGR<19 Super Comfort
Deep recessed design to achieve super eye comfort.
Attractive appearance with high efficacy.

DOME Series
DOWNLIGHT



D75
7.5W 750 lm
11W 950 lm




D100
8.5W 1200Lm
12W 1600Lm



D150
17W 2300Lm
24W 3100Lm




D200
24W 3300Lm
36W 4800Lm
51W 5600Lm



DS65
7.5W 750 lm
11W 950 lm



DS100
8.5W 1000Lm
12W 1400Lm



DS150
17W 2050Lm
24W 2800Lm




DS200
24W 2800Lm
36W 3900Lm

- Deep recessed design to achieve super eye comfort.
- Attractive appearance with high efficacy and functionality.
- Passive cooling management ensures durability.
- Optimal lens technology with narrow, medium and flood beam angles guarantee light quality.
- Interchangeable reflectors of matt, white and black colours. provide maximum design freedom.

DOME Series
DOWNLIGHT






Installation

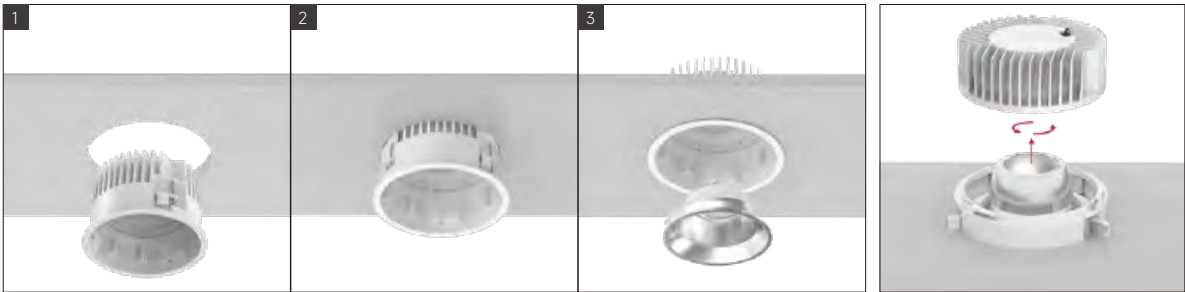


D200 fixture can be taken off from the back of the ceiling, which is easy and convenient for maintenance.

Creative Ceiling Treatment

Suitable for 1-25mm thickness ceiling board.

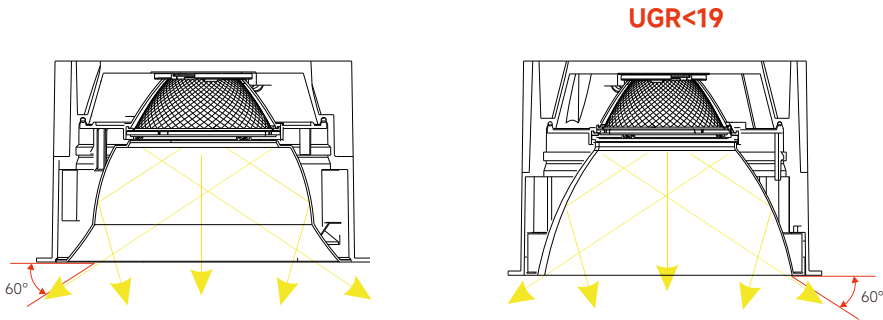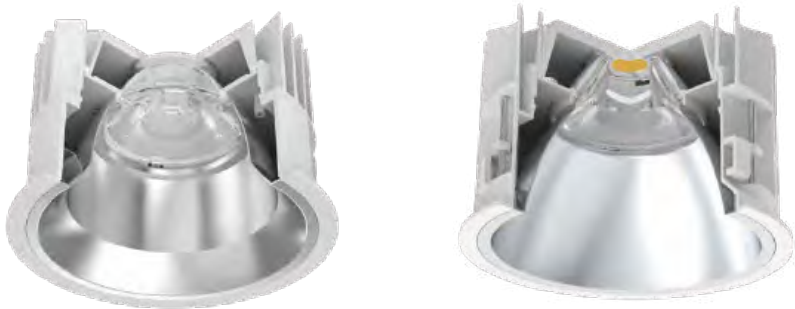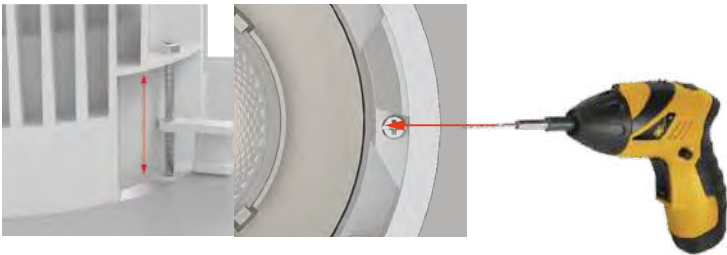

DOME Series
DOWNLIGHT/ ROUND

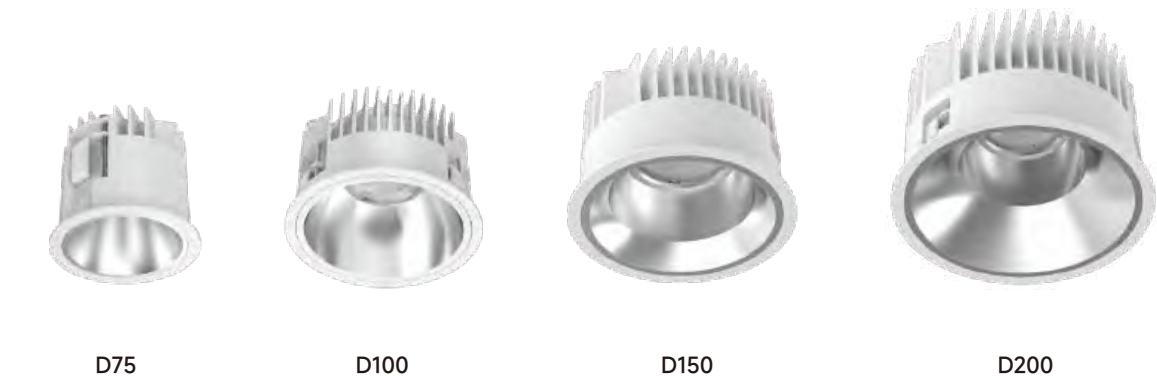

Downlight
D75/100/150/200




Features

- Cutout of 75mm/100mm/150mm/200mm.
- Integrated mechanicals of heatsink and mounting ring to reduce components.
- Deep recessed design achieves super eye comfort.
- Attractive appearance with efficiency and functionality.
- Passive cooling heatsink design ensures durability.


Specifications

- Dimming modes:Non-Dim , Phase, 1-10V, Dali
- Beam angle:18°,25°,30°, 50°,60°
- Physical: aluminium, powder coating
- Accessories: Secondary reflector, Lens

Type




Light distribution




Secondary Reflector



D75
DOWNLIGHT



Drawing





Order Options

7.5W 750 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D75-7.5W-830-25	Ø84*72mm	700 lm	31 V	250mA	7.5W	9W	83	3000K	25°
D75-7.5W-840-25	Ø84*72mm	750 lm	31 V	250mA	7.5W	9W	83	4000K	25°
D75-7.5W-830-50	Ø84*72mm	700 lm	31 V	250mA	7.5W	9W	83	3000K	50°
D75-7.5W-840-50	Ø84*72mm	750 lm	31 V	250mA	7.5W	9W	83	4000K	50°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

11W 950 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D75-11W-830-25	Ø84*72mm	900 lm	31 V	350mA	11W	13W	83	3000K	25°
D75-11W-840-25	Ø84*72mm	950 lm	31 V	350mA	11W	13W	83	4000K	25°
D75-11W-830-50	Ø84*72mm	900 lm	31 V	350mA	11W	13W	83	3000K	50°
D75-11W-840-50	Ø84*72mm	950 lm	31 V	350mA	11W	13W	83	4000K	50°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									



D100
Downlight



Order Options


8.5W 1200 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D100-8.5W-830-30	Ø110*78mm	1200 lm	34V	250mA	8.5W	10W	83	3000K	30°
D100-8.5W-840-30	Ø110*78mm	1300 lm	34V	250mA	8.5W	10W	83	4000K	30°
D100-8.5W-830-50	Ø110*78mm	1100 lm	34V	250mA	8.5W	10W	83	3000K	50°
D100-8.5W-840-50	Ø110*78mm	1200 lm	34V	250mA	8.5W	10W	83	4000K	50°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

12W 1600 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D100-12W-830-30	Ø110*78mm	1600 lm	34V	350mA	12W	14W	83	3000K	30°
D100-12W-840-30	Ø110*78mm	1700 lm	34V	350mA	12W	14W	83	4000K	30°
D100-12W-830-50	Ø110*78mm	1500 lm	34V	350mA	12W	14W	83	3000K	50°
D100-12W-840-50	Ø110*78mm	1600 lm	34V	350mA	12W	14W	83	4000K	50°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									


DOME Series
DOWNLIGHT



D150
Downlight



Drawing



Order Options

17W 2300 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D150-17W-830-30	Φ162*100mm	2300 lm	36 V	500mA	17W	20W	83	3000K	30°
D150-17W-840-30	Φ162*100mm	2500 lm	36 V	500mA	17W	20W	83	4000K	30°
D150-17W-830-65	Φ162*100mm	1900 lm	36 V	500mA	17W	20W	83	3000K	65°
D150-17W-840-65	Φ162*100mm	2000 lm	36 V	500mA	17W	20W	83	4000K	65°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

24W 3100 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D150-24W-830-30	Φ162*100mm	3100 lm	36 V	700mA	24W	26W	83	3000K	30°
D150-24W-840-30	Φ162*100mm	3300 lm	36 V	700mA	24W	26W	83	4000K	30°
D150-24W-830-65	Φ162*100mm	2600 lm	36 V	700mA	24W	26W	83	3000K	65°
D150-24W-840-65	Φ162*100mm	2800 lm	36 V	700mA	24W	26W	83	4000K	65°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



D200
Downlight



Drawing



Order Options

24W 3300 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D200-24W-830-18	Φ216*131mm	3300 lm	36 V	700mA	24W	26W	83	3000K	18°
D200-24W-840-18	Φ216*131mm	3500 lm	36 V	700mA	24W	26W	83	4000K	18°
D200-24W-830-30	Φ216*131mm	3400 lm	36 V	700mA	24W	26W	83	3000K	30°
D200-24W-840-30	Φ216*131mm	3600 lm	36 V	700mA	24W	26W	83	4000K	30°
D200-24W-830-65	Φ216*131mm	2900 lm	36 V	700mA	24W	26W	83	3000K	65°
D200-24W-840-65	Φ216*131mm	3100 lm	36 V	700mA	24W	26W	83	4000K	65°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


36W 4800 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D200-36W-830-18	Φ216*131mm	4800 lm	36 V	1050mA	36W	40W	83	3000K	18°
D200-36W-840-18	Φ216*131mm	5100 lm	36 V	1050mA	36W	40W	83	4000K	18°
D200-36W-830-30	Φ216*131mm	4900 lm	36 V	1050mA	36W	40W	83	3000K	30°
D200-36W-840-30	Φ216*131mm	5200 lm	36 V	1050mA	36W	40W	83	4000K	30°
D200-36W-830-65	Φ216*131mm	4200 lm	36 V	1050mA	36W	40W	83	3000K	65°
D200-36W-840-65	Φ216*131mm	4500 lm	36 V	1050mA	36W	40W	83	4000K	65°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


51W 5600 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D200-51W-830-18	Φ216*131mm	5900 lm	36 V	1400mA	51W	55W	83	3000K	18°
D200-51W-840-18	Φ216*131mm	6300 lm	36 V	1400mA	51W	55W	83	4000K	18°
D200-51W-830-30	Φ216*131mm	6300 lm	36 V	1400mA	51W	55W	83	3000K	30°
D200-51W-840-30	Φ216*131mm	6700 lm	36 V	1400mA	51W	55W	83	4000K	30°
D200-51W-830-65	Φ216*131mm	5200 lm	36 V	1400mA	51W	55W	83	3000K	65°
D200-51W-840-65	Φ216*131mm	5600 lm	36 V	1400mA	51W	55W	83	4000K	65°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

DOME Series
DOWNLIGHT

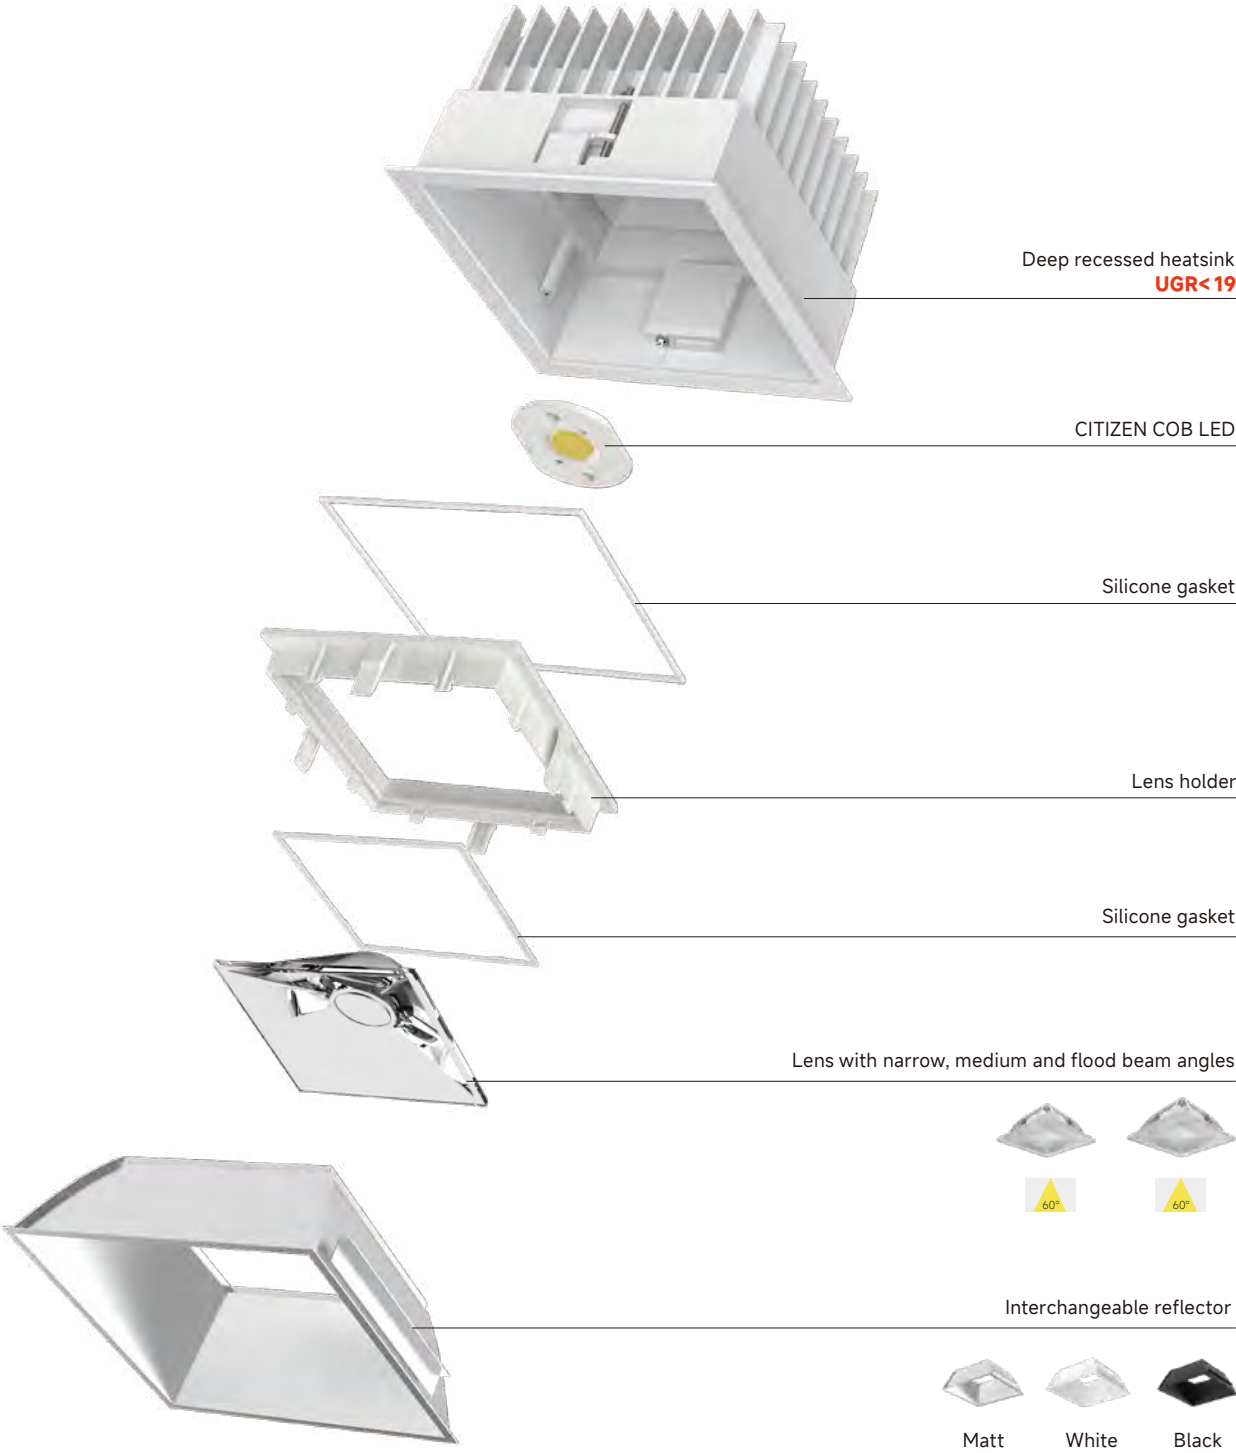

Installation

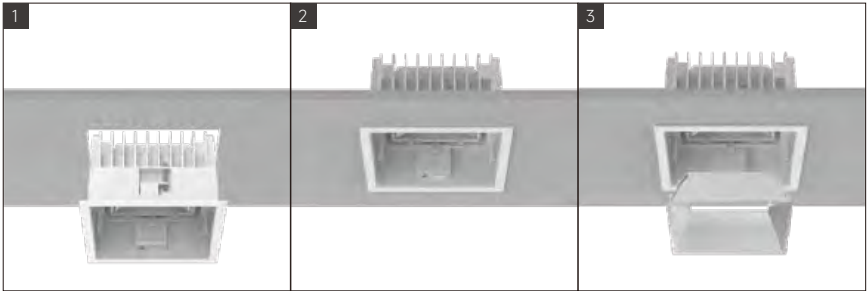

Creative Ceiling Treatment

Installed easily and securely in the ceiling, using two screw fixing mechanisms. Applying to 12-25mm thickness ceiling and to 1-12mm thickness ceiling with a fallen clip.



fit for ceiling thickness
12mm to 25mm




fit for ceiling thickness
1mm to 12mm



Foucs on every detail
Low glare for optimal eye comfort

DOME Series
DOWNLIGHT / SQUARE

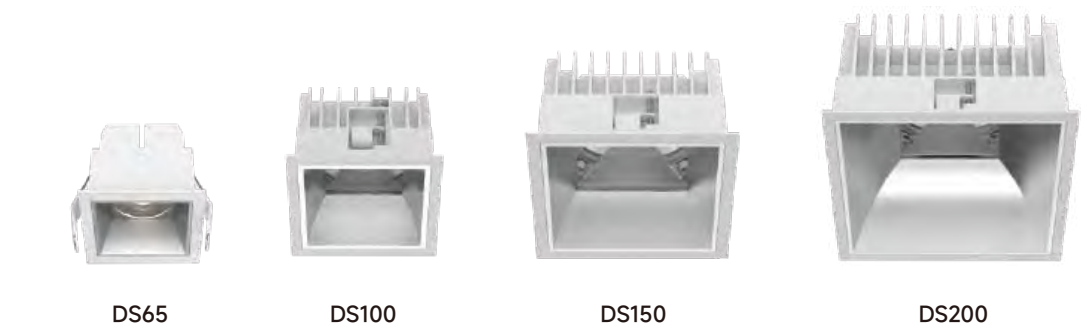

Downlight
DS65/100/150/200




Features

- Cutout of 65mm/ 100mm/150mm/200mm.
- Integrated mechanicals of heatsink and mounting ring to reduce components.
- Deep recessed design achieves super eye comfort.
- Attractive appearance with efficiency and functionality.
- Passive cooling heatsink design ensures durability.


Specifications

- Dimming modes:Non-Dim , Phase, 1-10V, Dali
- Beam angle:25°,60°,70°.
- Physical: aluminium, powder coating
- Accessories: Secondary reflector, Lens

Type




Light distribution




Secondary Reflector



DS65
DOWNLIGHT



Drawing



Order Options

7.5W 750 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS65-7.5W-830-25	75*61mm	700 lm	31 V	250mA	7.5W	9W	83	3000K	25°
DS65-7.5W-840-25	75*61mm	750 lm	31 V	250mA	7.5W	9W	83	4000K	25°
DS65-7.5W-830-60	75*61mm	700 lm	31 V	250mA	7.5W	9W	83	3000K	60°
DS65-7.5W-840-60	75*61mm	750 lm	31 V	250mA	7.5W	9W	83	4000K	60°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

11W 950 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS65-11W-830-25	75*61mm	900 lm	31 V	350mA	11W	13W	83	3000K	25°
DS65-11W-840-25	75*61mm	950 lm	31 V	350mA	11W	13W	83	4000K	25°
DS65-11W-830-60	75*61mm	900 lm	31 V	350mA	11W	13W	83	3000K	60°
DS65-11W-840-60	75*61mm	950 lm	31 V	350mA	11W	13W	83	4000K	60°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



DS100
DOWNLIGHT



Order Options


8.5W 1000lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS100-8.5W-830-60	110*79mm	1000 lm	36 V	250mA	8.5W	9W	83	3000K	60°
DS100-8.5W-840-60	110*79mm	1100 lm	36 V	250mA	8.5W	9W	83	4000K	60°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


12W 1400 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS100-12W-830-60	110*79mm	1400 lm	36 V	350mA	12W	14W	83	3000K	60°
DS100-12W-840-60	110*79mm	1500 lm	36 V	350mA	12W	14W	83	4000K	60°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

DOME Series
DOWNLIGHT / SQUARE

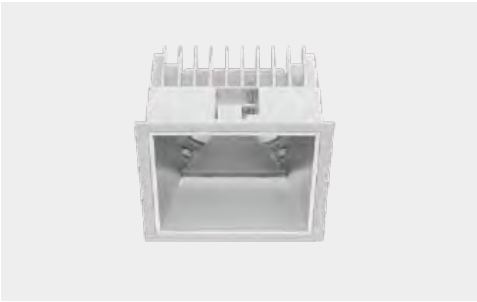


DS150
DOWNLIGHT



White Black

Drawing



Order Options

17W 2050 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS150-17W-830-65	167*100mm	2050 lm	36 V	500mA	17W	20W	83	3000K	65°
DS150-17W-840-65	167*100mm	2200 lm	36 V	500mA	17W	20W	83	4000K	65°


Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

24W 2800 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS150-24W-830-65	167*100mm	2800 lm	36 V	700mA	24W	26W	83	3000K	65°
DS150-24W-840-65	167*100mm	3000 lm	36 V	700mA	24W	26W	83	4000K	65°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)




DS200
DOWNLIGHT



White Black

Drawing



Order Options

24W 2800 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS200-24W-830-65	220*132mm	2800 lm	36 V	700mA	24W	26W	83	3000K	65°
DS200-24W-840-65	220*132mm	3000 lm	36 V	700mA	24W	26W	83	4000K	65°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

36W 3900 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS200-36W-830-65	220*132mm	3900 lm	36 V	1050mA	36W	40W	83	3000K	65°
DS200-36W-840-65	220*132mm	4200 lm	36 V	1050mA	36W	40W	83	4000K	65°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



DOME L

Attractive appearance with high efficacy.



DOME D100L
12W 1300Lm(3000K)



DOME D150L
18W 2200Lm(3000K)

DOME Series
DOWNLIGHT / SQUARE



D100L



D150L

Downlight
D100L/D150L




Features

- Cutout of 100mm,150mm;
- Integrated mechanicals of heatsink and mounting ring to reduce components.
- Deep recessed design achieves super eye comfort.
- Attractive appearance with efficiency and functionality.
- Passive cooling heatsink design ensures durability.

Specifications

- Dimming modes:Non-Dim , Phase, 1-10V, Dali
- Beam angle: 90°
- Physical: aluminium, powder coating
- Accessories: Secondary reflector, Lens

Type



Light distribution



downlight

Secondary Reflector




White Balck Matt



D100L
DOWNLIGHT



Drawing




Order Options


12W 1400 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D100L-12W-830-90	Φ112*53mm	1300 lm	34V	350mA	12W	14W	83	3000K	90°
D100L-12W-840-90	Φ112*53mm	1400 lm	34V	350mA	12W	14W	83	4000K	90°



D150L
DOWNLIGHT



Drawing



Order Options

18W 2400 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D150L-18W-830-90	Φ162*60mm	2200 lm	26 V	700mA	18W	21W	83	3000K	90°
D150L-18W-840-90	Φ162*60mm	2400 lm	26 V	700mA	18W	21W	83	4000K	90°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



164IE-lite lighting



VTRIM



VTRIM

Perfect choice for specified architectural projects

Compatible with LED Modules

Wide range of design variants for different applications

Available in trimless version

Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)

Magnetic design for changing decorative ring without any tools

VTRIM Series
DOWNLIGHT

Module	L50				L50H				PRO 50																											
Ring																																				
					 				  																											
Trim									 																											
Reflector									     																											
Reflector																																				
																																				
 Matt White Black Gold  Red Orange Blue  Matt White  Matt White Black Gold  Matt White Black Gold  Matt White Black Gold  Matt White Black Gold  Matt White Black Gold  Matt White Black Gold  Matt White Black Gold 																																				
 Matt Black Gold  Transparency Yellow Green  Black Gold  Black White Wood Marble  Black White Wood Marble  Black Gold  Black White Wood Marble  Matt Black Gold  Matt Black Gold  Matt Black Gold 																																				
 Black glass  Black glass  Black glass																																				

VTRIM Series
DOWNLIGHT

	L50	L50H	PRO 50
Module			
Ring			 Forsted glass Honeycomb
Trim		 145X75	 147X80
Reflector		 Decoration Ring	
	 VSA1	 VSF2	 VSA4
	 VSAT1	 VSFT2	 VSAT4
	 Matt White Black Gold	 Matt White Black Gold Black White Wood Marble Black glass	 Matt White Black Matt Black Gold

	VRA1	VRF2
		Magnet —
		 White Black Wood Marble Black glass



VRA3



VRA4



VRF5



IP44





VRA1 VRF2 VRA3 VRA4 VRF5 VSA1 VSF2 VSA4



VTRIM / MODULE
DOWNLIGHT



L50



L50H



PRO 50

Downlight
L50/L50H/PRO50




Features

- Higher efficiency.
- Compact height design.
- Ultra bright in light.
- Extremely small in size.
- Smart heatsink design with airflow and body radiation.

Specifications

- Dimming modes:ON-OFF, PhaseDIM, 1-10V, Dali
- Beam angle:15°, 25°, 35°, 60°
- Physical: Die-casting, powder coating
- Accessories: linear spread lens, frosted glass, honeycomb louver


Type



Mountings



Light distribution



Compact heatsink consisting of fins generates optimal heat dissipation




L50
DOWNLIGHT
MODULE



Black

Drawing



Order Options

7.5W 700lm-750lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50-7.5W-930-15	Φ50*44mm	700 lm	31 V	250 mA	7.5W	9W	90	3000K	15°
L50-7.5W-940-15	Φ50*44mm	750 lm	31 V	250 mA	7.5W	9W	90	4000K	15°
L50-7.5W-930-25	Φ50*44mm	700 lm	31 V	250 mA	7.5W	9W	90	3000K	25°
L50-7.5W-940-25	Φ50*44mm	750 lm	31 V	250 mA	7.5W	9W	90	4000K	25°
L50-7.5W-930-35	Φ50*44mm	700 lm	31 V	250 mA	7.5W	9W	90	3000K	35°
L50-7.5W-940-35	Φ50*44mm	750 lm	31 V	250 mA	7.5W	9W	90	4000K	35°
L50-7.5W-930-60	Φ50*44mm	700 lm	31 V	250 mA	7.5W	9W	90	3000K	60°
L50-7.5W-940-60	Φ50*44mm	750 lm	31 V	250 mA	7.5W	9W	90	4000K	60°

11W 950lm-1000lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50-11W-930-15	Φ50*44mm	950 lm	31 V	350 mA	11W	13W	90	3000K	15°
L50-11W-940-15	Φ50*44mm	1000 lm	31 V	350 mA	11W	13W	90	4000K	15°
L50-11W-930-25	Φ50*44mm	950 lm	31 V	350 mA	11W	13W	90	3000K	25°
L50-11W-940-25	Φ50*44mm	1000 lm	31 V	350 mA	11W	13W	90	4000K	25°
L50-11W-930-35	Φ50*44mm	950 lm	31 V	350 mA	11W	13W	90	3000K	35°
L50-11W-940-35	Φ50*44mm	1000 lm	31 V	350 mA	11W	13W	90	4000K	35°
L50-11W-930-60	Φ50*44mm	950 lm	31 V	350 mA	11W	13W	90	3000K	60°
L50-11W-940-60	Φ50*44mm	1000 lm	31 V	350 mA	11W	13W	90	4000K	60°

VTRIM / PRO50
DOWNLIGHT




L50H
DOWNLIGHT
MODULE



Black

Drawing



Order Options

9W 850lm-950lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50H-9W-930-20	Φ50*65mm	850 lm	36 V	250 mA	9W	11W	90	3000K	20°
L50H-9W-930-20	Φ50*65mm	900 lm	36 V	250 mA	9W	11W	90	4000K	20°
L50H-9W-930-35	Φ50*65mm	900 lm	36 V	250 mA	9W	11W	90	3000K	35°
L50H-9W-940-35	Φ50*65mm	950 lm	36 V	250 mA	9W	11W	90	4000K	35°
L50H-9W-930-60	Φ50*65mm	850 lm	36 V	250 mA	9W	11W	90	3000K	60°
L50H-9W-940-60	Φ50*65mm	900 lm	36 V	250 mA	9W	11W	90	4000K	60°

13W 1200lm-1300lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50H-13W-930-20	Φ50*65mm	1200 lm	36 V	350 mA	9W	15W	90	3000K	20°
L50H-13W-940-20	Φ50*65mm	1300 lm	36 V	350 mA	9W	15W	90	4000K	20°
L50H-13W-930-35	Φ50*65mm	1200 lm	36 V	350 mA	9W	15W	90	3000K	35°
L50H-13W-940-35	Φ50*65mm	1300 lm	36 V	350 mA	9W	15W	90	4000K	35°
L50H-13W-930-60	Φ50*65mm	1200 lm	36 V	350 mA	9W	15W	90	3000K	60°
L50H-13W-940-60	Φ50*65mm	1300 lm	36 V	350 mA	9W	15W	90	4000K	60°

PRO 50 LED Module
LED Power: 7W/ 9W/ 12W/ 13W/ 18W
LED Chip: Bridgelux CRI>97, R9=95, 2-step SDCM
Beam Angle: 10°/ 15°/ 25°/ 35°/ 50°
Standard CCT: 2700K/ 3000K/ 3500K/ 4000K
Optional CCT: 1800K-3000K Warm Dim/ 2700K-6500K Tunable White
Optional Accessory: Honeycomb/ Diffusion Filter/ Linear Spread Filter
Single Asymmetric Filter/ Double Asymmetric Filter

PRO 50



Accessory



Honeycomb



Diffusion filter



Linear spread filter



Single asymmetric filter




Double asymmetric filter

Vtrim Trim




LED Module


The Pro50 LED module is a perfect replacement for MR16 halogen modules.
Smart and elegant design.
Versatile for downlight and spotlight applications.
Uniform color for all LED modules within 2 MacAdam steps.
You can use Pro50 LED modules in various fixture designs with no color variability.
Outstanding lumen output, excellent lumen maintenance.
50,000-hour lifetime eliminates frequent re-lamping.
Pro50 5-Year Quality Guarantee.

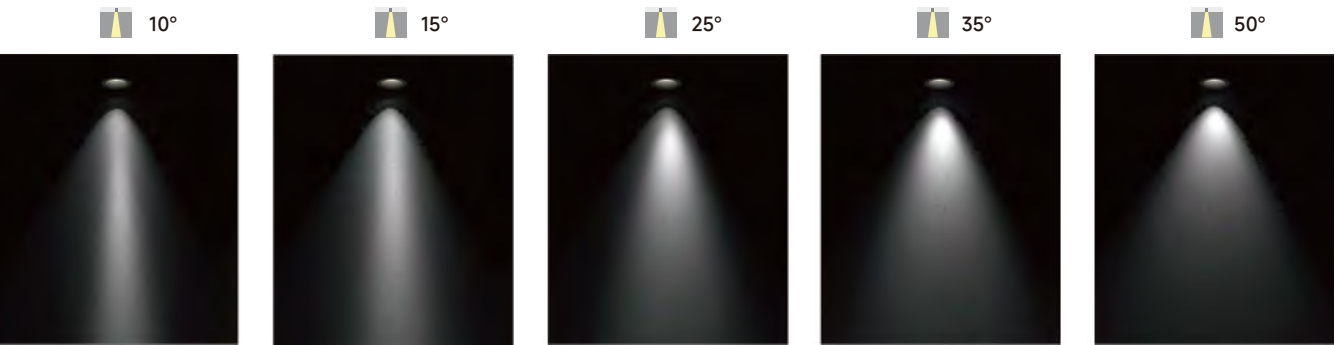


Honeycomb Effect

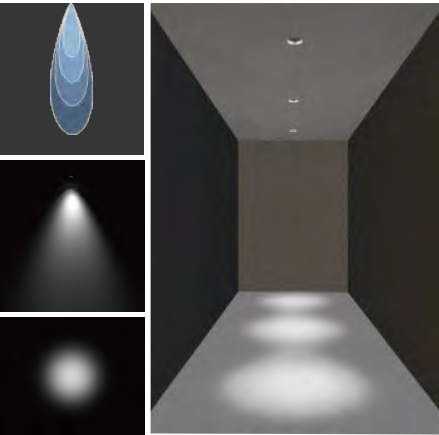

Diffusion Filter Effect

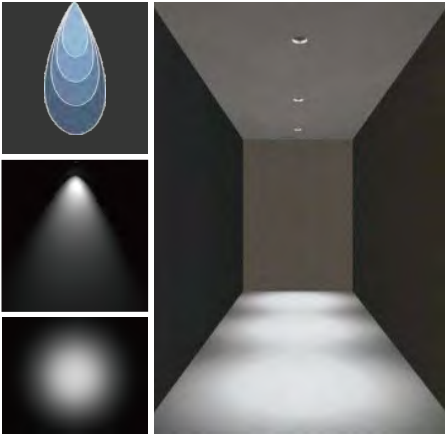


Linear Spread Filter Effect

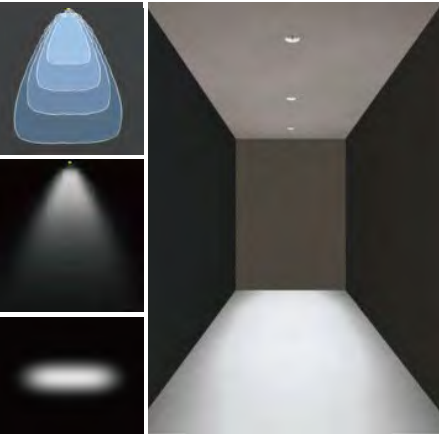

Single Asymmetric Filter Effect



Double Asymmetric Filter Effect

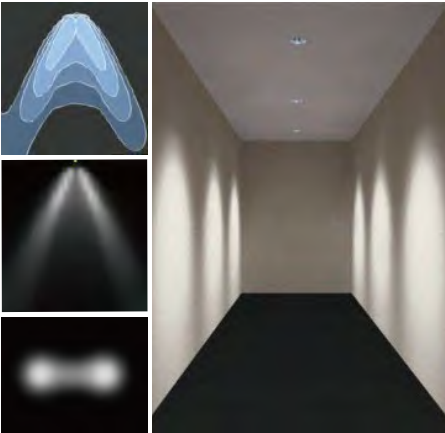


PRO50
DOWNLIGHT
MODULE



Black

Drawing



Order Options

7W 500lm-650lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-7W-927	Φ50*76mm	500 lm	36 V	200 mA	7W	9W	97	2700K	10°
Pro50-7W-930	Φ50*76mm	550 lm	36 V	200 mA	7W	9W	97	3000K	10°
Pro50-7W-935	Φ50*76mm	600 lm	36 V	200 mA	7W	9W	97	3500K	10°
Pro50-7W-940	Φ50*76mm	650 lm	36 V	200 mA	7W	9W	97	4000K	10°

13W 1050lm-1200lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-13W-927	Φ50*76mm	1050 lm	36 V	350 mA	13W	15W	97	2700K	15°/25°/35°
Pro50-13W-930	Φ50*76mm	1100 lm	36 V	350 mA	13W	15W	97	3000K	15°/25°/35°
Pro50-13W-935	Φ50*76mm	1150 lm	36 V	350 mA	13W	15W	97	3500K	15°/25°/35°
Pro50-13W-940	Φ50*76mm	1200 lm	36 V	350 mA	13W	15W	97	4000K	15°/25°/35°
Pro50-13W-927	Φ50*76mm	1000 lm	36 V	350 mA	13W	15W	97	2700K	50°
Pro50-13W-930	Φ50*76mm	1050 lm	36 V	350 mA	13W	15W	97	3000K	50°
Pro50-13W-935	Φ50*76mm	1100 lm	36 V	350 mA	13W	15W	97	3500K	50°
Pro50-13W-940	Φ50*76mm	1150 lm	36 V	350 mA	13W	15W	97	4000K	50°

18W 1400lm-1700lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-18W-927	Φ50*76mm	1500 lm	36 V	500 mA	18W	21W	97	2700K	15°/25°/35°
Pro50-18W-930	Φ50*76mm	1600 lm	36 V	500 mA	18W	21W	97	3000K	15°/25°/35°
Pro50-18W-935	Φ50*76mm	1650 lm	36 V	500 mA	18W	21W	97	3500K	15°/25°/35°
Pro50-18W-940	Φ50*76mm	1700 lm	36 V	500 mA	18W	21W	97	4000K	15°/25°/35°
Pro50-18W-927	Φ50*76mm	1400 lm	36 V	500 mA	18W	21W	97	2700K	50°
Pro50-18W-930	Φ50*76mm	1500 lm	36 V	500 mA	18W	21W	97	3000K	50°
Pro50-18W-935	Φ50*76mm	1600 lm	36 V	500 mA	18W	21W	97	3500K	50°
Pro50-18W-940	Φ50*76mm	1650 lm	36 V	500 mA	18W	21W	97	4000K	50°




PRO50-DW
DOWNLIGHT
MODULE




Black

Drawing



Order Options

12W 850lm-900lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-DW-12W-918-30	Φ50*76mm	Max.900lm	34 V	350 mA	12W	15W	95	1800K-3000K	38°
Pro50-DW-12W-918-30	Φ50*76mm	Max.850lm	34 V	350 mA	12W	15W	95	1800K-3000K	50°

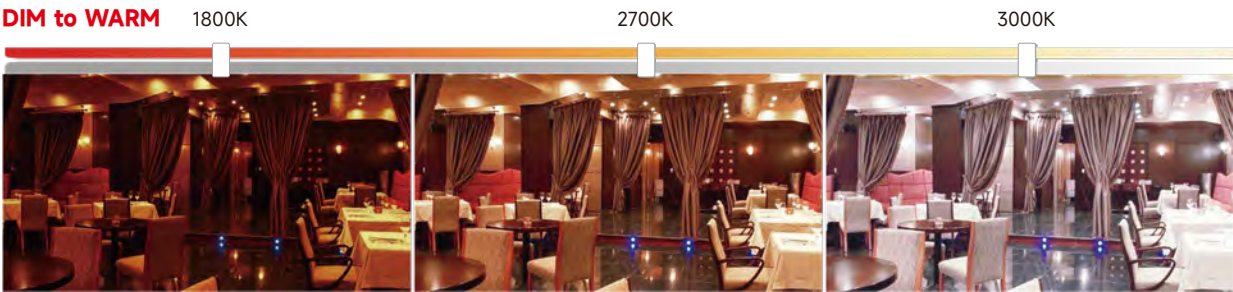


PRO50-TW
DOWNLIGHT
MODULE



Black

Drawing



Order Options

9W 850lm-900lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-TW-9W-927-65	Φ50*76mm	700-850lm	36 V	250 mA	9W	11W	90	2700K-6500K	20°
Pro50-TW-9W-927-65	Φ50*76mm	700-850lm	36 V	250 mA	9W	11W	90	2700K-6500K	40°
Pro50-TW-9W-927-65	Φ50*76mm	620-750lm	36 V	250 mA	9W	11W	90	2700K-6500K	50°

13W 850lm-900lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-TW-13W-927-65	Φ50*76mm	900-1100lm	36 V	350 mA	13W	15W	90	2700K-6500K	20°
Pro50-TW-13W-927-65	Φ50*76mm	900-1100lm	36 V	350 mA	13W	15W	90	2700K-6500K	40°
Pro50-TW-13W-927-65	Φ50*76mm	850-1050lm	36 V	350 mA	13W	15W	90	2700K-6500K	50°

Tunable White



VTRIM Series
DOWNLIGHT

VRA1

355°

30°

OPTIONAL:

VRA1 B

 Black

VRA1 G

 Gray

75

85

105

116

Φ85

Φ85

Φ85

L50-VRA1

L50-H-VRA1

Pro50-VRA1

VRF2

OPTIONAL:

VRF2 B

 Black

VRF2 G

 Gray

75

80

100

111

Φ85

Φ85

Φ85

L50-VRF2

L50-H-VRF2

Pro50-VRF2

VRA3

355°

30°

OPTIONAL:

VRA3 B

 Black

VRA3 G

 Gray

75

85

105

116

Φ85

Φ85

Φ85

L50-VRA3

L50-H-VRA3

Pro50-VRA3

VRA4

355°

18°

OPTIONAL:

VRA4 B

 Black

VRA4 G

 Gray

75

68

68

79

Φ85

Φ85

Φ85

L50-VRA4

L50-H-VRA4

Pro50-VRA4

VRW1

355°

30°

OPTIONAL:

VRA1 B

 Black

VRA1 G

 Gray

75

69

88

101

Φ90

Φ90

Φ90

L50-VRW1

L50-H-VRW1

Pro50-VRW1

VRF5

355°

OPTIONAL:

VRF5 B

 Black

VRF5 G

 Gray

75

72

92

103

Φ85

Φ85

Φ85

L50-VRF5

L50-H-VRF5

Pro50-VRF5

VSA1

355°

30°

OPTIONAL:

VSA1 B

 Black

VSA1 G

 Gray

75X75

85

105

116

85x85

85x85

85x85

L50-VSA1

L50-H-VSA1

Pro50-VSA1

VSF2

OPTIONAL:

VSF2 B

 Black

VSF2 G

 Gray

75X75

80

100

111

85x85

85x85

85x85

L50-VSF2

L50-H-VSF2

Pro50-VSF2

VSA4

355°

18°

OPTIONAL:

VSA4 B

 Black

VSA4 G

 Gray

75X75

74

94

105

80X80

85x85

85x85









85x85

L50-VSA4

L50-H-VSA4

Pro50-VSA4

VTRIM Series
DOWNLIGHT

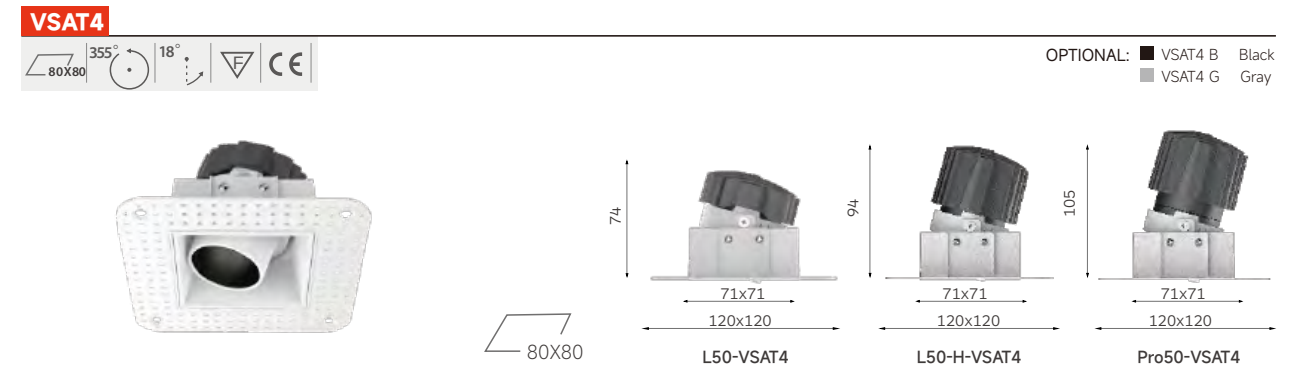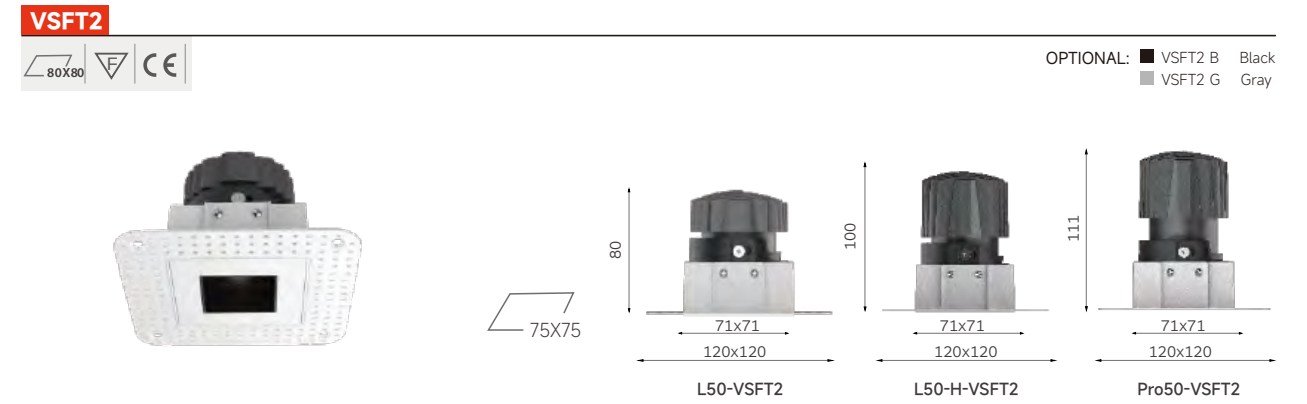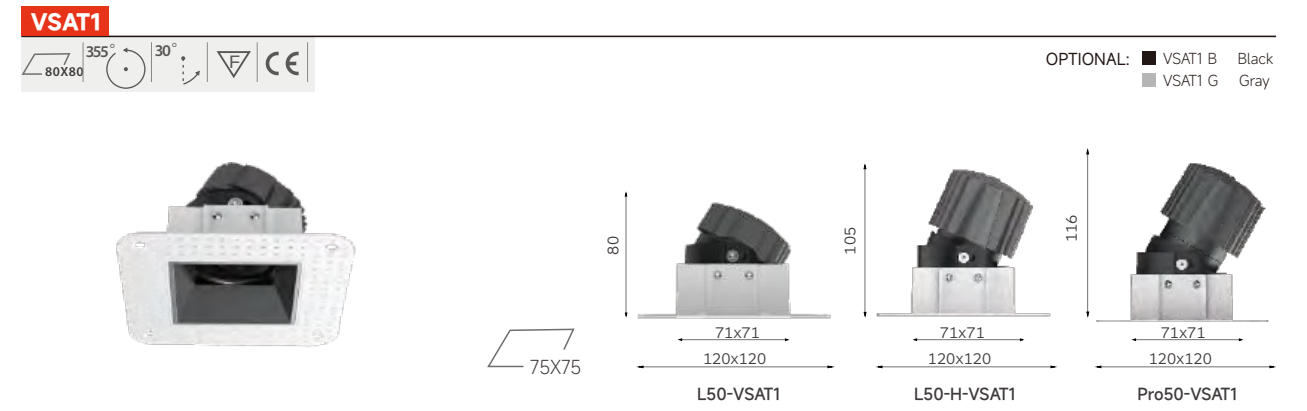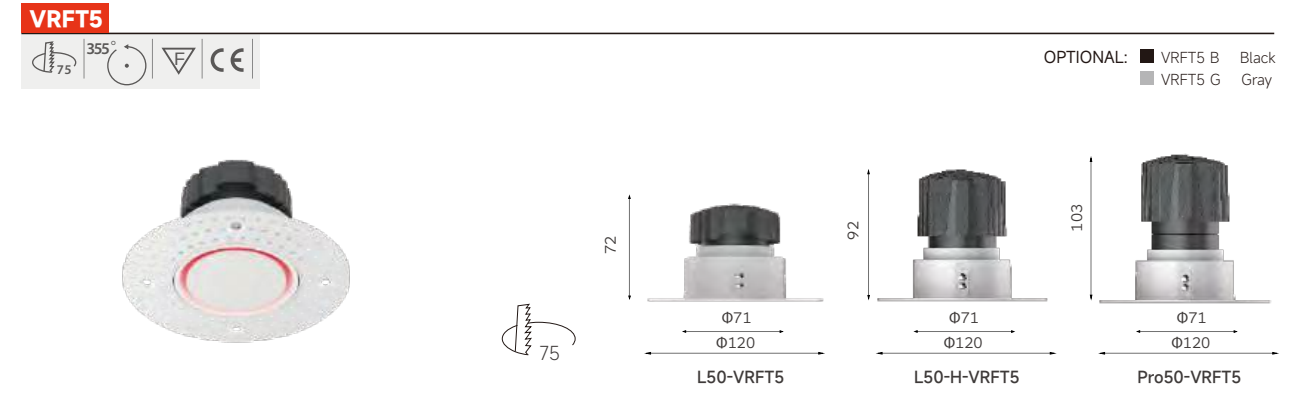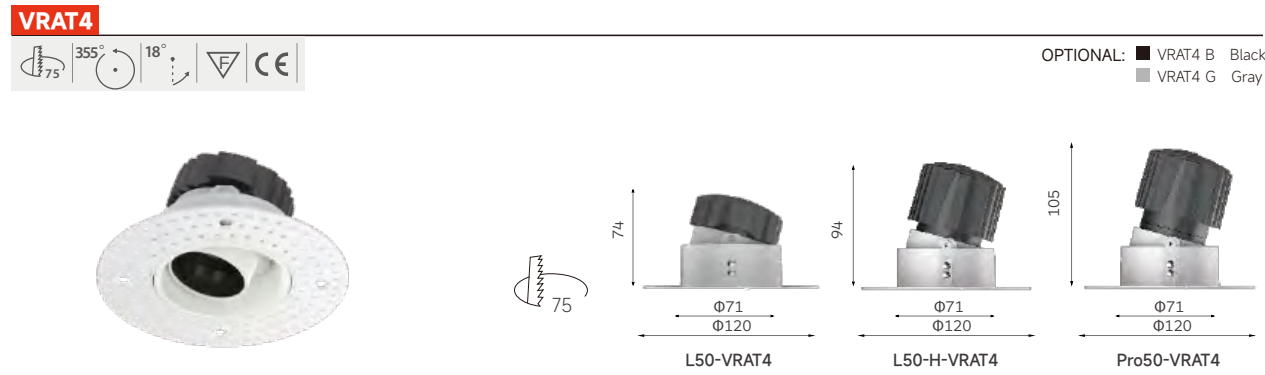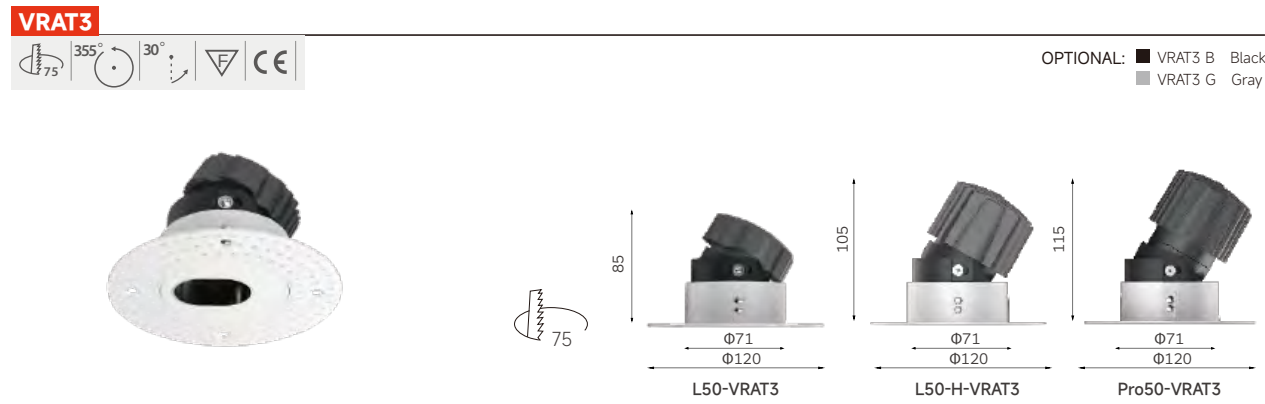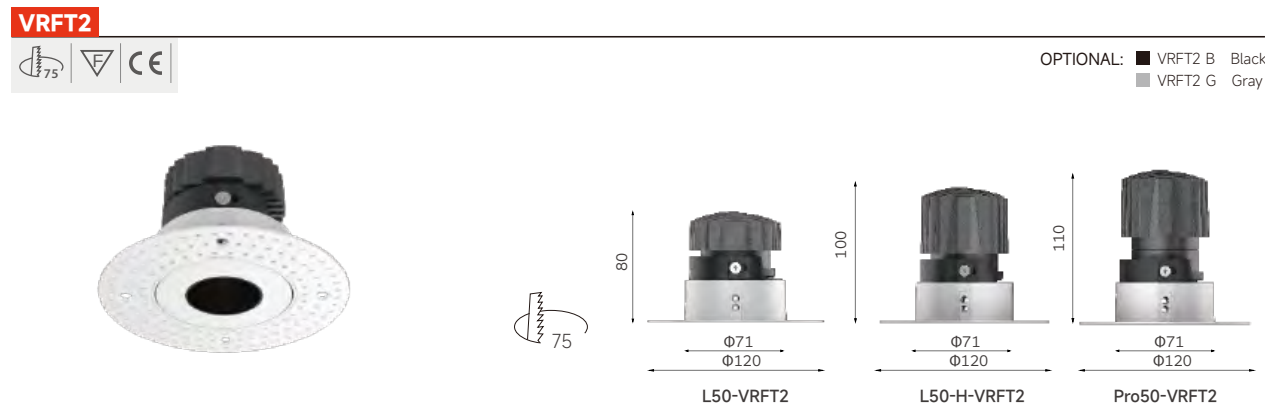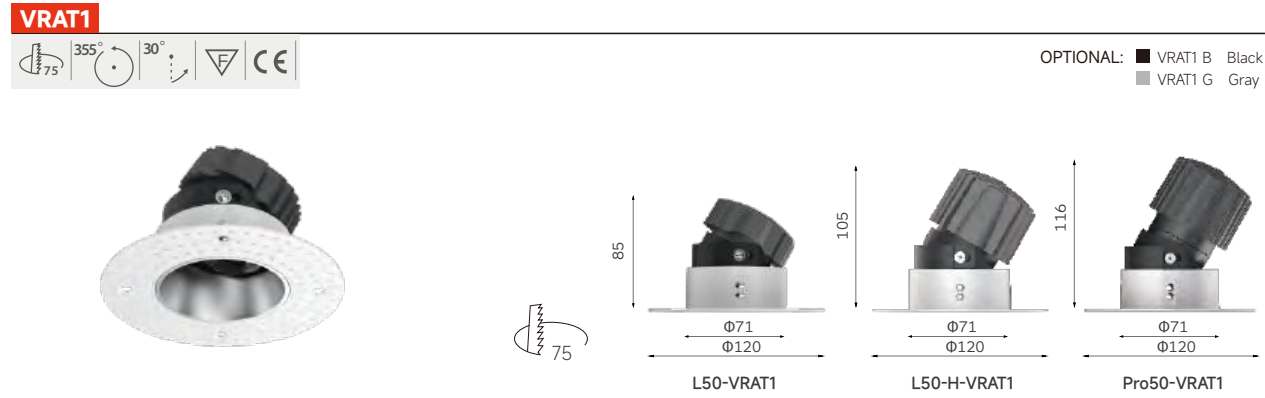

VTRIM Series
DOWNLIGHT

VSA1

145x75

355°

30°

OPTIONAL:

■

VSA1 B

Black

■

VSA1 G

Gray

145X75

85

155x85

L50-VSA1

105

155x85

L50-H-VSA1

116

155x85

Pro50-VSA1

VSF2

145x75

OPTIONAL:

■

VSF2 B

Black

■

VSF2 G

Gray

145X75

80

155x85

L50-VSF2

100

155x85

L50-H-VSF2

111

155x85

Pro50-VSF2

VSA4

145x75

355°

30°

OPTIONAL:

■

VSA4 B

Black

■

VSA4 G

Gray

145X75

74

155x85

L50-VSA4

94

155x85

L50-H-VSA4

105

155x85

Pro50-VSA4

VSAT1

145x80

355°

30°

OPTIONAL:

■

VSAT1 B

Black

■

VSAT1 G

Gray

147X80

85

140x72

187x118

L50-VSAT1

105

140x72

187x118

L50-H-VSAT1

116

140x72

187x118

Pro50-VSAT1

VSFT2

145x80

OPTIONAL:

■

VSFT2 B

Black

■

VSFT2 G

Gray

147X80

80

140x72

187x118

L50-VSFT2

100

140x72

187x118

L50-H-VSFT2

111

140x72

187x118

Pro50-VSFT2

VSAT4

145x80

355°

30°

OPTIONAL:

■

VSAT4 B

Black

■

VSAT4 G

Gray

147X80

74

140x72

187x118

L50-VSAT4

94

140x72

187x118

L50-H-VSAT4

105

140x72

187x118

Pro50-VSAT4



KIWI



K1X30 Ø=30
K1X55 Ø=55
K1X70 Ø=70




KIWI

Extensive collection features minimalism, functionality and versatility. Flexible for lighting schemes in retail or residential spaces.


KIWI Series
DOWNLIGHT/Adjustable



Delicate light engine,
 High quality anti-glare ring



Installation
 LED engine can be removed separately

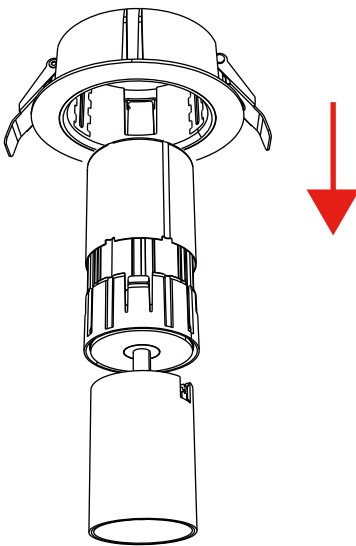

KIWI

Adjustable

350° rotatable and 90° tiltable.
 High quality optical lens with spot, narrow and medium beam angles.
 Interchangeable decoration ring with choice of black, white and gold colours.



Downlight
K1X30/K1X55/K1X70




Features

- Miniature size with cutout of 46mm .
- Extensive collection features minimalism, functionality and versatility.
- 350° rotatable and 90° tiltable.
- Interchangeable decoration ring with choice of black, white and gold colours.


Specifications

- Dimming modes:Non-Dim, Phase, 1-10V,DALI
- Beam angle: 15°, 18°, 24°, 25°, 30°, 36°, 55°
- Physical: aluminium, powder coating
- Accessories: secondary reflector plastic

Type



Light distribution




Secondary Reflector



K1X30/K1X55
Downlight



Drawing

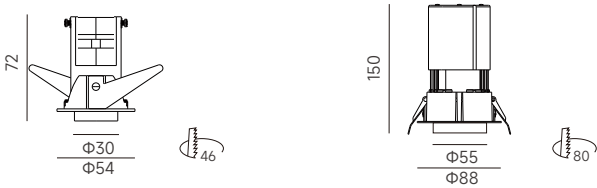

Order Options

4W 300lm-350lm		CREE						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X30-4W-930-15	Ø54*72mm	320 lm	36V	4W	6W	90	3000K	15°
K1X30-4W-940-15	Ø54*72mm	350 lm	36V	4W	6W	90	4000K	15°
K1X30-4W-930-30	Ø54*72mm	320 lm	36V	4W	6W	90	3000K	30°
K1X30-4W-940-30	Ø54*72mm	350 lm	36V	4W	6W	90	4000K	30°
K1X30-4W-930-55	Ø54*72mm	280 lm	36V	4W	6W	90	3000K	55°
K1X30-4W-930-55	Ø54*72mm	300 lm	36V	4W	6W	90	4000K	55°

9W 720lm-800lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X55-9W-930-18	Ø88*150mm	720 lm	36V	9W	11W	90	2700K	18°
K1X55-9W-940-18	Ø88*150mm	800 lm	36V	9W	11W	90	3000K	18°
K1X55-9W-930-24	Ø88*150mm	720 lm	36V	9W	11W	90	2700K	24°
K1X55-9W-940-24	Ø88*150mm	800 lm	36V	9W	11W	90	3000K	24°
K1X55-9W-930-36	Ø88*150mm	720 lm	36V	9W	11W	90	2700K	36°
K1X55-9W-940-36	Ø88*150mm	800 lm	36V	9W	11W	90	3000K	36°

KIWI Series

DOWNLIGHT/Adjustable




K1X70

Downlight



White Black

Drawing




Order Options

13W	1200lm-1300lm	CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X70-13W-930-15	Φ110*165mm	1200 lm	36V	13W	15W	90	3000K	15°
K1X70-13W-940-15	Φ110*165mm	1300 lm	36V	13W	15W	90	4000K	15°
K1X70-13W-930-25	Φ110*165mm	1200 lm	36V	13W	15W	90	3000K	25°
K1X70-13W-940-25	Φ110*165mm	1300 lm	36V	13W	15W	90	4000K	25°
K1X70-13W-930-30	Φ110*165mm	1200 lm	36V	13W	15W	90	3000K	30°
K1X70-13W-940-30	Φ110*165mm	1300 lm	36V	13W	15W	90	4000K	30°

18W	1600lm-1700lm	CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X70-18W-930-15	Φ110*165mm	1600 lm	36V	13W	21W	90	3000K	15°
K1X70-18W-940-15	Φ110*165mm	1700 lm	36V	13W	21W	90	4000K	15°
K1X70-18W-930-25	Φ110*165mm	1600 lm	36V	13W	21W	90	3000K	25°
K1X70-18W-940-25	Φ110*165mm	1700 lm	36V	13W	21W	90	4000K	25°
K1X70-18W-930-30	Φ110*165mm	1600 lm	36V	13W	21W	90	3000K	30°
K1X70-18W-940-30	Φ110*165mm	1700 lm	36V	13W	21W	90	4000K	30°



LEDGO

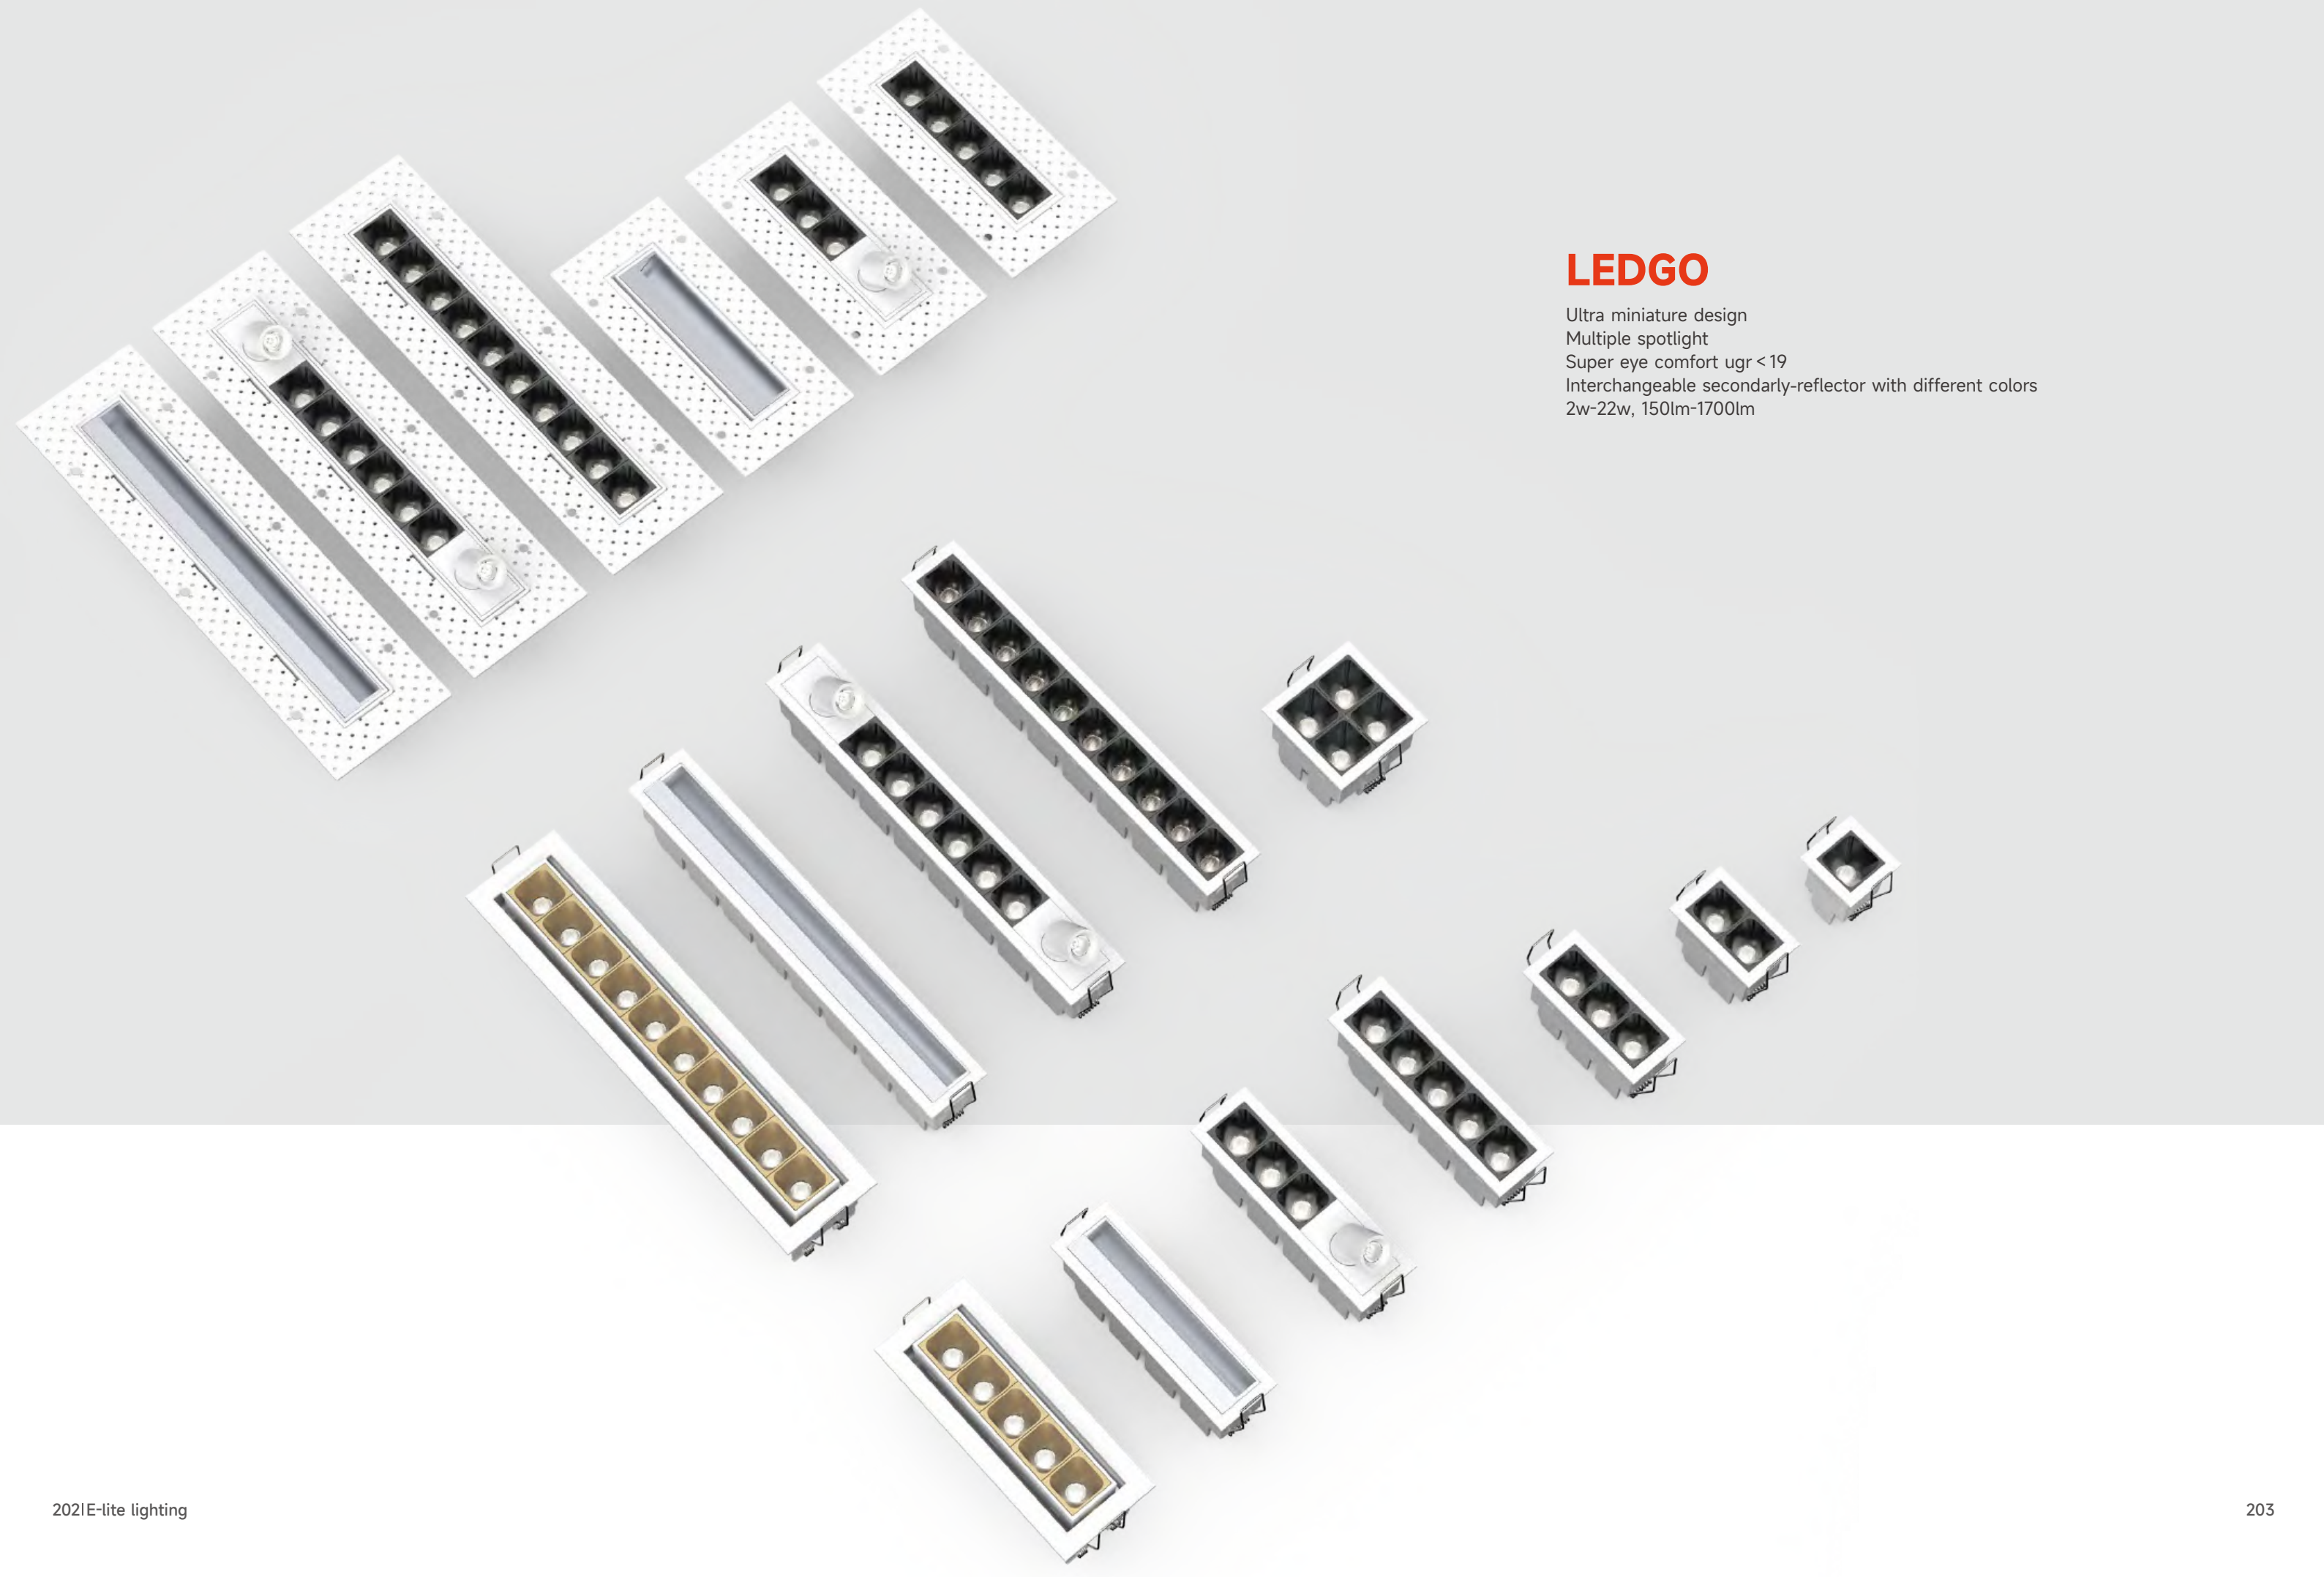

LEDGO

Ultra miniature design
Multiple spotlight
Super eye comfort $u_{gr} < 19$
Interchangeable secondary-reflector with different colors
2w-22w, 150lm-1700lm

LEDGO Series
DOWNLIGHT

Fixed



Adjustable



Wall Washer



Trimless



LF1
37X37
2W 170-180Lm



LF2
62X37
4W 300-350Lm



LF3
90X37
6W 500-550Lm




LX4
65X65
8W 650-700Lm




LF5
144X37
10W 800-850Lm



LF10
282X37
20W 1600-1700Lm



LF3-LS1
144X37
8W 600-650Lm



LF6-LS2
282X37
16W 1200-1300Lm



LA5
160X52
10 W 800-850Lm



LA10
298X52
20W 1600-1700Lm



LFT5
154X47
10W 800-850Lm



LFT10
292X47
20W 1600-1700Lm



LFT3-LS1
154X47
8W 600-650Lm



LFT6-LS2
292X47
16W 1200-1300Lm



LWT5
154X47
10W 500-550Lm



LWT10
292X47
20W 1000-1100Lm



LEDGO

Fixed

A combination of deep recessed secondary reflector and soft lens creates visual comfort

Adjustable

Four sizes with LED wattages 9W-22W. 20°, 40° beam angles are available 30° tilt and 355° rotation.

Wall Washer

Asymmetric wall washer reflector evenly illuminates walls

Secondary Reflector



Colour



LEDGO Series
DOWNLIGHT/ FIXED



Downlight
LF1/LF2/LF3



Features

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control


Specifications

- Dimming modes:Non-Dim , Phase, 1-10V
- Beam angle:24°,40°
- Physical: aluminium, wet painting
- Accessories: secondary reflector plastic

Type




Light distribution




Secondary Reflector




White Matt Gold Balck

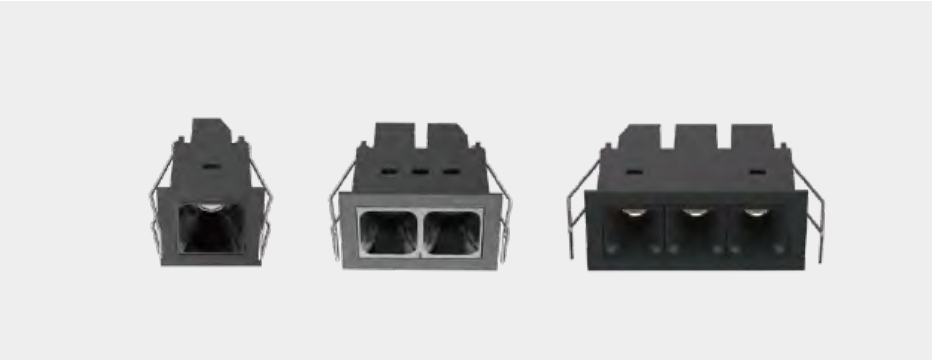

LF1/LF2
LF3
Downlight



Drawing

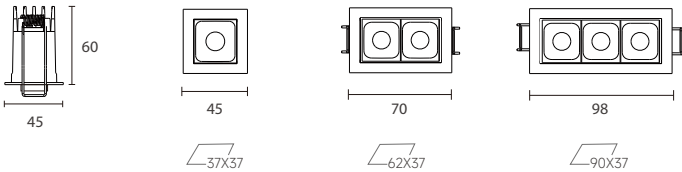


Order Options

2W 150lm-160lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF1-2W-930-24	45*45*60mm	150 lm	3V	700mA	2W	3W	90	3000K	24°
LF1-2W-940-24	45*45*60mm	160 lm	3V	700mA	2W	3W	90	4000K	24°
LF1-2W-930-40	45*45*60mm	150 lm	3V	700mA	2W	3W	90	3000K	40°
LF1-2W-940-40	45*45*60mm	160 lm	3V	700mA	2W	3W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									


4W 300lm-320lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF2-4W-930-24	45*70*60mm	300 lm	6V	700mA	4W	6W	90	3000K	24°
LF2-4W-940-24	45*70*60mm	320 lm	6V	700mA	4W	6W	90	4000K	24°
LF2-4W-930-40	45*70*60mm	300 lm	6V	700mA	4W	6W	90	3000K	40°
LF2-4W-940-40	45*70*60mm	320 lm	6V	700mA	4W	6W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

6W 500lm-550lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF3-6W-930-24	45*98*60mm	500 lm	9V	700mA	6W	8W	90	3000K	24°
LF3-6W-940-24	45*98*60mm	550 lm	9V	700mA	6W	8W	90	4000K	24°
LF3-6W-930-40	45*98*60mm	500 lm	9V	700mA	6W	8W	90	3000K	40°
LF3-6W-940-40	45*98*60mm	550 lm	9V	700mA	6W	8W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									


LEDGO Series
DOWNLIGHT

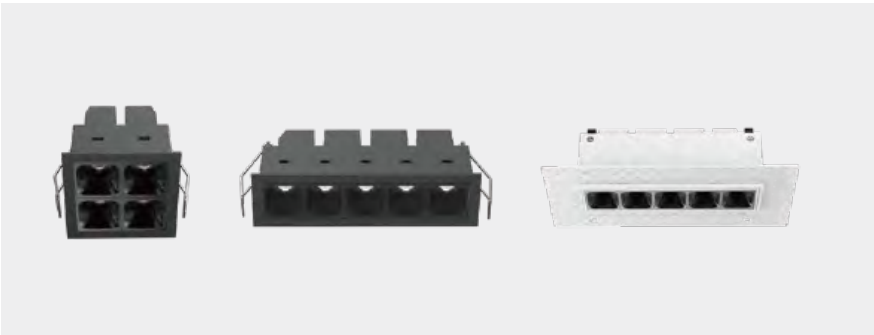

LX4/LF5
LFT5
Downlight



Drawing

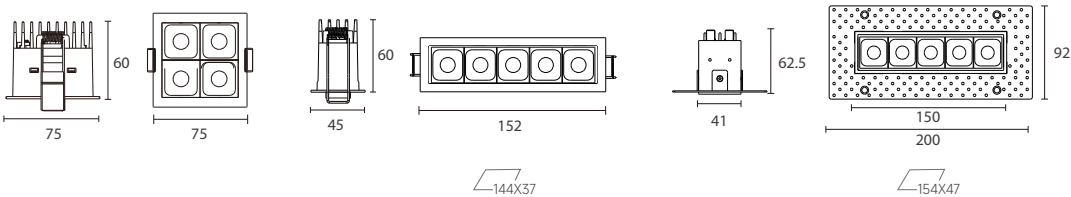

Order Options

8W 650 lm-700 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LX4-8W-930-24	75*75*100mm	650 lm	12 V	500mA	8W	10W	90	3000K	24°
LX4-8W-940-24	75*75*100mm	700 lm	12 V	500mA	8W	10W	90	4000K	24°
LX4-8W-930-40	75*75*100mm	650 lm	12 V	500mA	8W	10W	90	3000K	40°
LX4-8W-940-40	75*75*100mm	700 lm	12 V	500mA	8W	10W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

10W 800 lm-850 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF5-10W-930-24	45*152*60mm	800 lm	15 V	700mA	10W	12W	90	3000K	24°
LF5-10W-940-24	45*152*60mm	850 lm	15 V	700mA	10W	12W	90	4000K	24°
LF5-10W-930-40	45*152*60mm	800 lm	15 V	700mA	10W	12W	90	3000K	40°
LF5-10W-940-40	45*152*60mm	850 lm	15 V	700mA	10W	12W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									


10W 800 lm-850 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT5-10W-930-24	92*200*62.5mm	800 lm	15 V	700mA	10W	12W	90	3000K	24°
LFT5-10W-940-24	92*200*62.5mm	850 lm	15 V	700mA	10W	12W	90	4000K	24°
LFT5-10W-930-40	92*200*62.5mm	800 lm	15 V	700mA	10W	12W	90	3000K	40°
LFT5-10W-940-40	92*200*62.5mm	850 lm	15 V	700mA	10W	12W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									



LF10
LFT10
Downlight



Drawing

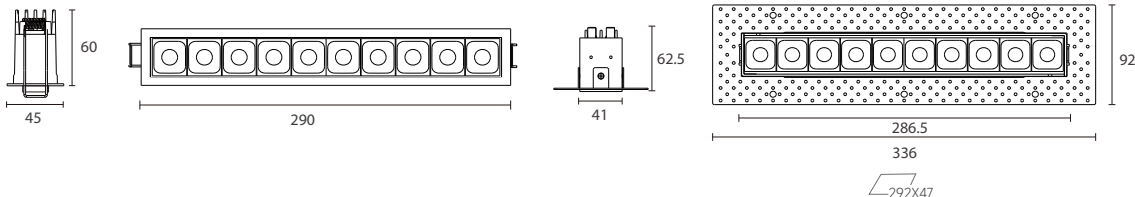


Order Options

20W 1600 lm-1700 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF10-20W-930-24	45*290*60mm	1600 lm	29V	700mA	20W	23W	90	3000K	24°
LF10-20W-940-24	45*290*60mm	1700 lm	29V	700mA	20W	23W	90	4000K	24°
LF10-20W-930-40	45*290*60mm	1600 lm	29V	700mA	20W	23W	90	3000K	40°
LF10-20W-940-40	45*290*60mm	1700 lm	29V	700mA	20W	23W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

20W 1600 lm-1700 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT10-20W-930-24	45*290*60mm	1600 lm	29V	700mA	20W	23W	90	3000K	24°
LFT10-20W-940-24	45*290*60mm	1700 lm	29V	700mA	20W	23W	90	4000K	24°
LFT10-20W-930-40	45*290*60mm	1600 lm	29V	700mA	20W	23W	90	3000K	40°
LFT10-20W-940-40	45*290*60mm	1700 lm	29V	700mA	20W	23W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

LEDGO Series
DOWNLIGHT

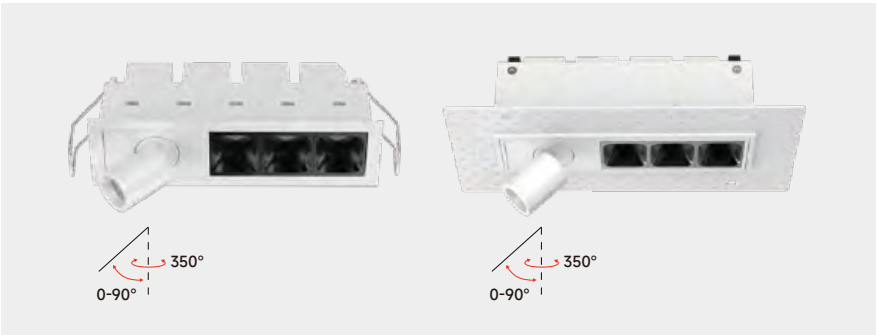


LF3-LS1
LFT3-LS1

Downlight



White Black


Drawing

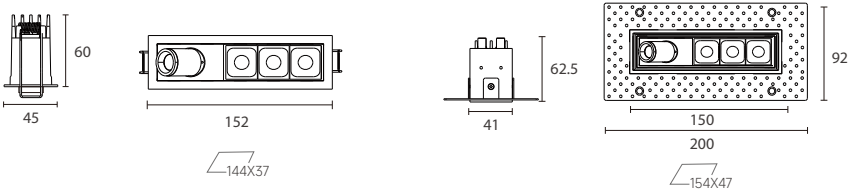

Order Options

8W 600 lm-650 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF3-LS1-8W-930-24	45*152*60mm	600 lm	12V	700mA	8W	10W	90	3000K	24°+15°
LF3-LS1-8W-940-24	45*152*60mm	650 lm	12V	700mA	8W	10W	90	4000K	24°+15°
LF3-LS1-8W-930-40	45*152*60mm	600 lm	12V	700mA	8W	10W	90	3000K	40°+25°
LF3-LS1-8W-940-40	45*152*60mm	650 lm	12V	700mA	8W	10W	90	4000K	40°+25°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

8W 600 lm-650 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT3-LS1-8W-930-24	92*200*62.5mm	600 lm	12V	700mA	8W	10W	90	3000K	24°+15°
LFT3-LS1-8W-940-24	92*200*62.5mm	650 lm	12V	700mA	8W	10W	90	4000K	24°+15°
LFT3-LS1-8W-930-40	92*200*62.5mm	600 lm	12V	700mA	8W	10W	90	3000K	40°+25°
LFT3-LS1-8W-940-40	92*200*62.5mm	650 lm	12V	700mA	8W	10W	90	4000K	40°+25°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

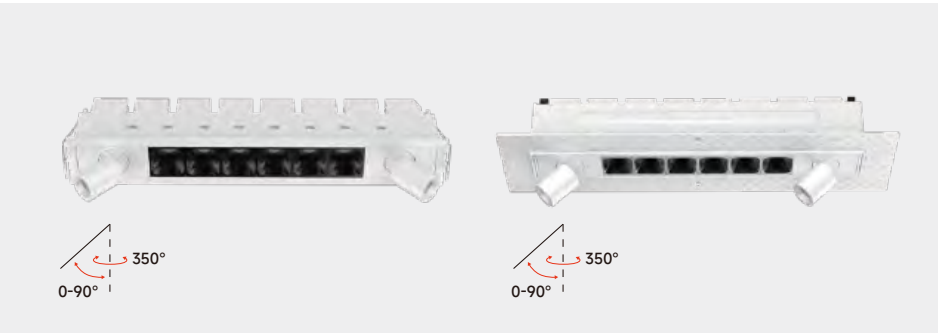


LF6-LS2
LFT6-LS2

Downlight



White Black

Drawing

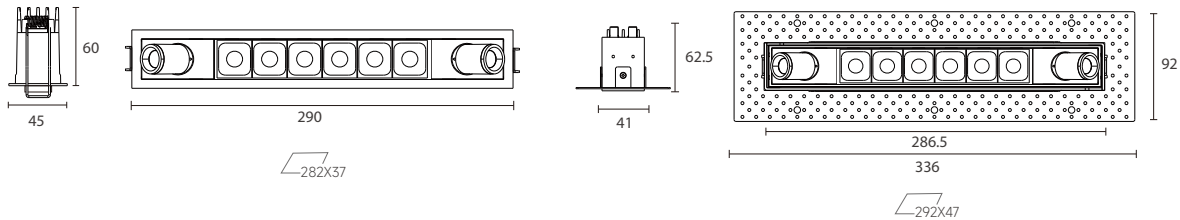

Order Options

16W 1200 lm-1300 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF6-LS2-16W-930-24	45*290*60mm	1200 lm	23V	700mA	16W	19W	90	3000K	24°+15°
LF6-LS2-16W-940-24	45*290*60mm	1300 lm	23V	700mA	16W	19W	90	4000K	24°+15°
LF6-LS2-16W-930-40	45*290*60mm	1200 lm	23V	700mA	16W	19W	90	3000K	40°+25°
LF6-LS2-16W-940-40	45*290*60mm	1300 lm	23V	700mA	16W	19W	90	4000K	40°+25°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

16W 1200 lm-1300 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT6-LS2-16W-930-24	92*336*62.5mm	1200 lm	23V	700mA	16W	19W	90	3000K	24°+15°
LFT6-LS2-16W-940-24	92*336*62.5mm	1300 lm	23V	700mA	16W	19W	90	4000K	24°+15°
LFT6-LS2-16W-930-40	92*336*62.5mm	1200 lm	23V	700mA	16W	19W	90	3000K	40°+25°
LFT6-LS2-16W-940-40	92*336*62.5mm	1300 lm	23V	700mA	16W	19W	90	4000K	40°+25°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

LEDGO Series
DOWNLIGHT




LA5
LA10
Downlight



White Black

Drawing

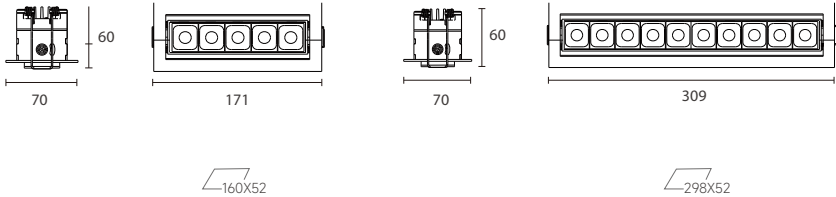

Order Options

11W 800lm-850lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LA5-11W-930-24	70*171*60mm	800 lm	15 V	700mA	11W	13W	90	3000K	24°
LA5-11W-940-24	70*171*60mm	850 lm	15 V	700mA	11W	13W	90	4000K	24°
LA5-11W-930-40	70*171*60mm	800 lm	15 V	700mA	11W	13W	90	3000K	40°
LA5-11W-940-40	70*171*60mm	850 lm	15 V	700mA	11W	13W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

22W 1600lm-1700lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LA10-22W-930-24	70*309*60mm	1600 lm	30V	700mA	22W	24W	90	3000K	24°
LA10-22W-940-24	70*309*60mm	1700 lm	30V	700mA	22W	24W	90	4000K	24°
LA10-22W-930-40	70*309*60mm	1600 lm	30V	700mA	22W	24W	90	3000K	40°
LA10-22W-940-40	70*309*60mm	1700 lm	30V	700mA	22W	24W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									




LW5
LWT5
Downlight



White Black

Drawing

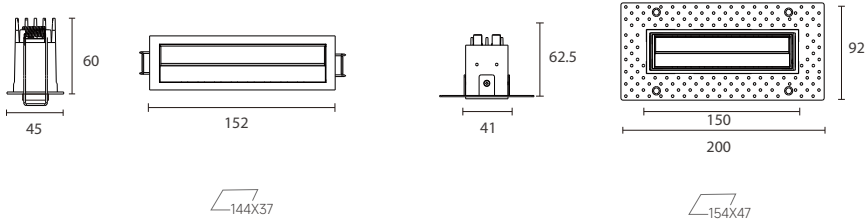

Order Options

10W 500lm-550lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LW5-10W-930	45*152*60mm	500 lm	15V	700mA	10W	12W	90	3000K	／
LW5-10W-940	45*152*60mm	550 lm	15V	700mA	10W	12W	90	4000K	／
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

10W 500lm-550lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LWT5-10W-930	92*200*62.5mm	500 lm	15V	700mA	10W	12W	90	3000K	／
LWT5-10W-940	92*200*62.5mm	550 lm	15V	700mA	10W	12W	90	4000K	／
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									


LEDGO Series
DOWNLIGHT



LW10
LWT10
Downlight



Drawing

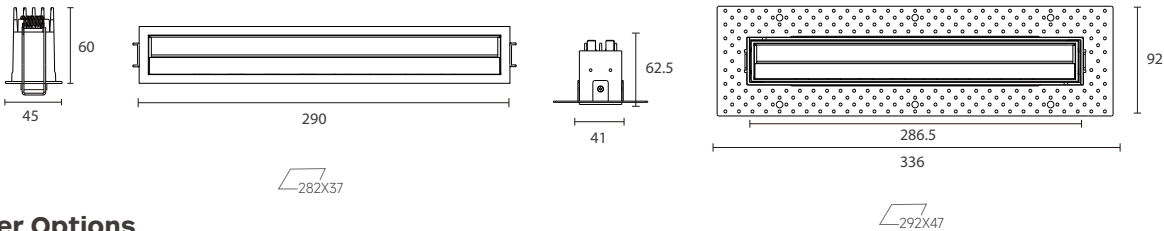

Order Options

20W 1000lm-1100lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LW10-20W-930	70*171*60mm	1000 lm	29V	700mA	20W	23W	90	3000K	✓
LW10-20W-940	70*171*60mm	1100 lm	29V	700mA	20W	23W	90	4000K	✓
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									

20W 1000lm-1100lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LWT10-20W-930	70*171*60mm	1000 lm	29V	700mA	20W	23W	90	3000K	✓
LWT10-20W-940	70*171*60mm	1100 lm	29V	700mA	20W	23W	90	4000K	✓
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									



LEDGO Series
DOWNLIGHT/ FIXED



LF2-IP65

LF3-IP65

LF5-IP65

LF10-IP65

Downlight
LF2-IP65/LF3-IP65/LF5-IP65/LF10-IP65



Features

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control


Specifications

- Dimming modes:Non-Dim , Phase, 1-10V
- Beam angle:24°,40°
- Physical: aluminium, wet painting
- Accessories: secondary reflector plastic

Type



Light distribution



Secondary Reflector




White

Matt

Gold

Balck

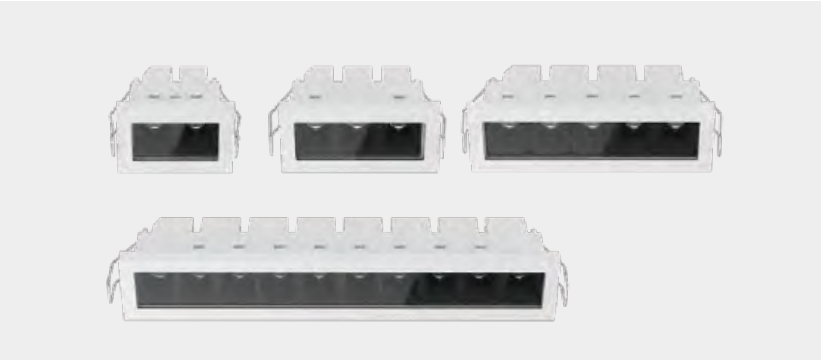


LF2-IP65 | LF5-IP65
LF3-IP65 | LF10-IP65

Downlight



Drawing

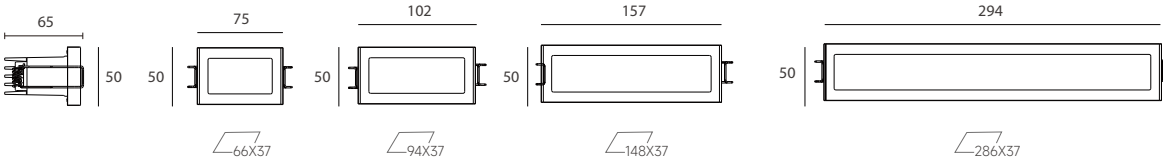

Order Options

4W 210lm-270lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF2-4W-930-24	50*75*65mm	250 lm	6V	700mA	4W	6W	90	3000K	24°
LF2-4W-940-24	50*75*65mm	270 lm	6V	700mA	4W	6W	90	4000K	24°
LF2-4W-930-40	50*75*65mm	210 lm	6V	700mA	4W	6W	90	3000K	40°
LF2-4W-940-40	50*75*65mm	230 lm	6V	700mA	4W	6W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									
6W 330lm-400lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF3-6W-930-24	50*102*65mm	380 lm	9V	700mA	6W	8W	90	3000K	24°
LF3-6W-940-24	50*102*65mm	400 lm	9V	700mA	6W	8W	90	4000K	24°
LF3-6W-930-40	50*102*65mm	330 lm	9V	700mA	6W	8W	90	3000K	40°
LF3-6W-940-40	50*102*65mm	350 lm	9V	700mA	6W	8W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									
10W 650lm-850lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF5-10W-930-24	50*157*65mm	780 lm	15V	700mA	10W	12W	90	3000K	24°
LF5-10W-940-24	50*157*65mm	850 lm	15V	700mA	10W	12W	90	4000K	24°
LF5-10W-930-40	50*157*65mm	650 lm	15V	700mA	10W	12W	90	3000K	40°
LF5-10W-940-40	50*157*65mm	700 lm	15V	700mA	10W	12W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									
20W 1200 lm-1400 lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF10-20W-930-24	50*294*65mm	1300 lm	29V	700mA	20W	23W	90	3000K	24°
LF10-20W-940-24	50*294*65mm	1400 lm	29V	700mA	20W	23W	90	4000K	24°
LF10-20W-930-40	50*294*65mm	1200 lm	29V	700mA	20W	23W	90	3000K	40°
LF10-20W-940-40	50*294*65mm	1300 lm	29V	700mA	20W	23W	90	4000K	40°
Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)									






BINGO


Spotlight

Concise structure with in-track LED driver
Optical choices in fixed or adjustable lens


Narrow, medium and wide beam angles are available for different lighting applications

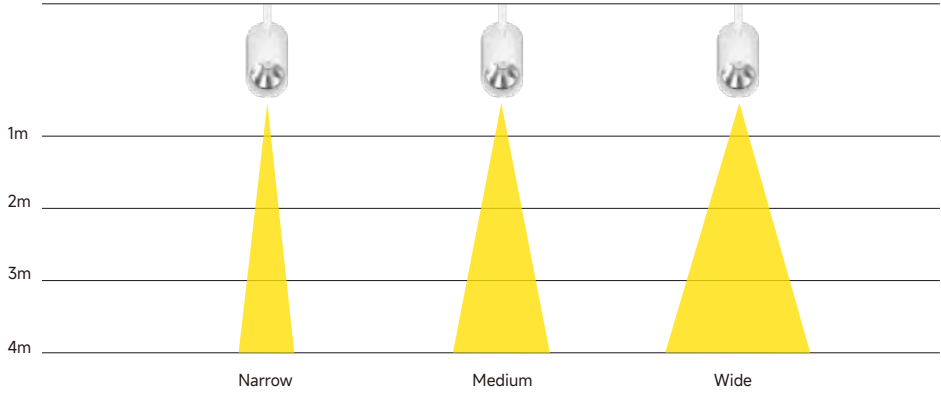

BINGO Series
SPOTLIGHT



BINGO S-E-F
15W 950lm-1000lm



BINGO M-E-F
15W 900lm-1300lm
21W 1200lm-1700lm



BINGO S-E-Z
15W 1100lm-1200lm



BINGO M-E-Z
15W 1300lm-1400lm
21W 1700lm-1800lm



BINGO K
28W 2200lm-2400lm

BINGO
SPOTLIGHT




BINGO Series
SPOTLIGHT




BINGO S-E-F
BINGO M-E-F

Spotlight



Drawing

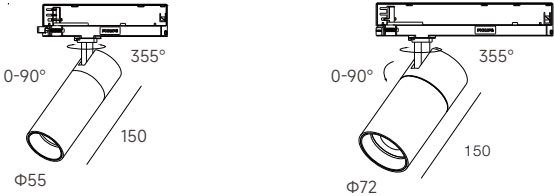

Order Options

15W 950lm-1000lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
BINGO S-E-F-15W-930-18	Φ55*150mm	950 lm	13W	15W	90	3000K	18°
BINGO S-E-F-15W-940-18	Φ55*150mm	1000 lm	13W	15W	90	4000K	18°
BINGO S-E-F-15W-930-25	Φ55*150mm	950 lm	13W	15W	90	3000K	25°
BINGO S-E-F-15W-940-25	Φ55*150mm	1000 lm	13W	15W	90	4000K	25°
BINGO S-E-F-15W-930-36	Φ55*150mm	950 lm	13W	15W	90	3000K	36°
BINGO S-E-F-15W-940-36	Φ55*150mm	1000 lm	13W	15W	90	4000K	36°
BINGO S-E-F-15W-930-36	Φ55*150mm	950 lm	13W	15W	90	3000K	50°
BINGO S-E-F-15W-940-36	Φ55*150mm	1000 lm	13W	15W	90	4000K	50°


15W 1200lm-1300lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
BINGO M-E-F-15W-930-15	Φ72*150mm	1200 lm	13W	15W	90	3000K	15°
BINGO M-E-F-15W-940-15	Φ72*150mm	1300 lm	13W	15W	90	4000K	15°
BINGO M-E-F-15W-930-25	Φ72*150mm	1200 lm	13W	15W	90	3000K	25°
BINGO M-E-F-15W-940-25	Φ72*150mm	1300 lm	13W	15W	90	4000K	25°
BINGO M-E-F-15W-930-30	Φ72*150mm	1200 lm	13W	15W	90	3000K	30°
BINGO M-E-F-15W-940-30	Φ72*150mm	1300 lm	13W	15W	90	4000K	30°
BINGO M-E-F-15W-930-50	Φ72*150mm	900 lm	13W	15W	90	3000K	50°
BINGO M-E-F-15W-940-50	Φ72*150mm	950 lm	13W	15W	90	4000K	50°

21W 1600lm-1700lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
BINGO M-E-F-21W-930-15	Φ72*150mm	1600 lm	18W	21W	90	3000K	15°
BINGO M-E-F-21W-940-15	Φ72*150mm	1700 lm	18W	21W	90	4000K	15°
BINGO M-E-F-21W-930-25	Φ72*150mm	1600 lm	18W	21W	90	3000K	25°
BINGO M-E-F-21W-940-25	Φ72*150mm	1700 lm	18W	21W	90	4000K	25°
BINGO M-E-F-21W-930-30	Φ72*150mm	1600 lm	18W	21W	90	3000K	30°
BINGO M-E-F-21W-940-30	Φ72*150mm	1700 lm	18W	21W	90	4000K	30°
BINGO M-E-F-21W-930-50	Φ72*150mm	1200 lm	18W	21W	90	3000K	50°
BINGO M-E-F-21W-940-50	Φ72*150mm	1300 lm	18W	21W	90	4000K	50°




BINGO S-E-Z
BINGO M-E-Z

Spotlight



Drawing

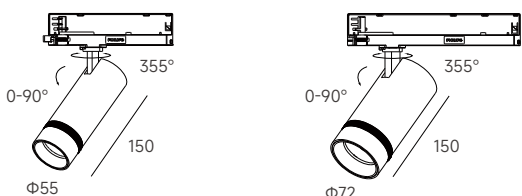

Order Options

15W 1100lm-1200lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
BINGO S-E-Z-15W-930	Φ55*150mm	1100 lm	13W	15W	90	3000K	20°-40°
BINGO S-E-Z-15W-940	Φ55*150mm	1200 lm	13W	15W	90	4000K	20°-40°
BINGO S-E-Z-15W-930	Φ55*150mm	1000 lm	13W	15W	90	3000K	35°-60°
BINGO S-E-Z-15W-940	Φ55*150mm	1100 lm	13W	15W	90	4000K	35°-60°

15W 1300lm-1400lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
BINGO M-E-Z-15W-930	Φ72*150mm	1300 lm	13W	15W	90	3000K	18°-35°
BINGO M-E-Z-15W-940	Φ72*150mm	1400 lm	13W	15W	90	4000K	18°-35°
BINGO M-E-Z-15W-930	Φ72*150mm	1100 lm	13W	15W	90	3000K	35°-60°
BINGO M-E-Z-15W-940	Φ72*150mm	1200 lm	13W	15W	90	4000K	35°-60°

21W 1700lm-1800lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
BINGO M-E-Z-21W-930	Φ72*150mm	1700 lm	18W	21W	90	3000K	18°-35°
BINGO M-E-Z-21W-940	Φ72*150mm	1800 lm	18W	21W	90	4000K	18°-35°
BINGO M-E-Z-21W-930	Φ72*150mm	1500 lm	18W	21W	90	3000K	35°-60°
BINGO M-E-Z-21W-940	Φ72*150mm	1600 lm	18W	21W	90	4000K	35°-60°

BINGO Series
SPOTLIGHT



BINGO K

Spotlight
BINGO K

CE

5

5 Years Warranty

AC

220-240V

IP

20

CRI

>90

CITIZEN

Features

- High efficiency lighting solution
- In-Track LED driver for simplified design
- Integrated installation effect
- Aluminium extrusion with optimal heat dissipation

Specifications

- Dimming modes:Non-Dim
- Beam angle: 20°,35°,55°
- Physical: aluminium, powder coating
- Accessories: plastic secondary reflector


Type




Light distribution




Track Adapter



BINGO K
Spotlight



Drawing



Order Options

28W 2200lm-2400lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
BINGO K-28W-930-20	Φ54*72mm	2200 lm	25W	28W	90	3000K	20°
BINGO K-28W-940-20	Φ54*72mm	2400 lm	25W	28W	90	4000K	20°
BINGO K-28W-930-35	Φ54*72mm	2400 lm	25W	28W	90	3000K	35°
BINGO K-28W-940-35	Φ54*72mm	2600 lm	25W	28W	90	4000K	35°
BINGO K-28W-930-55	Φ54*72mm	2400 lm	25W	28W	90	3000K	55°
BINGO K-28W-940-55	Φ54*72mm	2600 lm	25W	28W	90	4000K	55°



FELLOW

FELLOW M

28W 2700lm-2900lm

FELLOW S

15W 1200lm-1300lm
21W 1600lm-1700lm

FELLOW MINI

7W 450lm-480lm
8W 550lm-650lm




FELLOW

Spotlight

Concise structure with in-track LED driver
Optical choices in fixed or adjustable lens

Narrow, medium and wide beam angles are available for different lighting applications

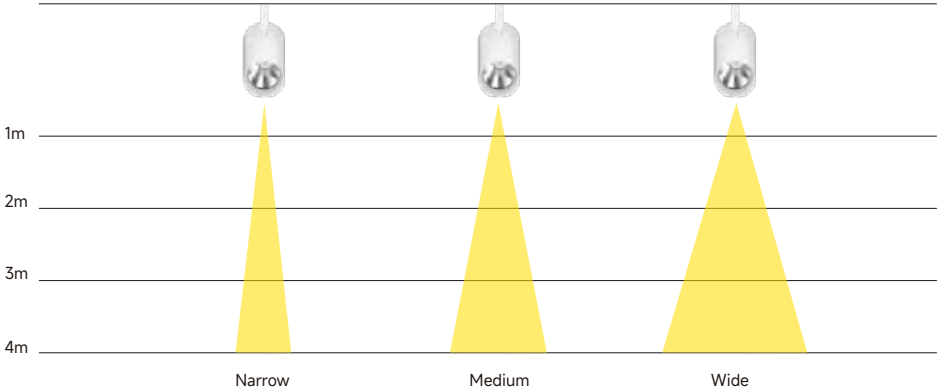

FELLOW Series
SPOTLIGHT



FELLOW MINI

Spotlight
FELLOW MINI



Features

- FELLOW Mini perfectly combines functionality and esthetics.
- Elegant design with LED driver inside housing
- The head rotates through 355° and pivots through 90°.
- Optimized passive cooling system ensures low temperature and long lifetime of LED.

Specifications

- Dimming modes:Non-Dim, TRIAC DIM
- Beam angle: 20°,35°,55°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Type



Φ55 Φ72

Light distribution



Spotlight


Track Adapter



3-Circuits




FELLOW MINI
Spotlight



White Black

Drawing




Order Options

7W 450lm-480lm		CITIZEN	with TRIAC driver					
Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
FELLOW Mini-7W-930-15	Φ45*153mm	550 lm	450 lm	5W	7W	90	3000K	15°
FELLOW Mini-7W-930-24	Φ45*153mm	550 lm	480 lm	5W	7W	90	3000K	24°
FELLOW Mini-7W-930-36	Φ45*153mm	550 lm	450 lm	5W	7W	90	3000K	36°
FELLOW Mini-7W-930-45	Φ45*153mm	550 lm	450 lm	5W	7W	90	3000K	45°

8W 550lm-650lm		CITIZEN	with ON-OFF driver					
Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
FELLOW Mini-8W-930-15	Φ45*153mm	650 lm	550 lm	6W	8W	90	3000K	15°
FELLOW Mini-8W-930-24	Φ45*153mm	650 lm	600 lm	6W	8W	90	3000K	24°
FELLOW Mini-8W-930-36	Φ45*153mm	650 lm	550 lm	6W	8W	90	3000K	36°
FELLOW Mini-8W-930-45	Φ45*153mm	650 lm	550 lm	6W	8W	90	3000K	45°

FELLOW Series
SPOTLIGHT

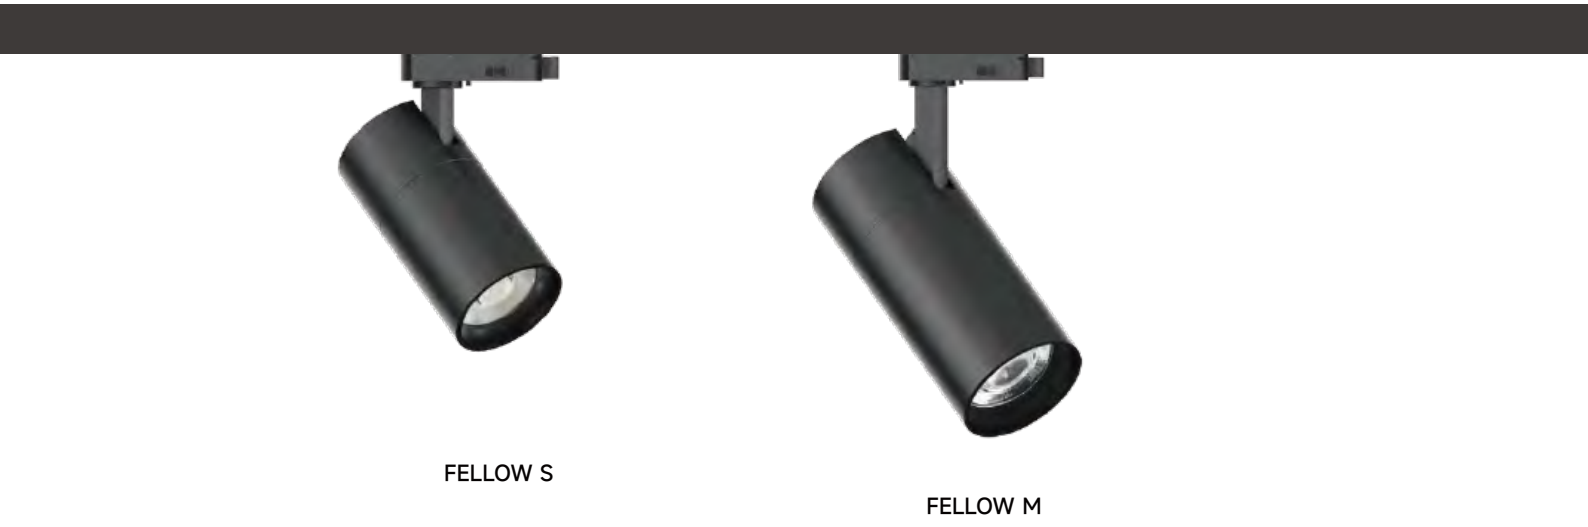

Spotlight
FELLOW S/M



Features

- FELLOW S/M perfectly combines functionality and esthetics.
- Elegant design with LED driver inside housing
- The head rotates through 355° and pivots through 90°.
- Optimized passive cooling system ensures low temperature and long lifetime of LED.

Type



Track Adapter



1-Circuit
(Standard)

3-Circuits


Specifications

- Dimming modes:Non-Dim, TRIAC DIM
- Beam angle: 15°,25°,30°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh


Light distribution



FELLOW S/M
Spotlight



Drawing

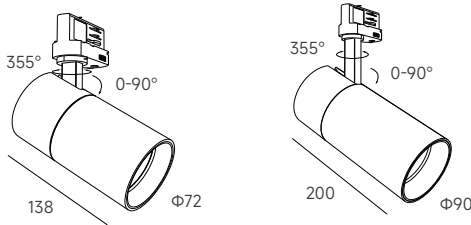

Order Options

15W 1200lm-1300lm		CITIZEN						
Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
FELLOW S-15W-930-15	Φ72*138mm	1500 lm	1200 lm	13W	15W	90	3000K	15°
FELLOW S-15W-940-15	Φ72*138mm	1600 lm	1300 lm	13W	15W	90	4000K	15°
FELLOW S-15W-930-25	Φ72*138mm	1500 lm	1200 lm	13W	15W	90	3000K	25°
FELLOW S-15W-940-25	Φ72*138mm	1600 lm	1300 lm	13W	15W	90	4000K	25°
FELLOW S-15W-930-30	Φ72*138mm	1500 lm	1200 lm	13W	15W	90	3000K	30°
FELLOW S-15W-940-30	Φ72*138mm	1600 lm	1300 lm	13W	15W	90	4000K	30°

21W 1600lm-1700lm		CITIZEN						
Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
FELLOW S-21W-930-15	Φ72*138mm	2000 lm	1600 lm	18W	21W	90	3000K	15°
FELLOW S-21W-940-15	Φ72*138mm	2100 lm	1700 lm	18W	21W	90	4000K	15°
FELLOW S-21W-930-25	Φ72*138mm	2000 lm	1600 lm	18W	21W	90	3000K	25°
FELLOW S-21W-940-25	Φ72*138mm	2100 lm	1700 lm	18W	21W	90	4000K	25°
FELLOW S-21W-930-30	Φ72*138mm	2000 lm	1600 lm	18W	21W	90	3000K	30°
FELLOW S-21W-940-30	Φ72*138mm	2100 lm	1700 lm	18W	21W	90	4000K	30°


28W 2700lm-2900lm		CITIZEN						
Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
FELLOW M-28W-930-18	Φ90*200mm	3400 lm	2700 lm	25W	28W	90	3000K	18°
FELLOW M-28W-940-18	Φ90*200mm	3600 lm	2900 lm	25W	28W	90	4000K	18°
FELLOW M-28W-930-30	Φ90*200mm	3400 lm	2700 lm	25W	28W	90	3000K	30°
FELLOW M-28W-940-30	Φ90*200mm	3600 lm	2900 lm	25W	28W	90	4000K	30°
FELLOW M-28W-930-45	Φ90*200mm	3400 lm	2700 lm	25W	28W	90	3000K	45°
FELLOW M-28W-940-45	Φ90*200mm	3600 lm	2900 lm	25W	28W	90	4000K	45°



GRACE Series
SPOTLIGHT



Narrow, medium and wide beam angles are available for different lighting applications

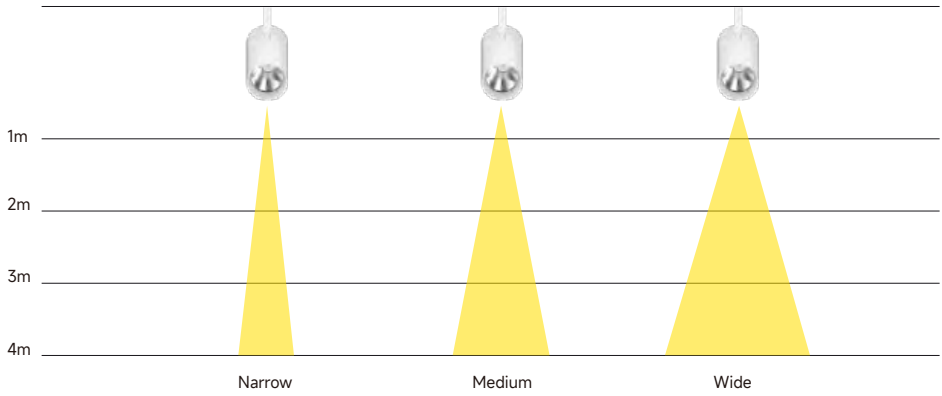

GRACE
Spotlight

Concise structure with driver inside housing
High quality optical lens ensures precise lighting distribution

GRACE Series
SPOTLIGHT



GRACE S

Spotlight
GRACE S

CE

5

5 Years Warranty

AC

220-240V

IP

20

CRI

>90

CITIZEN

Features

- Ultra-slim housing design with LED driver inside.
- The minimalist and cylindrical shape.
- The head rotates through 355° and pivots through 90°.
- Therm-optimal design ensures low temperature and long lifetime.

Specifications

- Dimming modes:Non-Dim
- Beam angle: 18°,24°,36°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Type



Φ55

Light distribution



Spotlight

Track Adapter



1-Circuit
(Standard)



3-Circuits



GRACE S
Spotlight




White



Black

Drawing



Order Options

15W 950lm-1000lm		CITIZEN							
Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam	
GRACE S-15W-930-18	Φ55*150mm	1300 lm	950 lm	13W	15W	90	3000K	18°	
GRACE S-15W-940-18	Φ55*150mm	1400 lm	1000 lm	13W	15W	90	4000K	18°	
GRACE S-15W-930-24	Φ55*150mm	1300 lm	950 lm	13W	15W	90	3000K	24°	
GRACE S-15W-940-24	Φ55*150mm	1400 lm	1000 lm	13W	15W	90	4000K	24°	
GRACE S-15W-930-36	Φ55*150mm	1300 lm	950 lm	13W	15W	90	3000K	36°	
GRACE S-15W-940-36	Φ55*150mm	1400 lm	1000 lm	13W	15W	90	4000K	36°	
GRACE S-15W-930-50	Φ55*150mm	1300 lm	950 lm	13W	15W	90	3000K	50°	
GRACE S-15W-940-50	Φ55*150mm	1400 lm	1000 lm	13W	15W	90	4000K	50°	

Linear Profile

Linear Profile

LINK30 258-267

LINK50 268-287

LINK60 288-295



LINK30


258IE-lite lighting



LINK30

linear lighting system

Extremely Compact Linear Light
UGR<16
Surface treatment process of high-quality profiles
The end cap is no visible screws
Pre-wired gear tray for quick installation

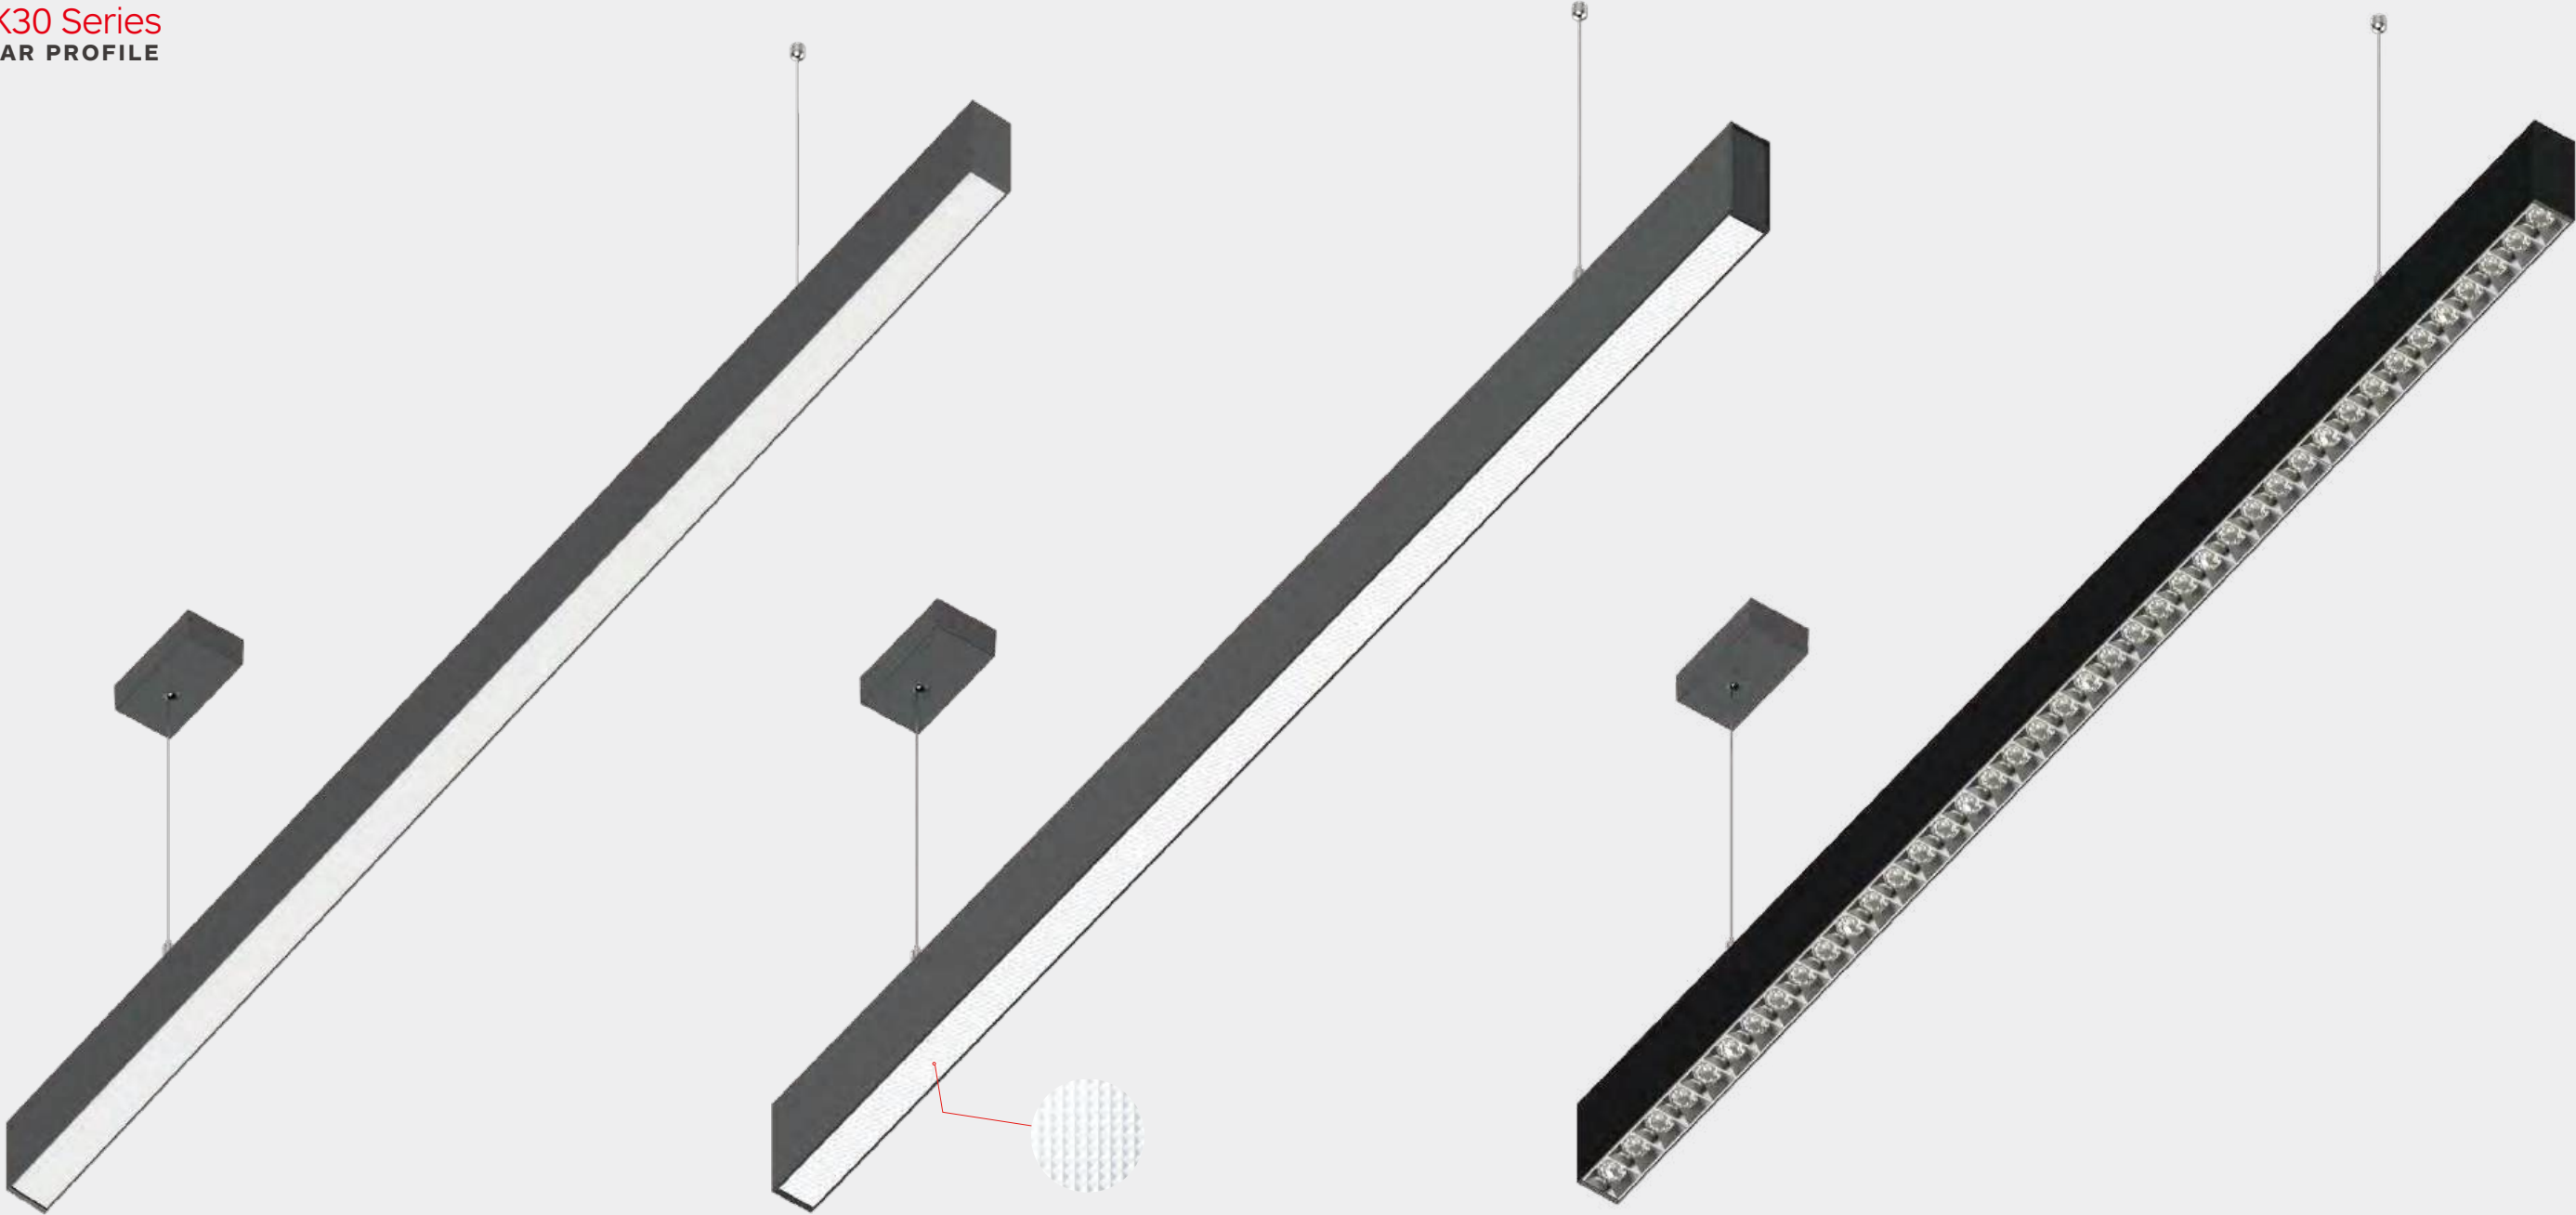

General Light

Comfort Light

Accent Light

Features




Switch for Uplight Up Light




Opal Cover

Easy stitching

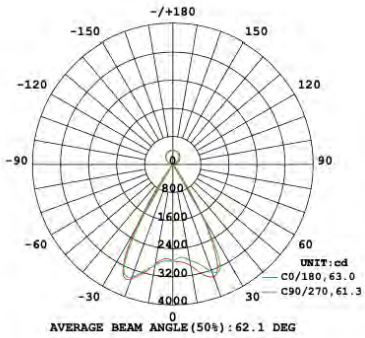

LINK30 Series
LINEAR PROFILE

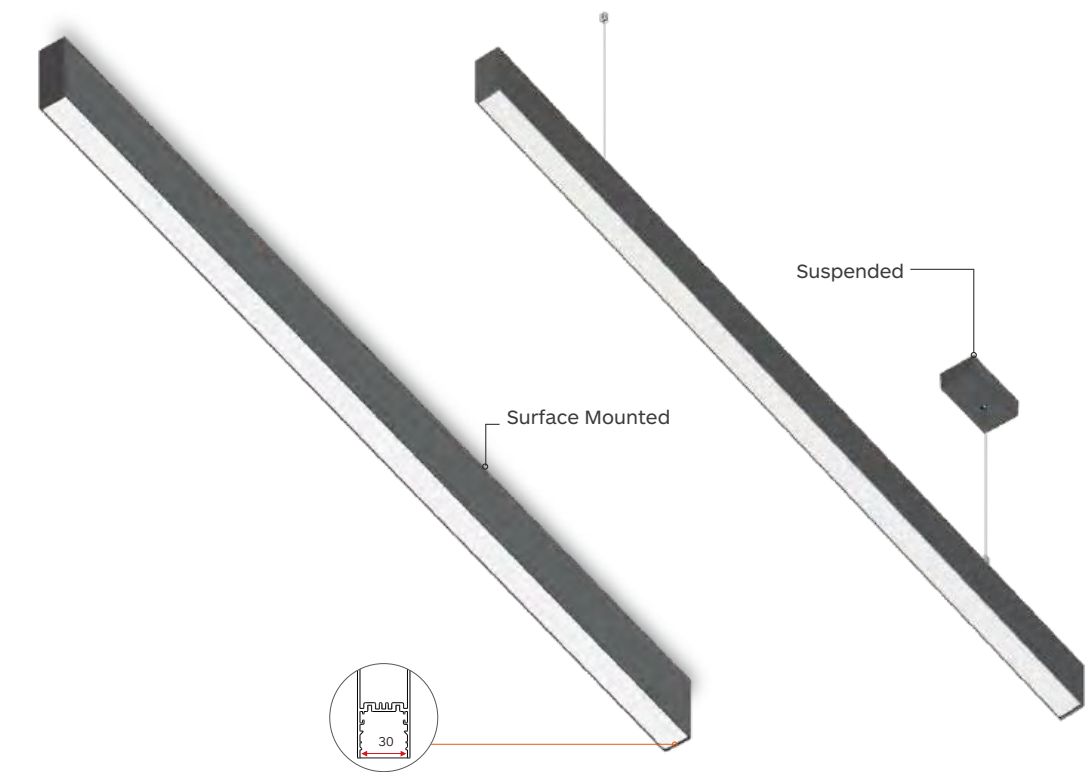

GL Fixture



Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: ON-OFF, 1-10V, DALI
- Samsung LEDs
- Length options: 1060mm,1590mm


Type




Installation type



LINK30-GL
Linear Profile




Drawing



Downward lighting							
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1060MM							
LINK30-GL1060-28W-830	25W	28W	2400lm	>80	3000K	110°	1060*78*34
LINK30-GL1060-28W-840	25W	28W	2600lm		4000K		
1200MM							
LINK30-GL1200-31W-830	28W	31W	3000lm	>80	3000K	110°	1200*78*34
LINK30-GL1200-31W-840	28W	31W	3200lm		4000K		
1590MM							
LINK30-GL1590-41W-830	37W	41W	4000lm	>80	3000K	110°	1590*78*34
LINK30-GL1590-41W-840	37W	41W	4200lm		4000K		

Downward and upward lighting							
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1060MM							
LINK30-GL1060U-36W-830	25W ↑ 8W ↓	26W ↑ 10W ↓	2400lm ↑ 2100lm ↓	>80	3000K	110° ↓ 100° ↑	1060*78*34
LINK30-GL1060U-36W-840	25W ↑ 8W ↓	26W ↑ 10W ↓	2600lm ↑ 2300lm ↓		4000K	110° ↓ 100° ↑	
1200MM							
LINK30-GL1200U-44W-830	28W ↑ 11W ↓	31W ↑ 13W ↓	3000lm ↑ 1600lm ↓	>80	3000K	110° ↓ 100° ↑	1200*78*34
LINK30-GL1200U-44W-840	28W ↑ 11W ↓	31W ↑ 13W ↓	3200lm ↑ 1800lm ↓		4000K	110° ↓ 100° ↑	
1590MM							
LINK30-GL1590U-54W-830	37W ↑ 11W ↓	41W ↑ 13W ↓	4000lm ↑ 1600lm ↓	>80	3000K	110° ↓ 100° ↑	1590*78*34
LINK30-GL1590U-54W-840	37W ↑ 11W ↓	41W ↑ 13W ↓	4200lm ↑ 1800lm ↓		4000K	110° ↓ 100° ↑	

LINK30 Series
LINEAR PROFILE

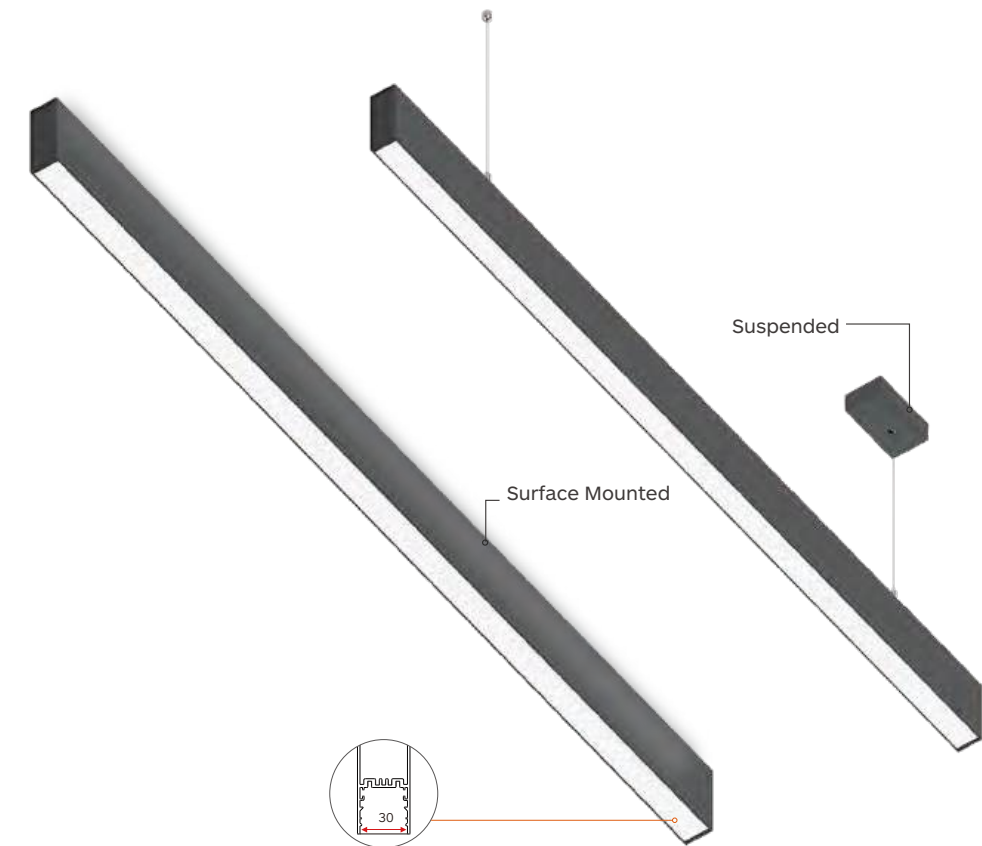

CL Fixture




Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation

Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: ON-OFF, 1-10V, DALI
- Samsung LEDs
- Length options: 1060mm,1590mm

Installation type




Type




LINK30-CL
Linear Profile




Drawing



Downward lighting							
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1060MM							
LINK30-CL1060-28W-830	25W	28W	2200lm	>80	3000K	70°	1060*78*34
LINK30-CL1060-28W-840	25W	28W	2400lm		4000K		
1200MM							
LINK30-CL1200-31W-830	28W	31W	2700lm	>80	3000K	70°	1200*78*34
LINK30-CL1200-31W-840	28W	31W	2900lm		4000K		
1590MM							
LINK30-CL1590-41W-830	37W	41W	3600lm	>80	3000K	70°	1590*78*34
LINK30-CL1590-41W-840	37W	41W	3800lm		4000K		

Downward and upward lighting							
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1060MM							
Link30-CL1060U-36W-830	25W↑ 8W ↓	26W↑ 10W ↓	2200lm↑ 1100lm ↓	>80	3000K	70° ↓ 100° ↑	1060*78*34
Link30-CL1060U-36W-840	25W↑ 8W ↓	26W↑ 10W ↓	2400lm↑ 1300lm ↓		4000K	70° ↓ 100° ↑	
1200MM							
LINK30-CL1200U-44W-830	28W↑ 11W ↓	31W↑ 13W ↓	2700lm↑ 1600lm ↓	>80	3000K	70° ↓ 100° ↑	1200*78*34
LINK30-CL1200U-44W-840	28W↑ 11W ↓	31W↑ 13W ↓	2900lm↑ 1800lm ↓		4000K	70° ↓ 100° ↑	
1590MM							
LINK30-CL1590U-54W-830	37W↑ 11W ↓	41W↑ 13W ↓	3600lm↑ 1600lm ↓	>80	3000K	70° ↓ 100° ↑	1590*78*34
LINK30-CL1590U-54W-840	37W↑ 11W ↓	41W↑ 13W ↓	3800lm↑ 1800lm ↓		4000K	70° ↓ 100° ↑	

LINK30 Series
LINEAR PROFILE

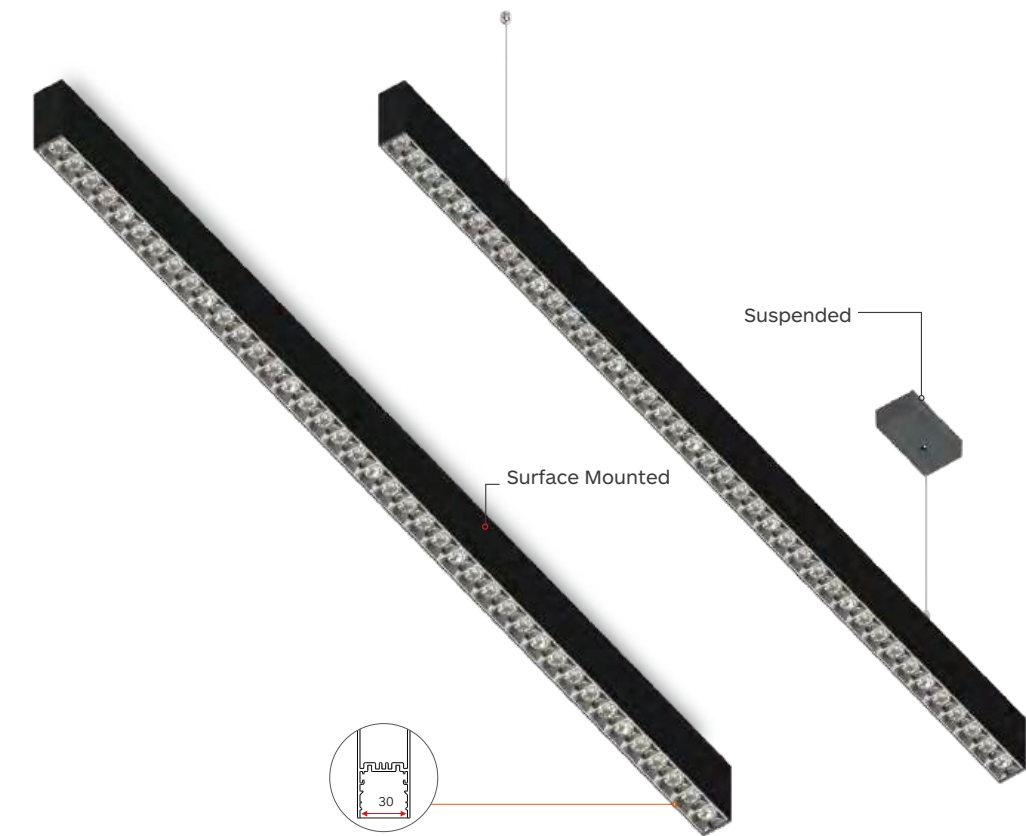

AL Fixture



Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: ON-OFF, 1-10V, DALI
- Samsung LEDs
- Length options: 1060mm,1590mm

Type




Installation type



LINK30-AL
Linear Profile



Drawing




Downward lighting 							
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1060MM							
LINK30-AL1060-28W-830	25W	28W	2700lm	>80	3000K	15°	1060*78*34
LINK30-AL1060-28W-840	25W	28W	2900lm		4000K		
LINK30-AL1060-28W-830	25W	28W	2700lm	>80	3000K	35°	1060*78*34
LINK30-AL1060-28W-840	25W	28W	2900lm		4000K		
LINK30-AL1060-28W-830	25W	28W	2800lm	>80	3000K	60°	1060*78*34
LINK30-AL1060-28W-840	25W	28W	3000lm		4000K		
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1200MM							
LINK30-AL1200-31W-830	28W	31W	3100lm	>80	3000K	15°	1200*78*34
LINK30-AL1200-31W-840	28W	31W	3300lm		4000K		
LINK30-AL1200-31W-830	28W	31W	3100lm	>80	3000K	35°	1200*78*34
LINK30-AL1200-31W-840	28W	31W	3300lm		4000K		
LINK30-AL1200-31W-830	28W	31W	3200lm	>80	3000K	60°	1200*78*34
LINK30-AL1200-31W-840	28W	31W	3400lm		4000K		
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1590MM							
LINK30-AL1590-41W-830	37W	41W	4100lm	>80	3000K	15°	1590*78*34
LINK30-AL1590-41W-840	37W	41W	4300lm		4000K		
LINK30-AL1590-41W-830	37W	41W	4100lm	>80	3000K	35°	1590*78*34
LINK30-AL1590-41W-840	37W	41W	4300lm		4000K		
LINK30-AL1590-41W-830	37W	41W	4200lm	>80	3000K	60°	1590*78*34
LINK30-AL1590-41W-840	37W	41W	4400lm		4000K		



LINK50

268IE-lite lighting

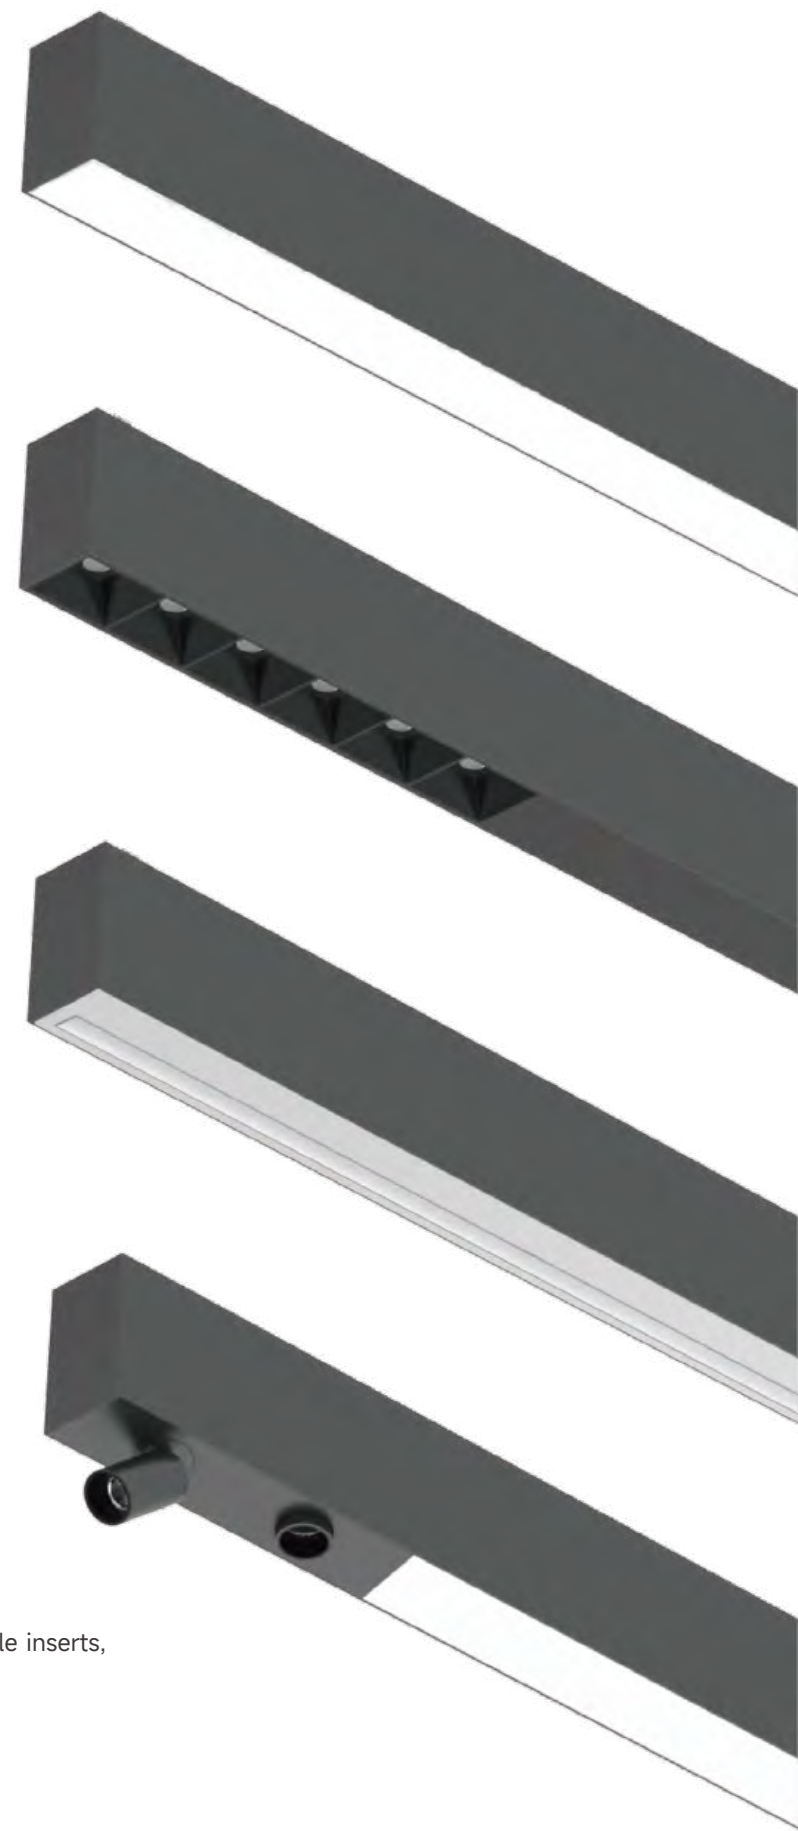


LINK 50

Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology

Channels




Inserts

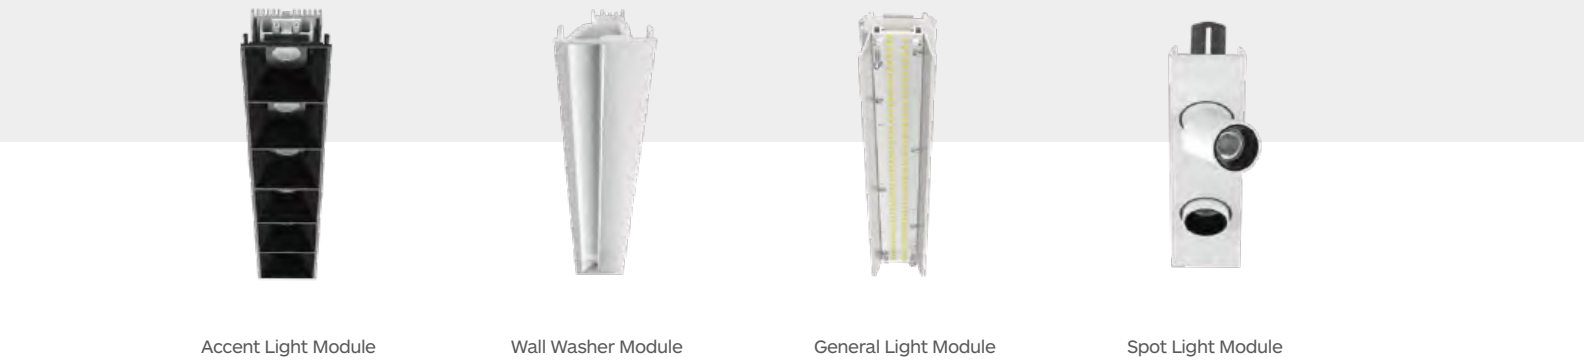


Covers



LINK 50

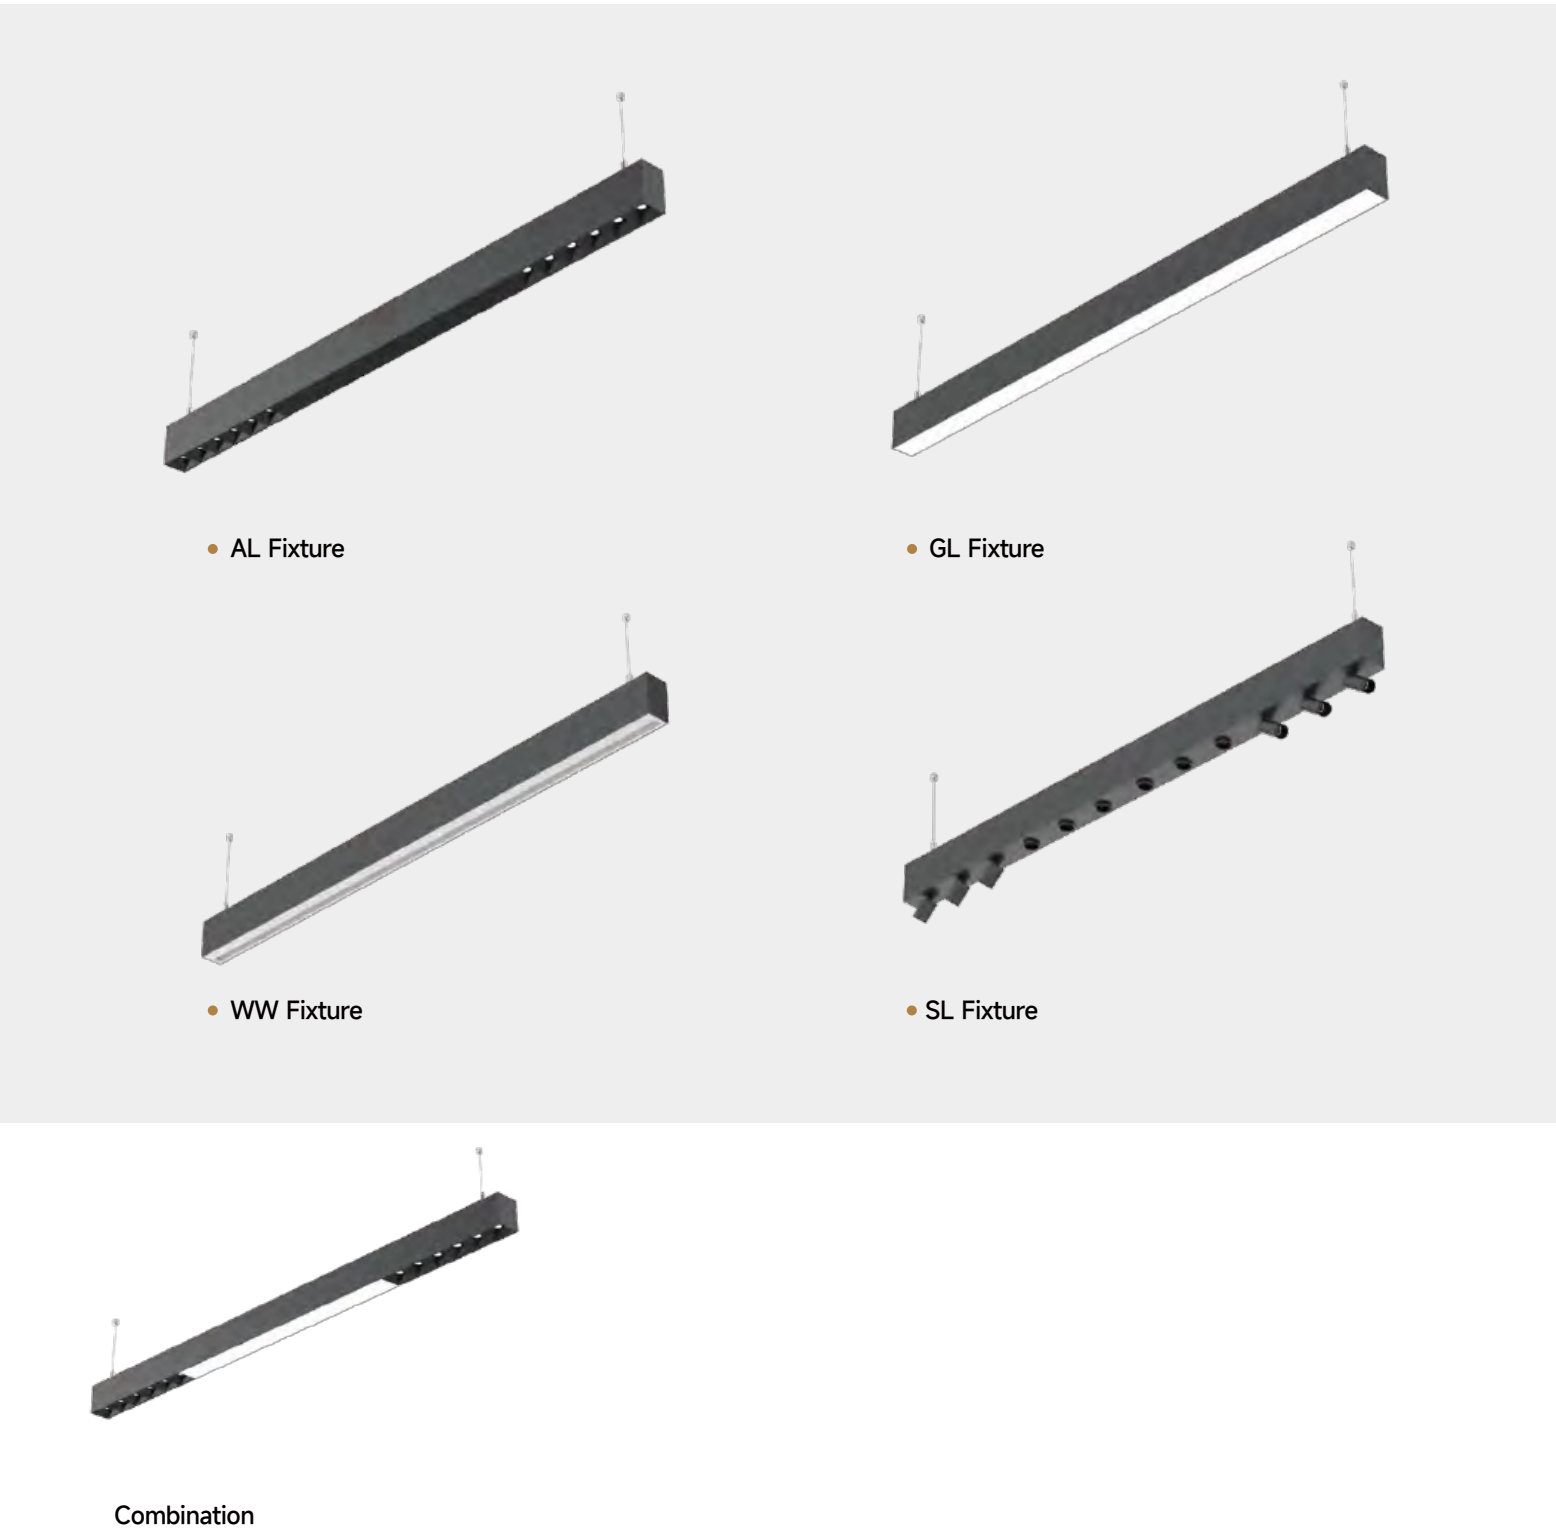

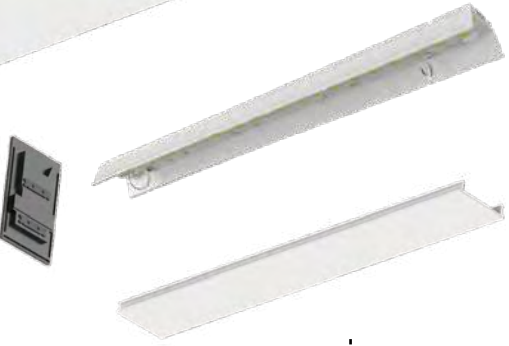

General Light Module
600mm



Blind Cover Module



Wall Washer Module
600mm




Accent Light Module
300mm



Magnetic End Cap

Different Module Inserts

Profile system made of extruded aluminium with 50mm width
various lighting modules suitable for multiple lighting applications
general light, accent light, and wall washer module for choice
Tool-free inserts mounting by clip-in mechanism
standard ,customized sizes module and cover for high precise system
Magnetic end cap without fixing screws



Linear Connector



Suspended Installation Version


Smart composition of different modules create equal spaced profiles
The end of the front profile and the open end of the following profile
can be seamlessly connected thanks to the blind cover
Perfect anti-glare due to black high-gloss grid
Up lighting is optional for suspended installation version



Blind cover with customized length
providing seamless connection


Corner module

Corner module is designed to take light around the corner
Its illuminated L-connectors opens up new scope for creative design
The 90° angle module is not only connector
It blends in as an integral part of the linear lighting system
Continuous light line linked by linear connector
The linear connector can be moved out from the end of the profile
It can't be seen from the outside

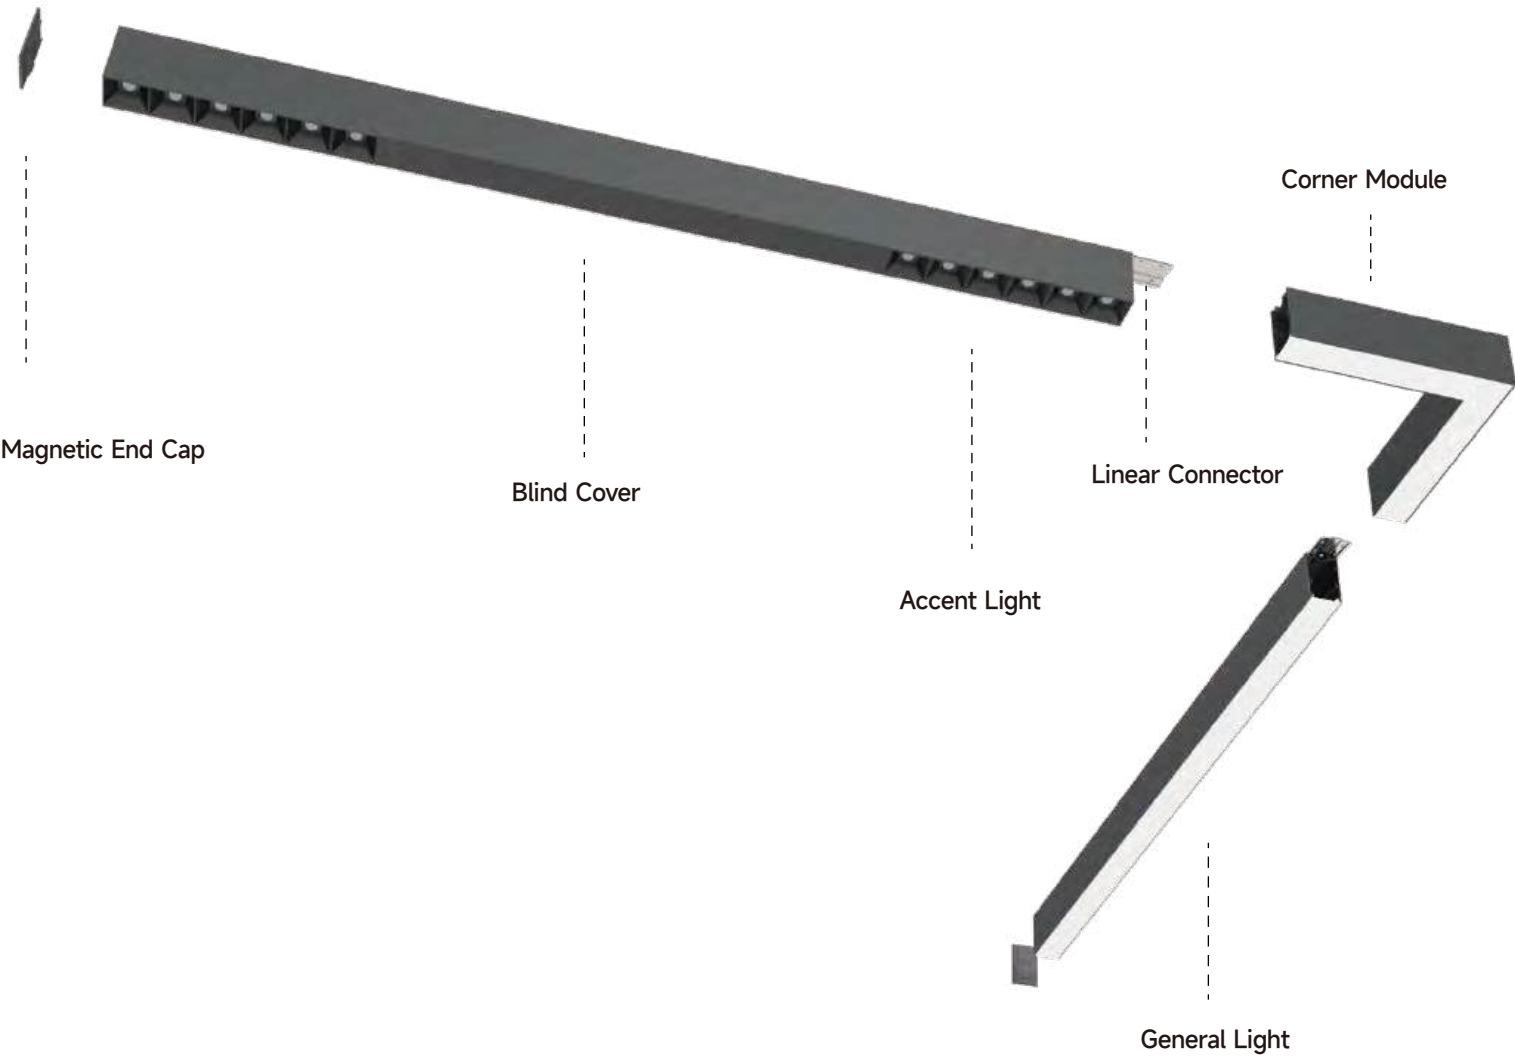


LINK 50 different module

Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology

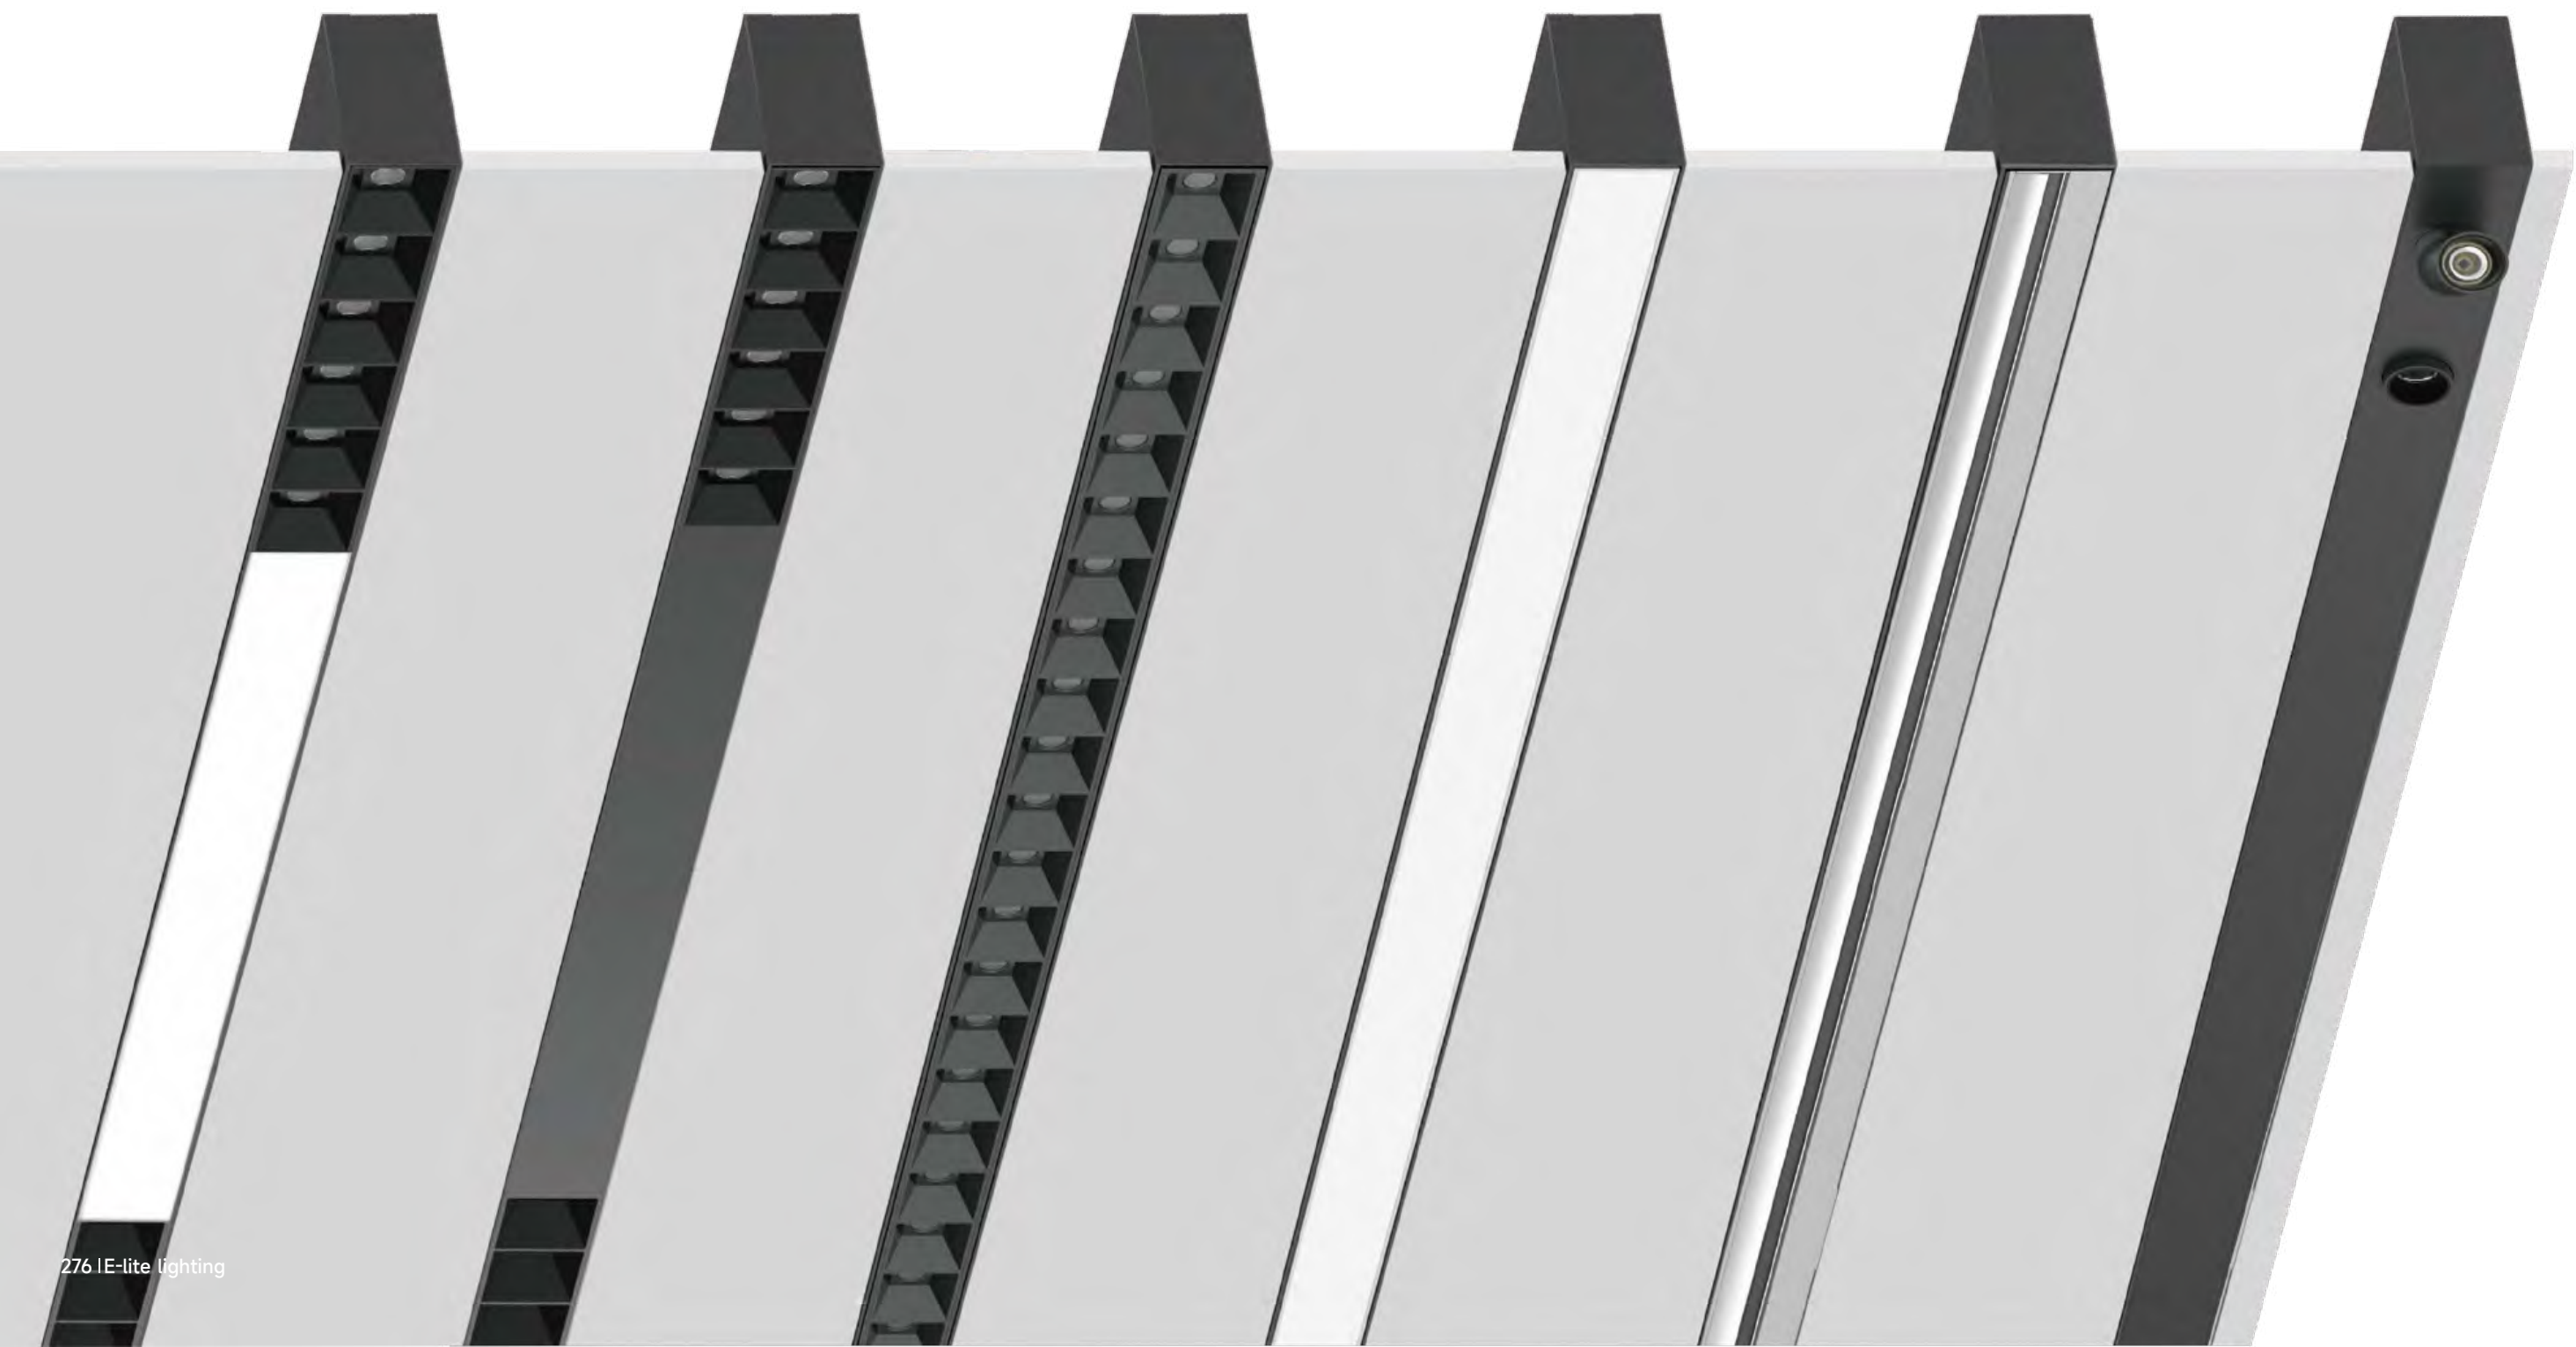

LINK50 Series
LINEAR PROFILE

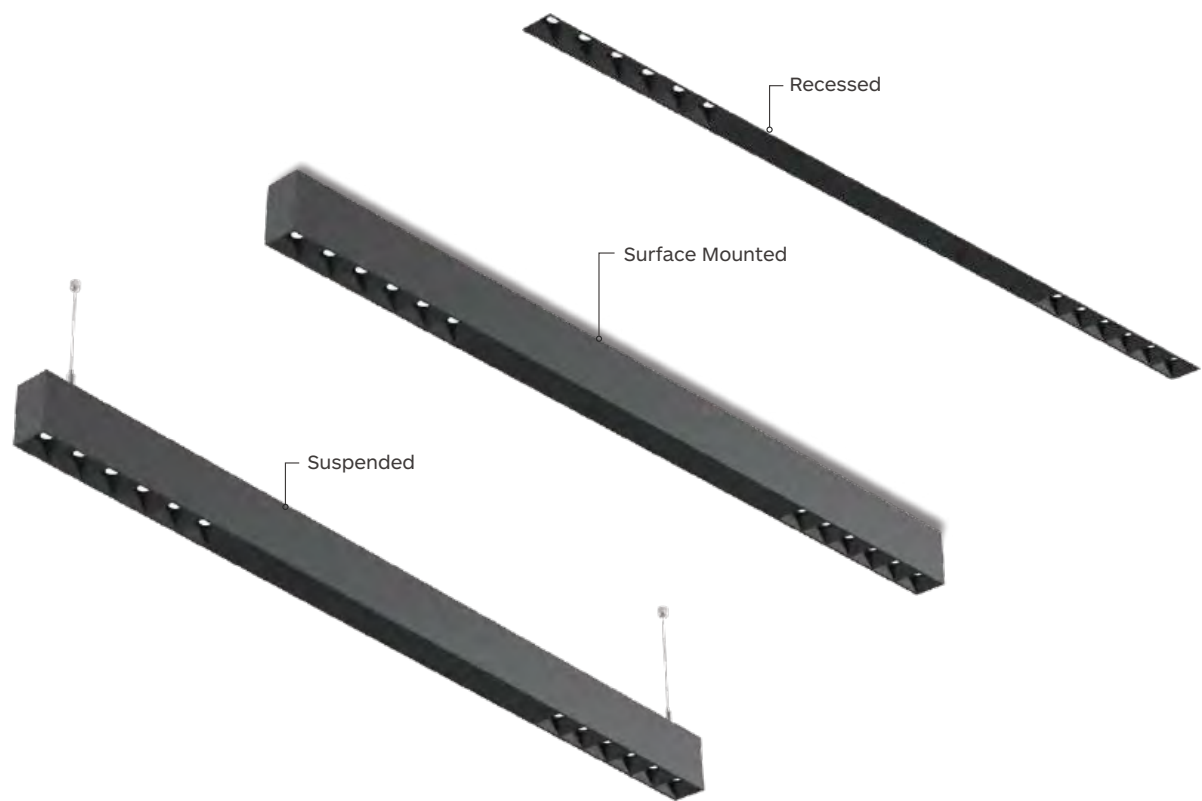

Accent Light Fixture



Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 1200mm,1800mm

Type




Installation type



LINK50-AL
Linear Profile




Drawing

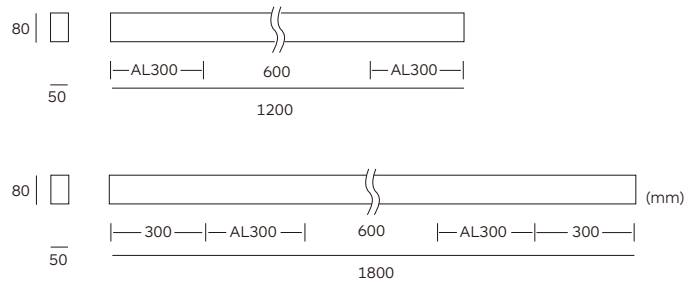


1200MM / 1800MM

30W 2200Lm OSRAM									
Code	LED LM	System LM	CD	LED W	System W	CRI	CCT	Beam	
Link50-2*AL300-30W-830-15	3000lm	2200lm	24024 cd	26W	30W	83	3000K	15°	
Link50-2*AL300-30W-840-15	3200lm	2400lm	26298 cd	26W	30W		4000K		
Link50-2*AL300-30W-830-30	3000lm	2200lm	7940 cd	26W	30W	83	3000K	30°	
Link50-2*AL300-30W-840-30	3200lm	2400lm	8614 cd	26W	30W		4000K		
Link50-2*AL300-30W-830-35x15	3000lm	2200lm	9876 cd	26W	30W	83	3000K	35°x15°	
Link50-2*AL300-30W-840-35x15	3200lm	2400lm	10704 cd	26W	30W		4000K		


LINK50 Series
LINEAR PROFILE

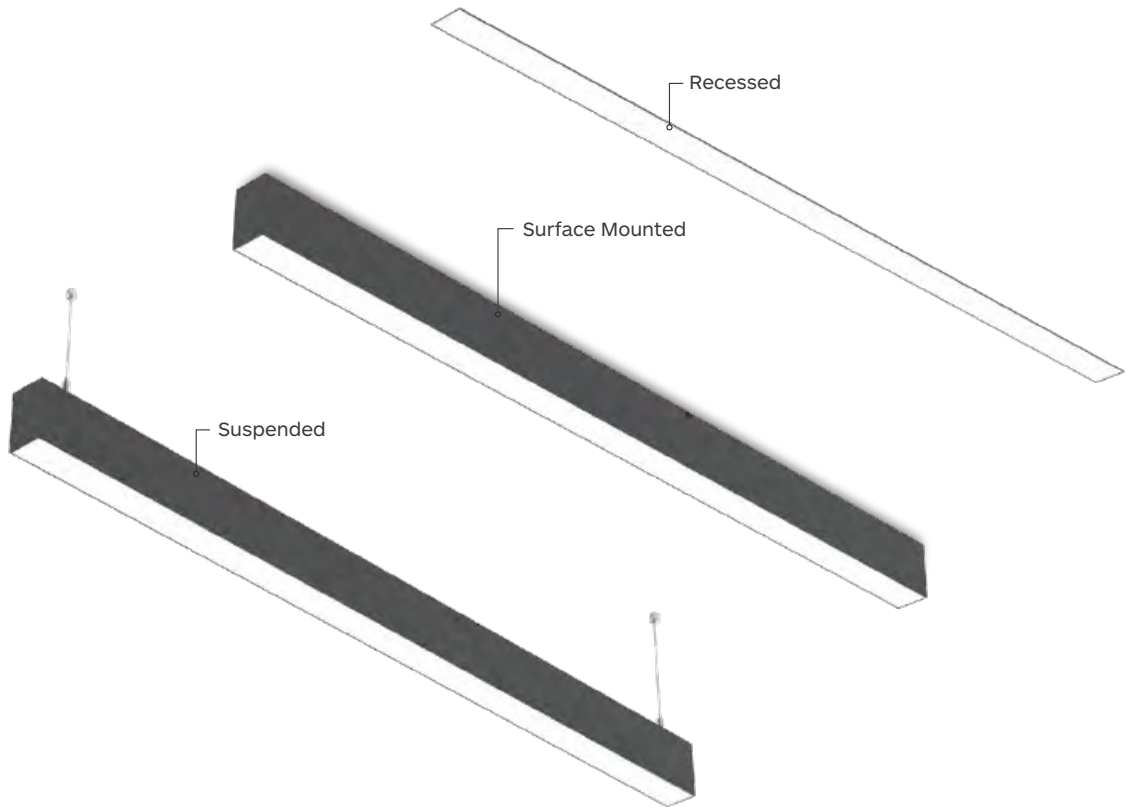

LINK50-GL
Linear Profile



Drawing

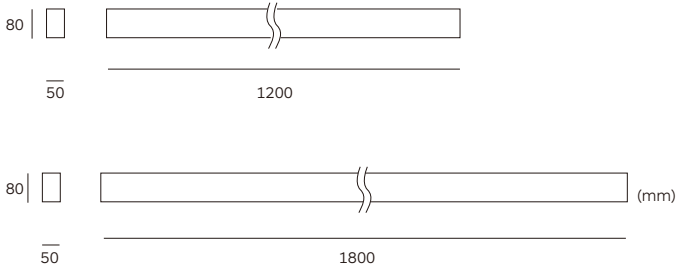

General Light Fixture



Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 1200mm,1800mm

Type



Installation type




1200MM

36W 3600-3800Lm		SAMSUNG					
Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Link50-GL1200-18W-830	4800lm	3600lm	32W	36W	83	3000K	105°
Link50-GL1200-18W-840	5000lm	3800lm	32W	36W		4000K	

1800MM

54W 5400-5800Lm		SAMSUNG					
Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Link50-GL1800-54W-830	6600lm	5400lm	48W	54W	83	3000K	105°
Link50-GL1800-54W-840	7000lm	5800lm	48W	54W		4000K	

LINK50 Series
LINEAR PROFILE

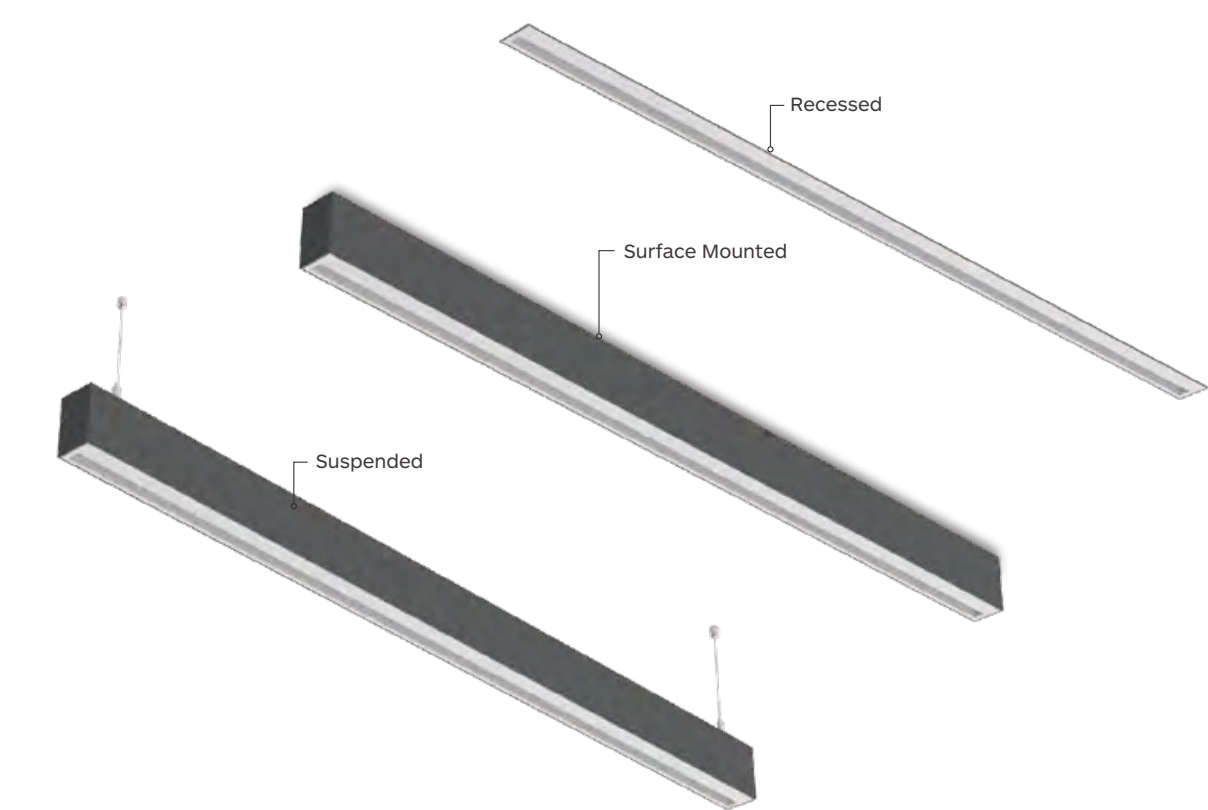

Wall Washer Fixture



Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 1200mm,1800mm


Type




Installation type

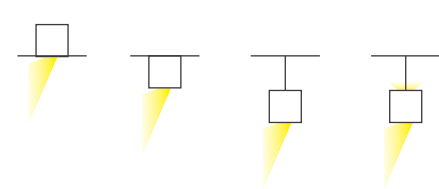

LINK50-WW
Linear Profile



Drawing

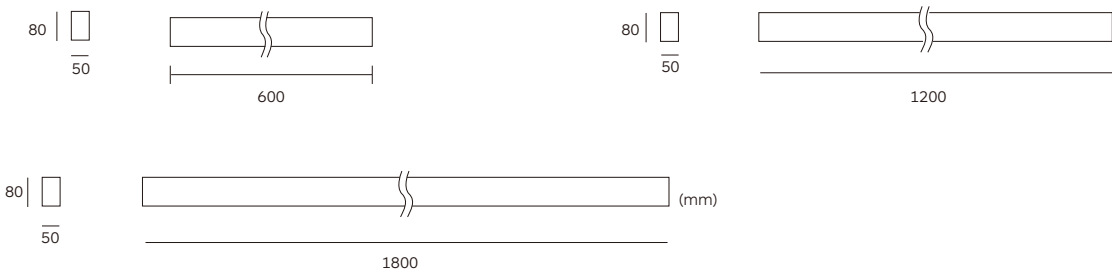

608MM

18W 1300-1400Lm		SAMSUNG					
Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Link50-WW608-18W-830	2400lm	1300lm	16W	18W	83	3000K	/
Link50-WW608-18W-840	2500lm	1400lm	16W	18W		4000K	


1200MM

36W 2500-2700Lm		SAMSUNG					
Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Link50-WW1200-36W-830	4800lm	2500lm	32W	36W	83	3000K	/
Link50-WW1200-36W-840	5000lm	2700lm	32W	36W		4000K	

1800MM

54W 3700-3900Lm		SAMSUNG					
Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Link50-WW1800-54W-830	6600lm	3700lm	48W	54W	83	3000K	/
Link50-WW1800-54W-840	7000lm	3900lm	48W	54W		4000K	

LINK50 Series
LINEAR PROFILE

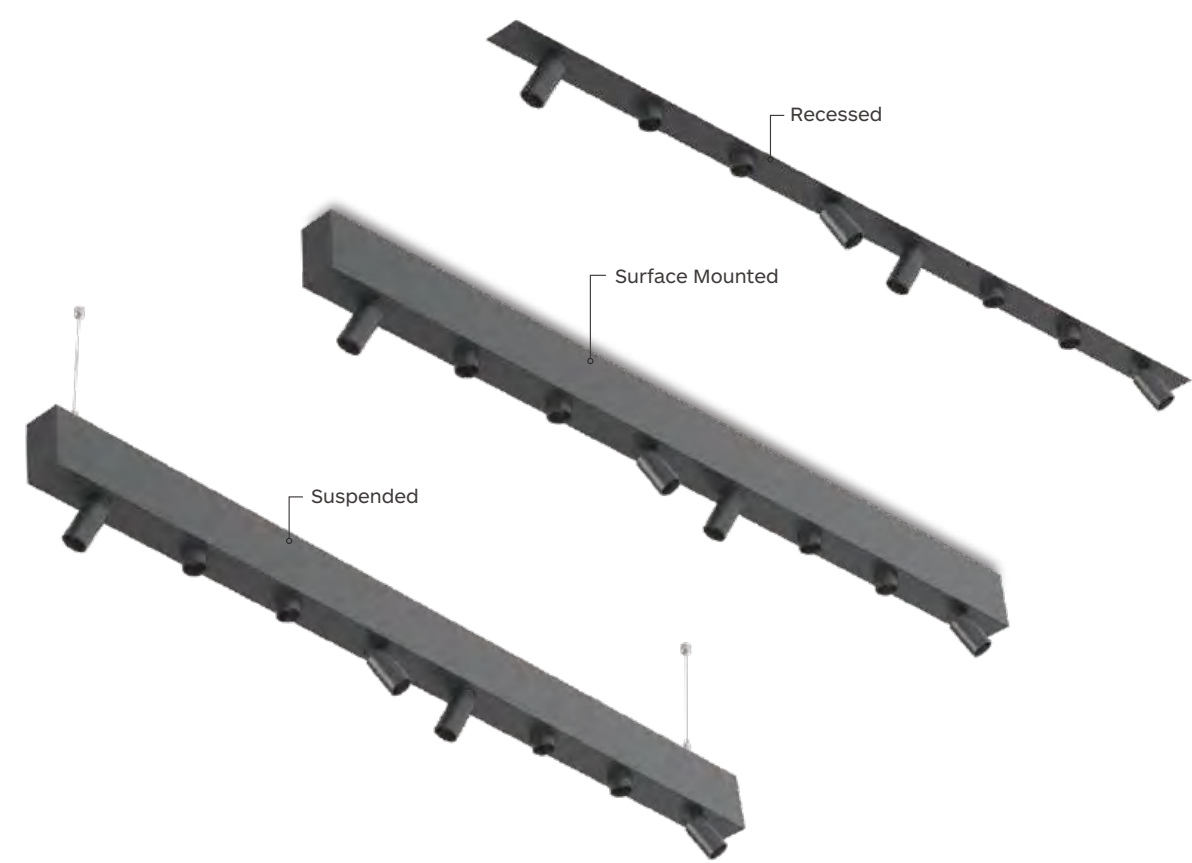

Spot Light



Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 1200mm,1800mm


Type




Installation type

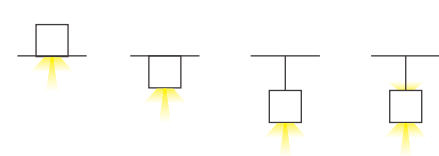

LINK50-SL
Linear Profile



Drawing

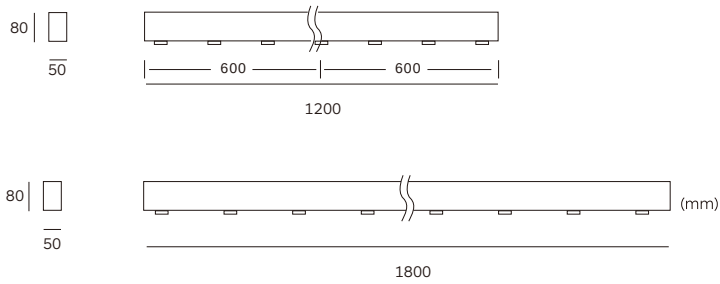


1200MM

40W 2800-3000Lm		OSRAM					
Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Link50-SL1200-40W-830-15	3800lm	2800lm	32W	40W	83	3000K	15°
Link50-SL1500-40W-840-15	4000lm	3000lm	32W	40W		4000K	
Link50-SL1200-40W-830-30	3800lm	2800lm	32W	40W	83	3000K	30°
Link50-SL1500-40W-840-30	4000lm	3000lm	32W	40W		4000K	
Link50-SL1200-40W-830-55	3800lm	2800lm	32W	40W	83	3000K	55°
Link50-SL1500-40W-840-55	4000lm	3000lm	32W	40W		4000K	

1800MM

60W 4200-4500Lm		OSRAM					
Code	LED LM	System LM	LED W	System W	CRI	CCT	Beam
Link50-SL1800-60W-830-15	5700lm	4200lm	48W	60W	83	3000K 4000K	15°
Link50-SL1800-60W-830-30	5700lm	4200lm	48W	60W		3000K 4000K	
Link50-SL1800-60W-830-55	5700lm	4200lm	48W	60W	83	3000K 4000K	55°

LINK50 Series
LINEAR PROFILE

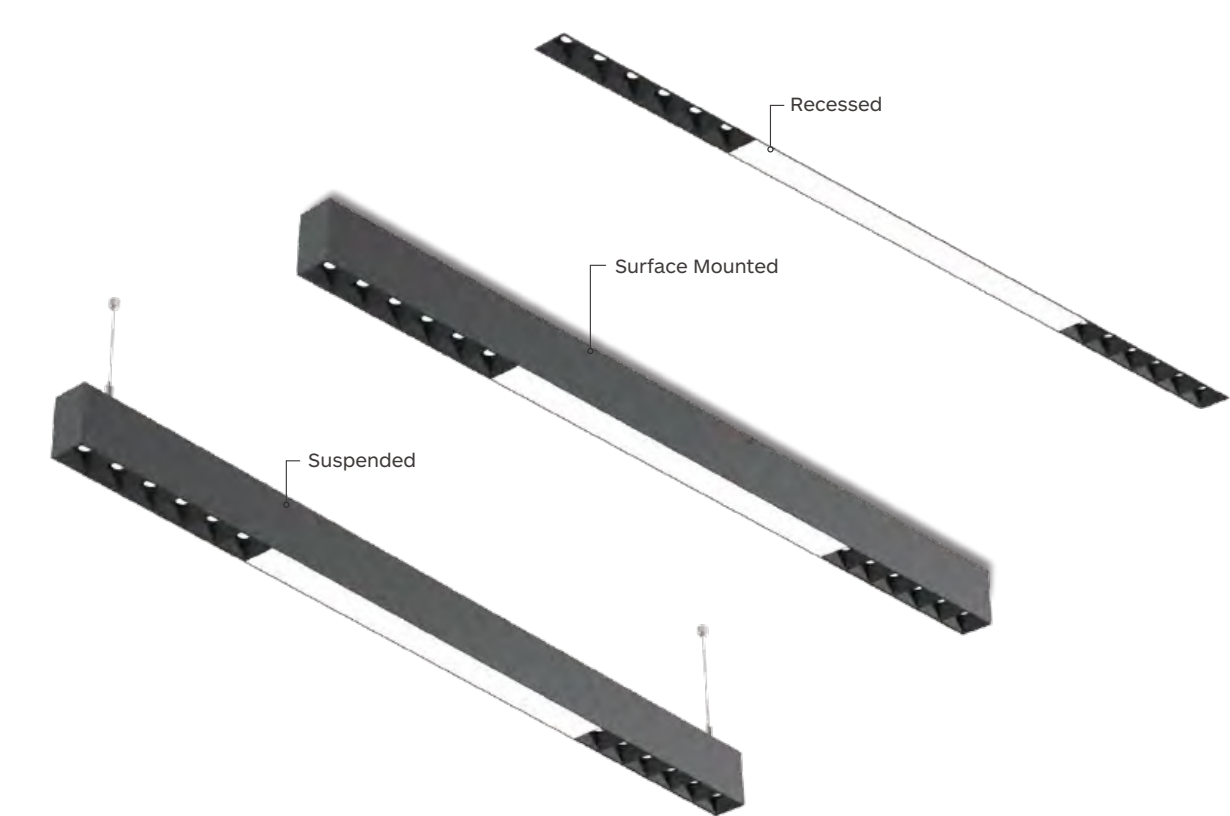

Combination of Accent Light and General Light



Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V
- SAMSUNG,CREE LEDs
- Length options: 1200mm,1800mm


Type




Installation type

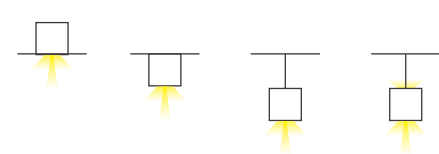

LINK50-2AL+GL
Linear Profile



Drawing




1200MM

48W 4000-4200Lm		OSRAM	SAMSUNG					
Code		LED LM	System LM	LED W	System W	CRI	CCT	Beam
Link50-2*AL300+GL600-48W-830-15&105		5200lm	4000lm	42W	48W	83	3000K	15° +105°
Link50-2*AL300+GL600-48W-840-15&105		5400lm	4200lm	42W	40W		4000K	
Link50-2*AL300+GL600-48W-830-30&105		5200lm	4000lm	42W	48W	83	3000K	30° +105°
Link50-2*AL300+GL600-48W-840-30&105		5400lm	4200lm	42W	48W		4000K	
Link50-2*AL300+GL600-48W-830-35*15&105		5200lm	4000lm	42W	48W	83	3000K	35*15° +105°
Link50-2*AL300+GL600-48W-840-35*15&105		5400lm	4200lm	42W	48W		4000K	



LINK60

2881E-lite lighting

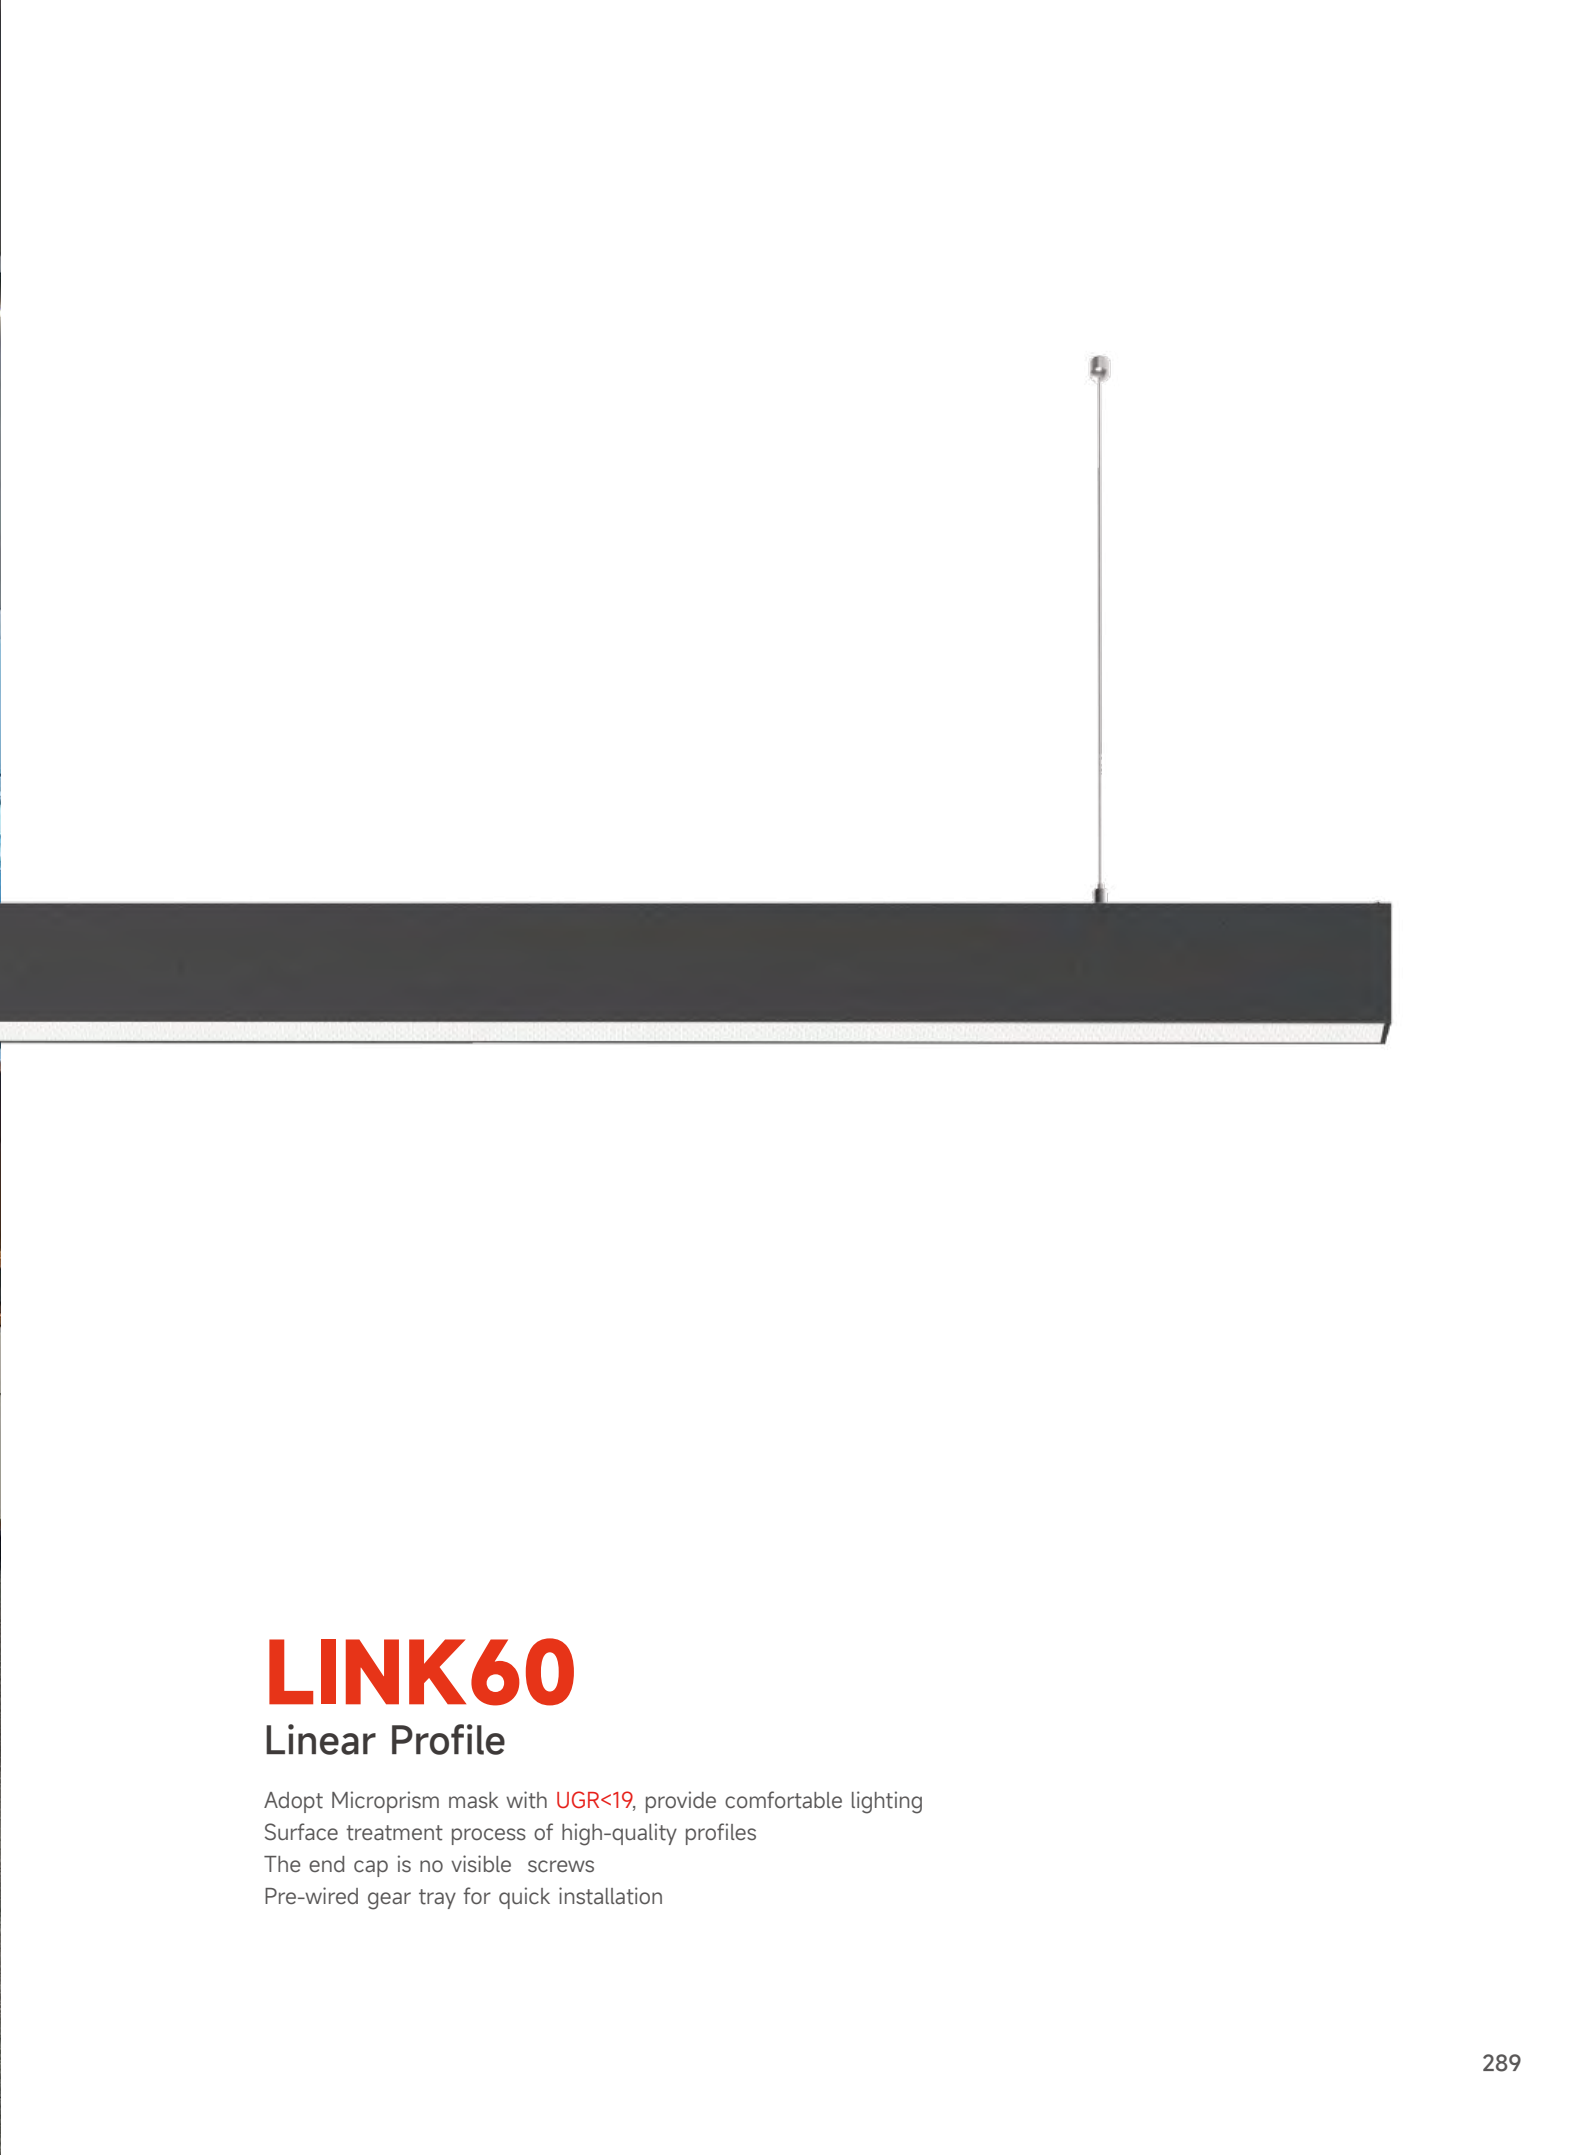

LINK60

Linear Profile

Adopt Microprism mask with **UGR<19**, provide comfortable lighting
Surface treatment process of high-quality profiles
The end cap is no visible screws
Pre-wired gear tray for quick installation

LINK60 Series
LINEAR PROFILE


Ultra-long flexible diffuser

Up to 30m long without light leakage.
Microprism craftsmanship,uniform and soft light.




No light leakage

Double end cap design without light leakage and visible screws.
Easy disassembly for continuous connection.

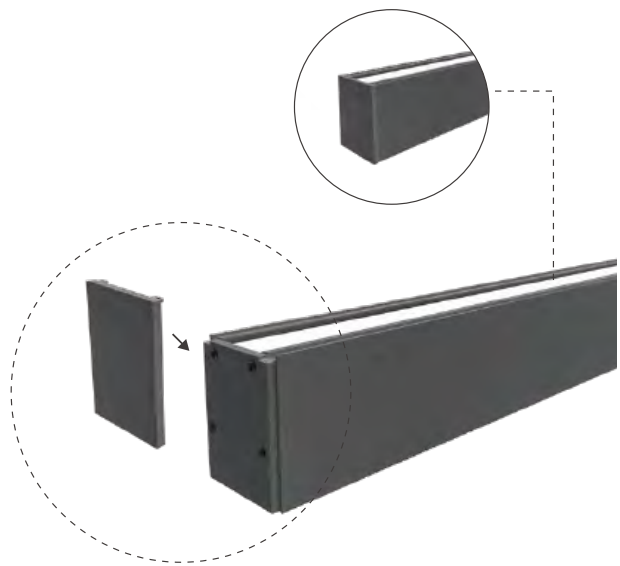


Canopy BOX

Aesthetics of appearance.

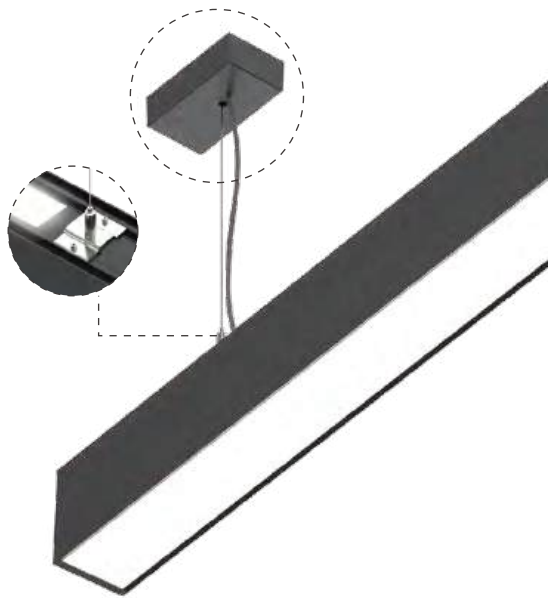


Surface mounted accessories

Rotary clip design for convenient installation.

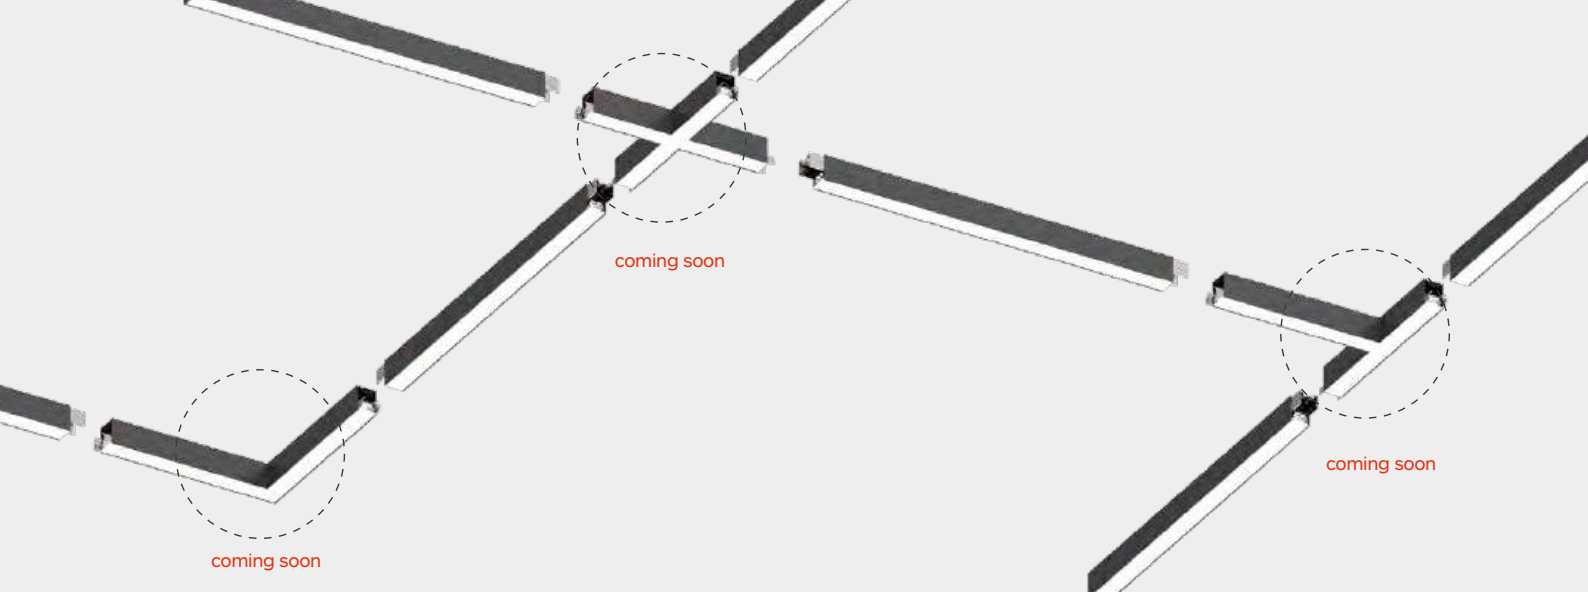

Seamless connection

Standard accessories,tight connection
without light leakage.

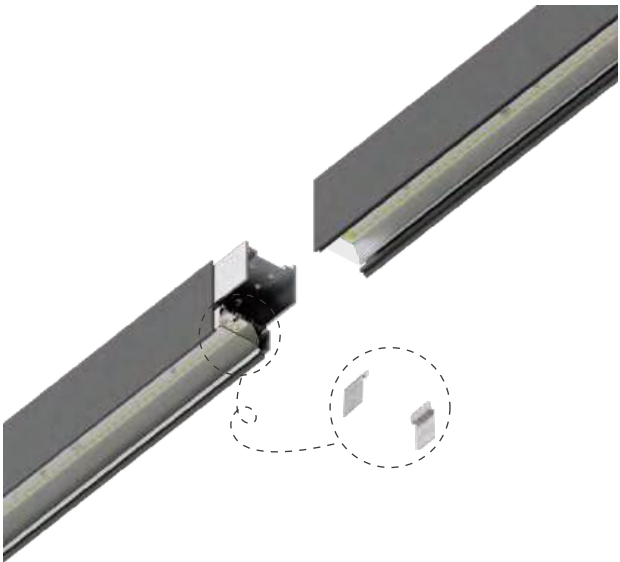


Connection accessories


Four kinds of corner,
No need complex cutting.



UGR<19


Profile system made of extruded aluminum with 65mm width,
3 installation way: surface mounted, suspended and recessed.

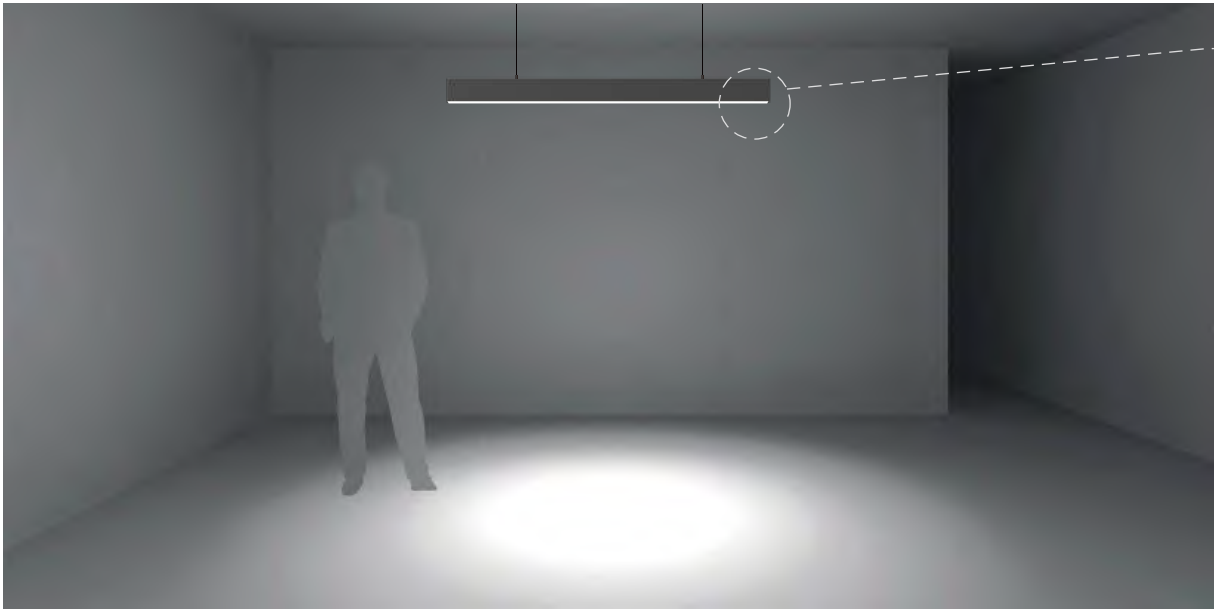

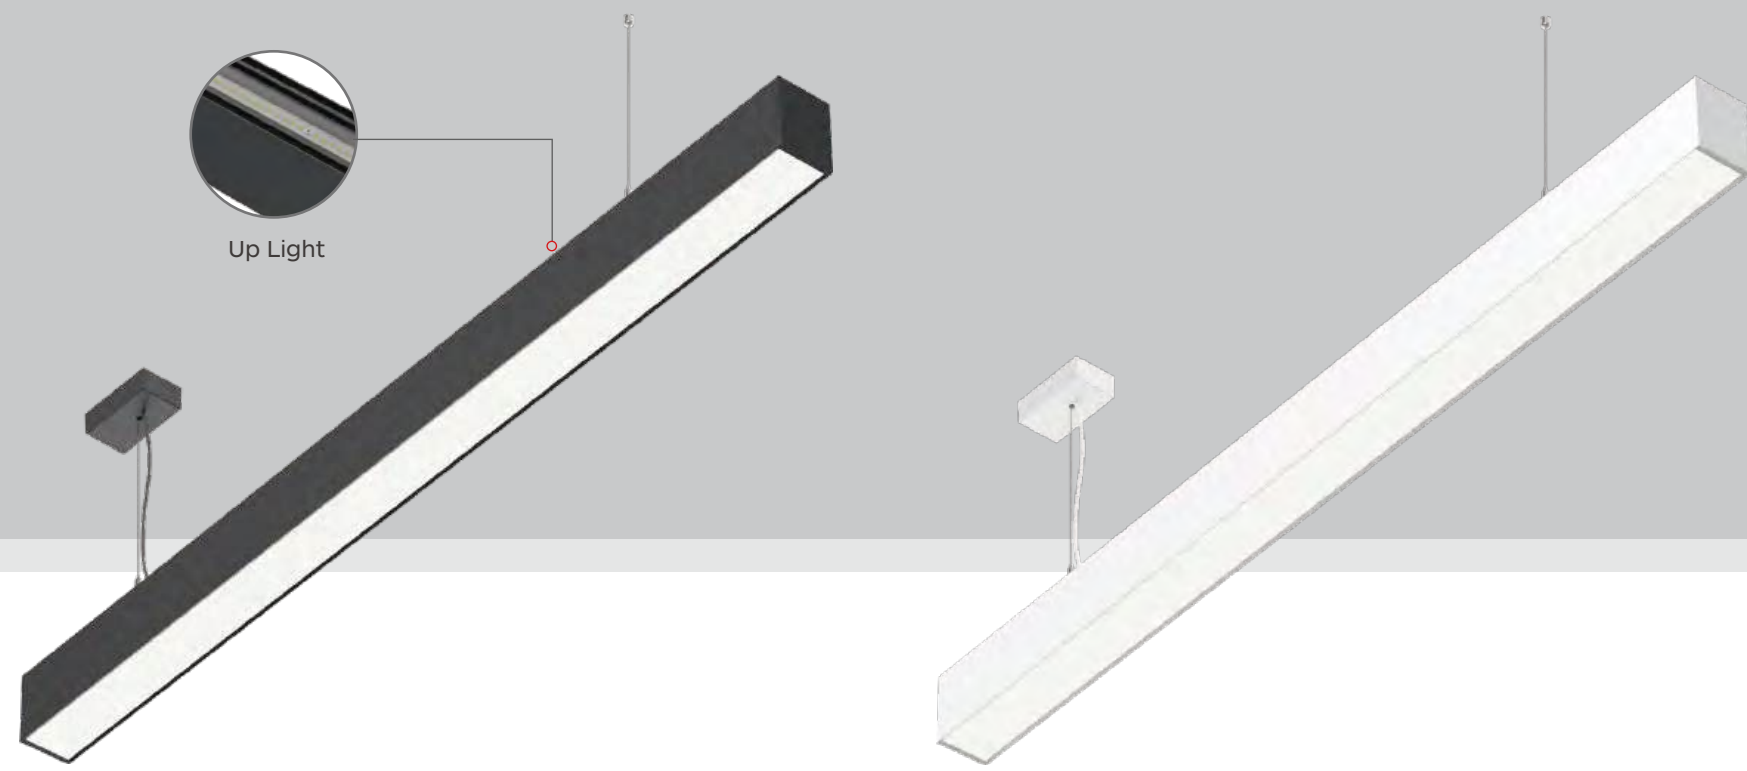

Always the right light
distribution

Whatever you wish to illuminate,
with E-lite you'll find the right light distribution.

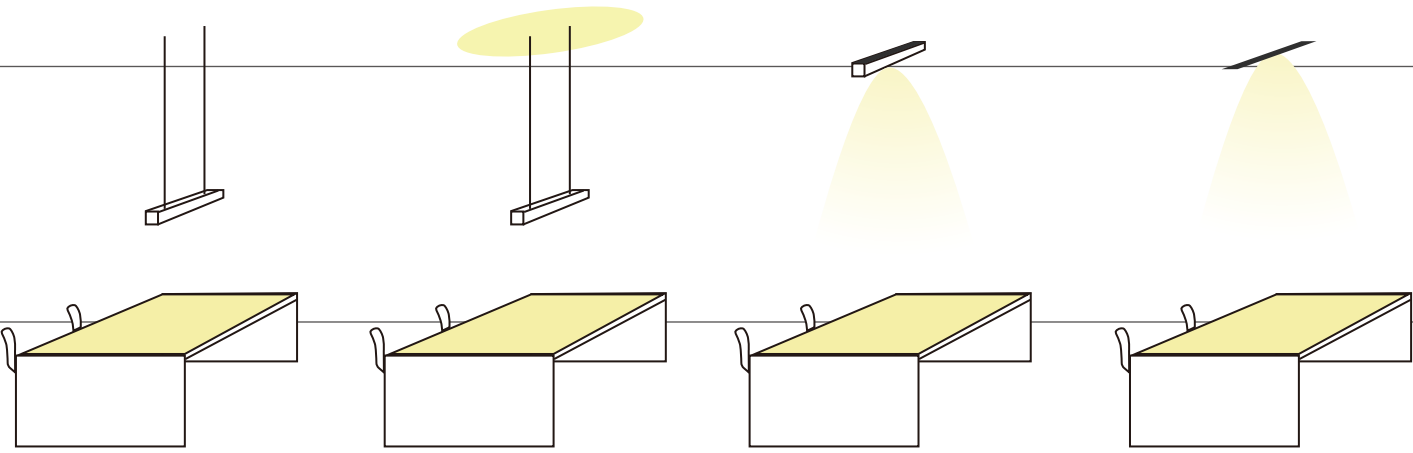


Suspended
Downward lighting

Suspended
Downward &
upward lighting

Surface Mounted


Recessed

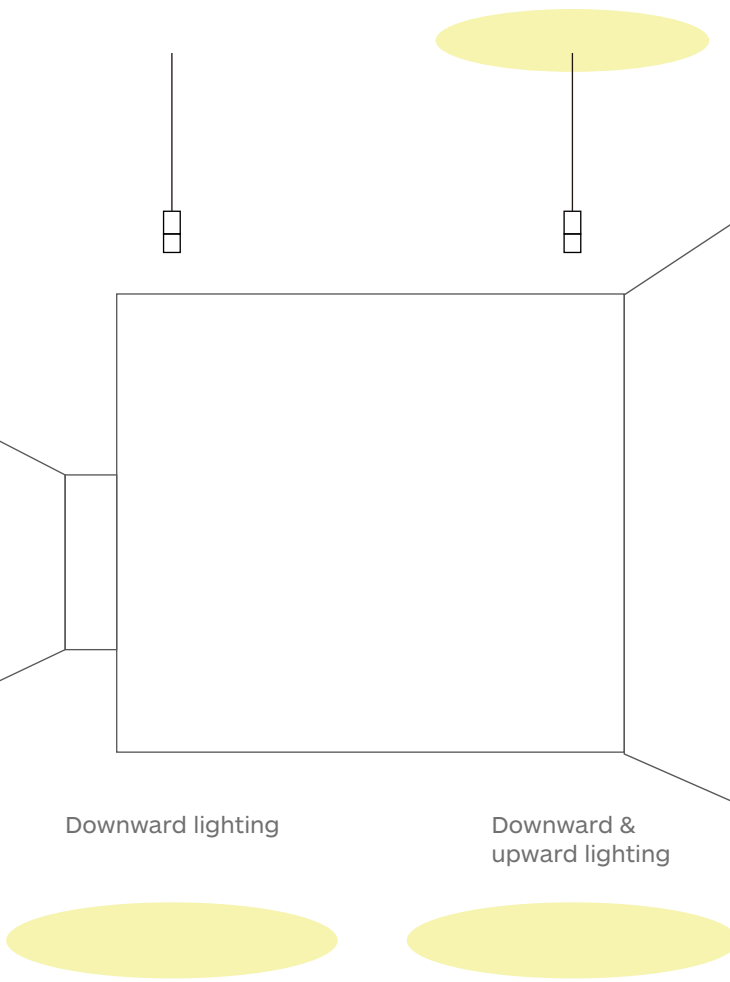

Downward lighting

Downward &
upward lighting

LINK60 Series
LINEAR PROFILE

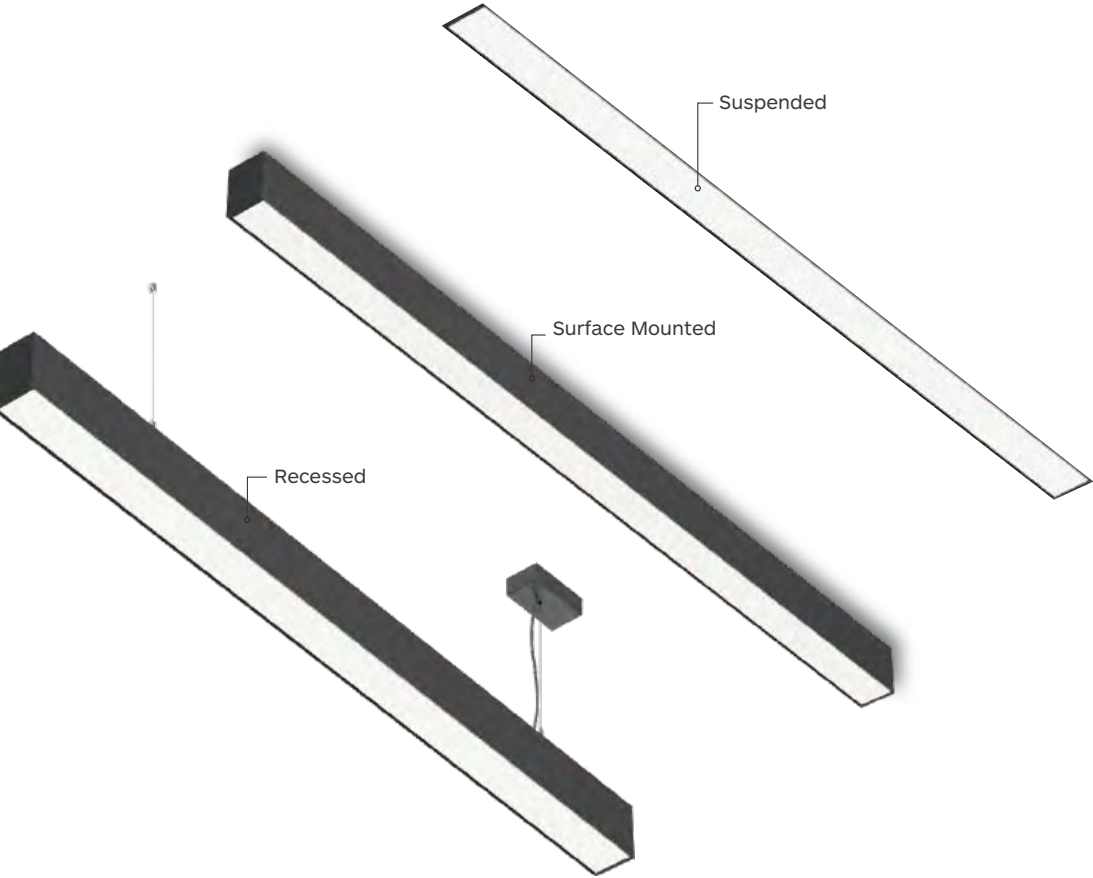

LINK60 Series




Features

- Adopt Microprism mask with UGR<19,provide comfortable lighting
- Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation

Specifications

- Illumination type: Downward & upward lighting
- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: ON-OFF, 1-10V, DALI
- Samsung LEDs
- Length options: 1.2m, 1.5m, 1.8m
- Installation: surface mounted, suspended and recessed

Installation type




Type




LINK60
Linear Profile



Drawing

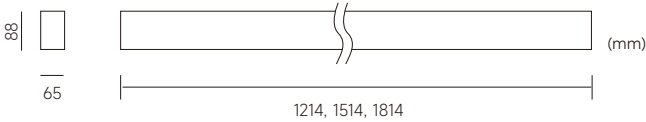

Downward lighting							
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1200MM							
LINK60-DL-CL1200-25W-830	23W	25W	2500lm	> 80	3000K	80°	1214*65*88mm
LINK60-DL-CL1200-25W-840	23W	25W	2600lm		4000K		
1500MM							
LINK60-DL-CL1500-33W-830	30W	33W	3300lm	> 80	3000K	80°	1514*65*88mm
LINK60-DL-CL1500-33W-840	30W	33W	3440lm		4000K		
1800MM							
LINK60-DL-CL1800-38W-830	35W	38W	3800lm	> 80	3000K	80°	1814*65*88mm
LINK60-DL-CL1800-38W-840	35W	38W	3960lm		4000K		

Downward and upward lighting							
Code	LED W	System W	System LM	CRI	CCT	Beam	Size
1200MM							
LINK60-UL-CL1200-38W-830	11W ↑ 23W ↓	13W ↑ 25W ↓	4230lm	>80	3000K	80° ↓ 100° ↑	1214*65*88mm
LINK60-UL-CL1200-38W-840	11W ↑ 23W ↓	13W ↑ 25W ↓	4410lm		4000K	80° ↓ 100° ↑	
1500MM							
LINK60-UL-CL1500-47W-830	15W ↑ 30W ↓	16W ↑ 31W ↓	5230lm	>80	3000K	80° ↓ 100° ↑	1514*65*88mm
LINK60-UL-CL1500-47W-840	15W ↑ 30W ↓	16W ↑ 31W ↓	5450lm		4000K	80° ↓ 100° ↑	
1800MM							
LINK60-UL-CL1800-58W-830	18W ↑ 35W ↓	20W ↑ 38W ↓	6460lm	>80	3000K	80° ↓ 100° ↑	1814*65*88mm
LINK60-UL-CL1800-58W-840	18W ↑ 35W ↓	20W ↑ 38W ↓	6730lm		4000K	80° ↓ 100° ↑	

Low Voltage System

Low Voltage System

LINE X05	298-307
Coming Soon →	
LINE X11	308-315
Coming Soon →	
LINE X26	316-369
SKYLINE	370-375
Coming Soon →	




LINE X 05



Low Voltage System

Thin extruded aluminum profile with 5mm width groove
24VDC Version
Good application for residential lighting projects
Available for Triac-dimming


LineX 05 DC24V Track

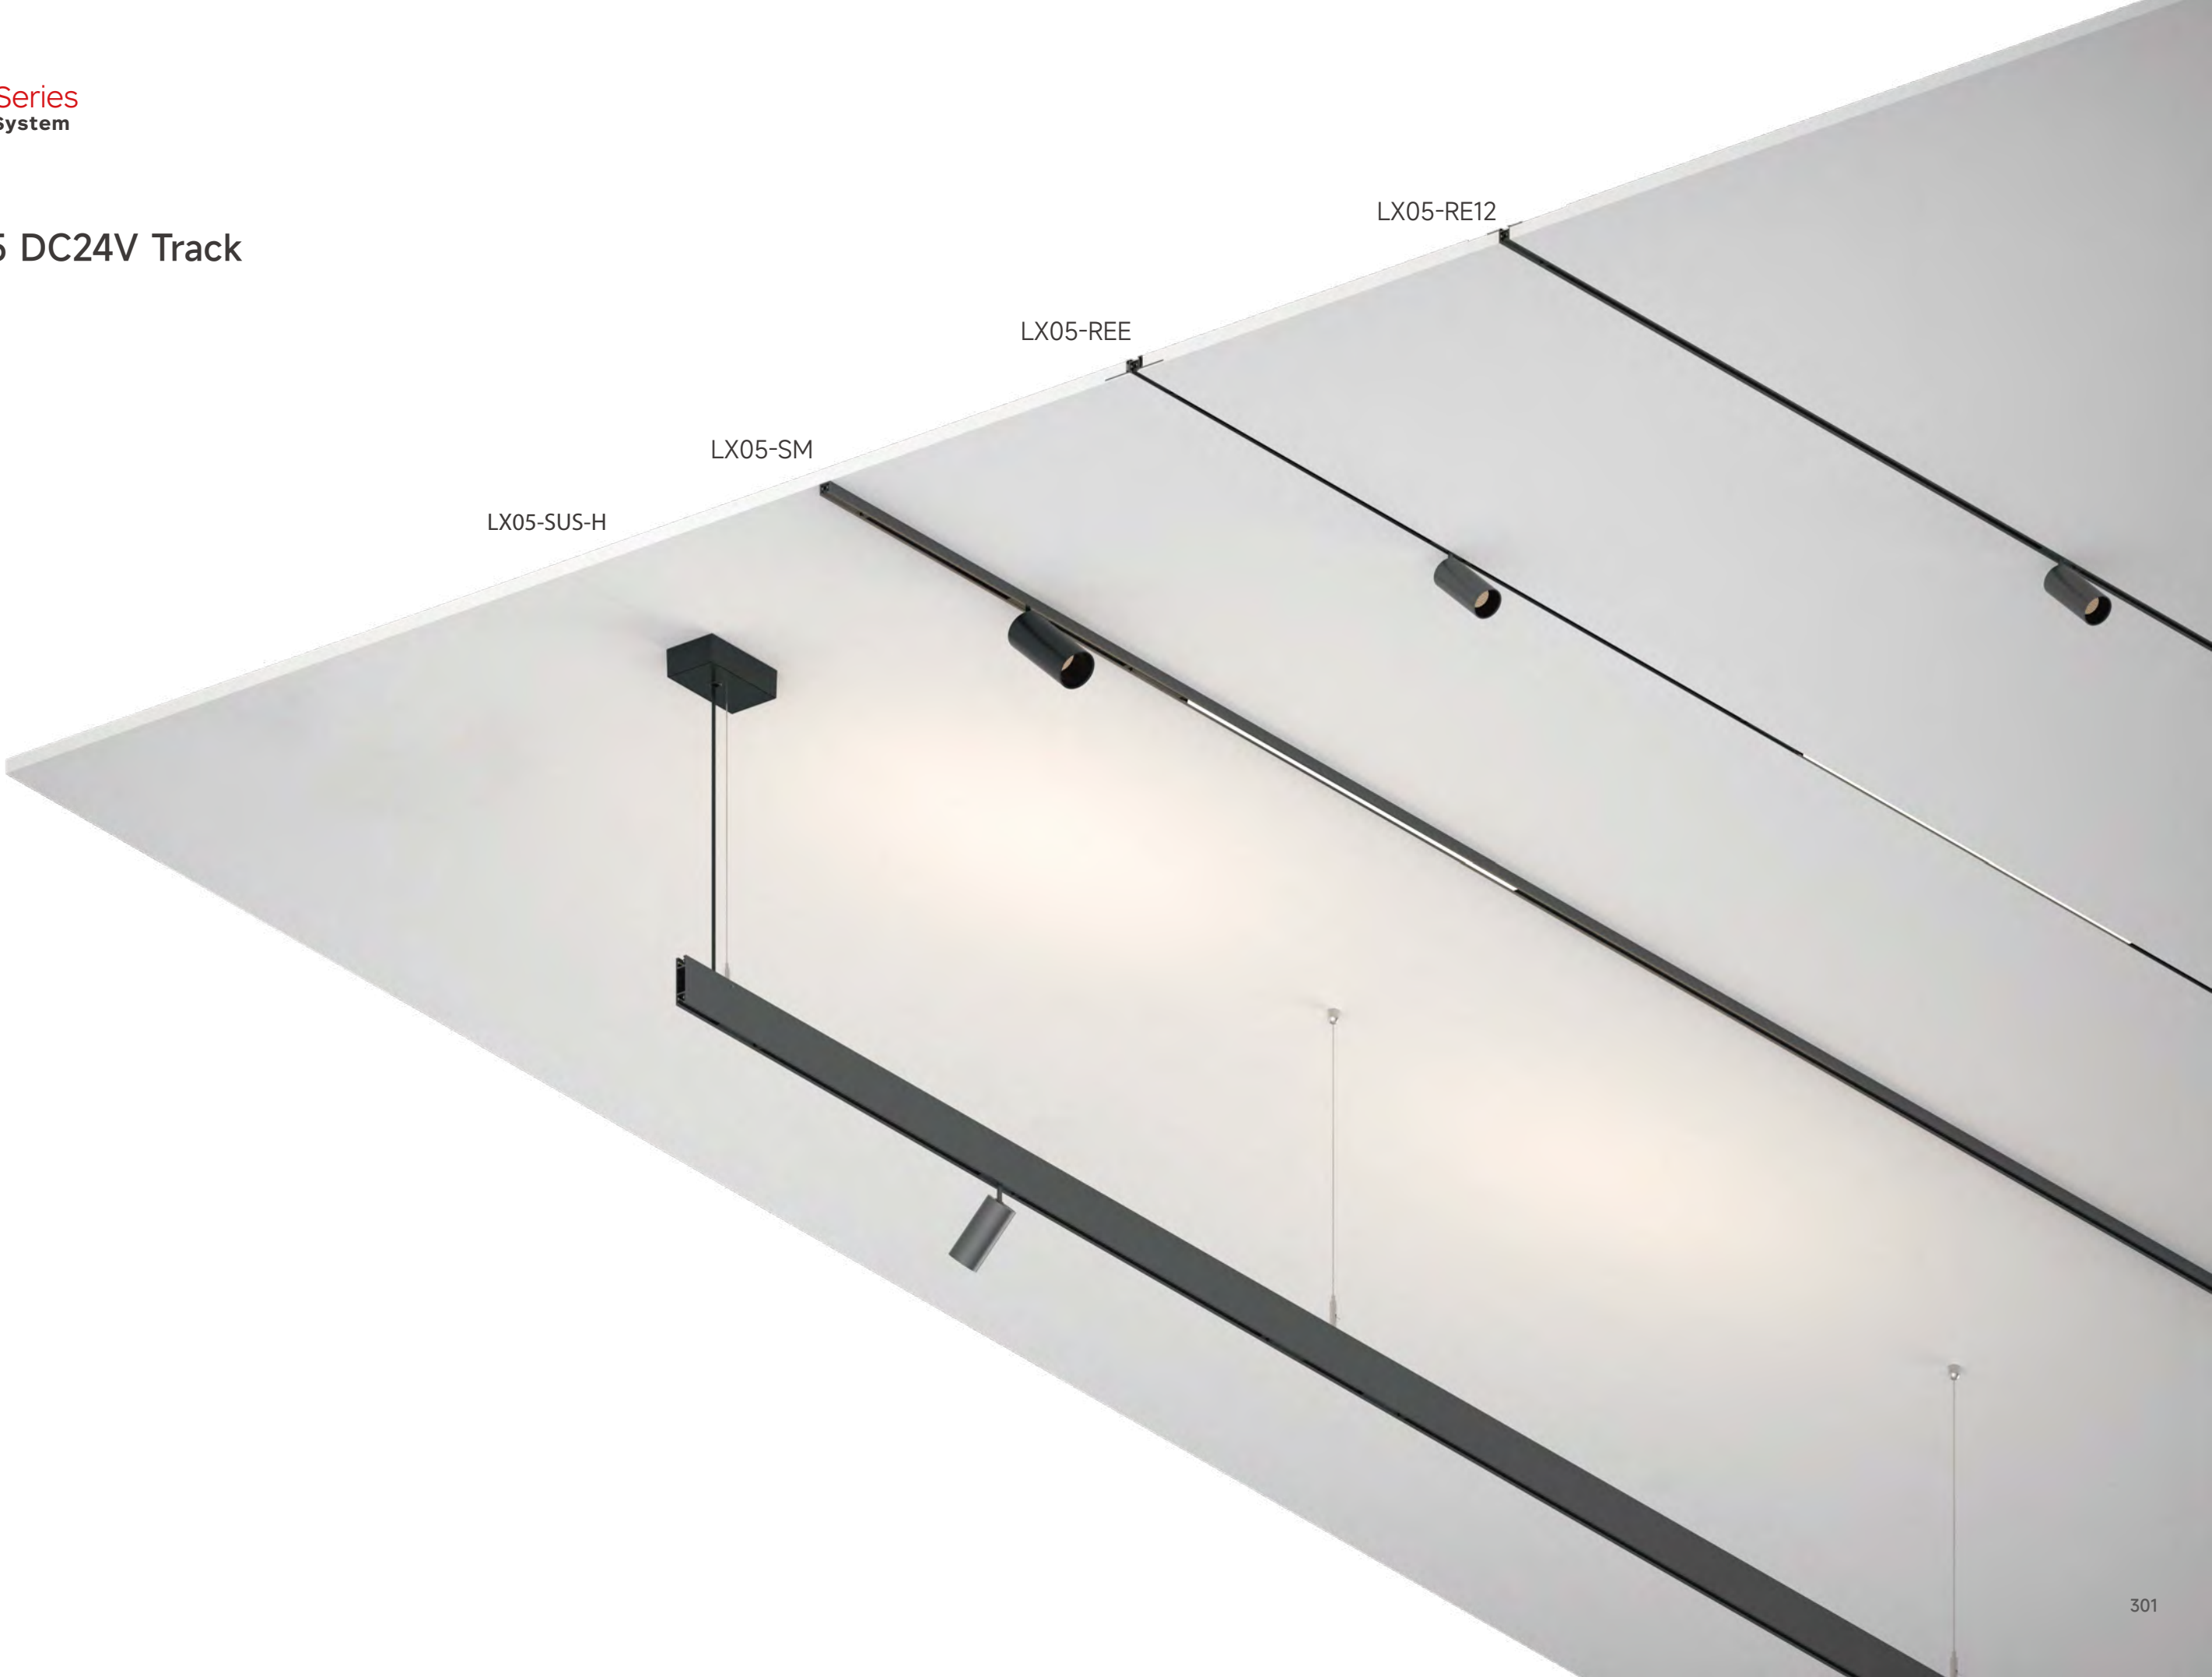


LINE X 05 Series
Low Voltage System

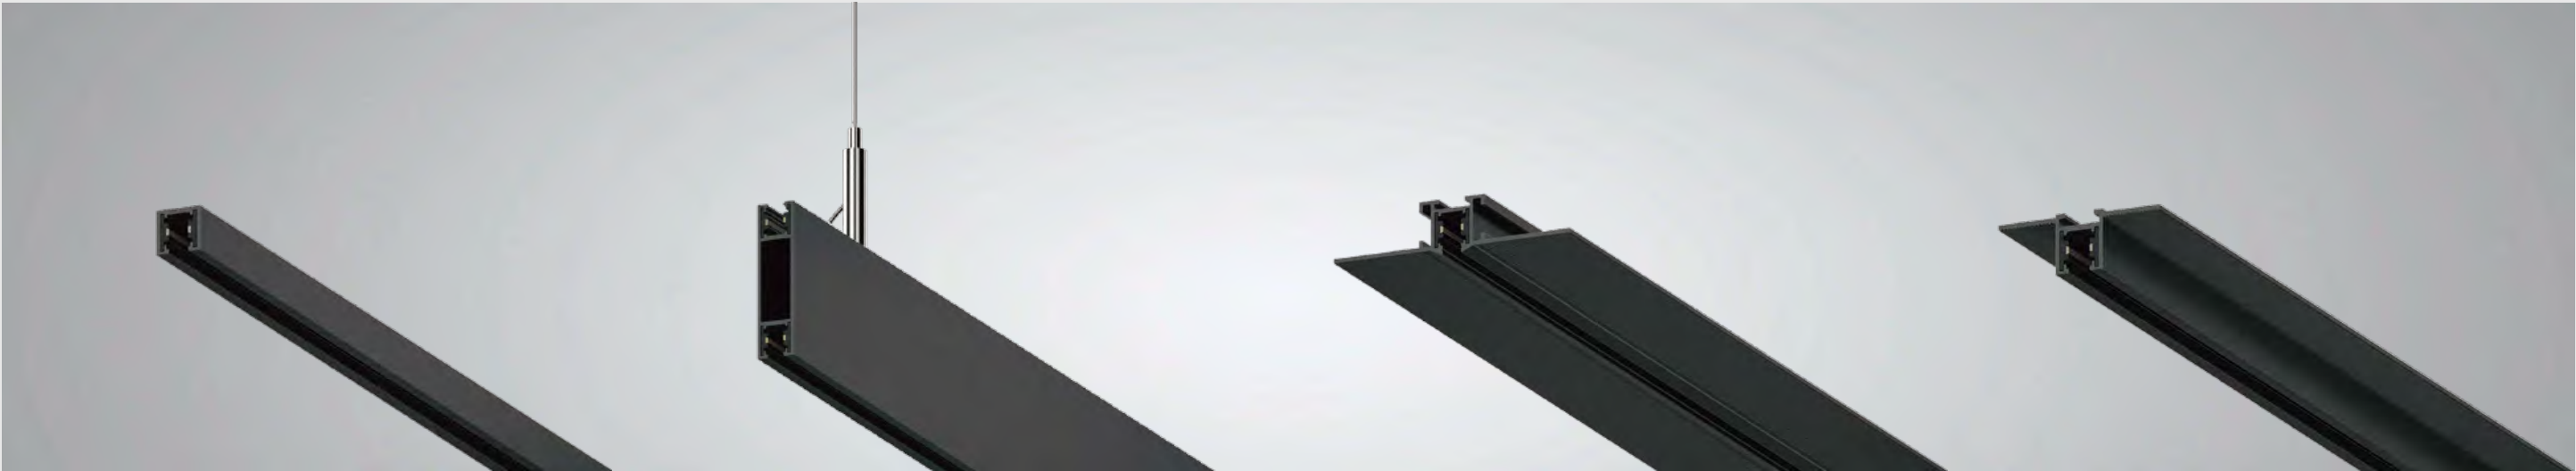


LX05-SM

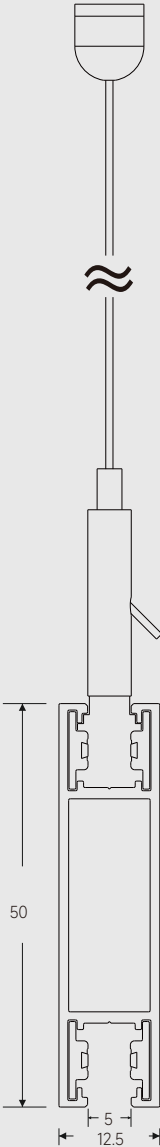

LX05-SUS-H

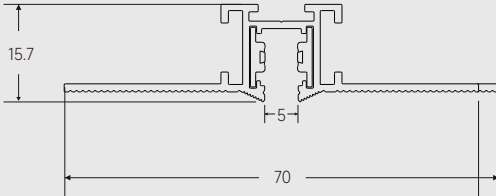


LX05-REE

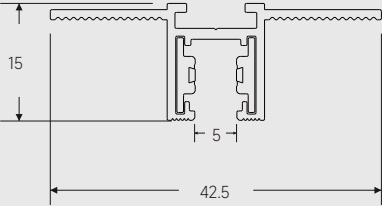

LX05-RE12

Surface-mounted Track

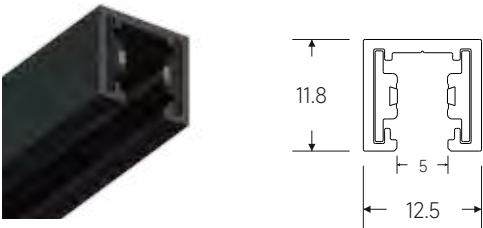

Order Options


Code	Description	Length(mm)	Power supply	Installation
LX05-SM	surface-mounted	1000/2000	built-in available	surface-mounted

Accessories

LX05-SM



Suspended Track

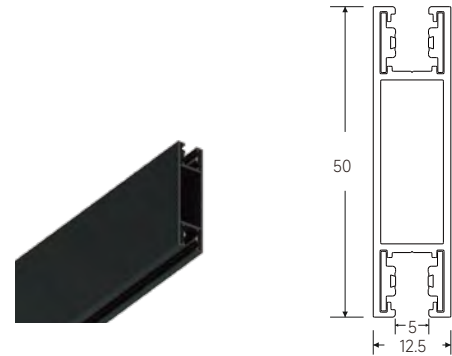


Order Options

Code	Description	Length(mm)	Power supply	Installation
LX05-SUS-H	downward & upward lighting	1000/2000	built-in available	suspended

Accessories

LX05-SUS-H

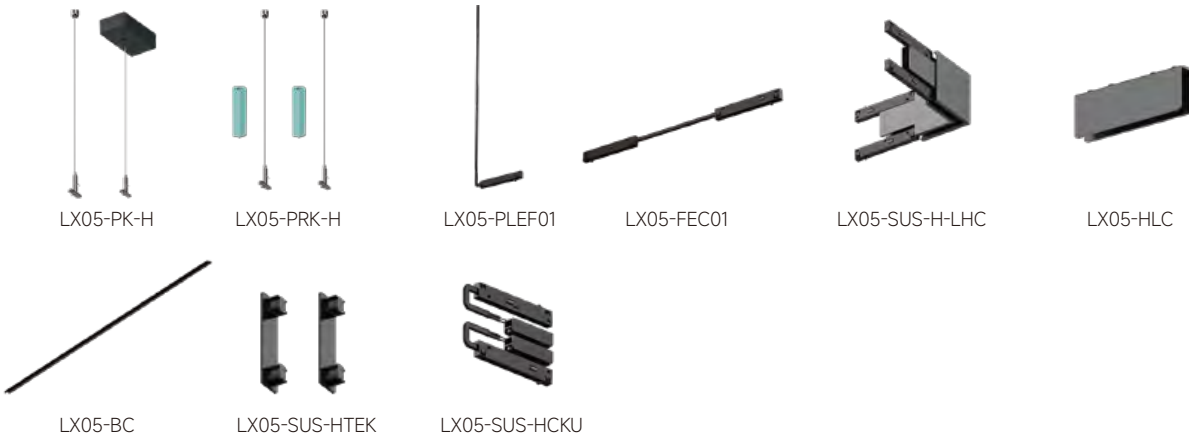

Recessed Track



Order Options

Code	Description	Length(mm)	Power supply	Installation
LX05-REE	easy installation	1000/2000	built-in available	trimless recessed
LX05-RE12	compatible with ½" ceiling	1000/2000	built-in available	trimless recessed

Accessories

LX05-REE




LX05-RE12



Inserts for track


Spotlight Insert

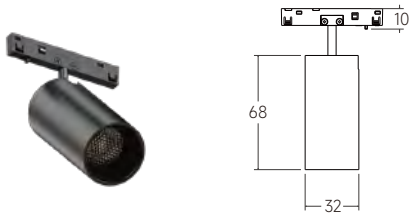

LX05-RS30-4W

Size: 58mm x Φ 32mm
System Lumen Output: 250lm
System Wattage: 4W
Beam Angle:18°/24°/36°
Housing Color: Black/White
CCT: 2700K/3000K/4000K
CRI: >90


Spotlight Insert

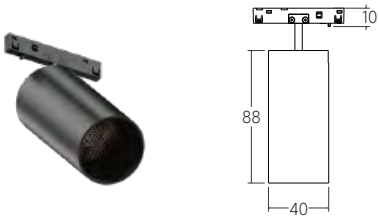

LX05-RS40-8W

Size: 88mm x Φ 40mm
System Lumen Output:600Lm
System Wattage: 8W
Beam Angle:18°/24°/36°
Housing Color: Black/White
CCT: 3000K CRI: >90

GIMI Decorative Pendant

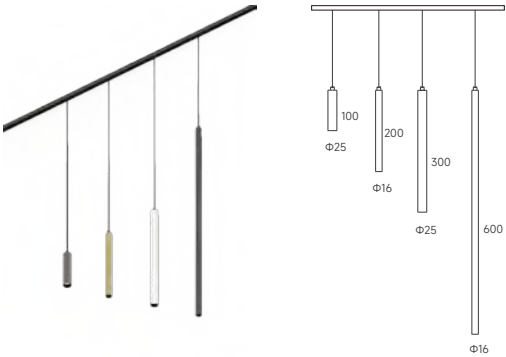

LX05-PS16/PS25

System Lumen Output: 160lm/230lm
System Wattage: 3W/4W
Size: Φ 16mm/25mm
CCT: 2700K/3000K/4000K
Color: Black/White/Brushed gold/Brushed bronze

FARA Decorative Pendant



LX05-SCD80

System Lumen Output: 270lm
System Wattage: 4W
Size: Φ 80mm
CCT: 2700K/3000K/4000K
Color: Black/White/Golden

LINE X 05 Series
Low Voltage System


FINO Decorative Pendant



LX05-SPD80

System Lumen Output: 170lm
System Wattage: 2W
Size: Φ80mm
CCT: 2700K/3000K/4000K
CRI: >90
Color: Black/White


Decorative Pendant

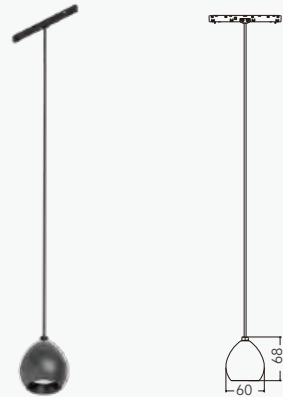

LX05-SURI 60

System Lumen Output: 220lm
System Wattage: 4W
Beam: 18°/24°/30°
CRI: >90
CCT: 2700K/3000K/4000K
Color: White/Black


Accent Light Insert

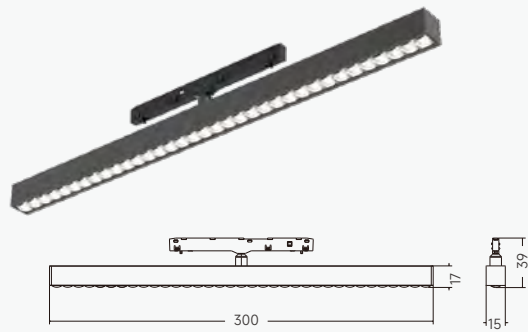

LX05-A-AL300

System Lumen Output: 1350lm
System Wattage: 12W
Beam Angle: 45°/80°
CCT: 2700K/3000K/4000K
CRI: >90
Color: White/Black

General Light LED Strip

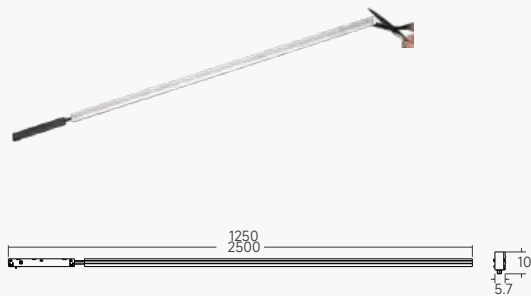

LX05-GL1250-6W
LX05-GL2500-12W

System Lumen Output: 250lm/500lm
System Wattage: 6W/12W
Beam Angle: 110°
CCT: 2700K/3000K/4000K
CRI: >90

Line X System-modular track kit,
easy installation package

The line X is available in a form of modular track kit, which is easy-to-use as a package. Track width options of 5mm and 11mm. Multiple modules can be integrated with the track easily. Available in classic black, white, and trending brushed bronze, brushed gold color. Various inserts, like accent lighting insert, general lighting insert, spotlight insert can be easily mounted to the track. It is ideal for residential lighting, retail shop applications .etc



LINE X 05 Series
Low Voltage System





LINE X 11

3081E-lite lighting

LINE X 11

Low Voltage System


Extruded aluminum profile with 11mm width groove.
24VDC Version
Good application for residential lighting projects
Available for Triac-dimming



LineX 11 DC24V Track



Surface-mounted Track

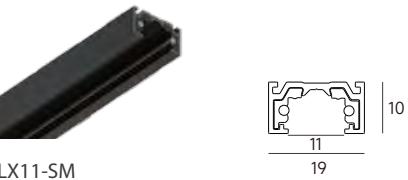

Order Options

Code	Description	Length(mm)	Power supply	Installation
LX11-SM	surface-mounted	1000/2000	built-in available	surface-mounted

Accessories

LX11-SM



Suspended Track



Order Options

Code	Description	Length(mm)	Power supply	Installation
LX11-SUS	standard	1000/2000	built-in available	suspended
LX11-SUS-O		1000/2000	built-in available	suspended

Accessories


LX11-SUS



LX11-SUS-O



Recessed Track

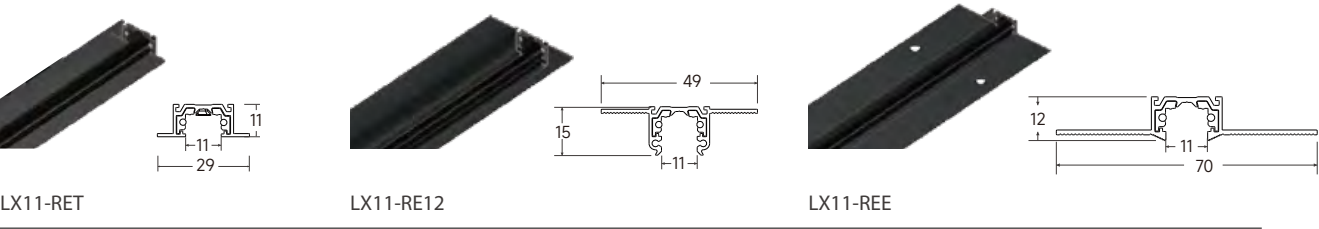

Order Options

Code	Description	Length(mm)	Power supply	Installation
LX11-RET	with trim	1000/2000	built-in available	trimless recessed
LX11-RE12	compatible with ½" ceiling	1000/2000	built-in available	trimless recessed
LX11-REE	easy installation	1000/2000	built-in available	trimless recessed

Accessories

LX11-RET



LX11-RE12



LX11-REE



Inserts for track

Spotlight Insert




LX11-RS30-4W

System Lumen Output: 250Lm (3000K)
System Wattage: 4W
Beam Angle:18°/24°/36°/50°
Housing Color: Black/White
CCT: 2700K/3000K/4000K
CRI: >90
Size:Φ32mm

LX11-RS40-8W

System Lumen Output: 600Lm (3000K)
System Wattage: 8W
Beam Angle:18°/24°/36°
Housing Color: Black/White
CCT: 2700K/3000K/4000K
CRI: >90
Size:Φ40mm


GIMI Decorative Pendant

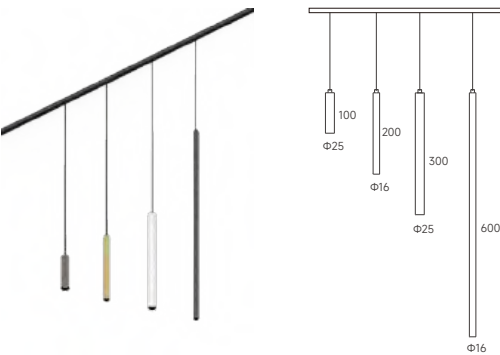

LX11-PS16/PS25

System Lumen Output: 160lm/230 Lm
System Wattage: 3W/4W
Size: Φ16mm/25mm
CCT: 2700K / 3000K / 4000K
CRI: >90
Color: Black/White/Brushed gold/Brushed bronze

FARA Decorative Pendant

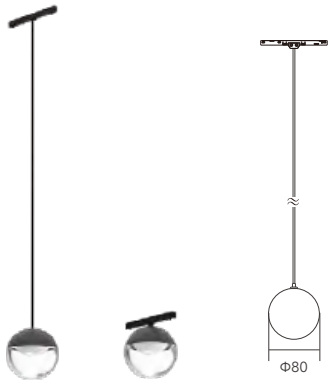

LX11-SCD80

System Lumen Output: 320lm
System Wattage: 4W
Size: Φ80mm
CCT: 2700K / 3000K / 4000K
CRI: >90
Color: Black/White/Gold
Beam: 180°


FINO Decorative Pendant



LX11-SPD80/LX11-SPD120

System Lumen Output: 200lm/320lm
System Wattage: 2W/5W
Size: Φ 80mm/ Φ 120mm
Beam: 360°
CRI: >90
CCT: 2700K/3000K/4000K
Color: Black/White


Accent Light Insert

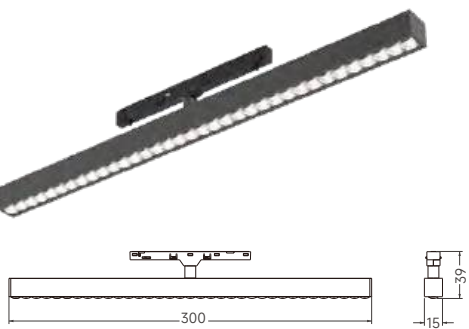

LX11-A-AL300

System W: 12W
Lumen: 1350lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 45°/80°
Color: White/Black

Decorative Pendant

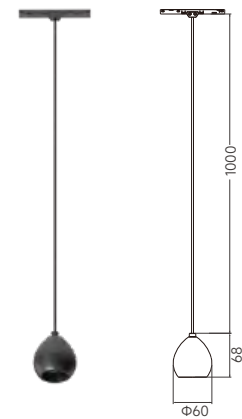

LX11-SURI 60


System W: 4W
Lumen: 220lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 18°/24°/30°
Color: White/Black



LX11-GL1250-13W
LX11-GL2500-25W


System Lumen Output: 480lm/920lm
System Wattage: 13W/25W
Beam Angle: 110°
CCT: 2700K/3000K/4000K
CRI: >90
With Opal Cover

Decorative Pendant

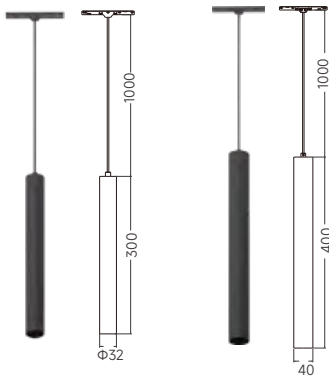


LX11-PS30/LX11-PS40

System: 4W/8W
Lumen: 250lm/600lm
Size: Φ 30mm/ Φ 40mm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 18°/24°/36°
Color: White/Black

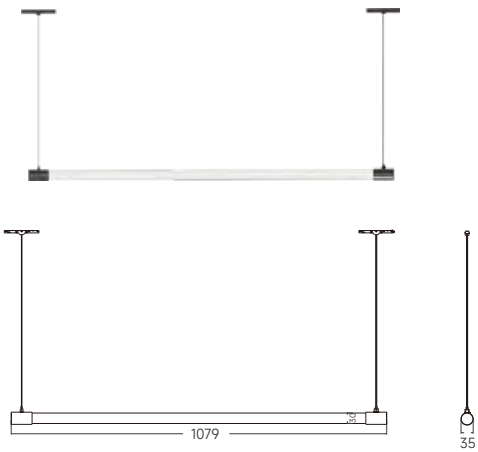


LX11-NHP10

System: 12W
Lumen: 850lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 360°
Color: White/Black

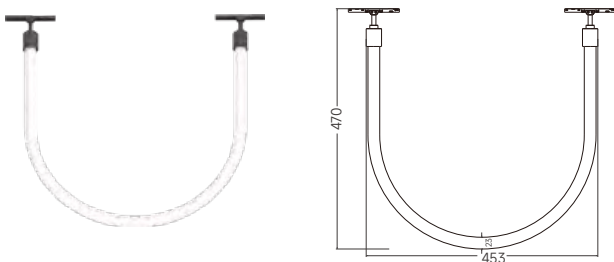

LX11-NHU12

System: 16W
Lumen: 1250lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 360°
Color: White/Black



LX11-NVP06

System: 8W
Lumen: 500lm
CRI: >90
CCT: 2700K/3000K/4000K
Beam: 360°
Color: White/Black

Line X System-modular track kit, easy installation package


The line X is available in a form of modular track kit, which is easy-to-use as a package.
Track width options of 5mm and 11mm. Multiple modules can be integrated with the track easily.
Available in classic black, white, and trending brushed bronze, brushed gold color.
Various inserts, like accent lighting insert, general lighting insert, spotlight insert can be easily mounted to the track.
It is ideal for residential lighting, retail shop applications .etc





LINE X 26

LineX 26 DC48V Track

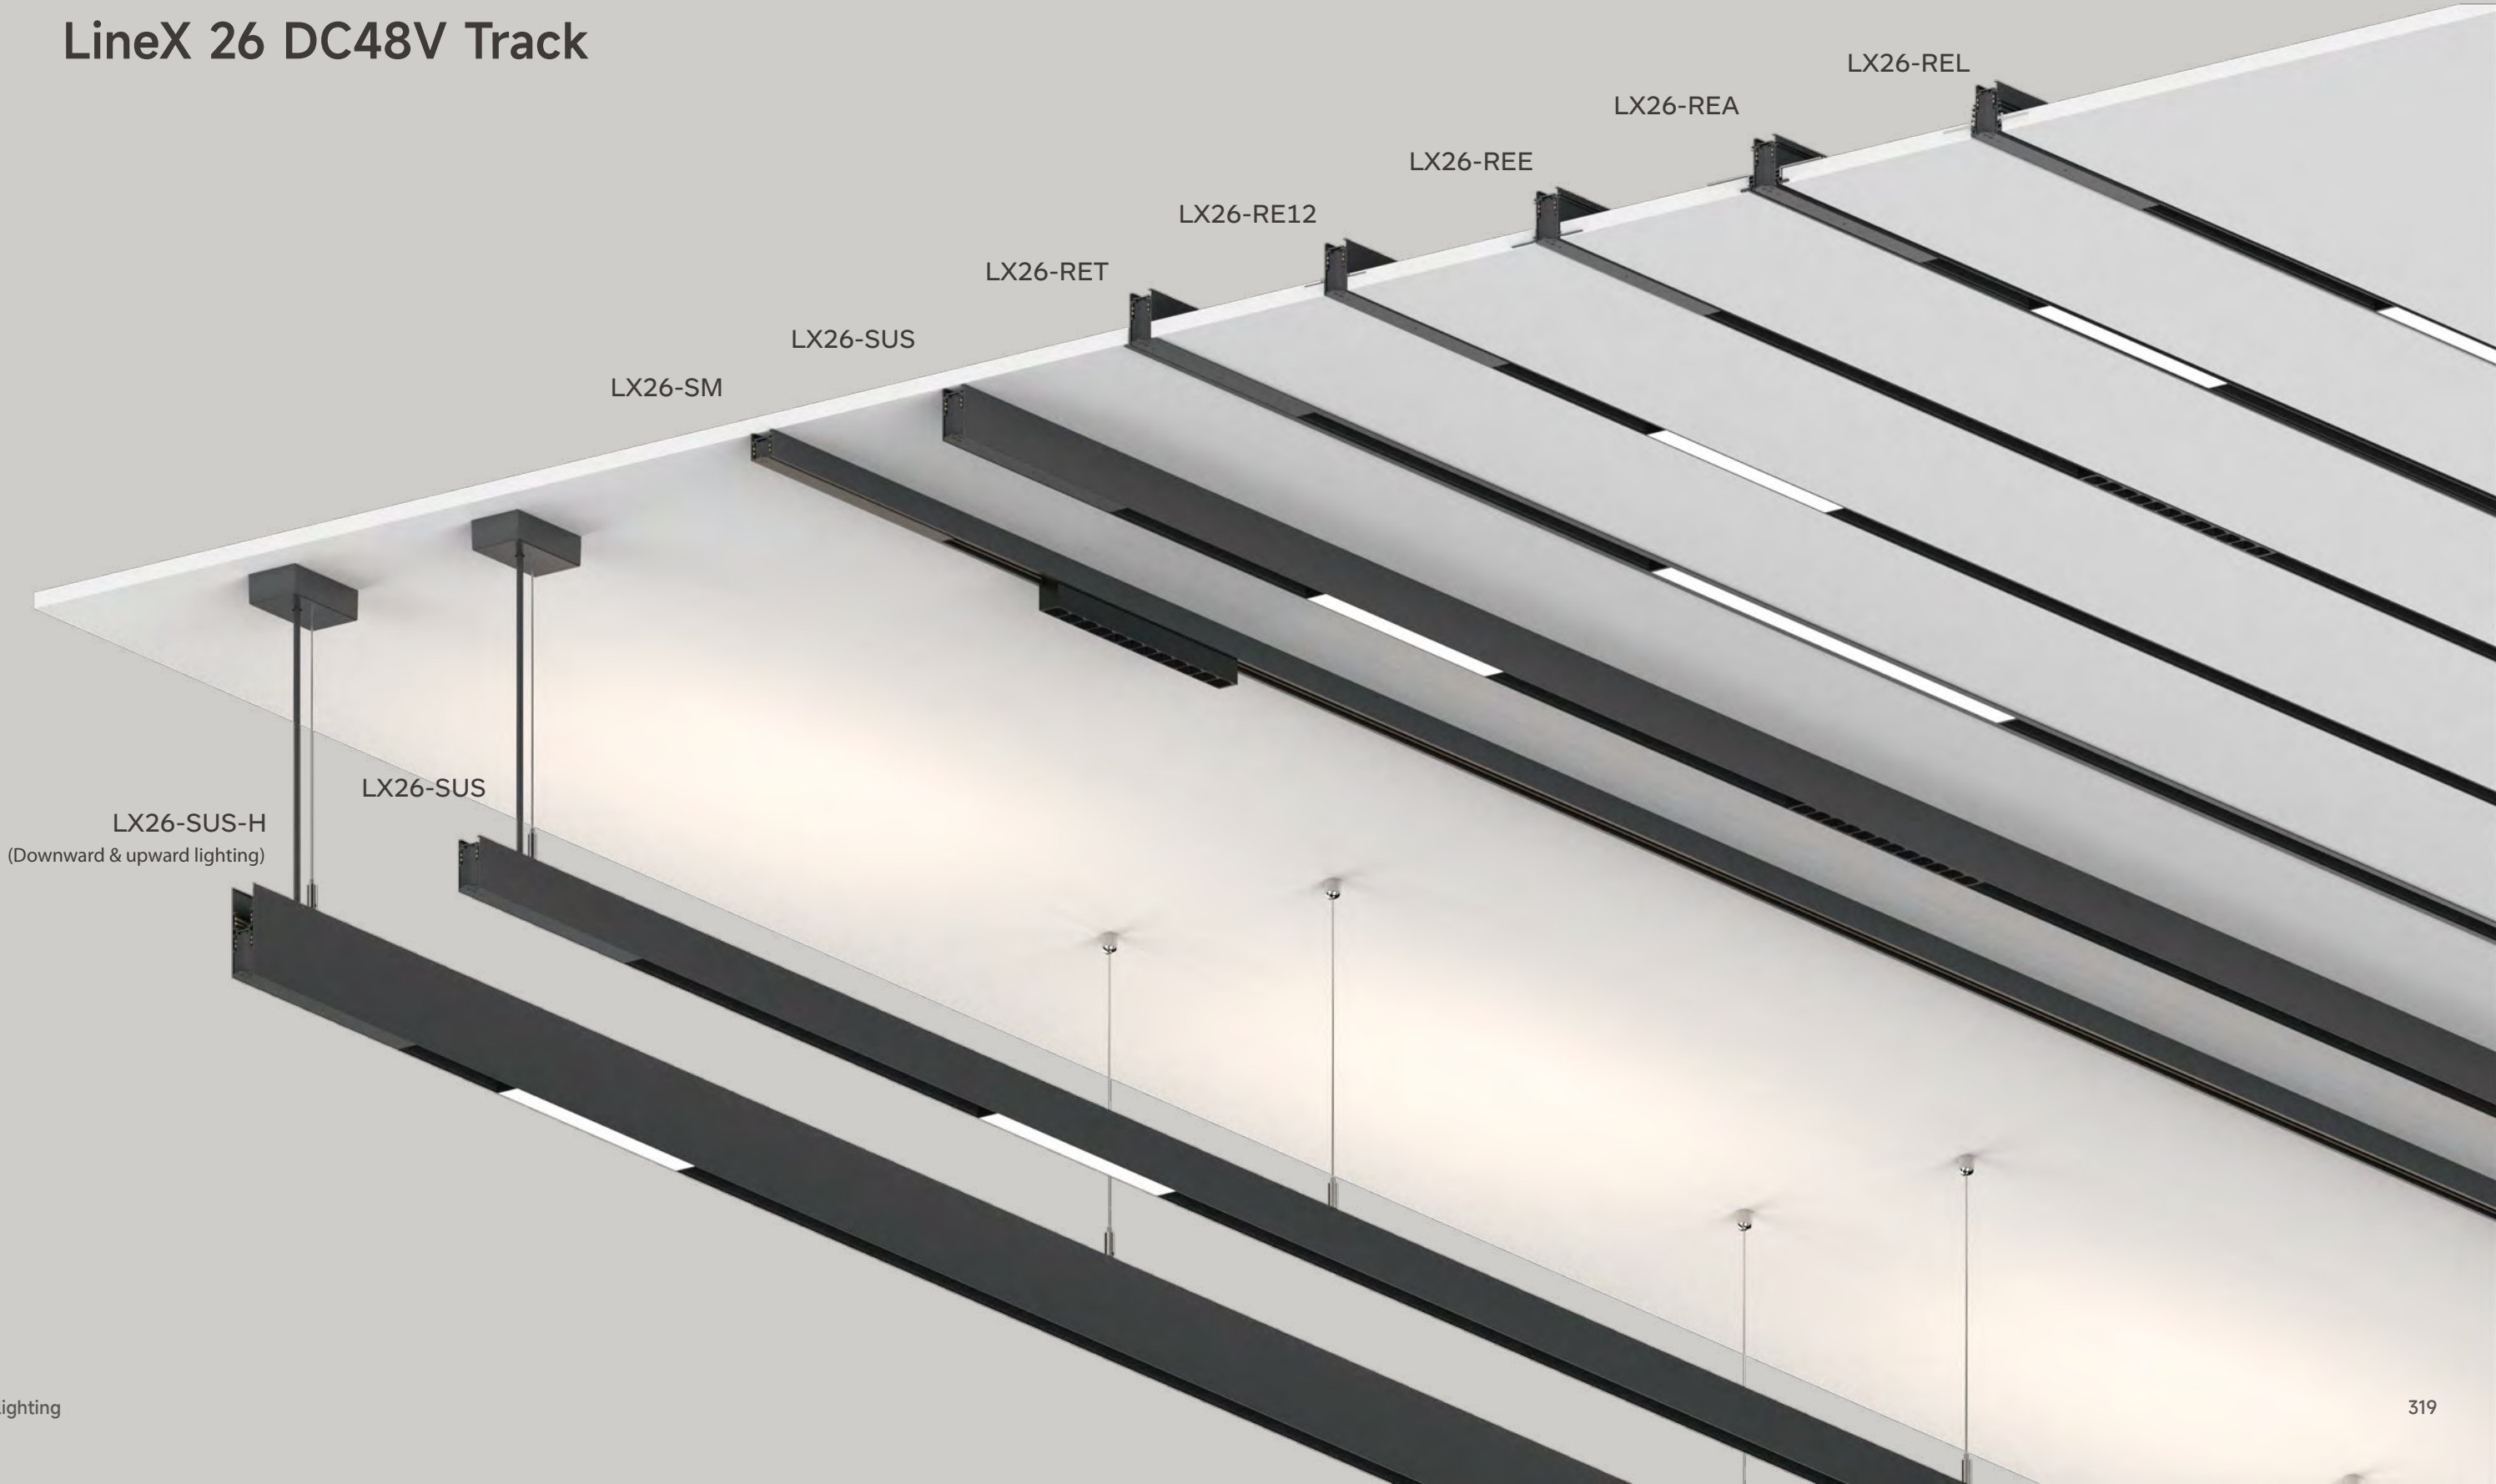

LX26-SUS-H
(Downward & upward lighting)

LX26-SUS

LX26-SM

LX26-SUS


LX26-RET

LX26-RE12

LX26-REE

LX26-REA

LX26-REL

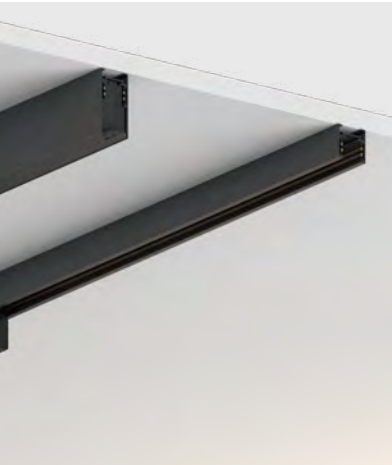

1

Surface-mounted
Track



LX26-SM
Surface-mounted



LX26-SUS
Standard track



2

Suspended
Track



LX26-SUS-H
Downward & upward lighting



LX26-SUS
Standard track




3

Recessed
Track



LX26-RET
With trim

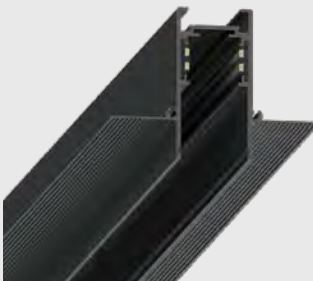

LX26-RE12
Compatible with ½" ceiling



LX26-REE
Easy installation
Trimless



LX26-REA
With adjustable trimless
recessed installation kit




LX26-REL
Compatible with various
thickness of ceiling
Trimless

LineX 26 DC48V Track



Surface-mounted

Surface-mounted Track

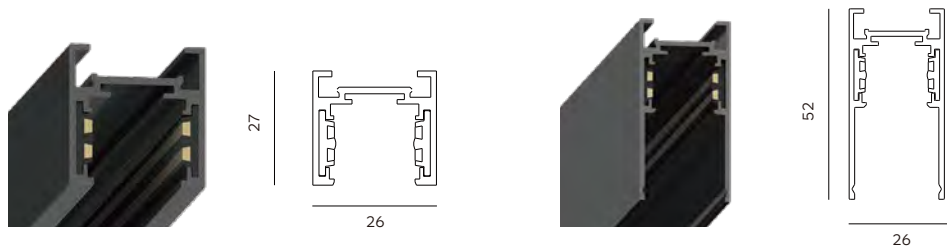

Order Options

Code	Description	Length(mm)	Power supply	Installation
LX26-SM	surface-mounted	1000/2000/3000	built-in available	surface-mounted
LX26-SUS	standard	1000/2000/3000	built-in available	surface-mounted, suspended

Accessories

LX26-SM




LX26-SUS





Suspended Track

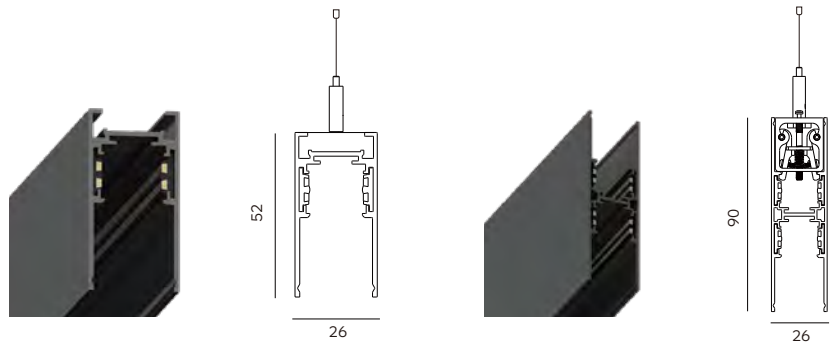

Order Options

Code	Description	Length(mm)	Power supply	Installation
LX26-SUS	standard	1000/2000/3000	built-in available	suspended
LX26-SUS-H	downward & upward lighting	1000/2000/3000	built-in available	suspended

Accessories


LX26-SUS




LX26-SUS-H



LINE X 26 Series
DC48V Low Voltage System

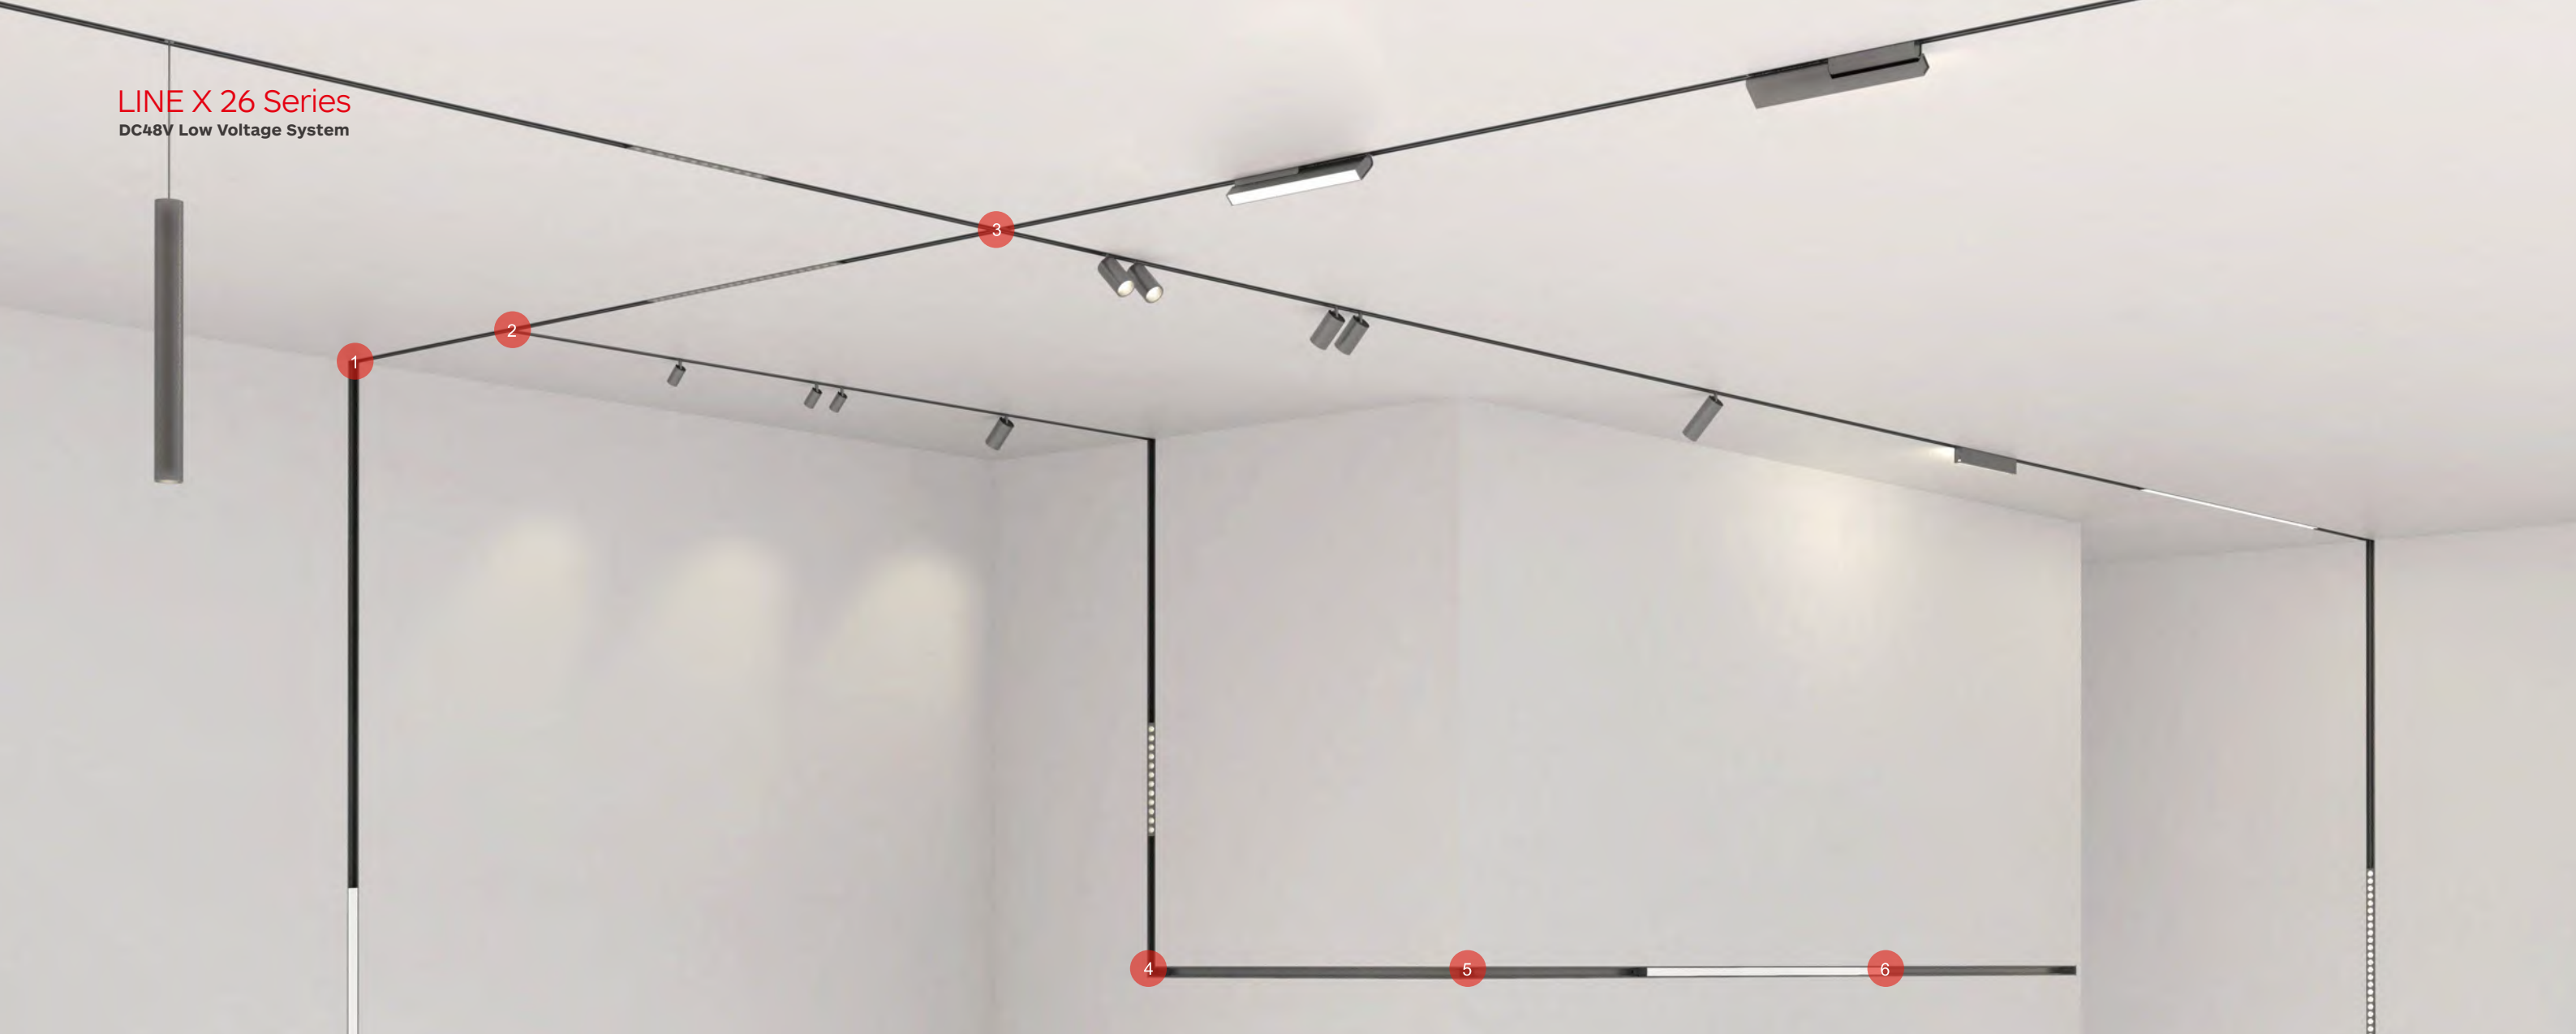

Recessed Track



LX26-RET



LX26-RE12



LX26-REE



LX26-REA



LX26-REL

Corner

1. 'L'shape vertical corner
2. 'T'shape corner
3. 'X'shape corner
4. 'L'shape corner
5. 'L'shape outer corner
6. Linear connector

Order Options

Code	Description	Length(mm)	Power supply	Installation
LX26-RET	with trim	1000/2000/3000	built-in available	recessed with trim
LX26-RE12	compatible with ½" ceiling	1000/2000/3000	built-in available	trimless recessed
LX26-REE	easy installation	1000/2000/3000	built-in available	trimless recessed
LX26-REA	with adjustable trimless recessed installation kit *Compatible with the ceiling of thickness between 12.5-20.5mm	1000/2000/3000	built-in available	trimless recessed
LX26-REL	compatible with various thickness of ceiling *Compatible with the ceiling of thickness: 5mm/9mm/12.5mm/15mm/18mm/20mm/25mm	1000/2000/3000	built-in available	trimless recessed

Accessories



LX26-RET



LX26-RET-LOC



LX26-RET-LHC



LX26-RET-LVC



LX26-RET-TC-Left



LX26-RET-TC-Right



LX26-RET-XC



LX26-RET-TEK



LX26-RET-TEKO



LX26-RTK



LX26-RLC



LX26-PLEF01



LX26-LEF01



LX26-FEC01



LX26-EJC01



KGP-100V48N



KGP-150V48N



KGP-250V48N



ELG-75-48-3Y



ELG-100-48-3Y



ELG-140-48-3Y



ELG-200-48-3Y



LX26-RE12



LX26-RE12-LOC



LX26-RE12-LHC



LX26-RE12-LVC



LX26-RE12-TC-Left



LX26-RE12-TC-Right



LX26-RE12-XC



LX26-RE12-TEK



LX26-RE12-TEKO



LX26-RLC



LX26-PLEF01



LX26-LEF01



LX26-FEC01



LX26-EJC01



KGP-100V48N



KGP-150V48N



KGP-250V48N



ELG-75-48-3Y



ELG-100-48-3Y



ELG-140-48-3Y



ELG-200-48-3Y



LX26-REE



LX26-REE-LOC



LX26-REE-LHC



LX26-REE-LVC



LX26-REE-TC-Left



LX26-REE-TC-Right



LX26-REE-XC



LX26-REE-TEK



LX26-REE-TEKO



LX26-RLC



LX26-PLEF01



LX26-LEF01



LX26-FEC01



LX26-EJC01



KGP-100V48N



KGP-150V48N



KGP-250V48N



ELG-75-48-3Y



ELG-100-48-3Y



ELG-140-48-3Y



ELG-200-48-3Y

Accessories



LX26-REA



LX26-REA-LOC



LX26-REA-LHC



LX26-REA-LVC



LX26-REA-TC-Left



LX26-REA-TC-Right



LX26-REA-XC




LX26-REA-TEK



LX26-REA-TEKO



LX26-REAMK



LX26-RLC



LX26-PLEF01



LX26-LEF01



LX26-FEC01



LX26-EJC01



KGP-100V48N



KGP-150V48N



KGP-250V48N



ELG-75-48-3Y



ELG-100-48-3Y



ELG-140-48-3Y



ELG-200-48-3Y



LX26-REL



LX26-REL-LOC



LX26-REL-LHC



LX26-REL-LVC



LX26-REL-TC-Left



LX26-REL-TC-Right



LX26-REL-XC



LX26-REL-TEK



LX26-REL-TEKO



LX26-RLC



LX26-PLEF01



LX26-LEF01



LX26-FEC01



LX26-EJC01



KGP-100V48N



KGP-150V48N



KGP-250V48N



ELG-75-48-3Y



ELG-100-48-3Y



ELG-140-48-3Y




ELG-200-48-3Y



*Several plastic anti-deformation accessories have been put into the tracks to help each track can remain the original shape before installation.


Installation

Surface-mounted track




Code: LX26-SM
Description: surface-mounted
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white

Surface-mounted track




Code: LX26-SUS
Description: standard
Length: 1000/2000/3000(mm)
Color:RAL9005 black, RAL9016 white

Suspended track

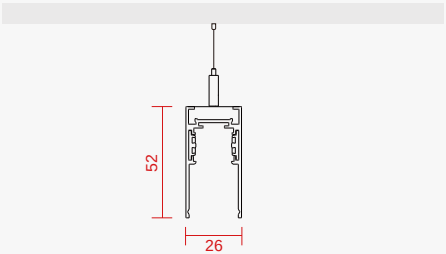


Code: LX26-SUS
Description: standard
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white

Suspended track

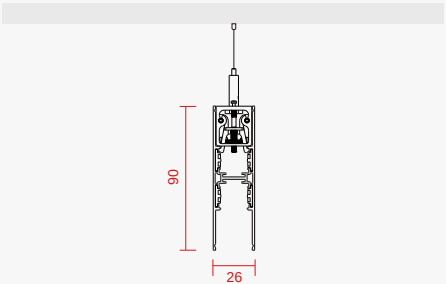


Code: LX26-SUS-H
Description: downward & upward lighting
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white

Recessed track




Code: LX26-RET
Description: with trim
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white


Recessed track

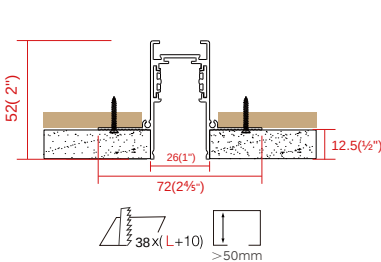


Code: LX26-RE12
Description: compatible with ½" ceiling
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white



Code: LX26-REE
Description: easy installation
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white



Code: LX26-REA
Description: with adjustable trimless recessed installation kit
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white
*Compatible with the ceiling of thickness between 12.5-20.5mm



Code: LX26-REL
Description: compatible with various thickness of ceiling
Length: 1000/2000/3000(mm)
Color: RAL9005 black, RAL9016 white
*Compatible with the ceiling of thickness: 5mm/9mm/12.5mm/15mm/18mm/20mm/25mm


**All dimensions in the catalogue in mm*

Inserts for track

Spotlight Insert




Accent Light Insert

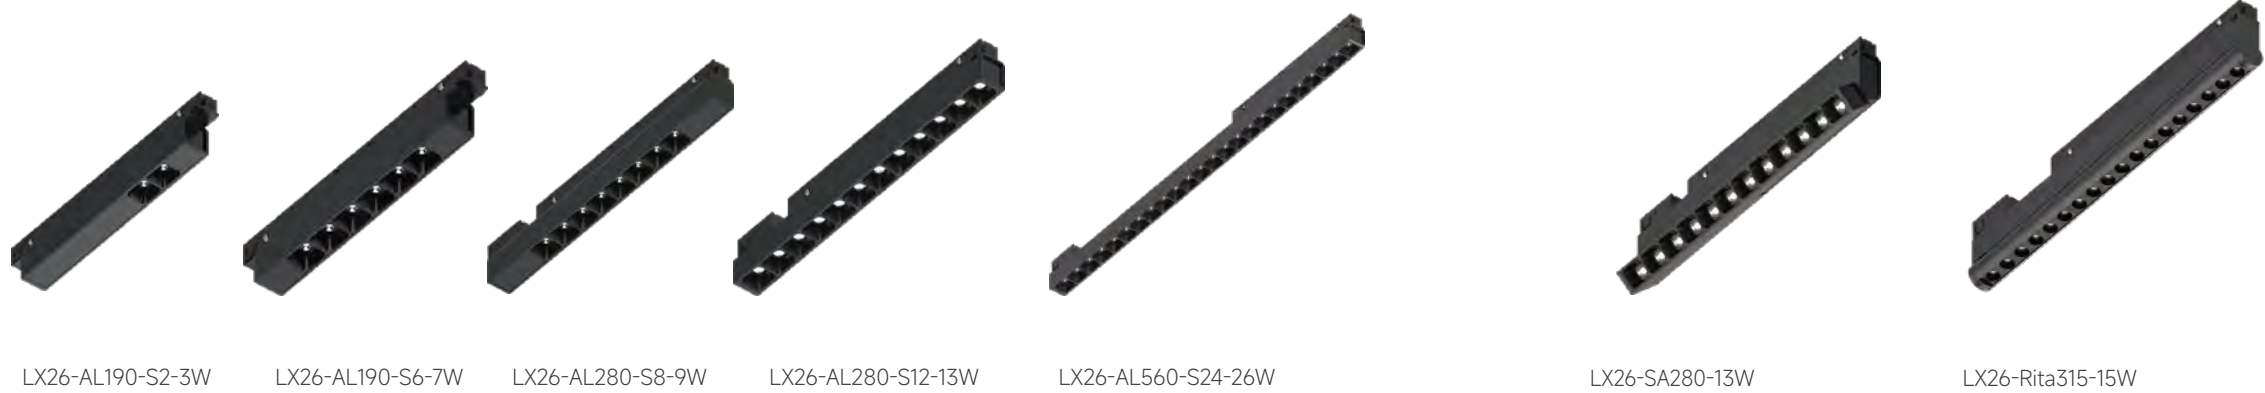

Inserts for track

General light insert

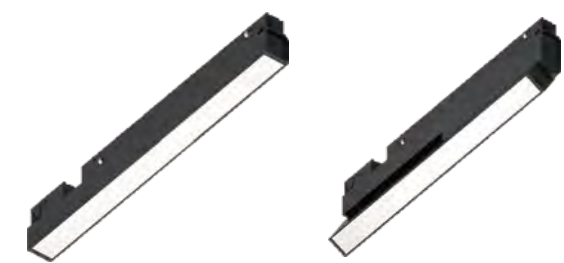

LX26-GL280-7W
LX26-GL560-13W
LX26-GL840-19W
LX26-GL1120-26W

LX26-SG280-7W

Decorative light insert



LX26-SPD120-5W

LX26-PD300-19W

LX26-SURI60-5W

Comfort light insert Wall washer insert



LX26-CL280-7W
LX26-CL560-13W
LX26-CL840-19W
LX26-CL1120-26W


LX26-WW280-7W
LX26-WW560-14W

Pendant Inserts



LX26-PS40-12W

LX26-PS55-14W

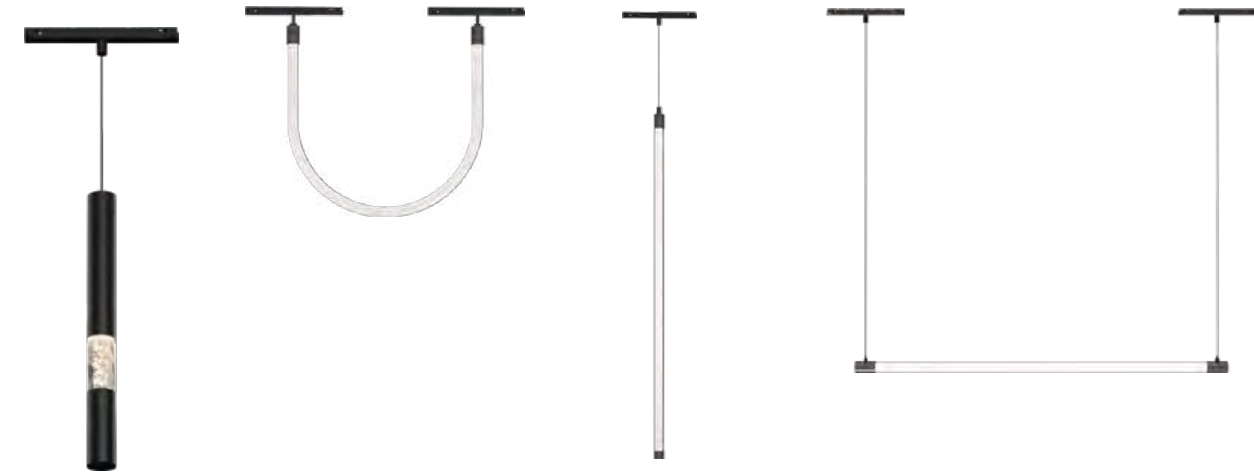

LX26-PDS40-12W

LX26-NHU12-19W

LX26-NVP12-19W

LX26-NHP10-14W

Downlight insert



LX26-WRD72-10W

LX26-WRD72-T2-20W

LX26-RS80-SL-10W


LX26-RS80-ST-10W

LX26-SS80-SL-10W


LX26-SS80-ST-10W

LINE X 26 Series

DC48V Low Voltage System

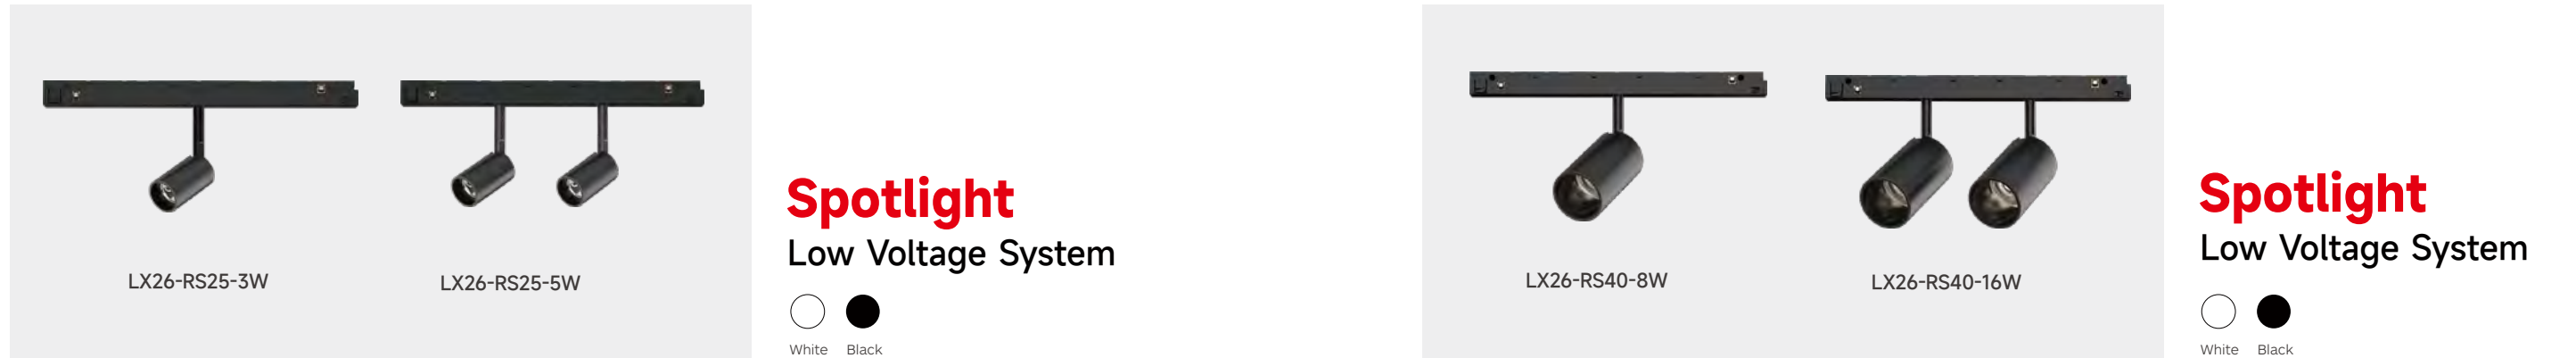

Drawings

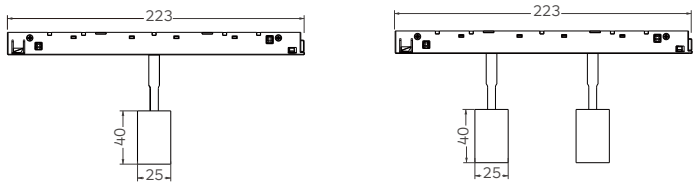

Order Options




LX26-RS25-3W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS25-3W-930-18	180Lm	2W	3W	DC48V	90	3000K	18°
LX26-RS25-3W-940-18	190Lm					4000K	
LX26-RS25-3W-930-30	180Lm	2W	3W	DC48V	90	3000K	30°
LX26-RS25-3W-940-30	190Lm					4000K	
LX26-RS25-3W-930-45	180Lm	2W	3W	DC48V	90	3000K	45°
LX26-RS25-3W-940-45	190Lm					4000K	
LX26-RS25-5W							
LX26-RS25-5W-930-18	350Lm	4W	5W	DC48V	90	3000K	18°
LX26-RS25-5W-940-18	380Lm					4000K	
LX26-RS25-5W-930-30	350Lm	4W	5W	DC48V	90	3000K	30°
LX26-RS25-5W-940-30	380Lm					4000K	
LX26-RS25-5W-930-45	350Lm	4W	5W	DC48V	90	3000K	45°
LX26-RS25-5W-940-45	380Lm					4000K	

Optional color



Drawings

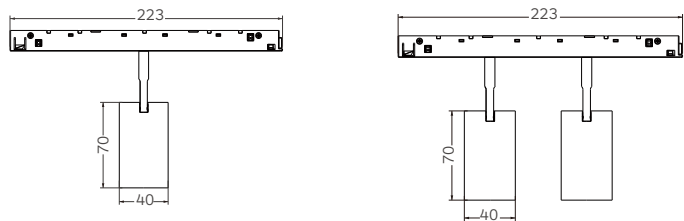

Order Options



LX26-RS40-8W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS40-8W-930-18	580Lm	7.5W	8W	DC48V	90	3000K	18°
LX26-RS40-8W-940-18	620Lm					4000K	
LX26-RS40-8W-930-30	580Lm	7.5W	8W	DC48V	90	3000K	30°
LX26-RS40-8W-940-30	620Lm					4000K	
LX26-RS40-8W-930-45	580Lm	7.5W	8W	DC48V	90	3000K	45°
LX26-RS40-8W-940-45	620Lm					4000K	
LX26-RS40-16W							
LX26-RS40-16W-930-18	1100Lm	15W	16W	DC48V	90	3000K	18°
LX26-RS40-16W-940-18	1200Lm					4000K	
LX26-RS40-16W-930-30	1100Lm	15W	16W	DC48V	90	3000K	30°
LX26-RS40-16W-940-30	1200Lm					4000K	
LX26-RS40-16W-930-45	850Lm	15W	16W	DC48V	90	3000K	45°
LX26-RS40-16W-940-45	900Lm					4000K	

Optional color




LINE X 26 Series

DC48V Low Voltage System




Spotlight

Low Voltage System



Drawings

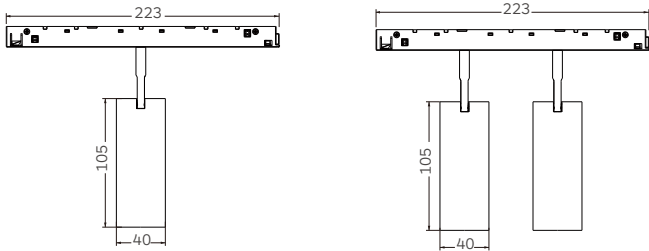

Order Options


LX26-RS40-12W							
	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS40-12W-930-18	750Lm	11W	12W	DC48V	90	3000K	18°
Code LX26-RS40-12W-940-18	800Lm						
LX26-RS40-12W-930-30	750Lm	11W	12W	DC48V	90	3000K	30°
LX26-RS40-12W-940-30	800Lm						
LX26-RS40-12W-930-45	600Lm	11W	12W	DC48V	90	3000K	45°
LX26-RS40-12W-940-45	650Lm						
LX26-RS40-24W							
LX26-RS40-24W-930-18	1500Lm	22W	24W	DC48V	90	3000K	18°
LX26-RS40-24W-940-18	1600Lm						
LX26-RS40-24W-930-30	1500Lm	22W	24W	DC48V	90	3000K	30°
LX26-RS40-24W-940-30	1600Lm						
LX26-RS40-24W-930-45	1200Lm	22W	24W	DC48V	90	3000K	45°
LX26-RS40-24W-940-45	1300Lm						

Optional color




Spotlight

Low Voltage System



Drawings

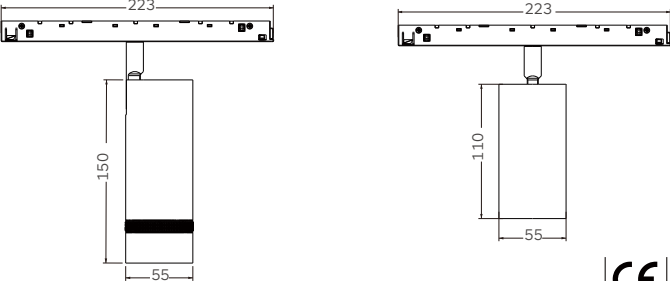

Order Options

LX26-RT55-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RT55-10W-930	800Lm	9W	10W	DC48V	90	3000K	20°~40°
LX26-RT55-10W-940	850Lm					4000K	
LX26-RT55-10W-930	750Lm	9W	10W	DC48V	90	3000K	35°~60°
LX26-RT55-10W-940	800Lm					4000K	
LX26-RS55-14W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS55-14W-930-20	1000Lm	12W	14W	DC48V	90	3000K	20°
LX26-RS55-14W-940-20	1100Lm					4000K	
LX26-RS55-14W-930-30	1000Lm	12W	14W	DC48V	90	3000K	30°
LX26-RS55-14W-940-30	1100Lm					4000K	
LX26-RS55-14W-930-40	950Lm	12W	14W	DC48V	90	3000K	40°
LX26-RS55-14W-940-40	1050Lm					4000K	
LX26-RS55-14W-930-50	950Lm	12W	14W	DC48V	90	3000K	50°
LX26-RS55-14W-940-50	1050Lm					4000K	

Optional color




LINE X 26 Series

DC48V Low Voltage System




Spotlight


Low Voltage System



Drawings



Order Options




LX26-RS72-19W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS72-19W-930-20	1700Lm	18W	19W	DC48V	90	3000K	20°
LX26-RS72-19W-940-20	1800Lm					4000K	
LX26-RS72-19W-930-35	1700Lm	18W	19W	DC48V	90	3000K	35°
LX26-RS72-19W-940-35	1800Lm					4000K	
LX26-RS72-19W-930-55	1700Lm	18W	19W	DC48V	90	3000K	55°
LX26-RS72-19W-940-55	1800Lm					4000K	
LX26-RS72-26W							
LX26-RS72-26W-930-20	2300Lm	25W	26W	DC48V	90	3000K	20°
LX26-RS72-26W-940-20	2500Lm					4000K	
LX26-RS72-26W-930-35	2300Lm	25W	26W	DC48V	90	3000K	35°
LX26-RS72-26W-940-35	2500Lm					4000K	
LX26-RS72-26W-930-55	2300Lm	25W	26W	DC48V	90	3000K	55°
LX26-RS72-26W-940-55	2500Lm					4000K	

Optional color




Spotlight

Low Voltage System



Drawings

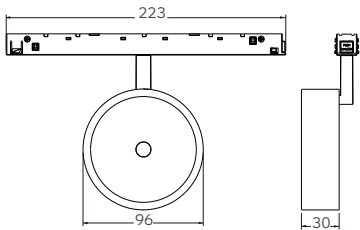

Order Options



LX26-WRS96-9W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-WRS96-9W-930-15	720Lm	8W	9W	DC48V	90	3000K	15°
LX26-WRS96-9W-940-15	780Lm					4000K	
LX26-WRS96-9W-930-25	750Lm	8W	9W	DC48V	90	3000K	25°
LX26-WRS96-9W-940-25	830Lm					4000K	
LX26-WRS96-9W-930-35	750Lm	8W	9W	DC48V	90	3000K	35°
LX26-WRS96-9W-940-35	830Lm					4000K	

Optional color



White Golden


LINE X 26 Series

DC48V Low Voltage System




Accent Light

Low Voltage System



Drawings

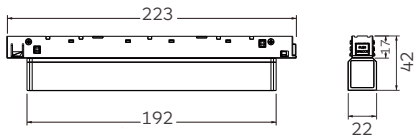

Order Options




LX26-AL190-S2-3W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-AL190-S2-3W-930-20	180Lm	2W	3W	DC48V	90	3000K	20°
LX26-AL190-S2-3W-940-20	200Lm					4000K	
LX26-AL190-S2-3W-930-35	180Lm	2W	3W	DC48V	90	3000K	35°
LX26-AL190-S2-3W-940-35	200Lm					4000K	
LX26-AL190-S6-7W							
LX26-AL190-S6-7W-930-20	550Lm	6W	7W	DC48V	90	3000K	20°
LX26-AL190-S6-7W-940-20	600Lm					4000K	
LX26-AL190-S6-7W-930-35	550Lm	6W	7W	DC48V	90	3000K	35°
LX26-AL190-S6-7W-940-35	600Lm					4000K	

Optional color



Accent Light

Low Voltage System



Drawings



Order Options



LX26-AL280-S8-9W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-AL280-S8-9W-930-20	750Lm	8W	9W	DC48V	90	3000K	20°
LX26-AL280-S8-9W-940-20	800Lm					4000K	
LX26-AL280-S8-9W-930-35	750Lm	8W	9W	DC48V	90	3000K	35°
LX26-AL280-S8-9W-940-35	800Lm					4000K	
LX26-AL280-S12-13W							
LX26-AL280-S12-13W-930-20	1100Lm	12W	13W	DC48V	90	3000K	20°
LX26-AL280-S12-13W-940-20	1200Lm					4000K	
LX26-AL280-S12-13W-930-35	1100Lm	12W	13W	DC48V	90	3000K	35°
LX26-AL280-S12-13W-940-35	1200Lm					4000K	


Optional color




LINE X 26 Series
DC48V Low Voltage System



Accent Light
Low Voltage System



Drawings



Order Options




LX26-AL560-S24-26W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-AL560-S24-26W-930-20	2200Lm	24W	26W	DC48V	90	3000K	20°
LX26-AL560-S24-26W-940-20	2300Lm					4000K	
LX26-AL560-S24-26W-930-35	2200Lm	24W	26W	DC48V	90	3000K	35°
LX26-AL560-S24-26W-940-35	2300Lm					4000K	
LX26-AL560-S24-26W-930-55	2000Lm	24W	26W	DC48V	90	3000K	55°
LX26-AL560-S24-26W-940-55	2100Lm					4000K	

Optional color







Accent Light
Low Voltage System




Accent Light
Low Voltage System



Drawings

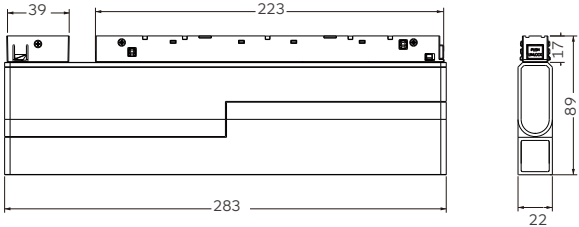

Drawings

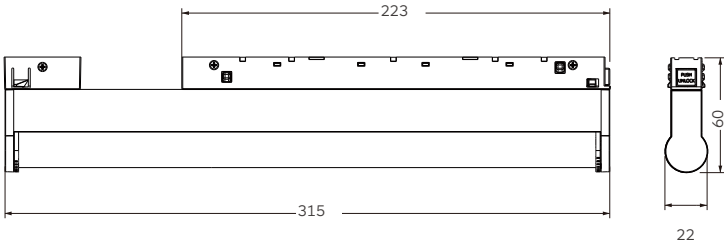

Order Options



LX26-SA280-13W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SA280-13W-930-20	1100Lm	12W	13W	DC48V	90	3000K	20°
LX26-SA280-13W-940-20	1200Lm					4000K	
LX26-SA280-13W-930-35	1100Lm	12W	13W	DC48V	90	3000K	35°
LX26-SA280-13W-940-35	1200Lm					4000K	

Optional color



Order Options



LX26-Rita315-15W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-Rita315-15W-930-30	1100Lm	13W	15W	DC48V	90	3000K	30°
LX26-Rita315-15W-940-30	1180Lm					4000K	


Optional color




LINE X 26 Series
DC48V Low Voltage System




General Light
Low Voltage System



General Light
Low Voltage System



Drawings

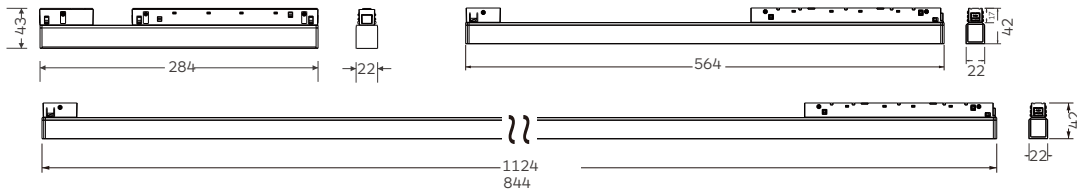


Order Options



LX26-GL280-7W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -GL280-7W-930-110	400Lm	6W	7W	DC48V	90	3000K	110°
LX26 -GL280-7W-940-110	450Lm					4000K	
LX26-GL560-13W							
LX26 -GL560-13W-930-110	800Lm	12W	13W	DC48V	90	3000K	110°
LX26 -GL560-13W-940-110	850Lm					4000K	
LX26-GL840-19W							
LX26 -GL840-19W-930-110	1200Lm	18W	19W	DC48V	90	3000K	110°
LX26 -GL840-19W-940-110	1300Lm					4000K	
LX26-GL1120-26W							
LX26 -GL1120-26W-930-110	1600Lm	24W	26W	DC48V	90	3000K	110°
LX26 -GL1120-26W-940-110	1700Lm					4000K	

Drawings

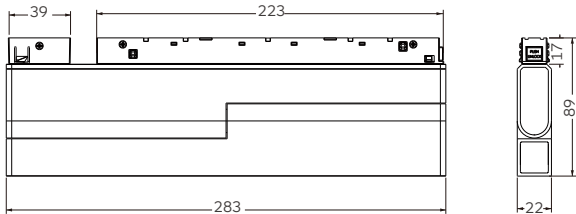

Order Options




LX26-SG280-7W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -SG280-7W-930-110	400Lm	6W	7W	DC48V	90	3000K	110°
LX26 -SG280-7W-940-110	450Lm					4000K	


Optional color




LINE X 26 Series
DC48V Low Voltage System

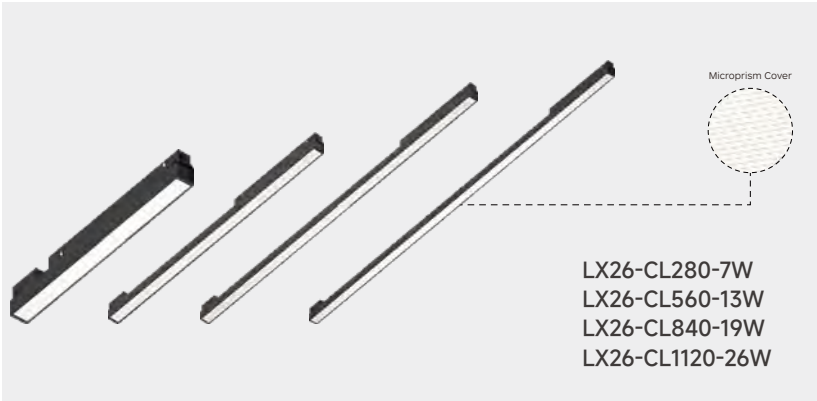


Comfort Light
Low Voltage System




Wall Washer
Low Voltage System



Drawings

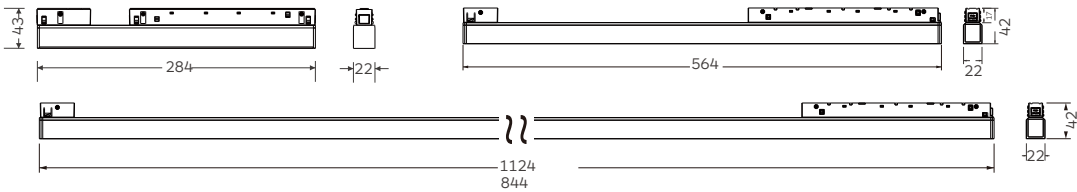

Drawings

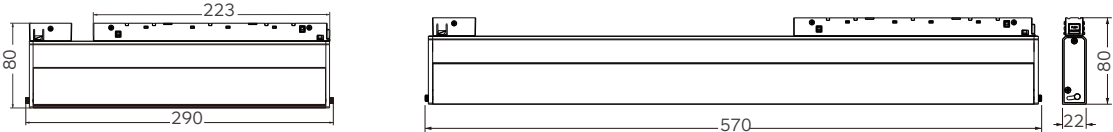

Order Options



LX26-CL280-7W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -CL280-7W-930-65	380Lm	6W	7W	DC48V	90	3000K	65°
LX26 -CL280-7W-940-65	420Lm					4000K	
LX26-CL560-13W							
LX26 -CL560-13W-930-65	750Lm	12W	13W	DC48V	90	3000K	65°
LX26 -CL560-13W-940-65	800Lm					4000K	
LX26-CL840-19W							
LX26 -CL840-19W-930-65	1100Lm	18W	19W	DC48V	90	3000K	65°
LX26 -CL840-19W-940-65	1200Lm					4000K	
LX26-CL1120-26W							
LX26 -CL1120-26W-930-65	1500Lm	24W	26W	DC48V	90	3000K	65°
LX26 -CL1120-26W-940-65	1600Lm					4000K	

Order Options



LX26-WW280-7W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-WW280-7W-930	350Lm	6W	7W	DC48V	90	3000K	Wall Washer
LX26-WW280-7W-940	380Lm					4000K	Wall Washer
LX26-WW560-13W							
LX26-WW560-13W-930	700Lm	12W	13W	DC48V	90	3000K	Wall Washer
LX26-WW560-13W-940	750Lm					4000K	Wall Washer

Optional color




LINE X 26 Series

DC48V Low Voltage System




Downlight

Low Voltage System



Drawings

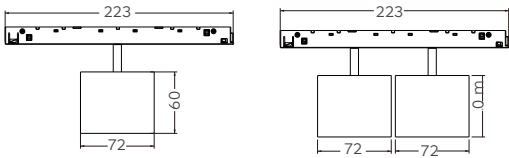

Order Options



LX26-WRD72-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-WRD72-10W-930-25	700Lm	9W	10W	DC48V	90	3000K	25°
LX26-WRD72-10W-940-25	750Lm					4000K	
LX26-WRD72-10W-930-36	750Lm	9W	10W	DC48V	90	3000K	36°
LX26-WRD72-10W-940-36	800Lm					4000K	
LX26-WRD72-10W-930-50	750Lm	9W	10W	DC48V	90	3000K	50°
LX26-WRD72-10W-940-50	800Lm					4000K	
LX26-WRD72-T2-20W							
LX26-WRD72-T2-20W-930-25	1400Lm	18W	20W	DC48V	90	3000K	25°
LX26-WRD72-T2-20W-940-25	1500Lm					4000K	
LX26-WRD72-T2-20W-930-36	1500Lm	18W	20W	DC48V	90	3000K	36°
LX26-WRD72-T2-20W-940-36	1600Lm					4000K	
LX26-WRD72-T2-20W-930-50	1500Lm	18W	20W	DC48V	90	3000K	50°
LX26-WRD72-T2-20W-940-50	1600Lm					4000K	


Accessory



Optional color




Reflector




Downlight

Low Voltage System



Drawings

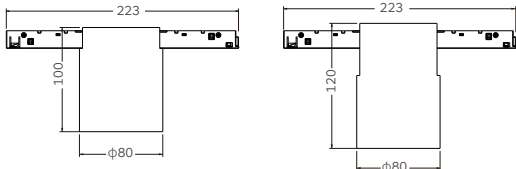

Order Options



LX26-RS80-SL-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS80-SL-10W-930	900lm	9W	10W	DC48V	90	3000K	30°
LX26-RS80-SL-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°
LX26-RS80-ST-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS80-ST-10W-930	900lm	9W	10W	DC48V	90	3000K	30°
LX26-RS80-ST-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°

Optional color




LINE X 26 Series

DC48V Low Voltage System




Downlight

Low Voltage System



Drawings

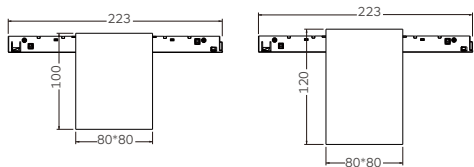

Order Options



LX26-SS80-SL-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SS80-SL-10W-930	1000lm	9W	10W	DC48V	90	3000K	30°
LX26-SS80-SL-10W-940	1000lm	9W	10W	DC48V	90	4000K	30°


LX26-SS80-ST-10W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SS80-ST-10W-930	1000lm	9W	10W	DC48V	90	3000K	30°
LX26-SS80-ST-10W-940	1100lm	9W	10W	DC48V	90	4000K	30°

Optional color




Decorative light

Low Voltage System



Drawings



Order Options



LX26-SPD120-5W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SPD120-5W-930-300	430Lm	4W	5W	DC48V	90	3000K	300°
LX26-SPD120-5W-940-300	470Lm					4000K	

Optional color






LINE X 26 Series

DC48V Low Voltage System




Decorative light

Low Voltage System



Drawings



Order Options

LX26-PD300-B-19W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -PD300-B-19W-930-60	1100Lm	18W	19W	DC48V	90	3000K	60°
LX26 -PD300-B-19W-940-60	1200Lm					4000K	60°

LX26-PD300-W-19W							
LX26 -PD300-W-19W-930-60	1100Lm	18W	19W	DC48V	90	3000K	60°
LX26 -PD300-W-19W-940-60	1200Lm					4000K	60°

Optional color




White




Decorative light

Low Voltage System



Drawings



Order Options

LX26-PS40-12W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-PS40-12W-930-18	750Lm	11W	12W	DC48V	90	3000K	18°
LX26-PS40-12W-940-18	800Lm					4000K	
LX26-PS40-12W-930-30	750Lm	11W	12W	DC48V	90	3000K	30°
LX26-PS40-12W-940-30	800Lm					4000K	
LX26-PS40-12W-930-45	600Lm	11W	12W	DC48V	90	3000K	45°
LX26-PS40-12W-940-45	650Lm					4000K	

LX26-PS55-14W							
LX26-PS55-14W-930-18	950Lm	13W	14W	DC48V	90	3000K	18°
LX26-PS55-14W-940-18	1000Lm					4000K	
LX26-PS55-14W-930-24	950Lm	13W	14W	DC48V	90	3000K	24°
LX26-PS55-14W-940-24	1000Lm					4000K	
LX26-PS55-14W-930-36	950Lm	13W	14W	DC48V	90	3000K	36°
LX26-PS55-14W-940-36	1000Lm					4000K	

Optional color




LINE X 26 Series

DC48V Low Voltage System




Decorative light

Low Voltage System



White Black

Drawings



Order Options



LX26-PDS40-12W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-PDS40-12W-930-15	800Lm	12W	13W	DC48V	90	3000K	15°
LX26-PDS40-12W-940-15	900Lm					4000K	
LX26-PDS40-12W-930-35	800Lm	12W	13W	DC48V	90	3000K	35°
LX26-PDS40-12W-940-35	900Lm					4000K	
LX26-PDS40-12W-930-45	800Lm	12W	13W	DC48V	90	3000K	45°
LX26-PDS40-12W-940-45	900Lm					4000K	

Optional color




Decorative light

Low Voltage System




White Black Golden

Drawings



Order Options



LX26-SURI60-5W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SURI60-5W-930-18	500Lm	4W	5W	DC48V	90	3000K	18°
LX26-SURI60-5W-940-18	550Lm					4000K	
LX26-SURI60-5W-930-24	500Lm	4W	5W	DC48V	90	3000K	24°
LX26-SURI60-5W-940-24	550Lm					4000K	
LX26-SURI60-5W-930-36	500Lm	4W	5W	DC48V	90	3000K	36°
LX26-SURI60-5W-940-36	550Lm					4000K	
LX26-SURI60-5W-930-50	500Lm	4W	5W	DC48V	90	3000K	50°
LX26-SURI60-5W-940-50	550Lm					4000K	

Optional color




LINE X 26 Series

DC48V Low Voltage System



Decorative light

Low Voltage System




Decorative light

Low Voltage System



Drawings




Order Options



LX26-NVP12-19W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-NVP12-19W-930	1700Lm	17W	19W	DC48V	90	3000K 4000K	360°

Drawings

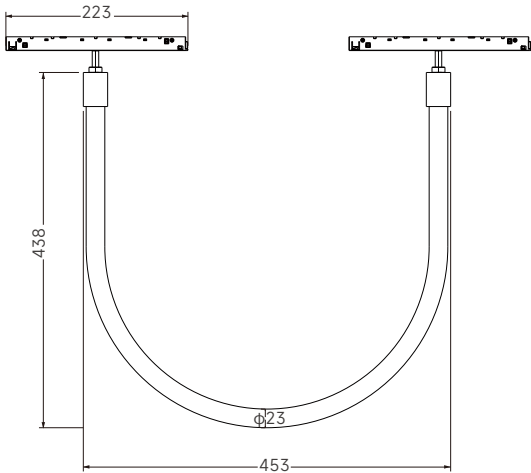


Order Options



LX26-NHU12-19W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-NHU12-19W-930	1700Lm	17W	19W	DC48V	90	3000K 4000K	360°

LINE X 26 Series

DC48V Low Voltage System

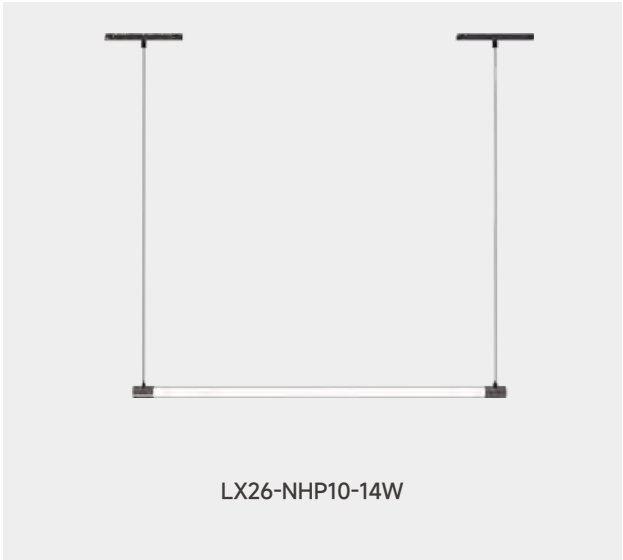


Decorative light

Low Voltage System

- White
- Black
- Golden

Drawings

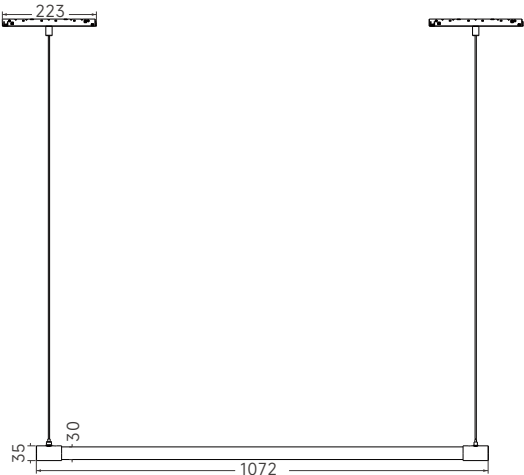

Order Options






LX26-NHP10-14W							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-NHP10-14W-930	1400Lm	13W	14W	DC48V	90	3000K 4000K	360°



SKYLINE


DC24V

Discover a new level of freedom of light
Be evolved with a functional network
Having a creative and fun concept

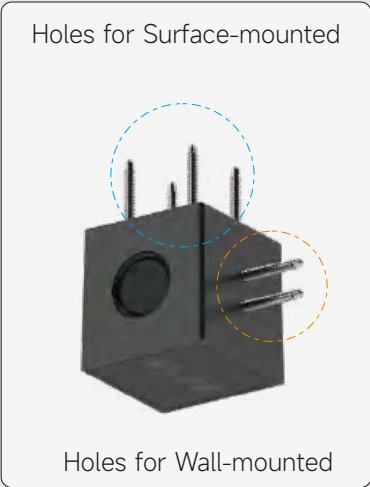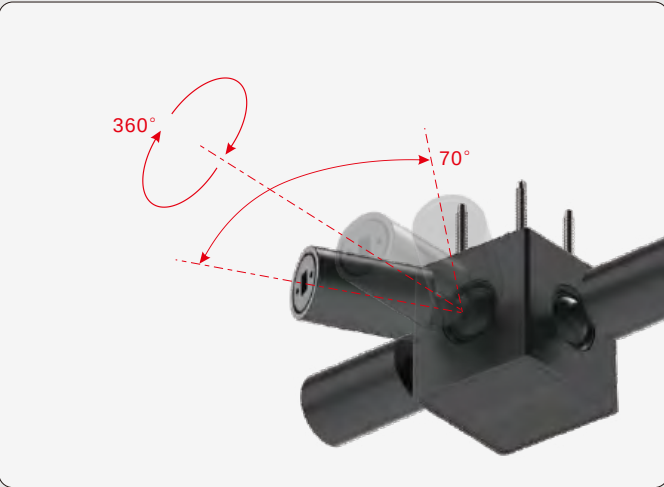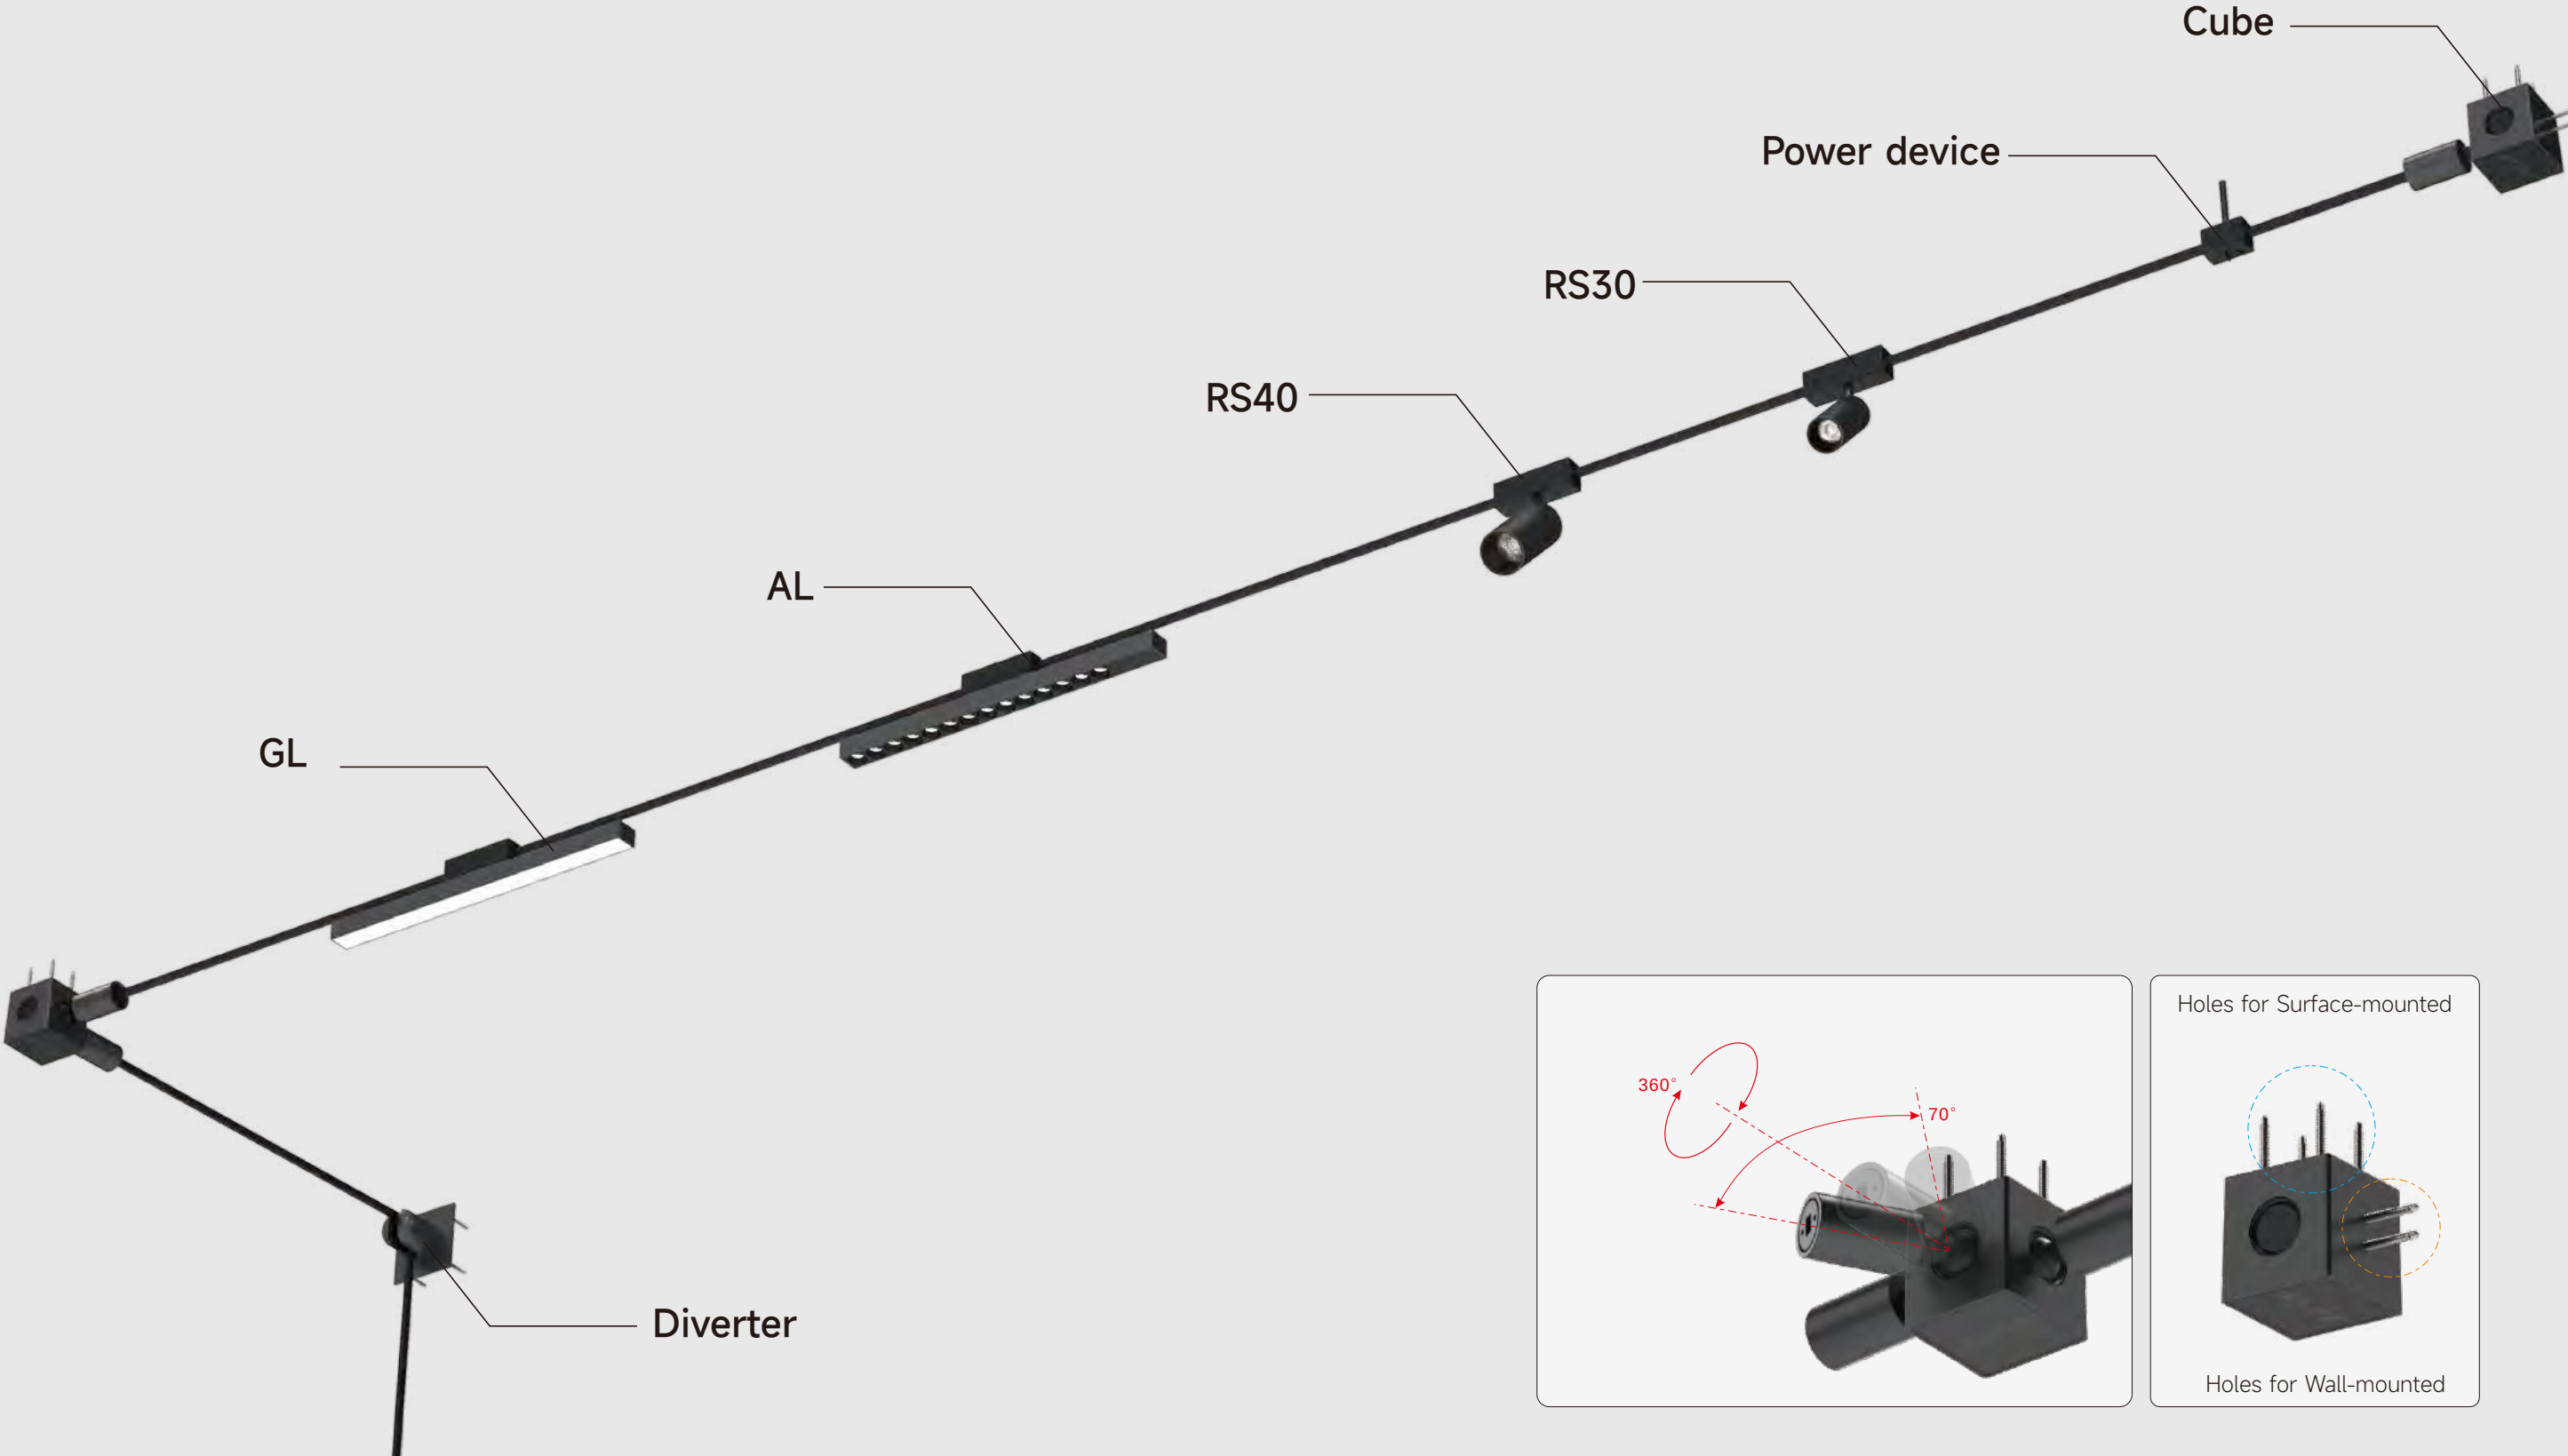

Inserts for track


Spotlight Insert

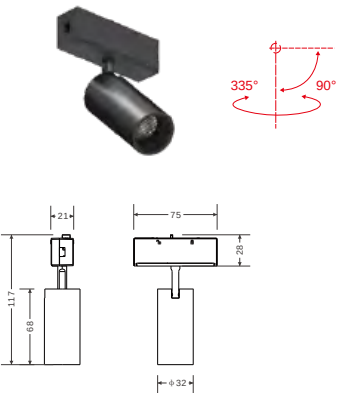

Skyline-RS30

Size: 58mm x Φ 32mm
Input voltage: DC24V
System power: 4W
CCT: 3000K/4000K
CRI: 90
Color: RAL9016 White, RAL9005 Black
System Lumen Output: 210Lm(3000K)

Spotlight Insert

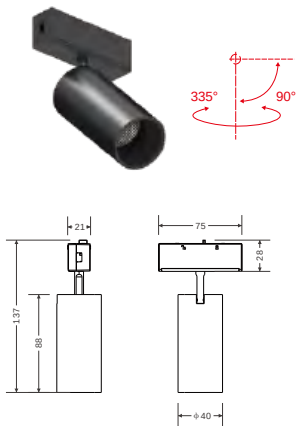


Skyline-RS40

Size: 88mm x Φ 40mm
Input Voltage: DC24V
System power: 8W
CCT: 3000K/4000K
CRI: 90
Color: RAL9016 White, RAL9005 Black
System Lumen Output: 400Lm (3000K)

Accent Light LED Strip




Skyline-AL



General Light LED Strip



Skyline-GL



Accessories



Architectural & Decorative

Architectural & Decorative

FLEX 378-399





378 IE-lite lighting

FLEX

FLEX Series
360°Circular Lighting Neon Strip

360° Circular Lighting Neon Strip



Water Proof – IP65
Indoor Application

FLEX Series

360°Circular Lighting Neon Strip

Illuminate your space with flexibility
360° circular lighting neon strip
Creative design and Casual combination



Arbitrary Cutting

FLEX Series
360°Circular Lighting Neon Strip

Quickinfo:

COLOUR TEMPERATURE

3000K
4000K

CRI 90

Voltage: 24VDC

Maximum length: 5 meters

Regular length;

0.6m(2ft) 1.2m(4ft)
1.8m(6ft) 2.4m (8ft)
3m(10ft) 5m(17ft)

Minimum bending diameter: 250mm

Wattage: 14.5W/M


Dimension:
23mm

Output lumen:
1000lm/m Φ23mm for 3000K

Light distribution



360°




Horizontal




Vertical



Semi-circle



Free bending




Minimum bending diameter




Top Outlet



Side Outlet

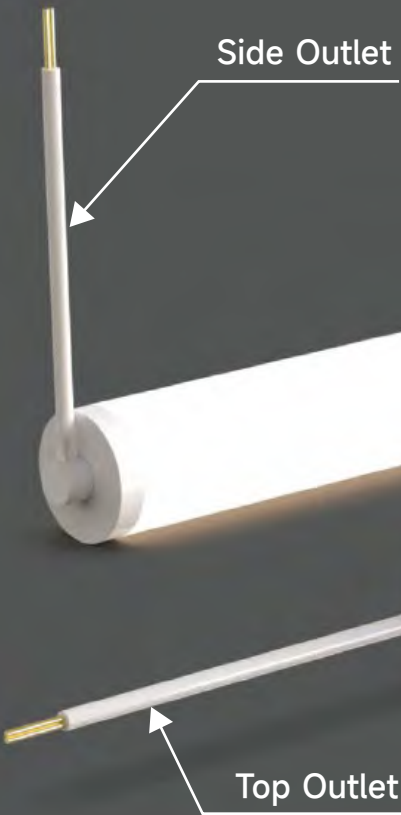


FLEX Series
360°Circular Lighting Neon Strip

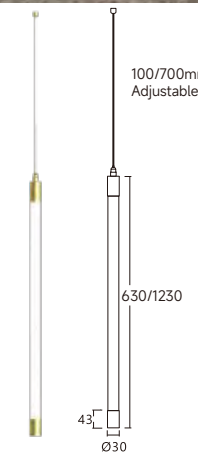

FLEX-SVPC12-SUS

17W | CRI90 | 3000K
4000K | IP65 | 360° | 3 YEARS | CB | CE

Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-SVPC12-SM-17W	17W	20W	24VDC	90	3000K	360°	1700lm	White Black Chrome Gold	EAGLERISE LS-20-24 MI (220-240Vac) 115*45*28mm

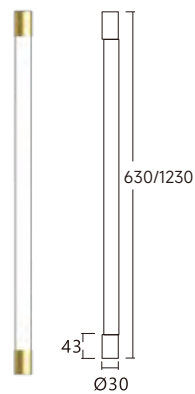


FLEX-SVPC12-SM

17W | CRI90 | 3000K
4000K | IP65 | 360° | 3 YEARS | CB | CE

Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-SVPC12-SM-17W	17W	20W	24VDC	90	3000K	360°	1700lm	White Black Chrome Gold	EAGLERISE LS-20-24 MI (220-240Vac) 115*45*28mm


FLEX Series
360°Circular Lighting Neon Strip



FLEX-SH06-SM

9W	CRI90	3000K 4000K	360°	IP65	3 YEAR WARRANTY	CB	CE
----	-------	----------------	------	------	-----------------	----	----

Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-SH06-SM-9W	9W	12W	24VDC	90	3000K	360°	900lm	White Black Chrome Gold	EAGLERISE LS-20-24 LI1 (220-240Vac) 115*45*28mm



FLEX-SV06-SUS


17W	CRI90	3000K 4000K	360°	IP65	3 YEAR WARRANTY	CB	CE
-----	-------	----------------	------	------	-----------------	----	----

Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-SV06-SUS-9W	9W	12W	24VDC	90	3000K	360°	900lm	White Black Chrome Gold	EAGLERISE LS-20-24 LI1 (220-240Vac) 115*45*28mm



FLEX Series
360°Circular Lighting Neon Strip

FLEX-SH12-SUS

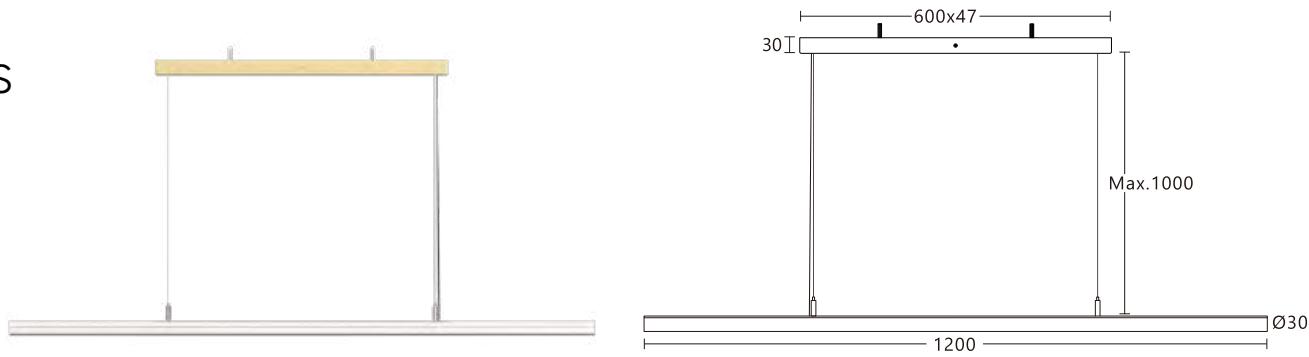


17W	CRI90	3000K 4000K	 360°	IP65		CB	CE
-----	-------	----------------	--	------	---	----	----

Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-SH12-SUS-17W	17W	20W	24VDC	90	3000K	360°	1700lm	White Black Chrome Gold	EAGLERISE LS-100-24 LI1 (220-240Vac) 115*45*28mm

FLEX Series
360°Circular Lighting Neon Strip



FLEX-C1A

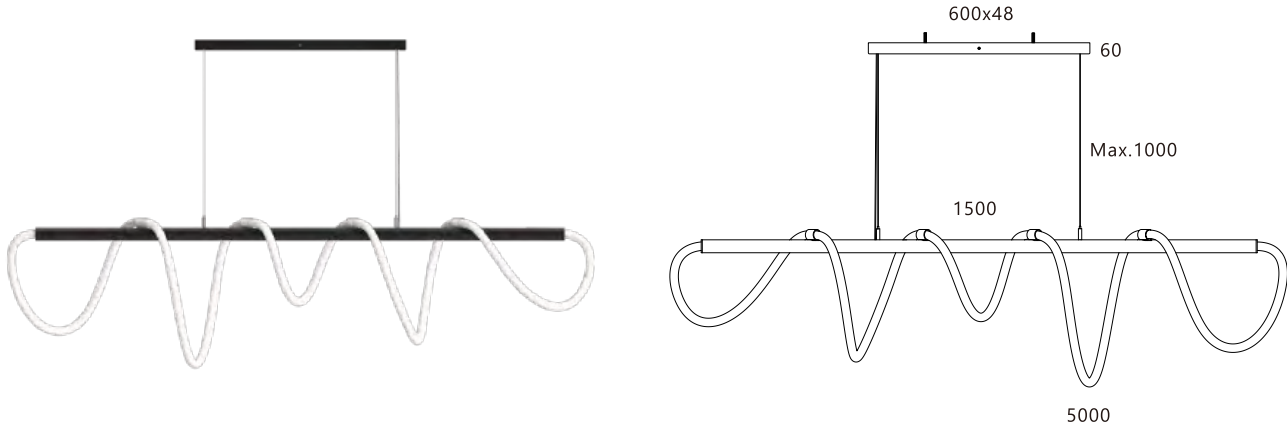


70W	CRI90	3000K 4000K	360°	IP65	3 YEAR	CB	CE
-----	-------	----------------	------	------	--------	----	----

Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-C1A-70W	70W	80W	24VDC	90	3000K	360°	7000lm	White Black	EAGLERISE LS-100-24 L1 (220-240Vac) 365*30*18mm

BOKE BK-HGV100-24V0
(220-240Vac)
355*30*21mm



FLEX-C5A3

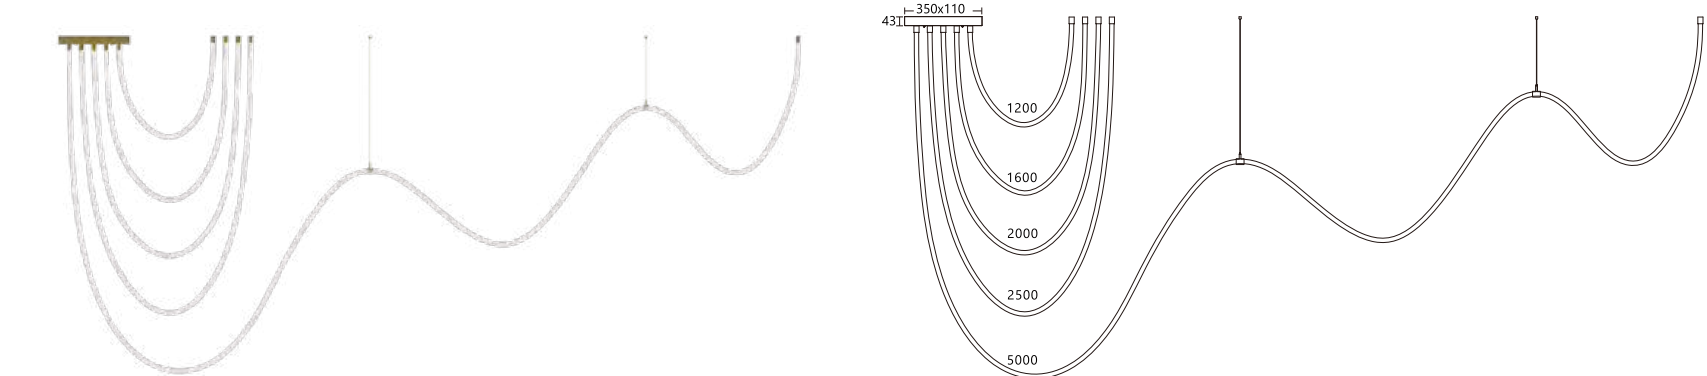

394IE-lite lighting

178W	CRI90	3000K 4000K	IP65	360°	CB	CE
------	-------	----------------	------	------	----	----


Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-C5A3-178W	178W	198W	24VDC	90	3000K	360°	17800lm	White Black Chrome Gold	MEANWELLHLG-185H-24 (90-305Vac) 228*68*38.8mm

FLEX Series
360°Circular Lighting Neon Strip



FLEX-C4A2


46W	CRI90	3000K 4000K	IP65	360°	3 YEAR WARRANTY	CB	CE
-----	-------	----------------	------	------	-----------------	----	----



Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-C4A2-46W	46W	54W	24VDC	90	3000K	360°	4600lm	White Black Chrome Gold	EAGLERISE LS-60-24 LiI (220-240Vac) 187*45*30.5mm

FLEX-C4A1

87W	CRI90	3000K 4000K	IP65	360°	3 YEAR WARRANTY	CB	CE
-----	-------	----------------	------	------	-----------------	----	----

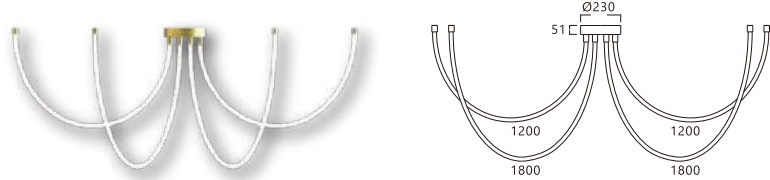


Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-C4A1-87W	87W	100W	24VDC	90	3000K	360°	8700lm	White Black Chrome Gold	2pcs *EAGLERISE LS-60-24 LiI (1.2m+1.8m/1pcs) (220-240Vac) 187*45*30.5mm

FLEX Series
360°Circular Lighting Neon Strip



FLEX-NHP12

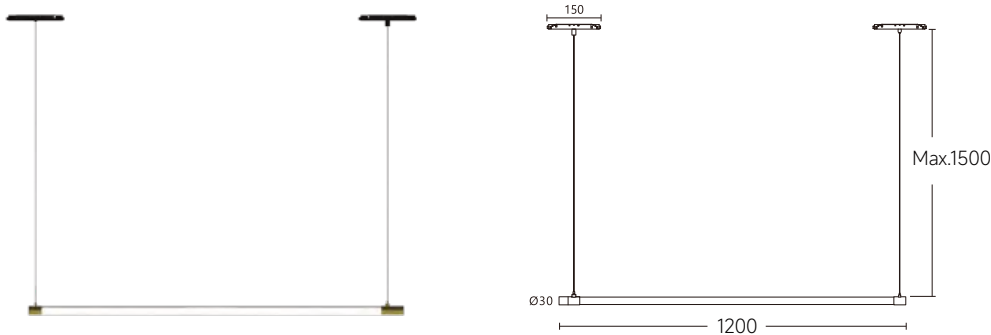


17W		CRI90	3000K 4000K	IP65	360°	3 YEAR		CB	CE
Code	LED Power	System Power	LED Voltage	CRI	CCT	Beam	System output	Canopy Color	Driver
FLEX-NHP12-SM-17W	17W	20W	24VDC	90	3000K	360°	1700lm	White Black Chrome Gold	EAGLERISE LS-20-24 MI (220-240Vac) 115*45*28mm

Stair Light

Stair Light

ANGEL 402-405

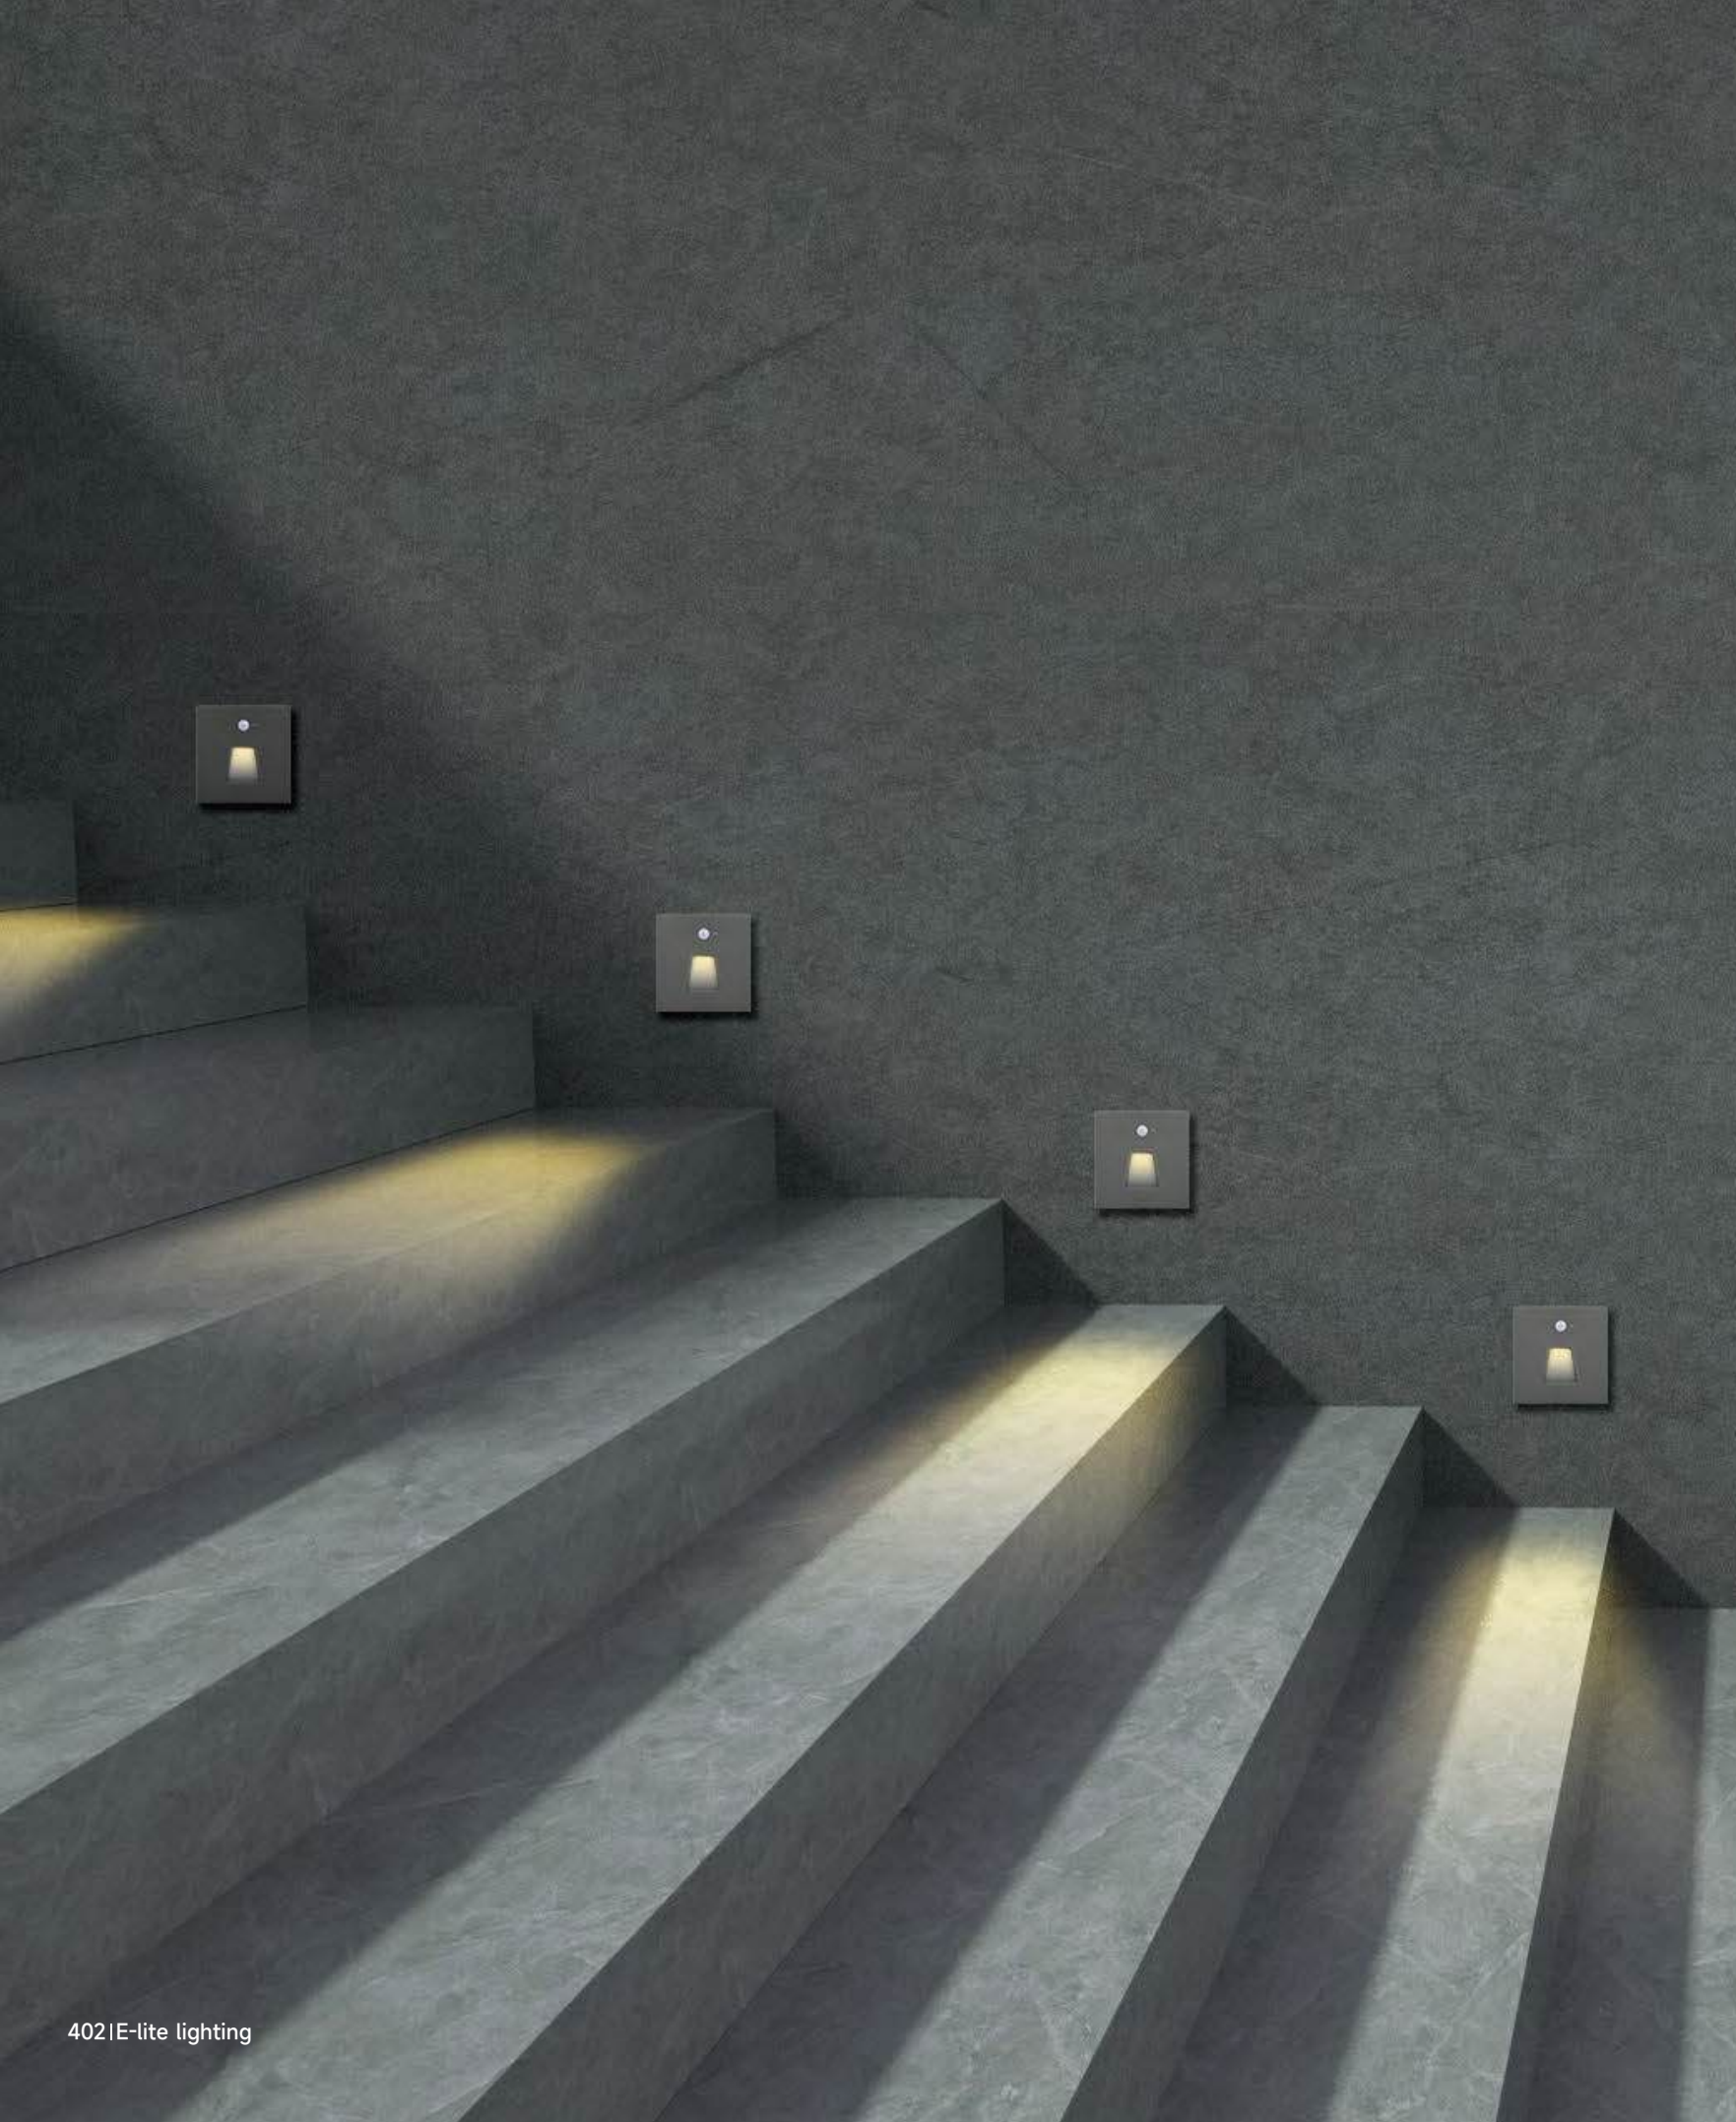

Linear Shape



Water Drop Shape



Trapezoid Shape



Trapezoid Shape




Water Drop Shape



Linear Shape


ANGEL

ANGEL Series
STAIR LIGHT

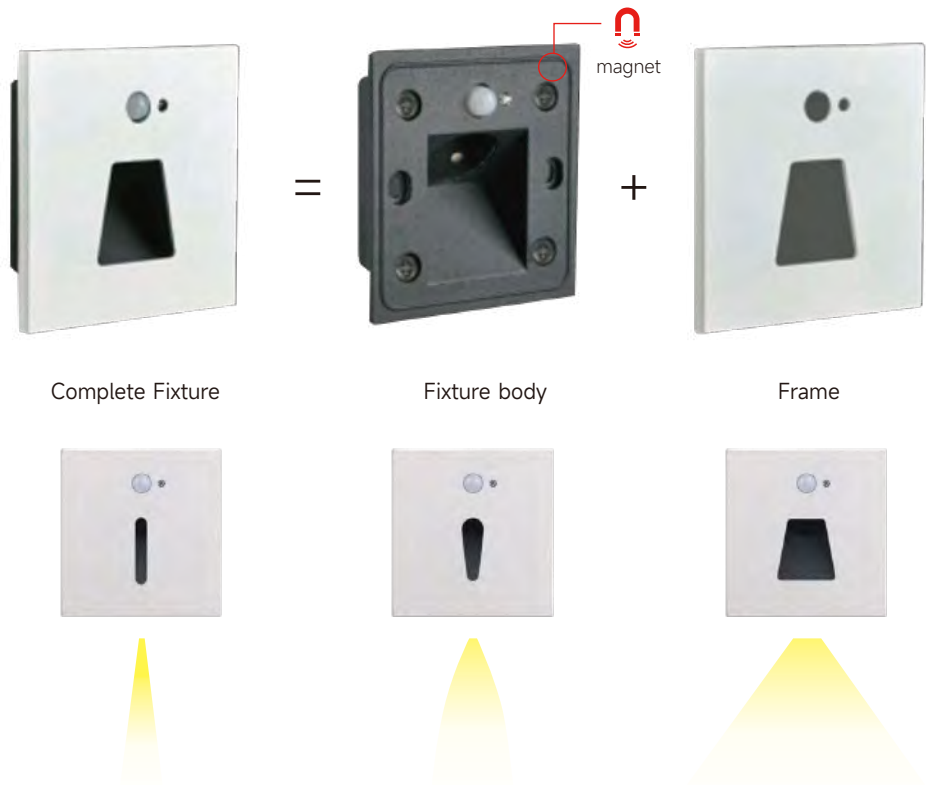


Intelligent PIR & Lux Sensor

When ambient brightness ≥8 lux,the light will not switch on;
When the human body leaves the induction range, the light automatically turns off after approximately 40 seconds,
with a margin of error of 10 seconds.

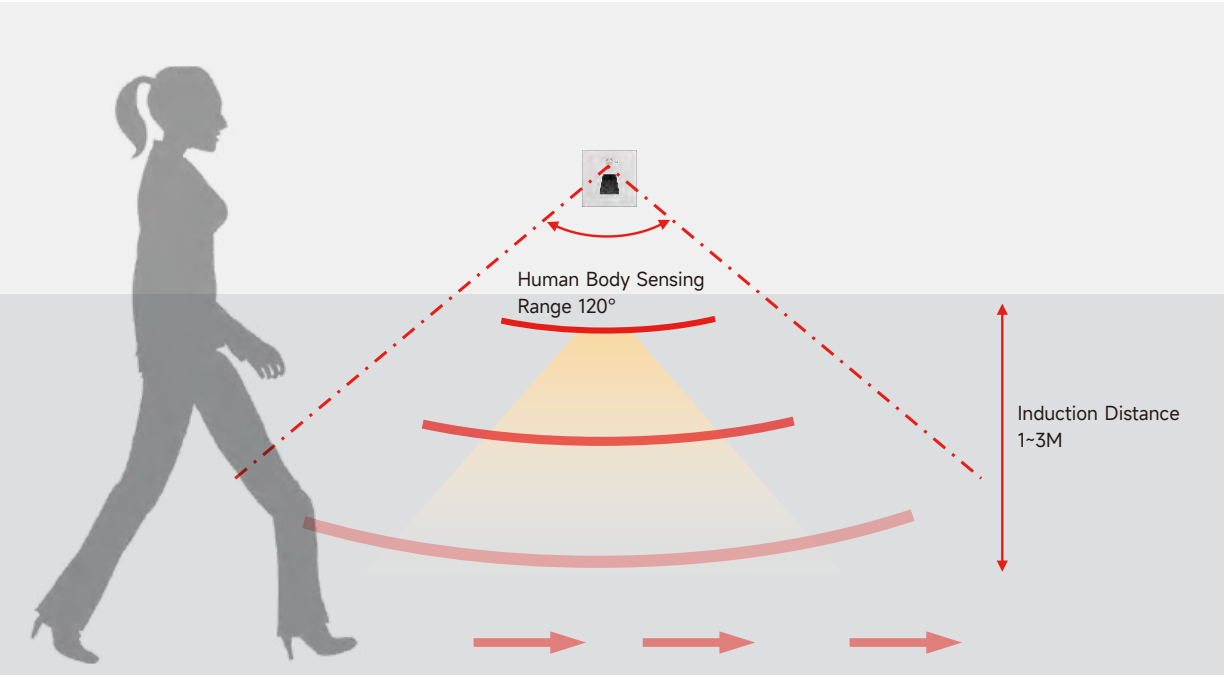

Drawing




Order Options

With Sensor							
Code	Size	Input	System W	CRI	CCT	IP	Control
ANS1-3W-930S-WN/SN/BN	86*90mm	220-240V	3W	90	3000K	65	Sensor
ANS2-3W-930S-WN/SN/BN	86*90mm	220-240V	3W	90	3000K	65	Sensor
ANS3-3W-930S-WN/SN/BN	86*90mm	220-240V	3W	90	3000K	65	Sensor



Drawing



Order Options

Without Sensor							
Code	Size	Input	System W	CRI	CCT	IP	Control
ANS4-3W-927S-WN/SN/BN	86*90mm	220-240V	3W	90	2700K	65	on-off
ANS5-3W-927S-WN/SN/BN	86*90mm	220-240V	3W	90	2700K	65	on-off
ANS6-3W-927S-WN/SN/BN	86*90mm	220-240V	3W	90	2700K	65	on-off