



# PLUTO Series

## IP66 Outdoor Projector Light



PLUTO Series  
IP66 Outdoor Projector Light

NEW



Projector light  
**PLUTO XS / S / M / L CV**



Features

- Different installation,based on the same fixture body.
- Triple layer coating technology make 1,000 hours salt spray test successful.
- Construction waterproof technology.
- PA66 material spike, good for ground installation.
- Super narrow 10° can well lit up the high palm tree or top church.


Specifications

- Dimming modes:ON-OFF, Phase-dim, 1-10V, DALI
- Beam angle:10°,24°,35°,55°
- Physical: Die-casting, Triple layer coating

Type



Light distribution




Accessory



**PLUTO XS/S/M/L CV**  
Projector Light



Drawing

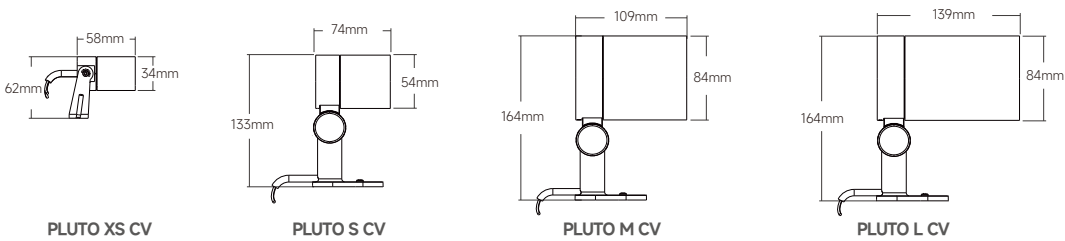

Order Options

| PLUTO XS CV        |           |       |          |               |     |       |      |
|--------------------|-----------|-------|----------|---------------|-----|-------|------|
| Code               | System LM | LED W | System W | Input Voltage | CRI | CCT   | Beam |
| PLUTO XS CV-830-12 | 150 lm    | 2.5W  | 3W       | 24V DC        | 80  | 3000K | 12°  |
| PLUTO XS CV-830-18 |           |       |          |               |     |       | 18°  |
| PLUTO XS CV-830-30 |           |       |          |               |     |       | 30°  |
| PLUTO XS CV-830-50 |           |       |          |               |     |       | 50°  |
| PLUTO S CV         |           |       |          |               |     |       |      |
| Code               | System LM | LED W | System W | Input Voltage | CRI | CCT   | Beam |
| PLUTO S CV-830-15  | 420 lm    | 4.2W  | 5W       | 24V DC        | 80  | 3000K | 15°  |
| PLUTO S CV-830-35  | 420 lm    |       |          |               |     |       | 35°  |
| PLUTO S CV-830-45  | 350 lm    |       |          |               |     |       | 45°  |
| PLUTO M CV         |           |       |          |               |     |       |      |
| Code               | System LM | LED W | System W | Input Voltage | CRI | CCT   | Beam |
| PLUTO M CV-830-10  | 1000 lm   | 11W   | 12W      | 24V DC        | 80  | 3000K | 10°  |
| PLUTO M CV-830-24  |           |       |          |               |     |       | 24°  |
| PLUTO M CV-830-35  |           |       |          |               |     |       | 35°  |
| PLUTO M CV-830-55  |           |       |          |               |     |       | 55°  |
| PLUTO L CV         |           |       |          |               |     |       |      |
| Code               | System LM | LED W | System W | Input Voltage | CRI | CCT   | Beam |
| PLUTO L CV-830-12  | 1500 lm   | 16W   | 18W      | 24V DC        | 80  | 3000K | 12°  |
| PLUTO L CV-830-18  | 1600 lm   |       |          |               |     |       | 18°  |
| PLUTO L CV-830-35  | 1600 lm   |       |          |               |     |       | 35°  |
| PLUTO L CV-830-55  | 1600 lm   |       |          |               |     |       | 55°  |

# 220~240Vac Input Version

## Installation possibilities:

- 1 - Directly to the ground
- 2 - Metal tube
- 3 - Plastic tube
- 4 - Direct cable
- 5 - Corrugated tube
- 6- Spike mounted

The PLUTO HV package includes: 1 base, 2 closing cap, 1 M20x1.5 cable gland, 3 wire connectors, 2 KA4x25 screws, 2 plastic anchors, 2 rubber ring For the detail operation, please refer to the installation instruction.



## PLUTO Series IP66 Outdoor Projector Light



### Projector light PLUTO S / M / L HV



#### Features

- Different installation, based on the same fixture body.
- Triple layer coating technology make 1,000 hours salt spray test successful.
- Construction waterproof technology.
- PA66 material spike, good for ground installation.
- Super narrow 10° can well lit up the high palm tree or top church.

#### Specifications

- Dimming modes: ON-OFF
- Beam angle: 10°, 24°, 35°, 55°
- Physical: Die-casting, Triple layer coating

#### Type

projector

#### Light distribution



#### Accessory



NEW




# PLUTO S/M/L HV


## Projector Light

●  
Black


Drawing



PLUTO S HV



PLUTO M HV



PLUTO L HV

Order Options

| PLUTO S HV        |           |       |          |               |     |       |      |
|-------------------|-----------|-------|----------|---------------|-----|-------|------|
| Code              | System LM | LED W | System W | Input Voltage | CRI | CCT   | Beam |
| PLUTO S HV-830-15 | 420 lm    | 4W    | 6W       | 220-240V      | 80  | 3000K | 15°  |
| PLUTO S HV-830-35 | 420 lm    |       |          |               |     |       | 35°  |
| PLUTO S HV-830-45 | 350 lm    |       |          |               |     |       | 45°  |
| PLUTO M HV        |           |       |          |               |     |       |      |
| Code              | System LM | LED W | System W | Input Voltage | CRI | CCT   | Beam |
| PLUTO M HV-830-10 | 1000 lm   | 11W   | 13W      | 220-240V      | 80  | 3000K | 10°  |
| PLUTO M HV-830-24 |           |       |          |               |     |       | 24°  |
| PLUTO M HV-830-35 |           |       |          |               |     |       | 35°  |
| PLUTO M HV-830-55 |           |       |          |               |     |       | 55°  |
| PLUTO L HV        |           |       |          |               |     |       |      |
| Code              | System LM | LED W | System W | Input Voltage | CRI | CCT   | Beam |
| PLUTO L HV-830-12 | 1500 lm   | 16W   | 19W      | 220-240V      | 80  | 3000K | 12°  |
| PLUTO L HV-830-18 | 1600 lm   |       |          |               |     |       | 18°  |
| PLUTO L HV-830-35 | 1600 lm   |       |          |               |     |       | 35°  |
| PLUTO L HV-830-55 | 1600 lm   |       |          |               |     |       | 55°  |

