

YOUR OEM/ODM PARTNER

Architectural & Technical Lighting
Residential Lighting
Commercial Lighting
Architectural & Decorative Lighting
Outdoor Lighting

Headquarters:

10/F, Building A, Sen Yang High-Tech Park,
KeLian Road, GuangMing Hign-Tech Area,
GuangMing District, Shenzhen, China.

Tel: (+86) 755 3669 7711
E-mail: Sales@e-litelighting.com
www.e-litelighting.com

Factory:

Nai Rui Industrial Park, No.5 Wei Deng Road, Ma' an Town,
Hui Cheng District, Hui Zhou, Guangdong, China | PC.: 516057



GLOBAL MARKET

25/26

25/26

CATALOGUE

YOUR OEM/ODM PARTNER



Huizhou Factory Building **new**

About Us

E-Lite Lighting Co., Ltd. is a trusted OEM/ODM/NDA partner to many global lighting brands due to specialization in professional LED commercial & architectural lighting design, development and production since 2007. Our reliable production facility, laboratory and design capability enable partners to realize the best implementation of their ideal concepts and launch cutting edge new products to build brands and markets in their countries with minimal operations investment. E-Lite's team has decades of experience in lighting industry and can provide high quality and professional comprehensive lighting solutions for customers.

Our Headquarters & Factory

Headquartered in Shenzhen Guangming with a R&D and operations center, and supported by a massive 48,000m² production facility in Huizhou, we are a leading manufacturer. Our high-quality products are trusted by clients across Europe, North America, the Middle East, Australia, and Southeast Asia.

Our Products

E-Lite Lighting specializes in the development and production of a comprehensive range of lighting solutions for residential, commercial, hospitality, office, and architectural applications. Our product portfolio includes recessed LED spotlights, downlights, surface-mounted lights, ceiling-mounted lights, pendant lights, wall-mounted luminaires, track lights, linear lights, display lights, recessed ground lights, and underwater lights. Our design team, comprised of experienced experts from China, Canada, and Germany, ensures innovative and aesthetically sophisticated products. Thanks to our pioneering capabilities in lighting design, E-Lite has established partnerships with world-leading lighting brands. We also offer customized LED lighting solutions tailored to client specifications, providing professional OEM and ODM services based on customer drawings or design requirements.

Our Certificate

As a leading lighting fixtures designer and manufacturer, E-Lite Lighting has been approved by ETL, UL, CE, CB, CSA, SAA, TUV and passed ISO9001, ISO45001, ISO14001. The quality team has worked in the lighting industry since 1996.

Production Equipment

The laboratory and production line are equipped with complete quality control and testing equipments, including but not limited to light distribution systems, spectrum analysis test systems, temperature test systems, LED driver testers, dielectric strength tester, earth resistance tester etc.

Our Service

In addition, a professional after-sales service support team has been established for lighting fixtures installation guidance and offer lighting solutions for different projects if needed. And all series LED lights are given at least three years warranty time and take the replacement for free. E-Lite Lighting aims to design and manufacture the best quality LED lights for our partners and worldwide customers by constant innovation efforts. We are now trying to be a global top-rank LED lighting solution expert and bring light to each corner of the world.

LUMINAIRES BY FAMILY

1 Downlight

START	003-058
STRADA	059-062
VTRIM	063-092
KAYA	093-098
TESLA	099-106
DOME	107-126
DOME L	127-130
V68	131-136
DOT	137-142
LEDGO	143-160

2 Low Voltage System

LINE X05	163-178
LINE X11	179-192
LINE X26	193-246

3 Spotlight

YOKO	249-252
DARLO	253-260
BINGO	261-272
GRACE	273-278
FELLOW	279-286
ALPHA	287-294
BINGO C	295-302
KIWI	303-312

4 Linear Profile

LINK6080	315-328
LINK 60	329-340
LINK50	341-358
LINK30	359-370

5 Surface & Pendant Light

LUCIA&FLATIA	373-392
FLATIA ECO	393-394
CREST	395-400
LUMI	401-406
NOVA-A 116	407-410
NOVA	411-424
ORBIT	425-430
KUBI	431-434
FELLOW MINI	435-440

6 Architectural & Decorative

Q LINE07	443-450
FINO	451-454
DENE	457-458
BIBO	459-460
FLEX	461-474

LUMINAIRES BY FAMILY

7 Stair Light

ANGEL ----- 477-480

8 Outdoor Light

- OTTO ----- 483-490
- FAIRY ----- 491-498
- SWAMM&CRANE ----- 499-500
- PLUTO ----- 501-510
- SOLAR ----- 511-512
- EOS ----- 513-516
- EPO ----- 517-520
- DORI ----- 521-524
- FOCAL ----- 525-526

LUMINAIRES BY APPLICATION

CONTENTS

01
START

Adjustable



SRA/TRA55 | 009 SRA/TRA68 2.0 | 013 SRA/TRA100 | 025 SRA/TRA125 | 027

SRA/TRA150 | 028 SSA/TSA68 2.0 | 017 SSA/TSA100 | 029 SSA/TSA125 | 031

SSA/TSA150 | 033

Fixed



SRF/TRF100 | 040 SRF/TRF125 | 041

SRF/TRF150 | 042 SSF/TSF100 | 044 SSF/TSF125 | 045 SSF/TSF150 | 046

01
START

Wall washer



SRW/TRW100 | 052 SRW/TRW125 | 053 SRW/TRW150 | 054 SSW/TSW100 | 056

SSW/TSW125 | 057 SSW/TSW150 | 058

02
STRADA



STRADA55 | 061 STRADA75 | 061 STRADA95 | 061

03
VTRIM



VRA1/VRAT1 | 087 VRF2/VRFT2 | 087 VRA3/VRAT3 | 087 VRA4/VRAT4 | 087

VRF5/VRFT5 | 088 VRW1 | 087 VSA1/VSAT1 | 088 VSF2/VSFT2 | 088

LUMINAIRES BY APPLICATION

CONTENTS

03

VTRIM



VSA4/VSAT4 | 088



VSA1/VSAT1 | 091




VSF2/VSFT2 | 091



VSA4/VSAT4 | 091

04

KAYA



K45 | 095




K75 | 095




K120 | 095

05

TESLA




TS3 | 103



TS4 | 103




TS6 | 103



TS8 | 103

06


DOME



D68 | 115



D75 | 118



D100 | 118



D150 | 119



D200 | 120



DS65 | 124



DS100 | 124



DS150 | 125



DS200 | 126

07

DOME L




D100L | 130




D150L | 130

08

V68



V68 | 133



V68W | 135

09

DOT



DOT35-G | 139



DOT45-G | 139



DOT35-H | 141



DOT45-H | 141

10

LEDGO



LF1 | 149



LF2 | 149



LF3 | 149



LX4 | 151



LF/LFT5 | 151



LF/LFT10 | 152






LF3-LS1/LFT3-LS1 | 153



LF6-LS2/LFT6-LS2 | 154

LUMINAIRES BY APPLICATION

CONTENTS

10 LEDGO				
	LA5 155	LA10 155	LW/LWT5 156	LW/LWT10 157
11 LX05				
	LF2-IP65 159	LF3-IP65 159	LF5-IP65 159	LF10-IP65 159
11 LX05				
	LX05-SM 171	LX05-SM-R300-1/4-CIRCLE 171	LX05-SM-R300-1/2-CIRCLE 171	LX05-SUS-H 172
				
	LX05-SUS-H-R300-1/4-CIRCLE 172	LX05-SUS-H-R300-1/2-CIRCLE 172	LX05-REE 173	LX05-RE12 173
				
	LX05-RS30-4W 174	LX05-RS40-8W 174	LX05-PS16/PS25 174	LX05-SCD80 174
				
	LX05-SPD80 175	LX05-SURI 60 175	LX05-A-AL300 175	LX05-GL1250-13W 175

11

LX05

LX05-DL-TK-1200 | 176

LX05-CDK-600 | 177

LX05-SL-TK-1000 | 178

12

LX11

LX11-SM | 183

LX11-SUS | 184

LX11-SUS-O | 184

LX11-REE | 185

LX11-RE12 | 185

LX11-RET | 185

LX11-RS30 | 186

LX11-RS40 | 186

LX11-PS16/PS25 | 186

LX11-SCD80 | 186

LX11-SPD80
LX11-SPD120 | 187

LX11-AL300-5W | 187

LX11-A-AL300 | 187

LX11-GL1250-13W
LX11-GL2500-25W | 187

LX11-PS30 | 188

LX11-PS40 | 188


LUMINAIRES BY APPLICATION

CONTENTS


12
LX11




LX11-SURI 60 | 188




LX11-NHP10 | 188




LX11-NVP06 | 188



LX11-NHU12 | 188



LX11-DL-TK-1200 | 189



LX05-DL-TK-2000 | 190



LX11-SL-TK-1000 | 191

13
LX26



LX26-SM | 199



LX26-SUS | 201



LX26-SUS-1/4 CIRCLE | 201




LX26-SUS-1/2 CIRCLE | 201



LX26-SUS-H | 205



LX26-RET | 207



LX26-RE12 | 207



LX26-REE | 207



LX26-REA | 207



LX26-REL | 207



LX26-RS25-3W | 217



LX26-RS25-5W | 217



LX26-RS40-8W | 218



LX26-RS40-16W | 218

13
LX26



LX26-RS40-12W | 219



LX26-RS40-24W | 219



LX26-RT55-10W | 220



LX26-RS55-14W | 220



LX26-RS72-19W | 221



LX26-WRS96-9W | 222



LX26-AL190-S2-3W | 223



LX26-AL190-S6-7W | 223



LX26-AL280-S8-9W | 224



LX26-AL280-S12-13W | 224



LX26-AL560-S24-26W | 225



LX26-SA280-13W | 227



LX26-Rita315-15W | 228



LX26-GL280-7W | 229



LX26-GL280-L-14W | 230



LX26-SG280-7W | 231



LX26-CL280-7W | 232



LX26-WW280-7W | 233



LX26-WRD72-10W | 234



LX26-WRD72-T2-20W | 234



LX26-RS-80-SL-10W | 235



LX26-RS-80-ST-10W | 235



LX26-SS-80-SL-10W | 236



LX26-SS-80-ST-10W | 236

LUMINAIRES BY APPLICATION

CONTENTS

13

LX26



LX26-SPD120/150/200 | 239



LX26-PD300 | 240



LX26-PS40-12W | 241



LX26-PS55-14W | 241



LX26-PDS40-12W | 242




LX26-SURI60-5W | 243



LX26-NVP12 | 244



LX26-NHU12 | 245



LX26-NHP10 | 246

14

YOKO



YOKO XS | 251




YOKO S | 251



YOKO M | 251

15

DARLO



DARLO 40/55 | 257



DARLO-P55 | 259

16

BINGO



BINGO S-E-F | 268



BINGO M-E-F | 268



BINGO S-E-Z | 269



BINGO M-E-Z | 269




BINGO K | 270



BINGO PRO | 271

17

GRACE



GRACE S | 277

18


FELLOW



FELLOW MINI | 283



FELLOW S | 285



FELLOW M | 285

19

ALPHA




ALPHA S | 291



ALPHA M | 293

LUMINAIRES BY APPLICATION

CONTENTS

20 BINGO C				
	BINGO C S-I-F 299	BINGO C M-I-F 299	BINGO C M-I-F 299	BINGO C M-I-F 299
				
	BINGO C S-I-Z 301	BINGO C S-I-Z 301	BINGO C S-I-Z 301	
				
	BINGO C M-I-Z 301	BINGO C M-I-Z 301	BINGO C M-I-Z 301	
21 KIWI				
	K1X30 310	K1X55 310	K1X70 311	
22 LINK6080				
	LINK6080-SUS 325	LINK6080-SM 325	LINK6080-RE 325	

23 LINK60				
	LINK60-SUS 339	LINK60-SM 339	LINK60-RE 339	
24 LINK50				
	LINK50-AL 351	LINK50-GL 353	LINK50-WW 355	LINK50-2AL+GL 357
25 LINK30				
	LINK30-GL 363	LINK30-CL 365	LINK30-AL 367	
26 LUCIA& FLATIA				
	LUCIA-C 350 381	LUCIA-C 450 381	LUCIA-C 600 381	LUCIA-C 900 381

LUMINAIRES BY APPLICATION

CONTENTS

26
LUCIA&
FLATIA



LUCIA-D 350 | 383 LUCIA-D 450 | 383 LUCIA-D 600 | 383 LUCIA-D 900 | 383



FLATIA-C 350 | 389 FLATIA-C 450 | 389 FLATIA-C 600 | 389 FLATIA-C 900 | 389



FLATIA-D 350 | 391 FLATIA-D 450 | 391 FLATIA-D 600 | 391 FLATIA-D 900 | 391

27
FLATIA ECO



FLATIA ECO 400 | 393 FLATIA ECO 600 | 393 FLATIA ECO 800 | 393

28
CREST



CREST400-SM | 399 CREST400-SUS | 399

29
LUMI



LUMI 300 | 405 LUMI 400 | 405 LUMI 600 | 405

30
NOVA-A



NOVA-A-116 | 407

31
NOVA



NOVA-C S | 416 NOVA-C M | 416 NOVA-80 | 417 NOVA-C L | 417



NOVA-P S | 422 NOVA-P M | 422 NOVA-P 80 | 423 NOVA-P L | 423

201E-lite lighting


21

LUMINAIRES BY APPLICATION

CONTENTS



ORBIT-S | 429 ORBIT-M | 429

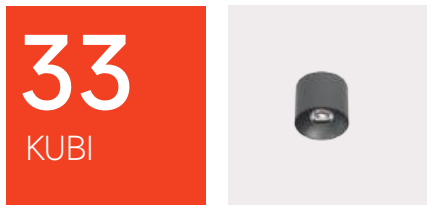

KUBI | 433



FELLOW MINI-C | 439 FELLOW MINI-W | 439



Q LINE07 | 447



FINO | 453



DENE | 457



BIBO | 459



FLEX-SH06-SM | 469 FLEX-SV06-SUS | 470 FLEX-C4A2 | 471 FLEX-SV06-SM | 472



FLEX-SHN12-SM | 473

LUMINAIRES BY APPLICATION

CONTENTS

40

ANGEL



S1

| 479

S2

| 479

S3

| 479

S4

| 479



S5


| 479

S6

| 479

41

OTTO



OTTO WAVE

| 489

OTTO CONVEX


| 489

OTTO RESEAU

| 489

42

FAIRY



FAIRY S100 A

| 497

FAIRY S100 B

| 497

FAIRY S100 B

| 497

43

SWAMM&CRANE



SWAMM





| 499

CRANE

| 499

44

PLUTO



PLUTO-U XS CV

| 503

PLUTO-F S CV




| 503

PLUTO-F M CV

| 503

PLUTO-F L CV

| 503



PLUTO-F S HV



| 505

PLUTO-F M HV

| 505

PLUTO-F L HV

| 505



PLUTO-B S HV

| 508

PLUTO-B M HV


| 508

PLUTO-B L HV

| 508

45

SOLAR



SOLAR Mini

| 511

SOLAR Maxi

| 511

46

EOS



EOS Nano

| 514

EOS Mini

| 514

EOS Maxi

| 515

LUMINAIRES BY APPLICATION

CONTENTS

47

EPO



EPO Nano | 518



EPO Mini | 518



EPO Maxi | 519

48

DORI



DORI MICRO | 522



DORI NANO | 522



DORI MINI | 523



DORI MAXI | 523

49

FOCAL



FOCAL R | 526



FOCAL S | 526

1 Downlight

Downlight

START	003-058
STRADA	059-062
VTRIM	063-092
KAYA	093-098
TESLA	099-106
DOME	107-126
DOME L	127-130
V68	131-136
DOT	137-142
LEDGO	143-160

START



SRA55



SRA68



SRA100



SRA125



SRA150



- Five tailored sizes for spatial flexibility
- Modular connectivity for custom configurations
- Uniform aesthetics across all dimensions
- Professional performance for architectural projects

Adjustable

SQUARE
Downlight



Fixed



Wall Washer



ROUND
Downlight



START

Downlight

One light engine with various accessories
Easy to specify, Easy to manage stock
Easy to install and adjust, Easy to change reflector

Adjustable

Fixed


Fixed

Wallwasher




Cutout Diameter(mm)	Φ55 Φ68 Φ100 Φ125 Φ150	68x68 100x100 122x122 147x147	Φ100 Φ125 Φ150	100x100 122x122 147x147	Φ100 Φ125 Φ150	100x100 122x122 147x147
	SRA55 SRA68 SRA100 SRA125 SRA150	SSA68 SSA100 SSA125 SSA150	SRF100 SRF125 SRF150	SSF100 SSF125 SSF150	SRW100 SRW125 SRW150	SSW100 SSW125 SSW150
Trim Diameter(mm)						
	H:96 H:95 H:130/157 H:159 H:190	H:102 H:131/158 H:160 H:190	H:130/157 H:159 H:190	H:131/158 H:160 H:190	H:130 H:159 H:190	H:131 H:160 H:190
Height(mm)						
Power	10W 9W 14W/20W 20W 27W	9W 14W/20W 20W 27W	14W/20W 20W 27W	14W/20W 20W 27W	15W 20W 27W	15W 20W 27W
Luminous Flux	900Lm 950Lm 1600Lm/2250Lm 2420Lm 3420Lm	950Lm 1600Lm/2250Lm 2420Lm 3420Lm	1410Lm/2000Lm 2100Lm 2950Lm	1410Lm/2000Lm 2100Lm 2950Lm	510Lm 1105Lm 1575Lm	510Lm 1105Lm 1575Lm
	12W 27W 27W 41W	12W 27W 27W 41W	27W 27W 41W	27W 27W 41W	21W 25W 41W	21W 25W 41W
	1250Lm 2420Lm 3200Lm 5300Lm	1250Lm 2420Lm 3200Lm 5300Lm	2470Lm 2730Lm 4830Lm	2470Lm 2730Lm 4830Lm	685Lm 1470Lm 2520Lm	685Lm 1470Lm 2520Lm
Beam Angle	18° 24° 36° 45° 50° 55° (only SRA68)	18° 24° 36° 45° 50° 55° (only SRA68)	35° 50°	35° 50°	Asymmetric optical distribution	
Corlour Temperature	Standard Option 3000K 2700K 4000K 5000K	Standard Option 3000K 2700K 4000K 5000K	Standard Option 3000K 2700K 4000K 5000K	Standard Option 3000K 2700K 4000K 5000K	Standard Option 3000K 2700K 4000K 5000K	Standard Option 3000K 2700K 4000K 5000K
CRI	Standard Option CRI>90 CRI>83	Standard Option CRI>90 CRI>83	Standard Option CRI>90 CRI>83	Standard Option CRI>90 CRI>83	Standard Option CRI>90 CRI>83	Standard Option CRI>90 CRI>83
LED Driver	Standard Option Non-Dim Phase DIM 1-10V DIM DALI DIM	Standard Option Non-Dim Phase DIM 1-10V DIM DALI DIM	Standard Option Non-Dim Phase DIM 1-10V DIM DALI DIM	Standard Option Non-Dim Phase DIM 1-10V DIM DALI DIM	Standard Option Non-Dim Phase DIM 1-10V DIM DALI DIM	Standard Option Non-Dim Phase DIM 1-10V DIM DALI DIM
Trimless Version						
Secondary Reflector						
Anti-glare Accessory						
Decoration Accessory						
Colour film						

START 55 Series
DOWNLIGHT / Adjustable

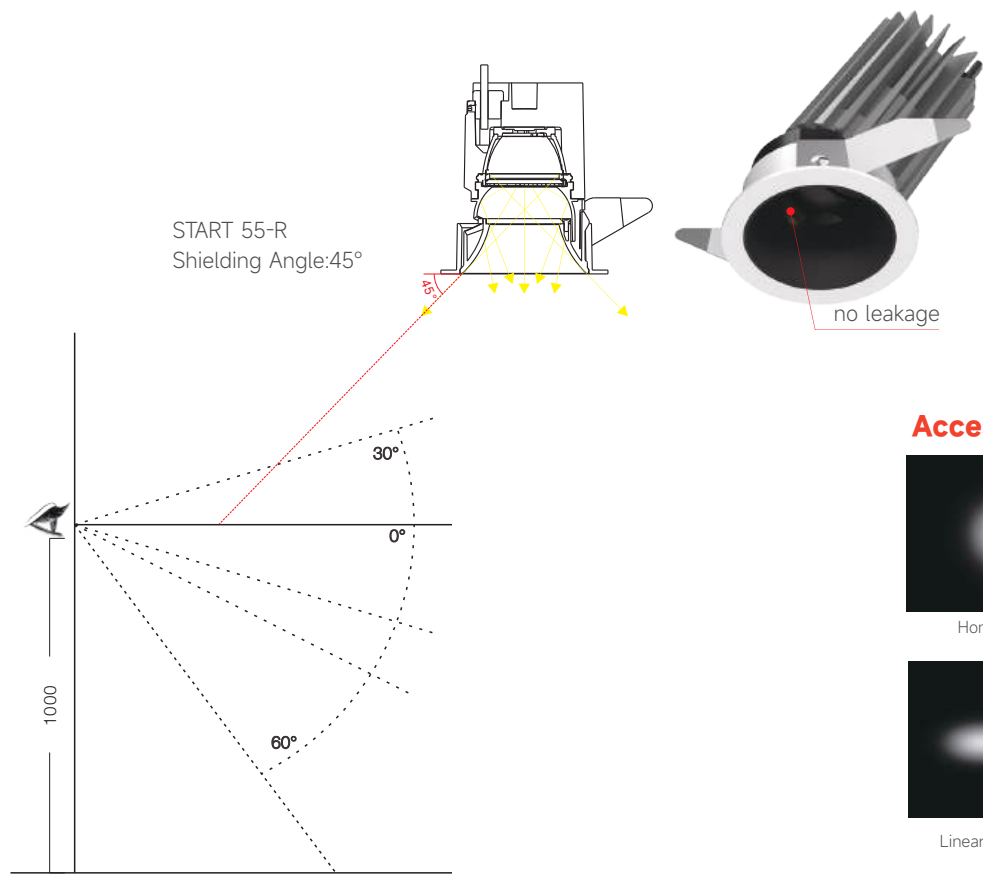

Accessory

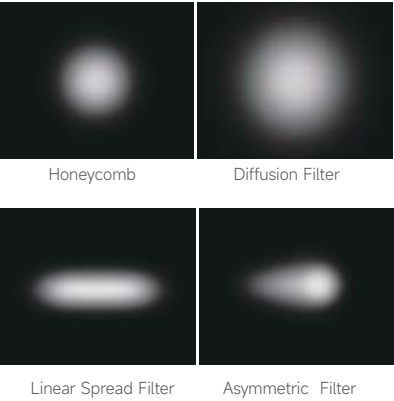



SRA55

TRA55

Downlight
SRA55 /TRA55




Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector
- Adjustable downlight


Specifications

- Dimming modes:Non-Dim, Phase Dim, 1-10V, DALI
- Beam angle:18°,24°,36°,45°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Installation Type



Light Distribution




Trim Colour




Trimless Colour



Accessories




Secondary Reflector Colour

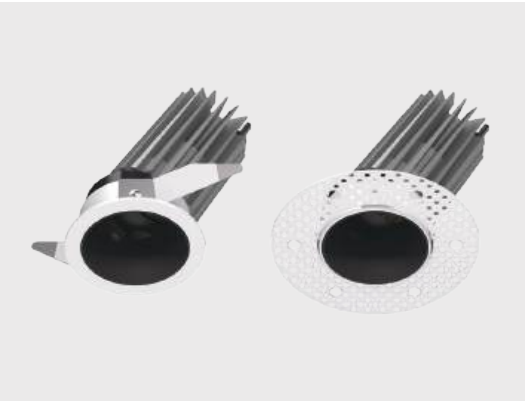

SRA55 /TRA55
Downlight

Drawing

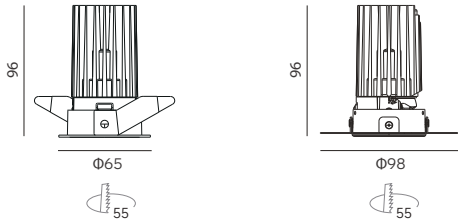

Order Options


10W 630lm-900lm 										
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
SRA55-CA930L18S-X	Ø65*96mm	630 lm	34 V	300mA	10 W	12 W	90	3000K	18°	
SRA55-CA940L18S-X	Ø65*96mm	700 lm	34 V	300mA	10 W	12 W	90	4000K	18°	
SRA55-CA930L24S-X	Ø65*96mm	740 lm	34 V	300mA	10 W	12 W	90	3000K	24°	
SRA55-CA940L24S-X	Ø65*96mm	800 lm	34 V	300mA	10 W	12 W	90	4000K	24°	
SRA55-CA930L36S-X	Ø65*96mm	850 lm	34 V	300mA	10 W	12 W	90	3000K	36°	
SRA55-CA940L36S-X	Ø65*96mm	900 lm	34 V	300mA	10 W	12 W	90	4000K	36°	
SRA55-CA930R45S-X	Ø65*96mm	850 lm	34 V	300mA	10 W	12 W	90	3000K	45°	
SRA55-CA940R45S-X	Ø65*96mm	900 lm	34 V	300mA	10 W	12 W	90	4000K	45°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

START 68 Series
DOWNLIGHT / Adjustable



No Light Leakage

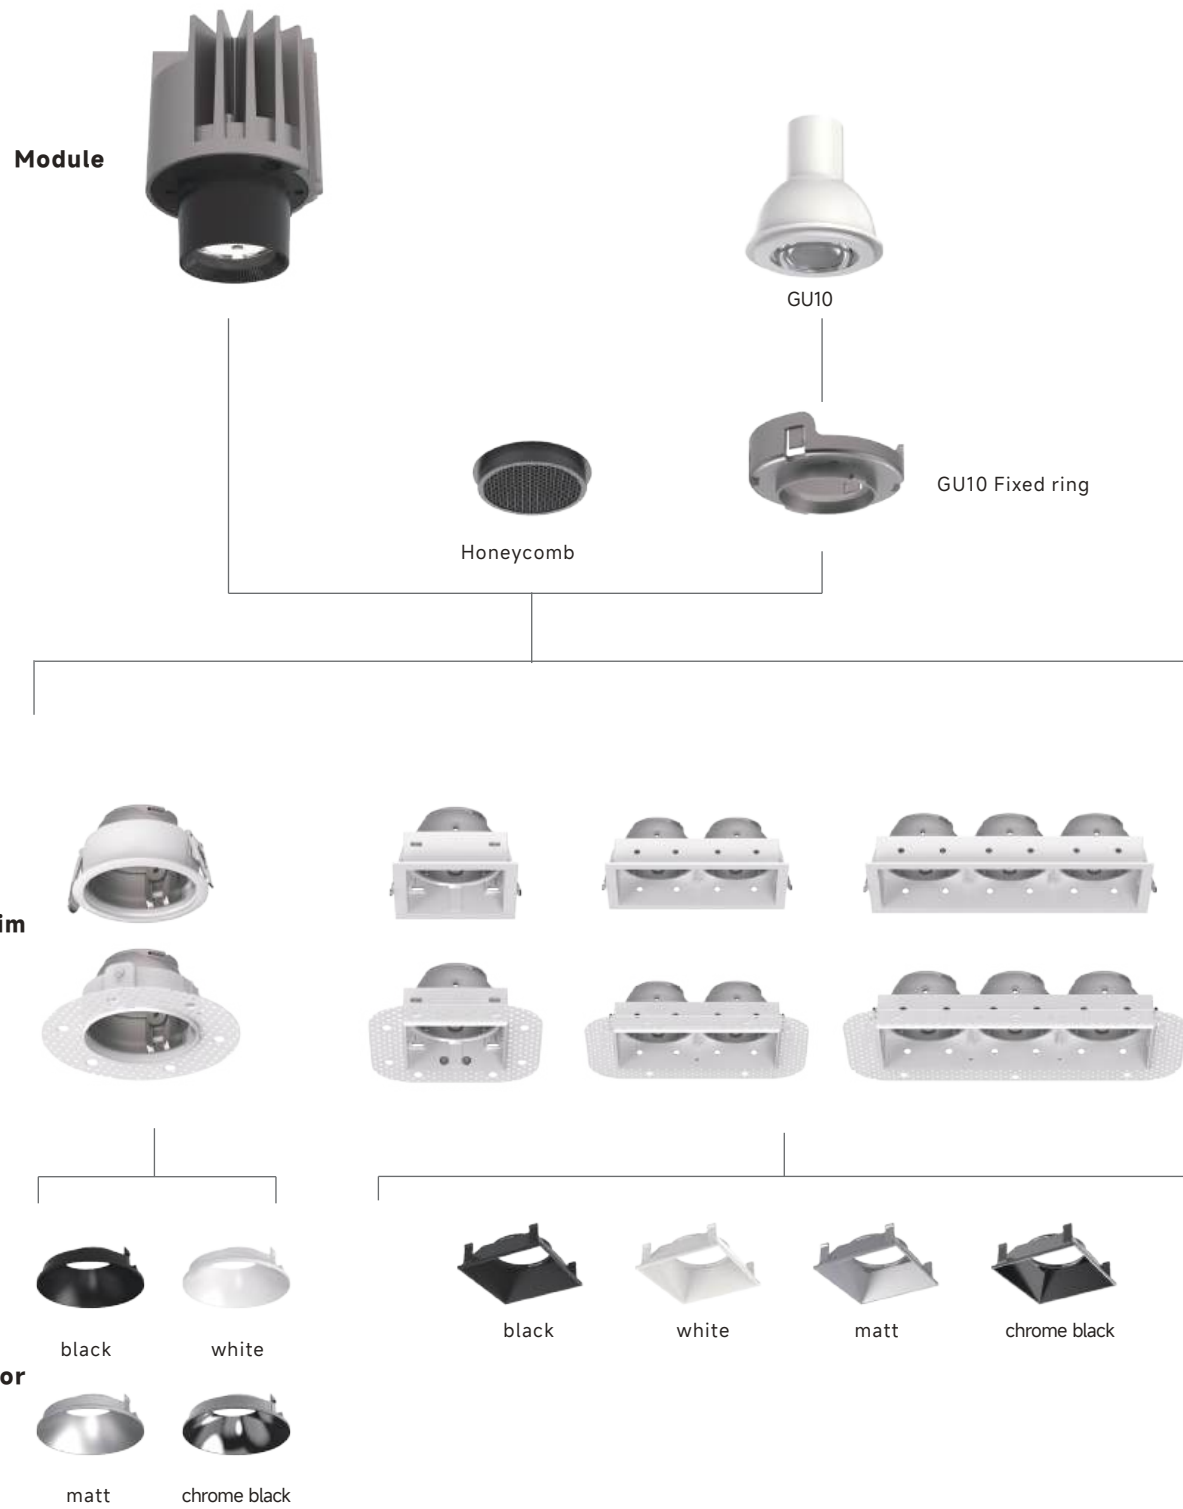



Downlight
SRA68 /TRA68 2.0

CE

CB

UK
CA

AC
220-240V

50000h
L80 B10

IP
54

UGR
<19

CRI
>90

Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:Non-Dim, Phase Dim, 1-10V, DALI
- Beam angle:24°, 36°, 55°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Installation Type



Light Distribution



Trim Colour



Trimless Colour



Anti-glare



Honeycomb

Accessory




Specular Chrome Black White

Matt Black



SRA68 /TRA68 2.0
Downlight


Drawing

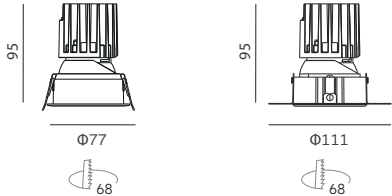

Order Options


9W 900-950Lm								
Code	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA68-2.0-9W-930-24D-X	900 lm	34 V	250mA	9 W	11 W	90	3000K	24°
SRA68-2.0-9W-940-24D-X	950 lm	34 V	250mA	9 W	11 W	90	4000K	24°
SRA68-2.0-9W-930-36D-X	900 lm	34 V	250mA	9 W	11 W	90	3000K	36°
SRA68-2.0-9W-940-36D-X	950 lm	34 V	250mA	9 W	11 W	90	4000K	36°
SRA68-2.0-9W-930-55D-X	900 lm	34 V	250mA	9 W	11 W	90	3000K	55°
SRA68-2.0-9W-940-55D-X	950 lm	34 V	250mA	9 W	11 W	90	4000K	55°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

12W 1200-1250Lm								
Code	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA68-2.0-12W-930-24D-X	1200 lm	34 V	350mA	12 W	14 W	90	3000K	24°
SRA68-2.0-12W-940-24D-X	1250 lm	34 V	350mA	12 W	14 W	90	4000K	24°
SRA68-2.0-12W-930-36D-X	1200 lm	34 V	350mA	12 W	14 W	90	3000K	36°
SRA68-2.0-12W-940-36D-X	1250 lm	34 V	350mA	12 W	14 W	90	4000K	36°
SRA68-2.0-12W-930-55D-X	1200 lm	34 V	350mA	12 W	14 W	90	3000K	55°
SRA68-2.0-12W-940-55D-X	1250 lm	34 V	350mA	12 W	14 W	90	4000K	55°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

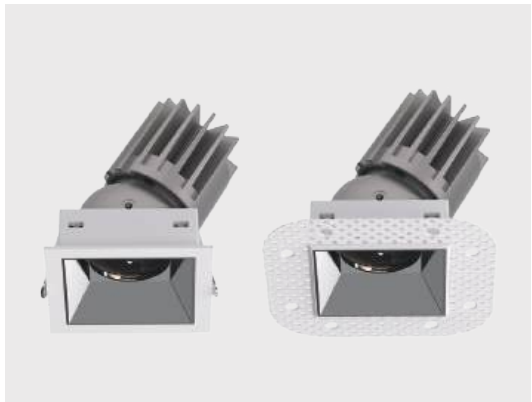

SSA68 /TSA68 2.0
Downlight


Drawing

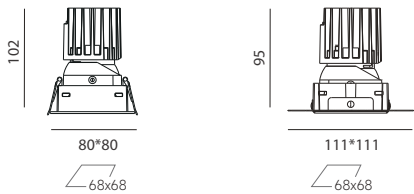

Order Options

9W 900-950Lm 							
Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA68-2.0-9W-930-24D-X	900 lm	34 V	9 W	11 W	90	3000K	24°
SSA68-2.0-9W-940-24D-X	950 lm	34 V	9 W	11 W	90	4000K	24°
SSA68-2.0-9W-930-36D-X	900 lm	34 V	9 W	11 W	90	3000K	36°
SSA68-2.0-9W-940-36D-X	950 lm	34 V	9 W	11 W	90	4000K	36°
SSA68-2.0-9W-930-55D-X	900 lm	34 V	9 W	11 W	90	3000K	55°
SSA68-2.0-9W-940-55D-X	950 lm	34 V	9 W	11 W	90	4000K	55°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

12W 1200-1250Lm 							
Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA68-2.0-12W-930-24D-X	1200 lm	34 V	12 W	14 W	90	3000K	24°
SSA68-2.0-12W-940-24D-X	1250 lm	34 V	12 W	14 W	90	4000K	24°
SSA68-2.0-12W-930-36D-X	1200 lm	34 V	12 W	14 W	90	3000K	36°
SSA68-2.0-12W-940-36D-X	1250 lm	34 V	12 W	14 W	90	4000K	36°
SSA68-2.0-12W-930-55D-X	1200 lm	34 V	12 W	14 W	90	3000K	55°
SSA68-2.0-12W-940-55D-X	1250 lm	34 V	12 W	14 W	90	4000K	55°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

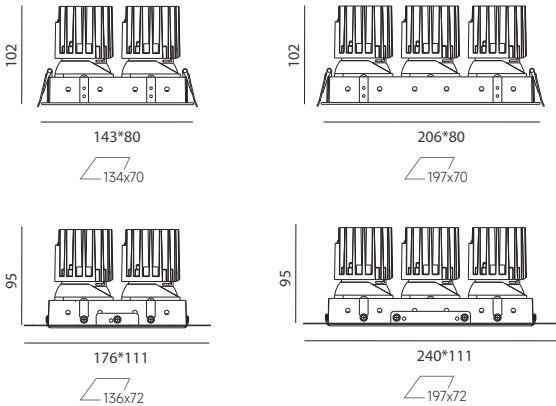



One light engine with various accessories



SRA | round adjustable/
downlight



SSA | square adjustable/
downlight

Trimless

Standard




Round-Adjustable

Square-Adjustable



Round-Fixed

Square-Fixed



(Only of Strat 100 Round)

Round-Wall Washer

Square-Wall Washer



Secondary
Reflector



Specular



Chrome Black



White



Matt



Black



Gold


Trimless
Round



Trimless
Square



START Series
DOWNLIGHT / Adjustable

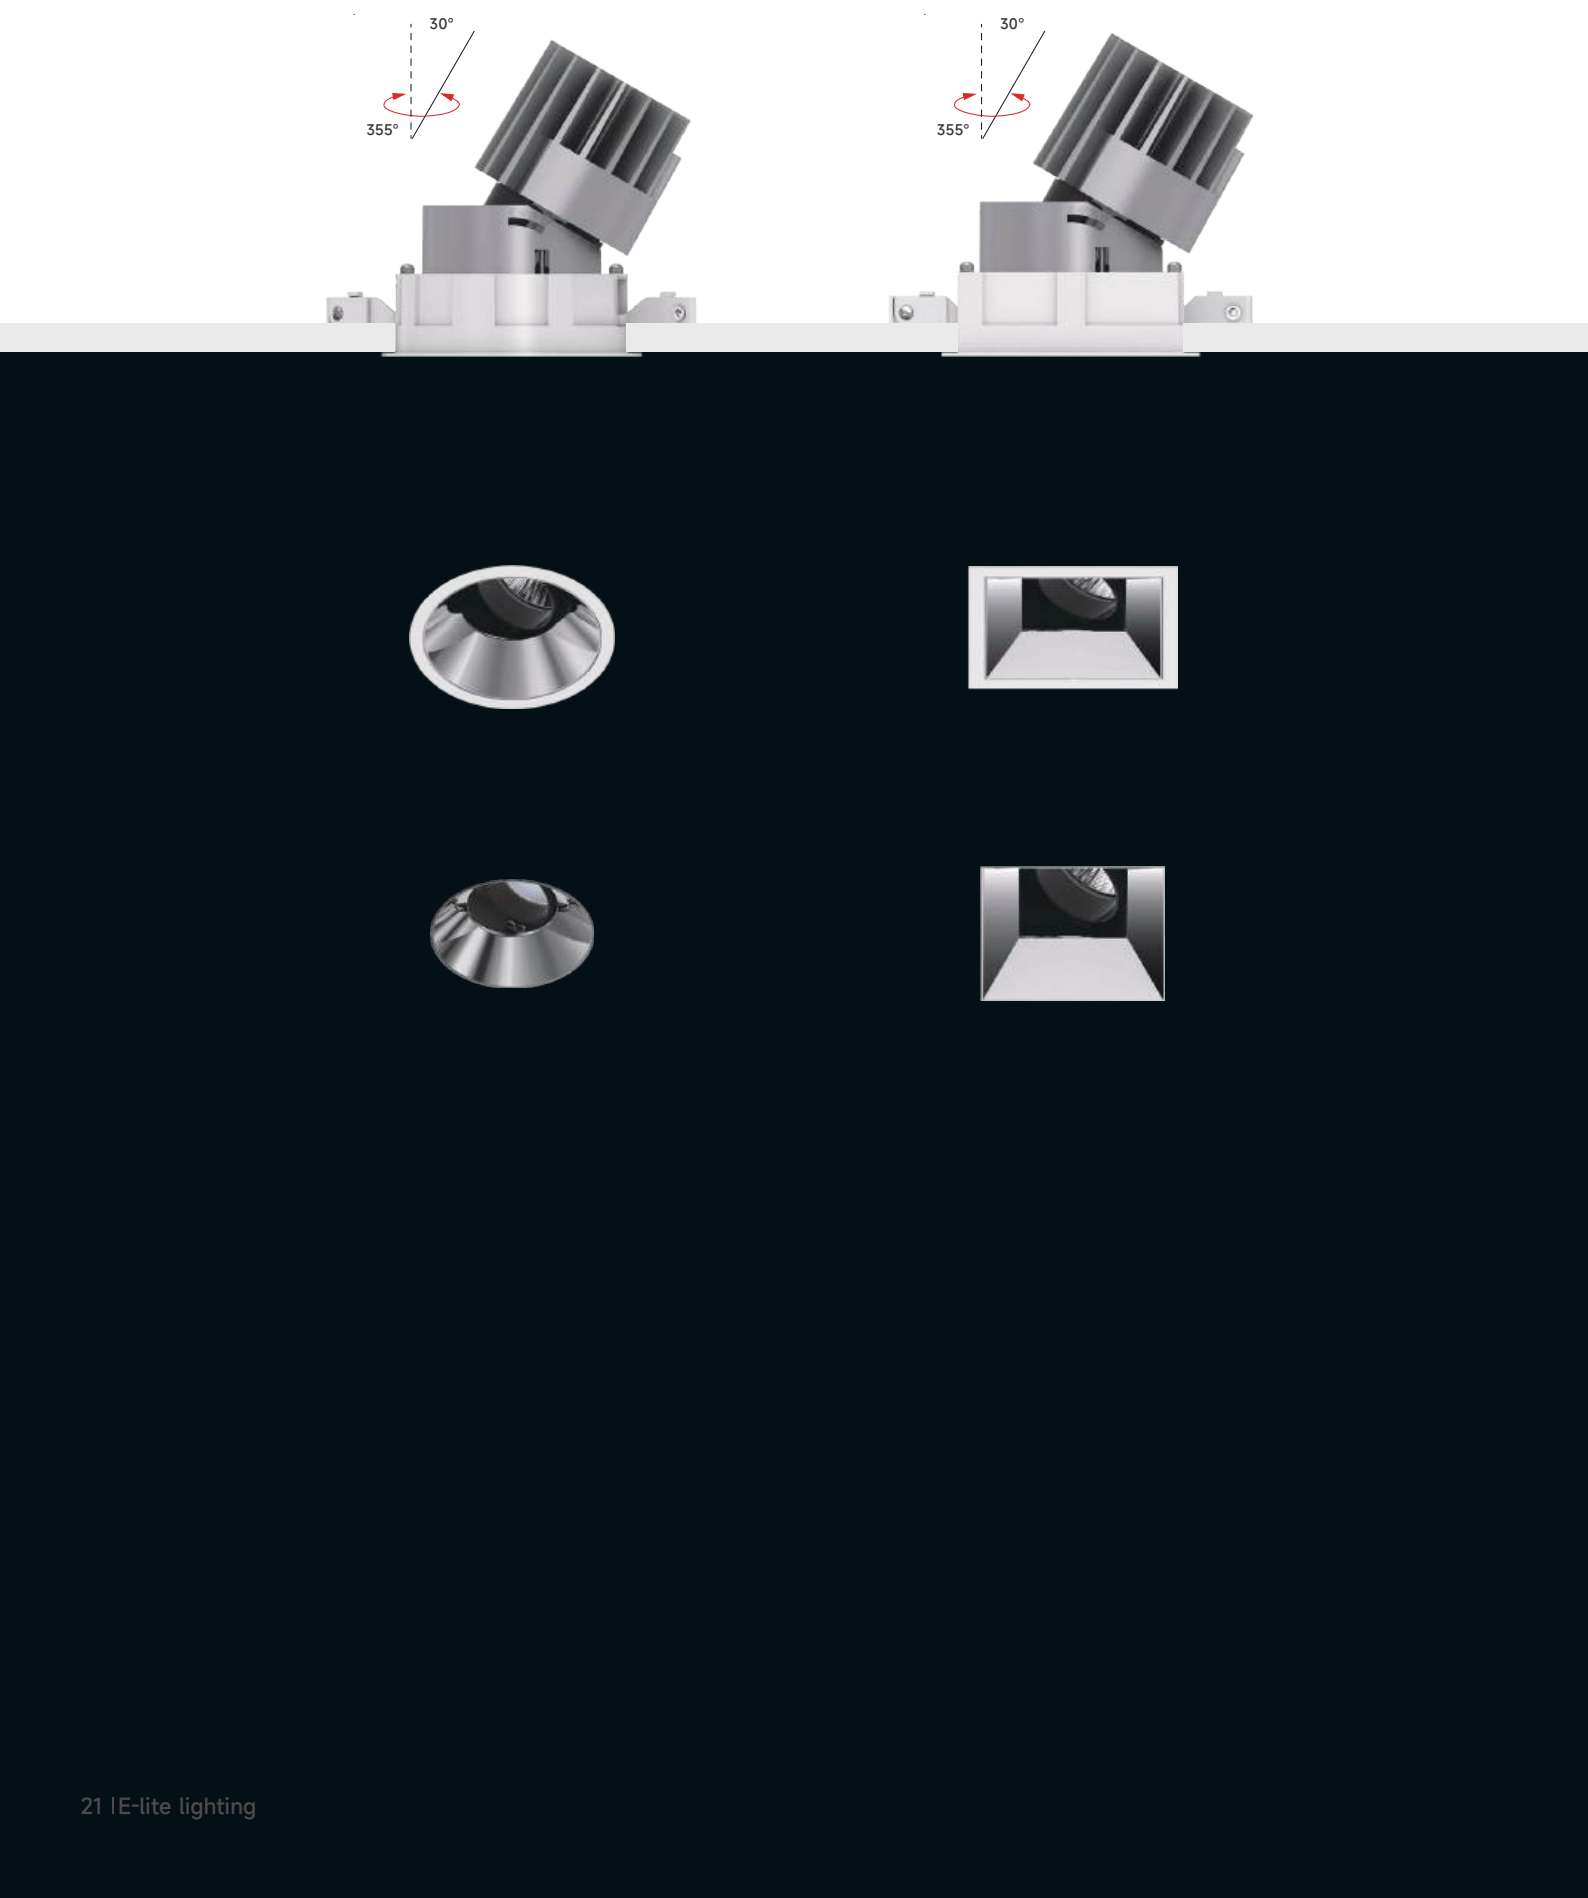


Adjustable


Aesthetic design trim available in round or square shape.
Five sizes with LED wattages 4W-38W.
30° tilt and 355° rotation.
Smart mechanical design ensures precise alignment.

START Series
DOWNLIGHT / Adjustable

Meticulous to detail
Interchangeable design
Best optics control
Guarantee maximal eye comfort

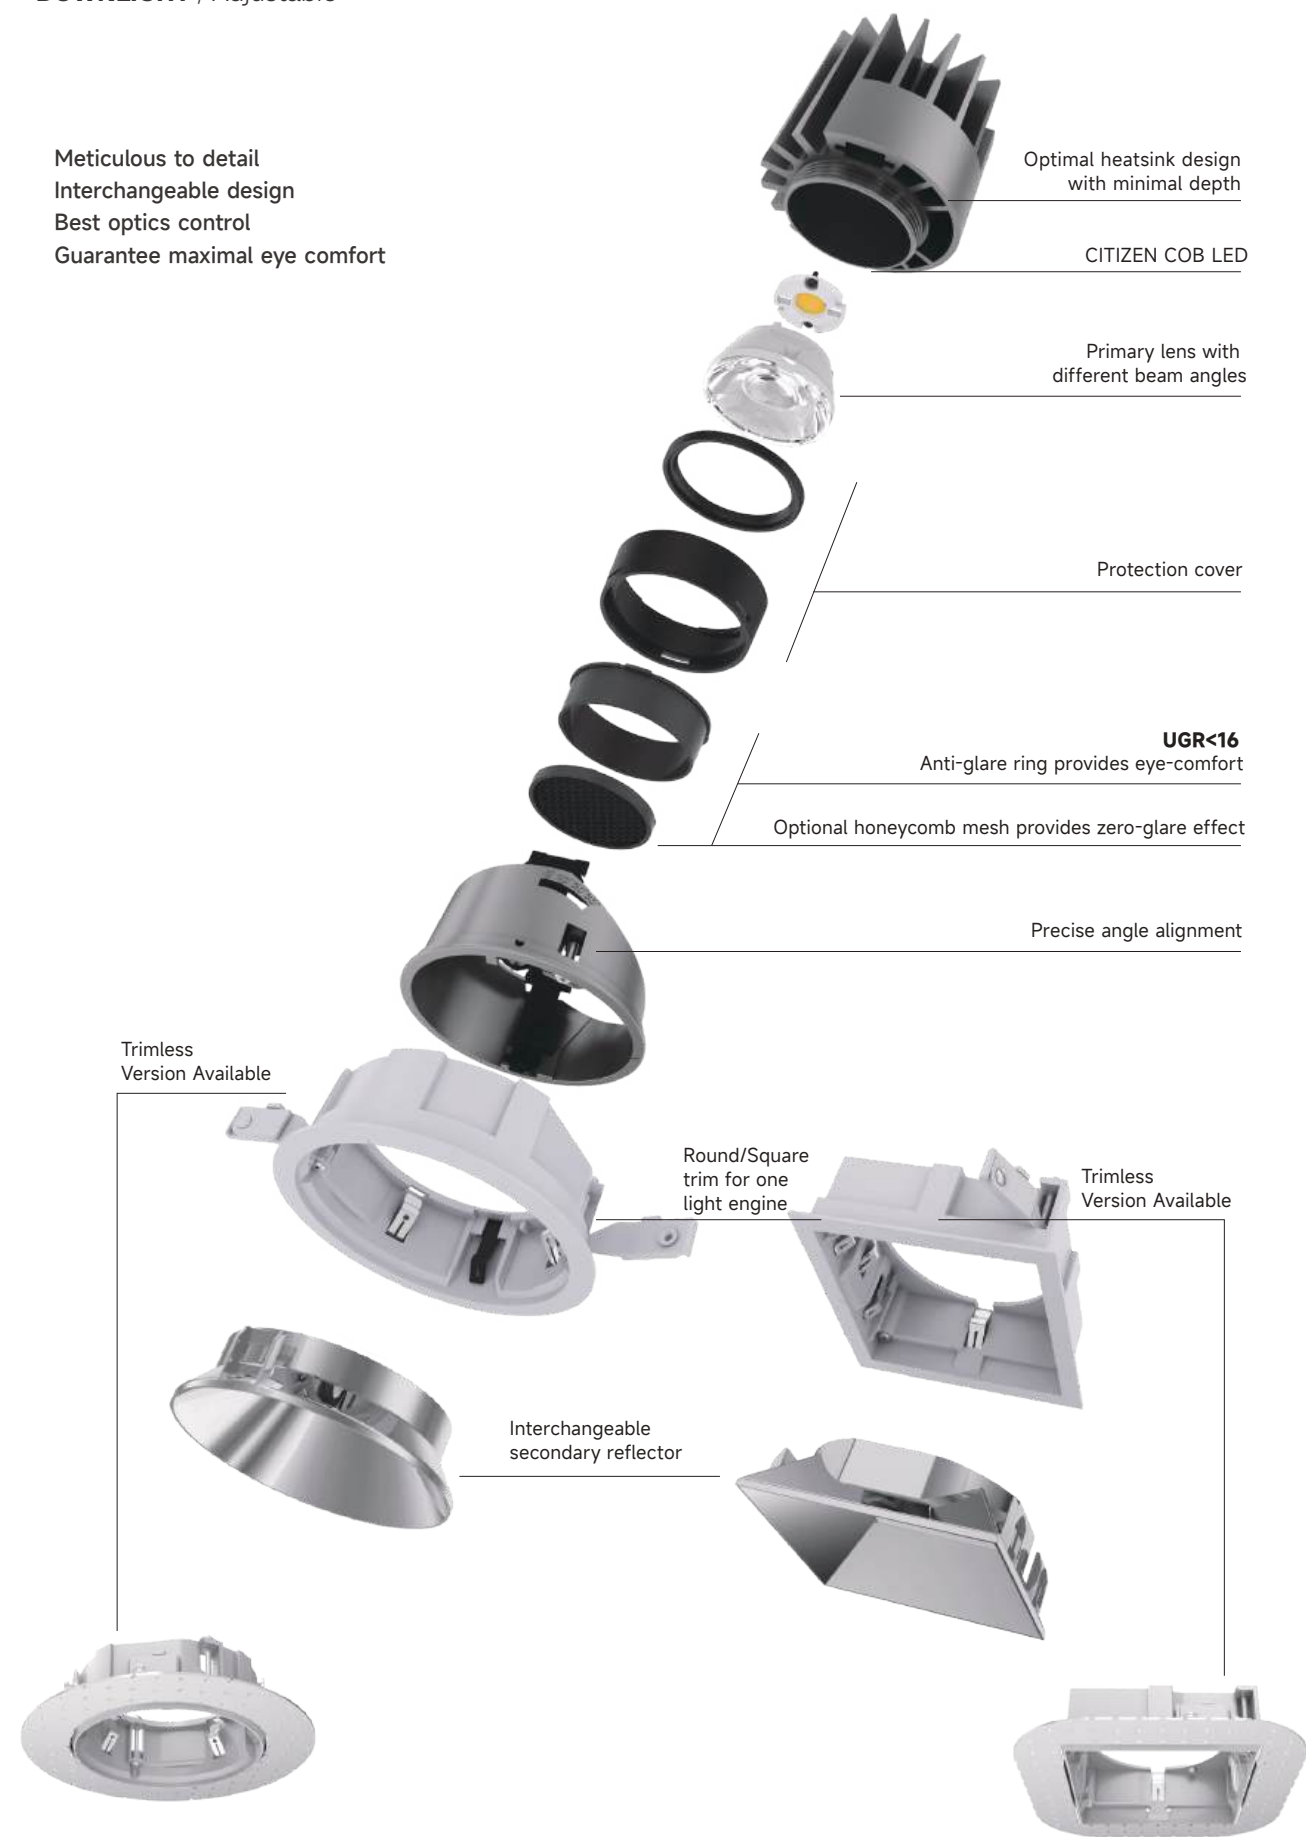

ADJUSTABLE

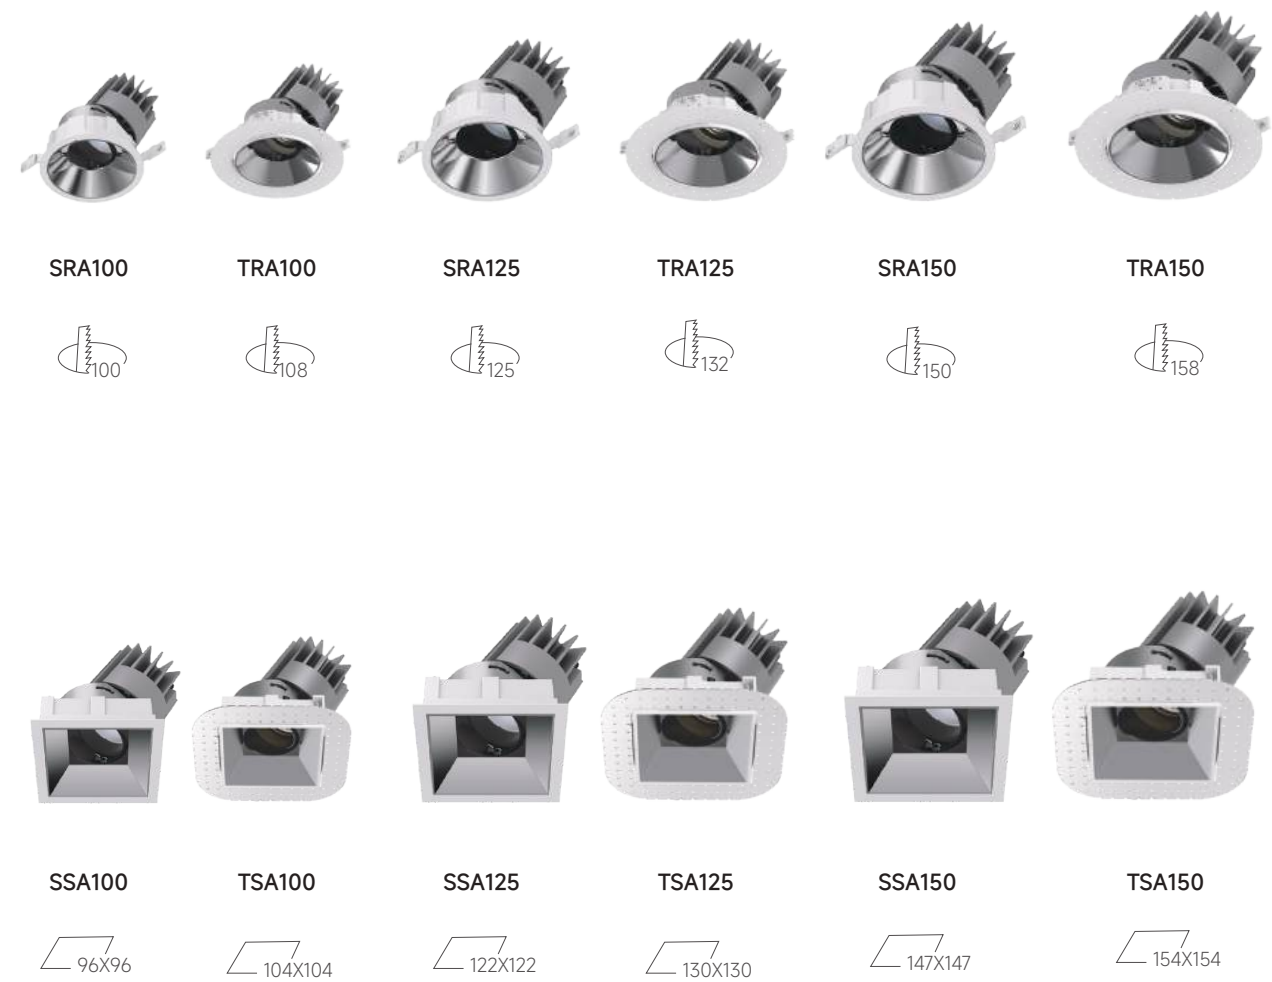



SRA100

SRA125

SRA150



TRA100

TRA125

TRA150

Downlight
SRA100/125/150




Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Physical: Die-casting
- Accessories: Honeycomb louver

Installation Type



Light Distribution



Trim Colour



White

Balck

Trimless Colour

Anti-glare Accessory



Honeycomb

Secondary Reflector Colour



Specular

Chrome Black

White




Matt

Balck

Gold

SRA100/TRA100
Downlight

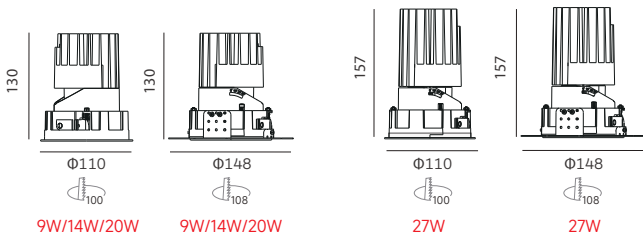

9W 600Lm-630Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA100-BA930L10S-X	Ø110*130mm	600 lm	35 V	200mA	7 W	9 W	90	3000K	10°
SRA100-BA940L10S-X	Ø110*130mm	630 lm	35 V	200mA	7 W	9 W	90	4000K	10°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

14W 1380Lm-1660Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA100-BB930L20S-X	Ø110*130mm	1380 lm	34 V	350mA	12 W	14 W	90	3000K	20°
SRA100-BB940L20S-X	Ø110*130mm	1450 lm	34 V	350mA	12 W	14 W	90	4000K	20°
SRA100-BB930L30S-X	Ø110*130mm	1580 lm	34 V	350mA	12 W	14 W	90	3000K	30°
SRA100-BB940L30S-X	Ø110*130mm	1660 lm	34 V	350mA	12 W	14 W	90	4000K	30°
SRA100-BB930L40S-X	Ø110*130mm	1500 lm	34 V	350mA	12 W	14 W	90	3000K	40°
SRA100-BB940L40S-X	Ø110*130mm	1580 lm	34 V	350mA	12 W	14 W	90	4000K	40°
SRA100-BB930L45S-X	Ø110*130mm	1480 lm	34 V	350mA	12 W	14 W	90	3000K	45°
SRA100-BB940L45S-X	Ø110*130mm	1560 lm	34 V	350mA	12 W	14 W	90	4000K	45°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

20W 1900Lm-2250Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA100-BC930L20S-X	Ø110*130mm	1900 lm	35 V	500mA	17 W	20 W	90	3000K	20°
SRA100-BC940L20S-X	Ø110*130mm	2000 lm	35 V	500mA	17 W	20 W	90	4000K	20°
SRA100-BC930L30S-X	Ø110*130mm	2140 lm	35 V	500mA	17 W	20 W	90	3000K	30°
SRA100-BC940L30S-X	Ø110*130mm	2250 lm	35 V	500mA	17 W	20 W	90	4000K	30°
SRA100-BC930L40S-X	Ø110*130mm	2100 lm	35 V	500mA	17 W	20 W	90	3000K	40°
SRA100-BC940L40S-X	Ø110*130mm	2210 lm	35 V	500mA	17 W	20 W	90	4000K	40°
SRA100-BC930L45S-X	Ø110*130mm	2060 lm	35 V	500mA	17 W	20 W	90	3000K	45°
SRA100-BC940L45S-X	Ø110*130mm	2160 lm	35 V	500mA	17 W	20 W	90	4000K	45°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


27W 2100Lm-2420Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA100-BD930L20S-X	Ø110*157mm	2200 lm	34V	700mA	24W	27W	90	3000K	20°
SRA100-BD940L20S-X	Ø110*157mm	2310 lm	34V	700mA	24W	27W	90	4000K	20°
SRA100-BD930L30S-X	Ø110*157mm	2300 lm	34V	700mA	24W	27W	90	3000K	30°
SRA100-BD940L30S-X	Ø110*157mm	2420 lm	34V	700mA	24W	27W	90	4000K	30°
SRA100-BD930L40S-X	Ø110*157mm	2300 lm	34V	700mA	24W	27W	90	3000K	40°
SRA100-BD940L40S-X	Ø110*157mm	2420 lm	34V	700mA	24W	27W	90	4000K	40°
SRA100-BD930L50S-X	Ø110*157mm	2100 lm	34V	700mA	24W	27W	90	3000K	50°
SRA100-BD940L50S-X	Ø110*157mm	2210 lm	34V	700mA	24W	27W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

START Series
DOWNLIGHT / Adjustable



SRA125/TRA125
Downlight

Drawing

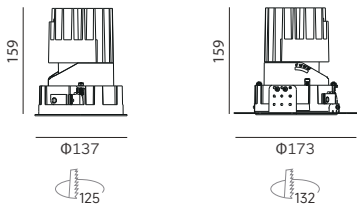


Order Options

20W 2000Lm-2420Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA125-BC930L20S-X	Φ137*159mm	2000 lm	34 V	500mA	17 W	20 W	90	3000K	20°
SRA125-BC940L20S-X	Φ137*159mm	2100 lm	34 V	500mA	17 W	20 W	90	4000K	20°
SRA125-BC930L30S-X	Φ137*159mm	2200 lm	34 V	500mA	17 W	20 W	90	3000K	30°
SRA125-BC940L30S-X	Φ137*159mm	2310 lm	34 V	500mA	17 W	20 W	90	4000K	30°
SRA125-BC930L40S-X	Φ137*159mm	2300 lm	34 V	500mA	17 W	20 W	90	3000K	40°
SRA125-BC940L40S-X	Φ137*159mm	2420 lm	34 V	500mA	17 W	20 W	90	4000K	40°
SRA125-BC930L50S-X	Φ137*159mm	2000 lm	34 V	500mA	17 W	20 W	90	3000K	50°
SRA125-BC940L50S-X	Φ137*159mm	2100 lm	34 V	500mA	17 W	20 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


27W 2600Lm-3200Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA125-BD930L20S-X	Φ137*159mm	2600 lm	34 V	700mA	24 W	27 W	90	3000K	20°
SRA125-BD940L20S-X	Φ137*159mm	2730 lm	34 V	700mA	24 W	27 W	90	4000K	20°
SRA125-BD930L30S-X	Φ137*159mm	2900 lm	34 V	700mA	24 W	27 W	90	3000K	30°
SRA125-BD940L30S-X	Φ137*159mm	3050 lm	34 V	700mA	24 W	27 W	90	4000K	30°
SRA125-BD930L40S-X	Φ137*159mm	3000 lm	34 V	700mA	24 W	27 W	90	3000K	40°
SRA125-BD940L40S-X	Φ137*159mm	3200 lm	34 V	700mA	24 W	27 W	90	4000K	40°
SRA125-BD930L50S-X	Φ137*159mm	2600 lm	34 V	700mA	24 W	27 W	90	3000K	50°
SRA125-BD940L50S-X	Φ137*159mm	2730 lm	34 V	700mA	24 W	27 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									



SRA150/TRA150
Downlight



Drawing

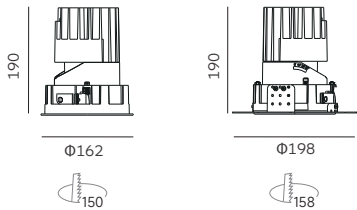


Order Options


27W 3000Lm-3420Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA150-BD930L20S-X	Φ162*190mm	3000 lm	34 V	700mA	24 W	27 W	90	3000K	20°
SRA150-BD940L20S-X	Φ162*190mm	3200 lm	34 V	700mA	24 W	27 W	90	4000K	20°
SRA150-BD930L25S-X	Φ162*190mm	3250 lm	34 V	700mA	24 W	27 W	90	3000K	25°
SRA150-BD940L25S-X	Φ162*190mm	3420 lm	34 V	700mA	24 W	27 W	90	4000K	25°
SRA150-BD930L36S-X	Φ162*190mm	3250 lm	34 V	700mA	24 W	27 W	90	3000K	36°
SRA150-BD940L36S-X	Φ162*190mm	3420 lm	34 V	700mA	24 W	27 W	90	4000K	36°
SRA150-BD930L45S-X	Φ162*190mm	3200 lm	34 V	700mA	24 W	27 W	90	3000K	45°
SRA150-BD940L45S-X	Φ162*190mm	3360 lm	34 V	700mA	24 W	27 W	90	4000K	45°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

41W 4700Lm-5300Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRA150-BF930L25S-X	Φ162*190mm	4700 lm	34 V	1050mA	36 W	41 W	90	3000K	25°
SRA150-BF940L25S-X	Φ162*190mm	4940 lm	34 V	1050mA	36 W	41 W	90	4000K	25°
SRA150-BF930L30S-X	Φ162*190mm	5050 lm	34 V	1050mA	36 W	41 W	90	3000K	30°
SRA150-BF940L30S-X	Φ162*190mm	5300 lm	34 V	1050mA	36 W	41 W	90	4000K	30°
SRA150-BF930L40S-X	Φ162*190mm	5050 lm	34 V	1050mA	36 W	41 W	90	3000K	40°
SRA150-BF940L40S-X	Φ162*190mm	5300 lm	34 V	1050mA	36 W	41 W	90	4000K	40°
SRA150-BF930L50S-X	Φ162*190mm	5000 lm	34 V	1050mA	36 W	41 W	90	3000K	50°
SRA150-BF940L50S-X	Φ162*190mm	5300 lm	34 V	1050mA	36 W	41 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

START Series
DOWNLIGHT / Adjustable

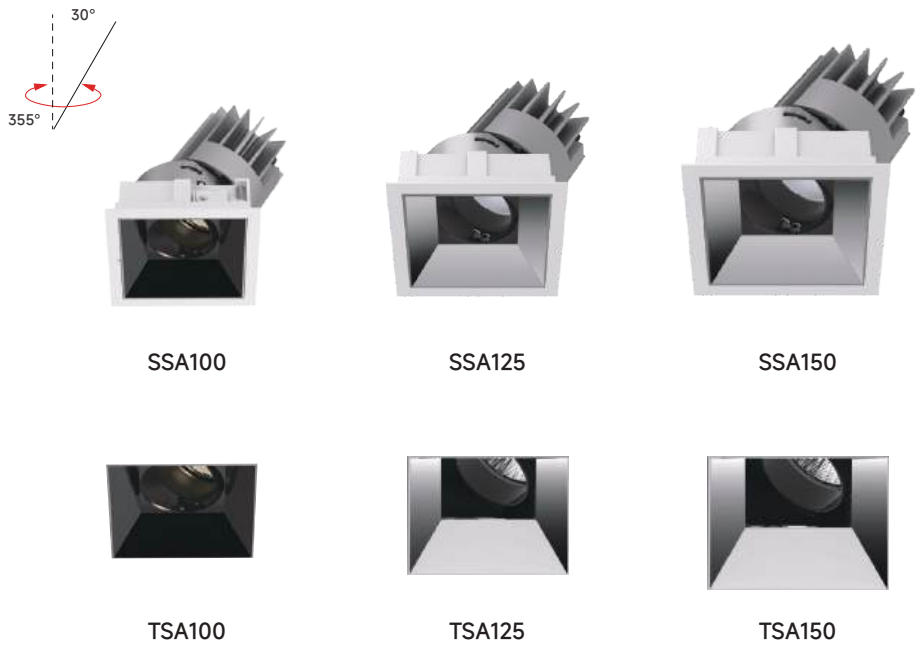

Downlight
SSA100/125/150




Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Installation Type



Light Distribution



Trim Colour



Trimless Colour



Anti-glare



Honeycomb

Matt

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold

White

Black

Gold


White

START Series
DOWNLIGHT / Adjustable



SSA125/TSA125
Downlight

Drawing

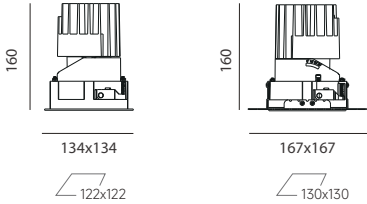

Order Options

20W 2000Lm-2420Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSA125-BC930L20S-X	134*134*160mm	2000 lm	34 V	500mA	17 W	20 W	90	3000K	20°
SSA125-BC940L20S-X	134*134*160mm	2100 lm	34 V	500mA	17 W	20 W	90	4000K	20°
SSA125-BC930L30S-X	134*134*160mm	2200 lm	34 V	500mA	17 W	20 W	90	3000K	30°
SSA125-BC940L30S-X	134*134*160mm	2310 lm	34 V	500mA	17 W	20 W	90	4000K	30°
SSA125-BC930L40S-X	134*134*160mm	2300 lm	34 V	500mA	17 W	20 W	90	3000K	40°
SSA125-BC940L40S-X	134*134*160mm	2420 lm	34 V	500mA	17 W	20 W	90	4000K	40°
SSA125-BC930L50S-X	134*134*160mm	2000 lm	34 V	500mA	17 W	20 W	90	3000K	50°
SSA125-BC940L50S-X	134*134*160mm	2100 lm	34 V	500mA	17 W	20 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

27W 2600Lm-3200Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSA125-BD930L20S-X	134*134*160mm	2600 lm	34 V	700mA	24 W	27 W	90	3000K	20°
SSA125-BD940L20S-X	134*134*160mm	2730 lm	34 V	700mA	24 W	27 W	90	4000K	20°
SSA125-BD930L30S-X	134*134*160mm	2900 lm	34 V	700mA	24 W	27 W	90	3000K	30°
SSA125-BD940L30S-X	134*134*160mm	3050 lm	34 V	700mA	24 W	27 W	90	4000K	30°
SSA125-BD930L40S-X	134*134*160mm	3000 lm	34 V	700mA	24 W	27 W	90	3000K	40°
SSA125-BD940L40S-X	134*134*160mm	3200 lm	34 V	700mA	24 W	27 W	90	4000K	40°
SSA125-BD930L50S-X	134*134*160mm	2600 lm	34 V	700mA	24 W	27 W	90	3000K	50°
SSA125-BD940L50S-X	134*134*160mm	2730 lm	34 V	700mA	24 W	27 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									




START Series
DOWNLIGHT / Adjustable



SSA150/TSA150
Downlight

Drawing

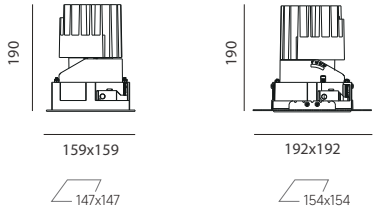

Order Options

27W 3000Lm-3420Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSA150-BD930L20S-X	159*159*190mm	3000 lm	34 V	700mA	24 W	27 W	90	3000K	20°
SSA150-BD940L20S-X	159*159*190mm	3200 lm	34 V	700mA	24 W	27 W	90	4000K	20°
SSA150-BD930L25S-X	159*159*190mm	3250 lm	34 V	700mA	24 W	27 W	90	3000K	25°
SSA150-BD940L25S-X	159*159*190mm	3420 lm	34 V	700mA	24 W	27 W	90	4000K	25°
SSA150-BD930L36S-X	159*159*190mm	3250 lm	34 V	700mA	24 W	27 W	90	3000K	36°
SSA150-BD940L36S-X	159*159*190mm	3420 lm	34 V	700mA	24 W	27 W	90	4000K	36°
SSA150-BD930L45S-X	159*159*190mm	3200 lm	34 V	700mA	24 W	27 W	90	3000K	45°
SSA150-BD940L45S-X	159*159*190mm	3360 lm	34 V	700mA	24 W	27 W	90	4000K	45°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

41W 4700Lm-5300Lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSA150-BF930L25S-X	159*159*190mm	4700 lm	34 V	1050mA	36 W	41 W	90	3000K	25°
SSA150-BF940L25S-X	159*159*190mm	4940 lm	34 V	1050mA	36 W	41 W	90	4000K	25°
SSA150-BF930L30S-X	159*159*190mm	5050 lm	34 V	1050mA	36 W	41 W	90	3000K	30°
SSA150-BF940L30S-X	159*159*190mm	5300 lm	34 V	1050mA	36 W	41 W	90	4000K	30°
SSA150-BF930L40S-X	159*159*190mm	5050 lm	34 V	1050mA	36 W	41 W	90	3000K	40°
SSA150-BF940L40S-X	159*159*190mm	5300 lm	34 V	1050mA	36 W	41 W	90	4000K	40°
SSA150-BF930L50S-X	159*159*190mm	5000 lm	34 V	1050mA	36 W	41 W	90	3000K	50°
SSA150-BF940L50S-X	159*159*190mm	5300 lm	34 V	1050mA	36 W	41 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									






Fixed

Aesthetic design trim available in round or square shape.
Three sizes with LED wattages 13W-38W.
Deep recessed secondary reflector generates visual comfort

Fixed

Meticulous to detail
Interchangeable design
Best optics control
Guarantee maximal eye comfort

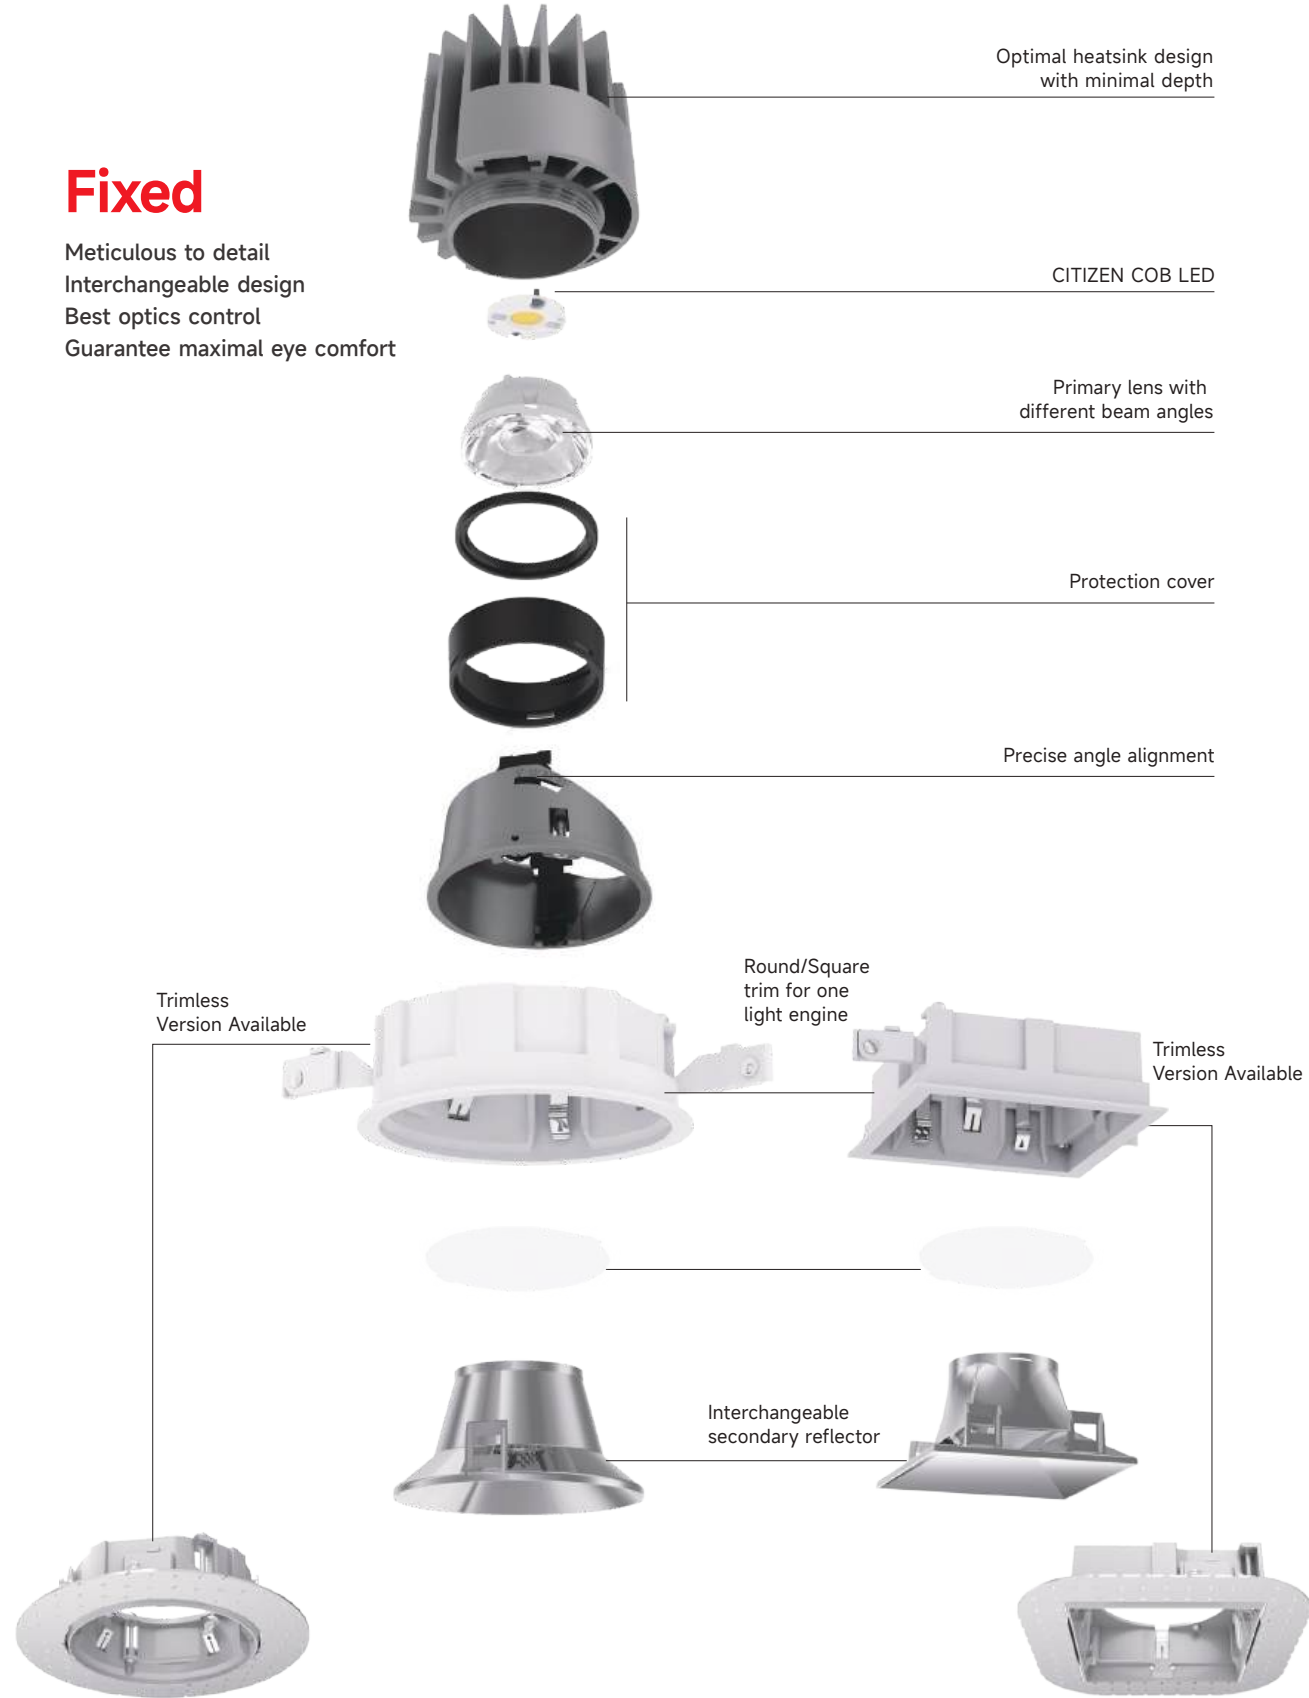

FIXED



SRF100

TRF100

SRF125

TRF125

SRF150

TRF150



SSF100

TSF100

SSF125

TSF125

SSF150

TSF150





Downlight
SRF100/125/150

CE

CB

UK
CA

Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>90


Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Physical: Die-casting, wet painting

Installation Type



Light Distribution



Trim Colour




Trimless Colour



Secondary Reflector Colour



SRF100/TRF100
Downlight

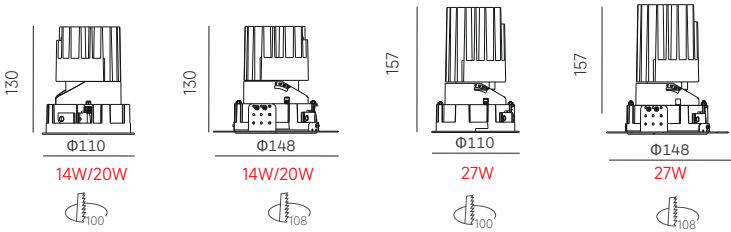

Order Options

14W 1200Lm-1410Lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRF100-BB930L25S-X	Ø110*130mm	1200 lm	34 V	350mA	12 W	14 W	90	3000K	25°
SRF100-BB940L25S-X	Ø110*130mm	1260 lm	34 V	350mA	12 W	14 W	90	4000K	25°
SRF100-BB930L30S-X	Ø110*130mm	1370 lm	34 V	350mA	12 W	14 W	90	3000K	30°
SRF100-BB940L30S-X	Ø110*130mm	1440 lm	34 V	350mA	12 W	14 W	90	4000K	30°
SRF100-BB930L40S-X	Ø110*130mm	1340 lm	34 V	350mA	12 W	14 W	90	3000K	40°
SRF100-BB940L40S-X	Ø110*130mm	1410 lm	34V	350mA	12 W	14 W	90	4000K	40°
SRF100-BB930L50S-X	Ø110*130mm	1200 lm	34 V	350mA	12 W	14 W	90	3000K	50°
SRF100-BB940L50S-X	Ø110*130mm	1260 lm	34 V	350mA	12 W	14 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


20W 1700Lm-2000Lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRF100-BC930L25S-X	Ø110*130mm	1700 lm	35 V	500mA	17 W	20 W	90	3000K	25°
SRF100-BC940L25S-X	Ø110*130mm	1790 lm	35 V	500mA	17 W	20 W	90	4000K	25°
SRF100-BC930L30S-X	Ø110*130mm	1900 lm	35 V	500mA	17 W	20 W	90	3000K	30°
SRF100-BC940L30S-X	Ø110*130mm	2000 lm	35 V	500mA	17 W	20 W	90	4000K	30°
SRF100-BC930L40S-X	Ø110*130mm	1850 lm	35 V	500mA	17 W	20 W	90	3000K	40°
SRF100-BC940L40S-X	Ø110*130mm	1950 lm	35 V	500mA	17 W	20 W	90	4000K	40°
SRF100-BC930L50S-X	Ø110*130mm	1800 lm	35 V	500mA	17 W	20 W	90	3000K	50°
SRF100-BC940L50S-X	Ø110*130mm	1890 lm	35 V	500mA	17 W	20 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

27W 2150Lm-2470Lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRF100-BD930L20S-X	Ø110*157mm	2150 lm	34V	700mA	24W	27W	90	3000K	20°
SRF100-BD940L20S-X	Ø110*157mm	2260 lm	34V	700mA	24W	27W	90	4000K	20°
SRF100-BD930L30S-X	Ø110*157mm	2350 lm	34V	700mA	24W	27W	90	3000K	30°
SRF100-BD940L30S-X	Ø110*157mm	2470 lm	34V	700mA	24W	27W	90	4000K	30°
SRF100-BD930L40S-X	Ø110*157mm	2300 lm	34V	700mA	24W	27W	90	3000K	40°
SRF100-BD940L40S-X	Ø110*157mm	2420 lm	34V	700mA	24W	27W	90	4000K	40°
SRF100-BD930L50S-X	Ø110*157mm	2300 lm	34V	700mA	24W	27W	90	3000K	50°
SRF100-BD940L50S-X	Ø110*157mm	2420 lm	34V	700mA	24W	27W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									



SRF125/TRF125
Downlight

Drawing

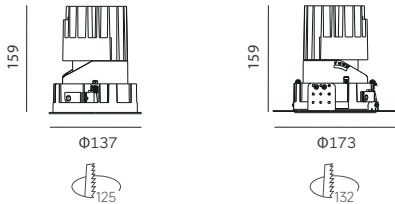

Order Options


20 W 1700lm-2100lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRF125-BC930L28S-X	Φ137*159mm	1800 lm	34 V	500mA	17 W	20W	90	3000K	28°
SRF125-BC940L28S-X	Φ137*159mm	1890 lm	34 V	500mA	17 W	20W	90	4000K	28°
SRF125-BC930L32S-X	Φ137*159mm	1900 lm	34 V	500mA	17 W	20W	90	3000K	32°
SRF125-BC940L32S-X	Φ137*159mm	2000 lm	34 V	500mA	17 W	20W	90	4000K	32°
SRF125-BC930L40S-X	Φ137*159mm	2000 lm	34 V	500mA	17 W	20W	90	3000K	40°
SRF125-BC940L40S-X	Φ137*159mm	2100 lm	34 V	500mA	17 W	20W	90	4000K	40°
SRF125-BC930L50S-X	Φ137*159mm	1700 lm	34 V	500mA	17 W	20W	90	3000K	50°
SRF125-BC940L50S-X	Φ137*159mm	1790 lm	34 V	500mA	17 W	20W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

27 W 2300lm-2730lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRF125-BD930L28S-X	Φ137*159mm	2400 lm	34 V	700mA	24W	27W	90	3000K	28°
SRF125-BD940L28S-X	Φ137*159mm	2550 lm	34 V	700mA	24W	27W	90	4000K	28°
SRF125-BD930L32S-X	Φ137*159mm	2500 lm	34 V	700mA	24W	27W	90	3000K	32°
SRF125-BD940L32S-X	Φ137*159mm	2630 lm	34 V	700mA	24W	27W	90	4000K	32°
SRF125-BD930L40S-X	Φ137*159mm	2600 lm	34 V	700mA	24W	27W	90	3000K	40°
SRF125-BD940L40S-X	Φ137*159mm	2730 lm	34 V	700mA	24W	27W	90	4000K	40°
SRF125-BD930L50S-X	Φ137*159mm	2300 lm	34 V	700mA	24W	27W	90	3000K	50°
SRF125-BD940L50S-X	Φ137*159mm	2320 lm	34 V	700mA	24W	27W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									



SRF150/TRF150
Downlight

Drawing



Order Options

27 W 2700lm-2950lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRF150-BD930R25S-X	Φ162*190mm	2700 lm	34 V	700mA	24W	27W	90	3000K	25°
SRF150-BD940R25S-X	Φ162*190mm	2840 lm	34 V	700mA	24W	27W	90	4000K	25°
SRF150-BD930R30S-X	Φ162*190mm	2800 lm	34 V	700mA	24W	27W	90	3000K	30°
SRF150-BD940R30S-X	Φ162*190mm	2950 lm	34 V	700mA	24W	27W	90	4000K	30°
SRF150-BD930R40S-X	Φ162*190mm	2900 lm	34 V	700mA	24W	27W	90	3000K	40°
SRF150-BD940R40S-X	Φ162*190mm	3050 lm	34 V	700mA	24W	27W	90	4000K	40°
SRF150-BD930R50S-X	Φ162*190mm	2800 lm	34 V	700mA	24W	27W	90	3000K	50°
SRF150-BD940R50S-X	Φ162*190mm	2950 lm	34 V	700mA	24W	27W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

41 W 4500lm-4830lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SRF150-BF930R30S-X	Φ162*190mm	4500 lm	34 V	1050mA	36W	41W	90	3000K	30°
SRF150-BF940R30S-X	Φ162*190mm	4730 lm	34 V	1050mA	36W	41W	90	4000K	30°
SRF150-BF930R38S-X	Φ162*190mm	4500 lm	34 V	1050mA	36W	41W	90	3000K	38°
SRF150-BF940R38S-X	Φ162*190mm	4730 lm	34 V	1050mA	36W	41W	90	4000K	38°
SRF150-BF930R45S-X	Φ162*190mm	4600 lm	34 V	1050mA	36W	41W	90	3000K	45°
SRF150-BF940R45S-X	Φ162*190mm	4830 lm	34 V	1050mA	36W	41W	90	4000K	45°
SRF150-BF930R50S-X	Φ162*190mm	4500 lm	34 V	1050mA	36W	41W	90	3000K	50°
SRF150-BF940R50S-X	Φ162*190mm	4730 lm	34 V	1050mA	36W	41W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									




Downlight
SSF100/125/150



Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Installation Type



Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Physical: Die-casting, wet painting

Light Distribution



Trim Colour




Trimless Colour



Secondary Reflector Colour



SSF100/TSF100
Downlight

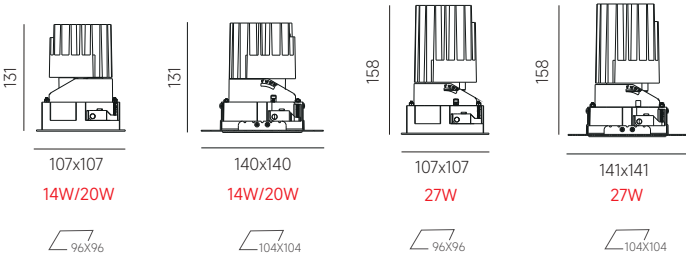

Order Options

14W 1200Lm-1410Lm									
bridgelux									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSF100-BB930L25S-X	107*107*131mm	1200 lm	34 V	350mA	12 W	14 W	90	3000K	25°
SSF100-BB940L25S-X	107*107*131mm	1260 lm	34 V	350mA	12 W	14 W	90	4000K	25°
SSF100-BB930L30S-X	107*107*131mm	1370 lm	34 V	350mA	12 W	14 W	90	3000K	30°
SSF100-BB940L30S-X	107*107*131mm	1440 lm	34 V	350mA	12 W	14 W	90	4000K	30°
SSF100-BB930L40S-X	107*107*131mm	1340 lm	34 V	350mA	12 W	14 W	90	3000K	40°
SSF100-BB940L40S-X	107*107*131mm	1410 lm	34V	350mA	12 W	14 W	90	4000K	40°
SSF100-BB930L50S-X	107*107*131mm	1200 lm	34 V	350mA	12 W	14 W	90	3000K	50°
SSF100-BB940L50S-X	107*107*131mm	1260 lm	34 V	350mA	12 W	14 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


20W 1700Lm-2000Lm									
bridgelux									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSF100-BC930L25S-X	107*107*131mm	1700 lm	35 V	500mA	17 W	20 W	90	3000K	25°
SSF100-BC940L25S-X	107*107*131mm	1790 lm	35 V	500mA	17 W	20 W	90	4000K	25°
SSF100-BC930L30S-X	107*107*131mm	1900 lm	35 V	500mA	17 W	20 W	90	3000K	30°
SSF100-BC940L30S-X	107*107*131mm	2000 lm	35 V	500mA	17 W	20 W	90	4000K	30°
SSF100-BC930L40S-X	107*107*131mm	1850 lm	35 V	500mA	17 W	20 W	90	3000K	40°
SSF100-BC940L40S-X	107*107*131mm	1950 lm	35 V	500mA	17 W	20 W	90	4000K	40°
SSF100-BC930L50S-X	107*107*131mm	1800 lm	35 V	500mA	17 W	20 W	90	3000K	50°
SSF100-BC940L50S-X	107*107*131mm	1890 lm	35 V	500mA	17 W	20 W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

27W 2150Lm-2470Lm									
bridgelux									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSF100-BD930L20S-X	107*107*158mm	2150 lm	34V	700mA	24W	27W	90	3000K	20°
SSF100-BD940L20S-X	107*107*158mm	2260 lm	34V	700mA	24W	27W	90	4000K	20°
SSF100-BD930L30S-X	107*107*158mm	2350 lm	34V	700mA	24W	27W	90	3000K	30°
SSF100-BD940L30S-X	107*107*158mm	2470 lm	34V	700mA	24W	27W	90	4000K	30°
SSF100-BD930L40S-X	107*107*158mm	2300 lm	34V	700mA	24W	27W	90	3000K	40°
SSF100-BD940L40S-X	107*107*158mm	2420 lm	34V	700mA	24W	27W	90	4000K	40°
SSF100-BD930L50S-X	107*107*158mm	2300 lm	34V	700mA	24W	27W	90	3000K	50°
SSF100-BD940L50S-X	107*107*158mm	2420 lm	34V	700mA	24W	27W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									



SSF125/TSF125
Downlight

Drawing

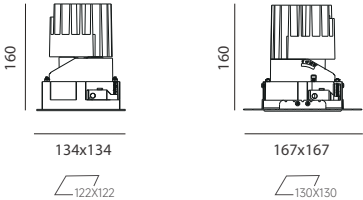

Order Options


20 W 1700lm-2100lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSF125-BC930L28S-X	134*134*160mm	1800 lm	34 V	500mA	17 W	20W	90	3000K	28°
SSF125-BC940L28S-X	134*134*160mm	1890 lm	34 V	500mA	17 W	20W	90	4000K	28°
SSF125-BC930L32S-X	134*134*160mm	1900 lm	34 V	500mA	17 W	20W	90	3000K	32°
SSF125-BC940L32S-X	134*134*160mm	2000 lm	34 V	500mA	17 W	20W	90	4000K	32°
SSF125-BC930L40S-X	134*134*160mm	2000 lm	34 V	500mA	17 W	20W	90	3000K	40°
SSF125-BC940L40S-X	134*134*160mm	2100 lm	34 V	500mA	17 W	20W	90	4000K	40°
SSF125-BC930L50S-X	134*134*160mm	1700 lm	34 V	500mA	17 W	20W	90	3000K	50°
SSF125-BC940L50S-X	134*134*160mm	1790 lm	34 V	500mA	17 W	20W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

27 W 2300lm-2730lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSF125-BD930L28S-X	134*134*160mm	2400 lm	34 V	700mA	24W	27W	90	3000K	28°
SSF125-BD940L28S-X	134*134*160mm	2550 lm	34 V	700mA	24W	27W	90	4000K	28°
SSF125-BD930L32S-X	134*134*160mm	2500 lm	34 V	700mA	24W	27W	90	3000K	32°
SSF125-BD940L32S-X	134*134*160mm	2630 lm	34 V	700mA	24W	27W	90	4000K	32°
SSF125-BD930L40S-X	134*134*160mm	2600 lm	34 V	700mA	24W	27W	90	3000K	40°
SSF125-BD940L40S-X	134*134*160mm	2730 lm	34 V	700mA	24W	27W	90	4000K	40°
SSF125-BD930L50S-X	134*134*160mm	2300 lm	34 V	700mA	24W	27W	90	3000K	50°
SSF125-BD940L50S-X	134*134*160mm	2320 lm	34 V	700mA	24W	27W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									



SSF150/TSF150
Downlight

Drawing

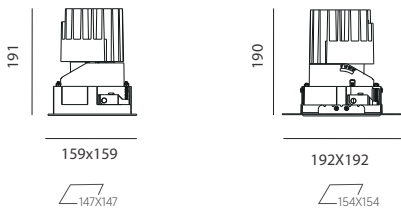

Order Options

27 W 2700lm-2950lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSF150-BD930R25S-X	159*159*191mm	2700 lm	34 V	700mA	24W	27W	90	3000K	25°
SSF150-BD940R25S-X	159*159*191mm	2840 lm	34 V	700mA	24W	27W	90	4000K	25°
SSF150-BD930R30S-X	159*159*191mm	2800 lm	34 V	700mA	24W	27W	90	3000K	30°
SSF150-BD940R30S-X	159*159*191mm	2950 lm	34 V	700mA	24W	27W	90	4000K	30°
SSF150-BD930R40S-X	159*159*191mm	2900 lm	34 V	700mA	24W	27W	90	3000K	40°
SSF150-BD940R40S-X	159*159*191mm	3050 lm	34 V	700mA	24W	27W	90	4000K	40°
SSF150-BD930R50S-X	159*159*191mm	2800 lm	34 V	700mA	24W	27W	90	3000K	50°
SSF150-BD940R50S-X	159*159*191mm	2950 lm	34 V	700mA	24W	27W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

41 W 4500lm-4830lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
SSF150-BF930R30S-X	159*159*191mm	4500 lm	34 V	1050mA	36W	41W	90	3000K	30°
SSF150-BF940R30S-X	159*159*191mm	4730 lm	34 V	1050mA	36W	41W	90	4000K	30°
SSF150-BF930R38S-X	159*159*191mm	4500 lm	34 V	1050mA	36W	41W	90	3000K	38°
SSF150-BF940R38S-X	159*159*191mm	4730 lm	34 V	1050mA	36W	41W	90	4000K	38°
SSF150-BF930R45S-X	159*159*191mm	4600 lm	34 V	1050mA	36W	41W	90	3000K	45°
SSF150-BF940R45S-X	159*159*191mm	4830 lm	34 V	1050mA	36W	41W	90	4000K	45°
SSF150-BF930R50S-X	159*159*191mm	4500 lm	34 V	1050mA	36W	41W	90	3000K	50°
SSF150-BF940R50S-X	159*159*191mm	4730 lm	34 V	1050mA	36W	41W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									



WALL WASHER


Meticulous to detail
Interchangeable design
Best optics control
Guarantee maximal eye comfort

WALL WASHER



					
SRW100	TRW100	SRW125	TRW125	SRW150	TRW150
					
					
SSW100	TSW100	SSW125	TSW125	SSW150	TSW150
					




The installation is based on 3M height wall
Evenly illuminated wall without dark shadow at the corner

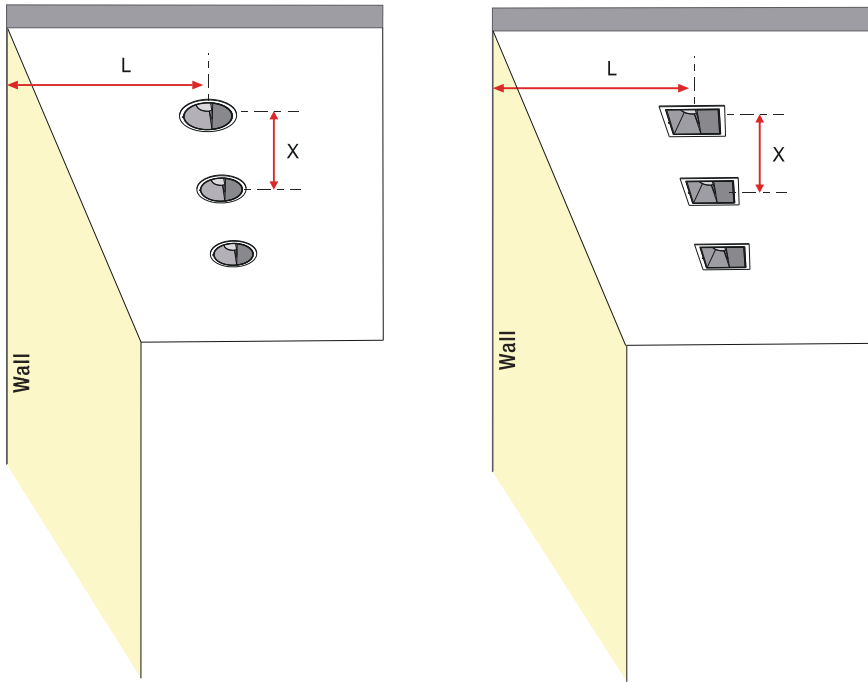


Suggestions on Installation Distance for Uniform Lighting Effects

	X(mm) L(mm) MODEL	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
	SRW100	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
	SRW125	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
	SRW150	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm

	X(mm) L(mm) MODEL	500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
	SSW100	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm	1250 mm
	SSW125	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm	1250 mm
	SSW150	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm	1250 mm

START Series
DOWNLIGHT / WALL WASHER

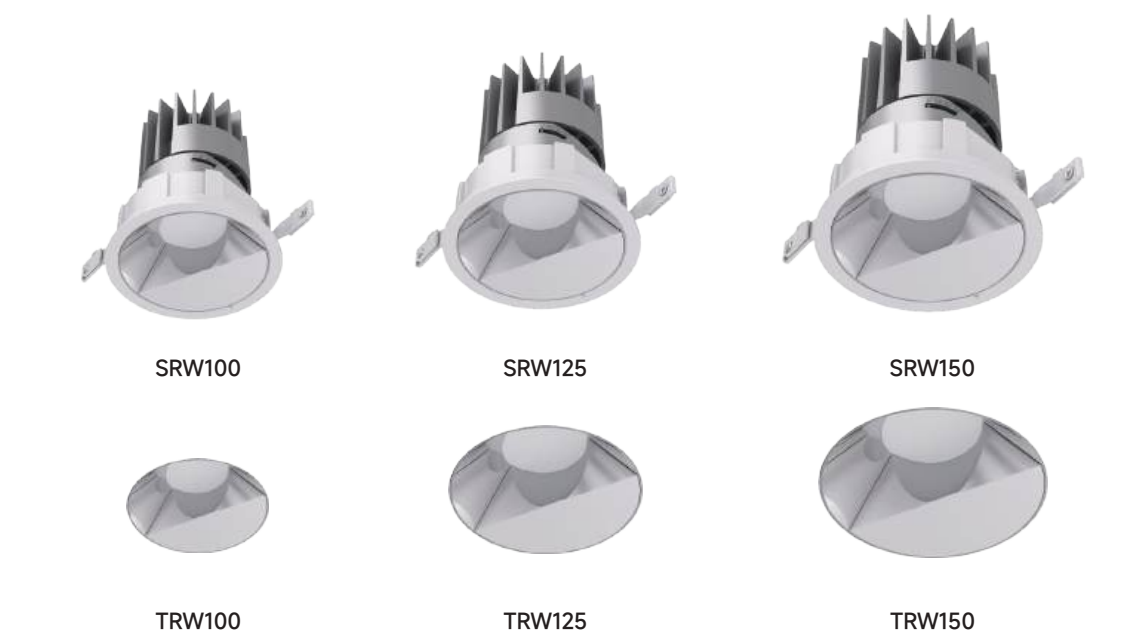

Downlight
SRW100/125/150

CE

CB

UK
CA

Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>90


Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Physical: Die-casting

Installation Type



Light Distribution



Trim Colour



Trimless Colour




Wall Washer Reflector



SRW100/TRW100
Downlight / Wall Washer

Drawing



Order Options

15W 480lm-510lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SRW100-CB930LW1M-X	Φ110*130mm	480 lm	36 V	350mA	13W	15W	90	3000K
SRW100-CB940LW1M-X	Φ110*130mm	510 lm	36 V	350mA	13W	15W	90	4000K

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)
Note: Primary reflector version/It's not the same LED engine as the lens version.


21W 650lm-685lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SRW100-CC930LW1M-X	Φ110*130mm	650 lm	36 V	500mA	18W	21W	90	3000K
SRW100-CC940LW1M-X	Φ110*130mm	685 lm	36 V	500mA	18W	21W	90	4000K

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)
Note: Primary reflector version/It's not the same LED engine as the lens version.



SRW125/TRW125
Downlight / Wall Washer

Drawing

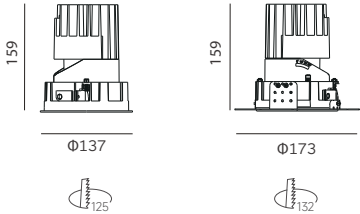

Order Options


20W 1050lm-1105lm 								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SRW125-BC930LW1M-X	Φ137*159mm	1050 lm	34 V	500mA	17W	20W	90	3000K
SRW125-BC940LW1M-X	Φ137*159mm	1105 lm	34 V	500mA	17W	20W	90	4000K
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

25W 1400lm-1470lm 								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SRW125-BD930LW1M-X	Φ137*159mm	1400 lm	34 V	700mA	24W	27W	90	3000K
SRW125-BD940LW1M-X	Φ137*159mm	1470 lm	34 V	700mA	24W	27W	90	4000K
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								



SRW150/TRW150
Downlight / Wall Washer

Drawing

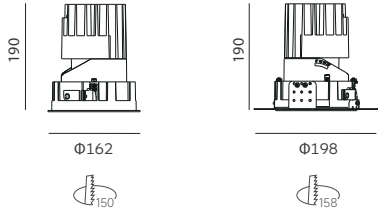


Order Options


27W 1500lm-1575lm 								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SRW150-BD930LW1M-X	Φ162*190mm	1500 lm	34 V	700mA	24W	27W	90	3000K
SRW150-BD940LW1M-X	Φ162*190mm	1575 lm	34 V	700mA	24W	27W	90	4000K
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

41W 2400lm-2520lm 								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SRW150-BE930LW1M-X	Φ162*190mm	2400 lm	34 V	1050mA	36W	41W	90	3000K
SRW150-BE940LW1M-X	Φ162*190mm	2520 lm	34 V	1050mA	36W	41W	90	4000K
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

START Series
DOWNLIGHT / WALL WASHER

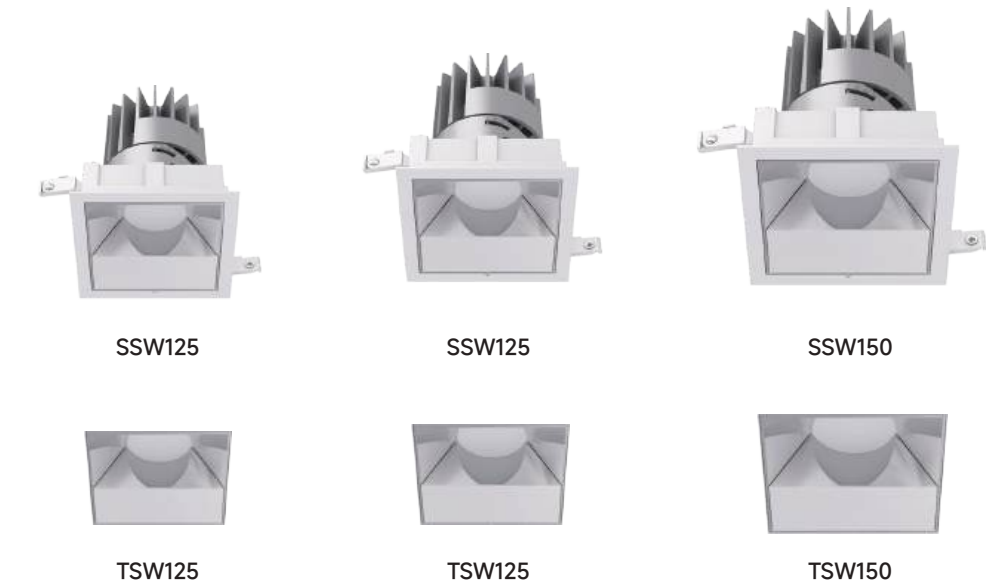

Downlight
SSW100/125/150



Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Physical: Die-casting

Installation Type



Light Distribution



Trim Colour



Trimless Colour




Wall Washer Reflector



SSW100/TSW100
Downlight / Wall Washer

Drawing

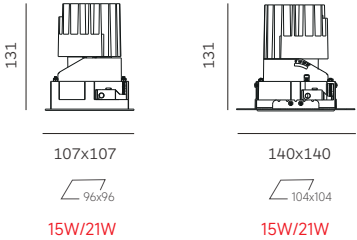

Order Options

15W 480lm-510lm		CITIZEN							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	
SSW100-CB930LW1M-X	107*107*131mm	480 lm	36 V	350mA	13W	15W	90	3000K	
SSW100-CB940LW1M-X	107*107*131mm	510 lm	36 V	350mA	13W	15W	90	4000K	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)
Note: Primary reflector version/It's not the same LED engine as the lens version.


21W 650lm-685lm		CITIZEN							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	
SSW100-CC930LW1M-X	107*107*131mm	650 lm	36 V	500mA	18W	21W	90	3000K	
SSW100-CC940LW1M-X	107*107*131mm	685 lm	36 V	500mA	18W	21W	90	4000K	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)
Note: Primary reflector version/It's not the same LED engine as the lens version.



SSW125/TSW125
Downlight / Wall Washer


Drawing



Order Options


20W 1050lm-1105lm 								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SSW125-BC930LW1M-X	134*134*160mm	1050 lm	34 V	500mA	17W	20W	90	3000K
SSW125-BC940LW1M-X	134*134*160mm	1105 lm	34 V	500mA	17W	20W	90	4000K
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

25W 1400lm-1470lm 								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SSW125-BD930LW1M-X	134*134*160mm	1400 lm	34 V	700mA	24W	27W	90	3000K
SSW125-BD940LW1M-X	134*134*160mm	1470 lm	34 V	700mA	24W	27W	90	4000K
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

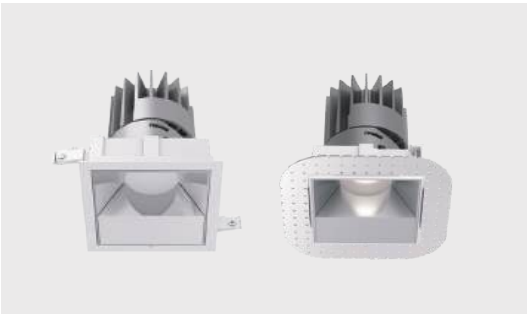

SSW150/TSW150
Downlight / Wall Washer

Drawing

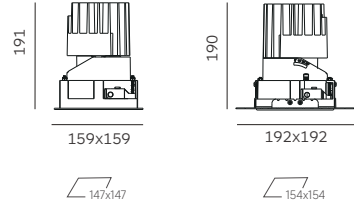

Order Options

27W 1500lm-1575lm 								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SSW150-BD930LW1M-X	159*159*191mm	1500 lm	34 V	700mA	24W	27W	90	3000K
SSW150-BD940LW1M-X	159*159*191mm	1575 lm	34 V	700mA	24W	27W	90	4000K
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

41W 2400lm-2520lm 								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT
SSW150-BE930LW1M-X	159*159*191mm	2400 lm	34 V	1050mA	36W	41W	90	3000K
SSW150-BE940LW1M-X	159*159*191mm	2520 lm	34 V	1050mA	36W	41W	90	4000K
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								



STRADA Series
DOWNLIGHT

NEW



Downlight
STRADA

CE

5
5 Years Warranty

AC
220-240V

IP
20

50000h
L80 B10

UGR
<19

CRI
>90


Features

- Design with modular genes for multiple lighting applications
- Tool-free for easy assembly
- Interchangeable components for flexibility and diversity
- Easy stock management
- Simplified design to achieve competitive price


Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Beam angle:20°,25°,30°,36°,45°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Installation Type



Light Distribution



Trim Colour



Trimless



Anti-glare Accessory




Secondary Reflector Colour



STRADA
DOWNLIGHT

Drawing

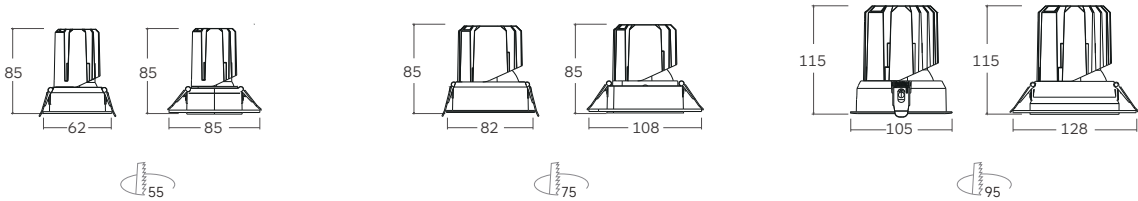

Order Options

10W-25W 900lm-2150lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	BEAM
Strada55-R-10W-930-20-X	Ø62*85mm	500 lm	33V	250mA	8W	10W	Ra>90	3000K	20°
Strada55-R-10W-930-30-X	Ø62*85mm	700 lm	33V	250mA	8W	10W	Ra>90	3000K	30°
Strada55-R-10W-930-36-X	Ø62*85mm	830 lm	33V	250mA	8W	10W	Ra>90	3000K	36°
Strada55-R-10W-930-45-X	Ø62*85mm	900 lm	33V	250mA	8W	10W	Ra>90	3000K	45°
Strada75-R-13W-930-20-X	Ø82*85mm	950 lm	34V	300mA	11W	13W	Ra>90	3000K	20°
Strada75-R-13W-930-25-X	Ø82*85mm	950 lm	34V	300mA	11W	13W	Ra>90	3000K	25°
Strada75-R-13W-930-36-X	Ø82*85mm	1080 lm	34V	300mA	11W	13W	Ra>90	3000K	36°
Strada75-R-13W-930-45-X	Ø82*85mm	930 lm	34V	300mA	11W	13W	Ra>90	3000K	45°
Strada95-R-25W-930-20-X	Ø105*115mm	2100 lm	36V	600mA	22W	25W	Ra>90	3000K	20°
Strada95-R-25W-930-25-X	Ø105*115mm	2100 lm	36V	600mA	22W	25W	Ra>90	3000K	25°
Strada95-R-25W-930-36-X	Ø105*115mm	2150 lm	36V	600mA	22W	25W	Ra>90	3000K	36°
Strada95-R-25W-930-45-X	Ø105*115mm	2100 lm	36V	600mA	22W	25W	Ra>90	3000K	45°
Remark:			X=F (Non-Dim)	X=P (Phase Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)		



631E-lite lighting



VTRIM



VTRIM

Perfect choice for specified architectural projects

Compatible with LED Modules

Wide range of design variants for different applications

Available in trimless version

Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)


Magnetic design for changing decorative ring without any tools

VTRIM Series
DOWNLIGHT

Module	L50				L50H				PRO 50			
Ring												
Trim												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												
Reflector												

VTRIM Series DOWNLIGHT

	L50		L50H		PRO 50	
Module						
Ring					 Forsted glass Honeycomb Linear Spread Lens Diffuser	
Trim					 145X75 147X80	
Reflector					 Decoration Ring	
	 VSA1		 VSF2		 VSA4	
	 VSAT1		 VSFT2		 VSAT4	
	 Matt White Black Gold		 Matt White Black Gold Wood Marble		 Matt White Black Gold	
	 Black Gold Chrome Black		 Black White Wood Marble Black glass		 Matt Black Gold	

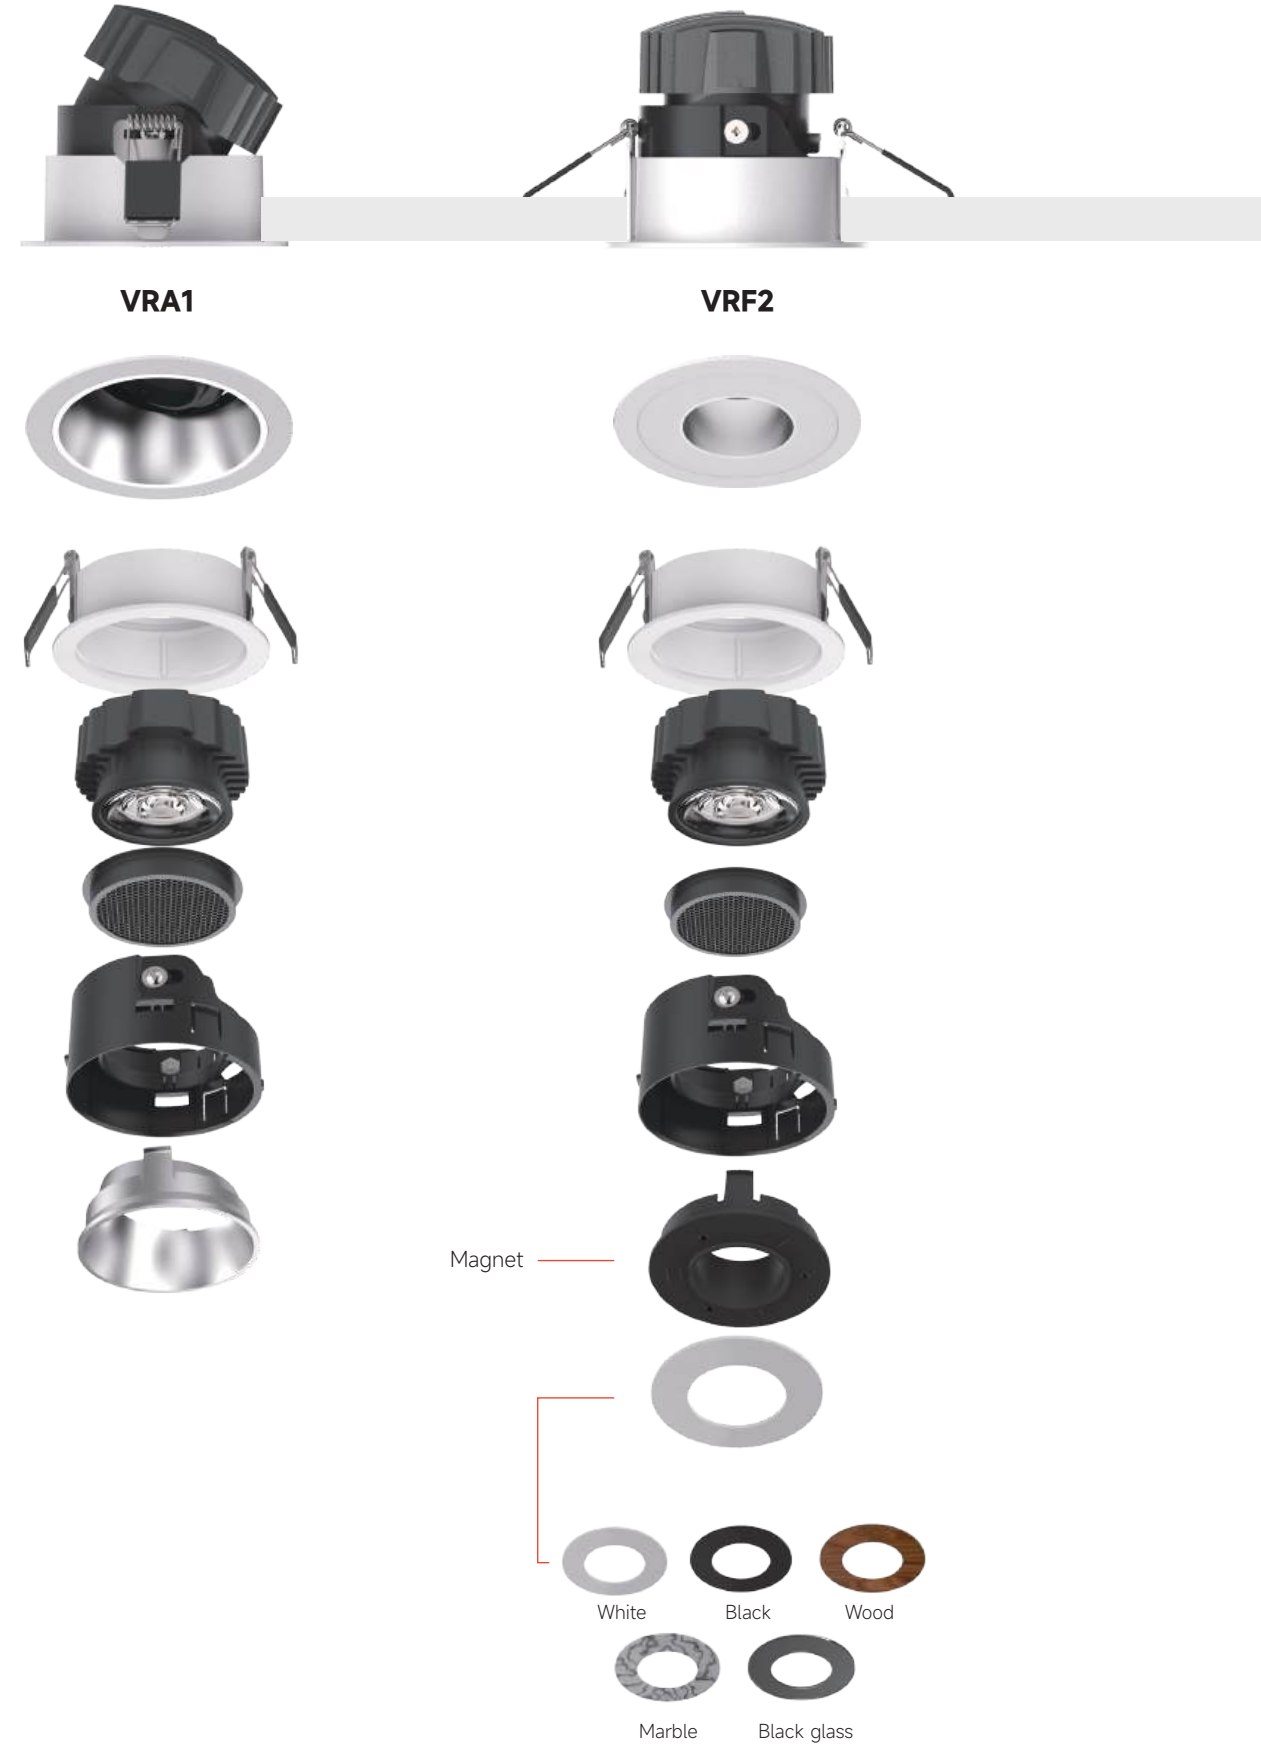

VTRIM Series
DOWNLIGHT



VRA3



VRA4




VRF5




IP44





VRW1



VSA1



Matt White



Black Gold



Chrome Black



VSF2



Magnet



Black



White



Wood



Marble



Black glass



VSA4



Matt



White



Black



Gold



Matt



Black



Gold

VRA1 VRF2 VRA3 VRA4 VRF5 VSA1 VSF2 VSA4



VTRIM / MODULE
DOWNLIGHT



L50

Downlight
L50

CE

CB

UK
CA

Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
44

UGR
<19

CRI
>90

Features

- Higher efficiency.
- Compact height design.
- Ultra bright in light.
- Extremely small in size.
- Smart heatsink design with airflow and body radiation.


Specifications

- Dimming modes:Non-Dim, PhaseDIM, 1-10V, Dali
- Beam angle:15°, 25°, 35°, 60°
- Physical: Die-casting, powder coating
- Accessories: honeycomb,diffusion filter,linear spread filter, single asymmetric filter,double asymmetric filter

Installation Type



Light distribution



Housing Colour



Balck




Compact heatsink consisting of fins generates optimal heat dissipation



L50
DOWNLIGHT
MODULE

Drawing



Order Options

8W 750lm-800lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50-6.5W-930-15-X	Ø50*44mm	750 lm	32 V	200 mA	6.5W	8W	90	3000K	15°
L50-6.5W-940-15-X	Ø50*44mm	800 lm	32 V	200 mA	6.5W	8W	90	4000K	15°
L50-6.5W-930-25-X	Ø50*44mm	750 lm	32 V	200 mA	6.5W	8W	90	3000K	25°
L50-6.5W-940-25-X	Ø50*44mm	800 lm	32 V	200 mA	6.5W	8W	90	4000K	25°
L50-6.5W-930-35-X	Ø50*44mm	750 lm	32 V	200 mA	6.5W	8W	90	3000K	35°
L50-6.5W-940-35-X	Ø50*44mm	800 lm	32V	200 mA	6.5W	8W	90	4000K	35°
L50-6.5W-930-60-X	Ø50*44mm	750 lm	32 V	200 mA	6.5W	8W	90	3000K	60°
L50-6.5W-940-60-X	Ø50*44mm	800 lm	32 V	200 mA	6.5W	8W	90	4000K	60°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

12W 1100lm-1200lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50-10W-930-15-X	Ø50*44mm	1100 lm	34 V	300 mA	10W	12W	90	3000K	15°
L50-10W-940-15-X	Ø50*44mm	1200 lm	34 V	300 mA	10W	12W	90	4000K	15°
L50-10W-930-25-X	Ø50*44mm	1100 lm	34 V	300 mA	10W	12W	90	3000K	25°
L50-10W-940-25-X	Ø50*44mm	1200 lm	34 V	300 mA	10W	12W	90	4000K	25°
L50-10W-930-35-X	Ø50*44mm	1100 lm	34 V	300 mA	10W	12W	90	3000K	35°
L50-10W-940-35-X	Ø50*44mm	1200 lm	34 V	300 mA	10W	12W	90	4000K	35°
L50-10W-930-60-X	Ø50*44mm	1100 lm	34 V	300 mA	10W	12W	90	3000K	60°
L50-10W-940-60-X	Ø50*44mm	1200 lm	34 V	300 mA	10W	12W	90	4000K	60°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

VTRIM / L50H
DOWNLIGHT



L50H

Downlight
L50H

CE

CB

UK
CA

US
Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
44

UGR
<19

CRI
>90


Features

- Higher efficiency.
- Ultra bright in light.
- Smart heatsink design with airflow and body radiation.


Specifications

- Dimming modes:Non-Dim, PhaseDIM, 1-10V, Dali
- Beam angle:20°, 35°, 60°
- Physical: Die-casting, powder coating
- Accessories: honeycomb,diffusion filter,linear spread filter, single asymmetric filter,double asymmetric filter

Installation Type



Light distribution



Housing Colour



Balck




Compact heatsink consisting of fins generates optimal heat dissipation



L50H
DOWNLIGHT
MODULE

Drawing



Order Options

10W 1050lm-1150lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50H-8.5W-930-20-X	Ø50*65mm	1050 lm	33 V	250 mA	8.5W	10W	90	3000K	20°
L50H-8.5W-930-20-X	Ø50*65mm	1150 lm	33 V	250 mA	8.5W	10W	90	4000K	20°
L50H-8.5W-930-35-X	Ø50*65mm	1050 lm	33 V	250 mA	8.5W	10W	90	3000K	35°
L50H-8.5W-940-35-X	Ø50*65mm	1150 lm	33 V	250 mA	8.5W	10W	90	4000K	35°
L50H-8.5W-930-60-X	Ø50*65mm	1050 lm	33 V	250 mA	8.5W	10W	90	3000K	60°
L50H-8.5W-940-60-X	Ø50*65mm	1150 lm	33 V	250 mA	8.5W	10W	90	4000K	60°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

14W 1400lm-1500lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
L50H-12W-930-20-X	Ø50*65mm	1400 lm	34 V	350 mA	12W	14W	90	3000K	20°
L50H-12W-940-20-X	Ø50*65mm	1500 lm	34 V	350 mA	12W	14W	90	4000K	20°
L50H-12W-930-35-X	Ø50*65mm	1400 lm	34 V	350 mA	12W	14W	90	3000K	35°
L50H-12W-940-35-X	Ø50*65mm	1500 lm	34 V	350 mA	12W	14W	90	4000K	35°
L50H-12W-930-60-X	Ø50*65mm	1400 lm	34 V	350 mA	12W	14W	90	3000K	60°
L50H-12W-940-60-X	Ø50*65mm	1500 lm	34 V	350 mA	12W	14W	90	4000K	60°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

VTRIM / PRO50
DOWNLIGHT

PRO 50 LED Module
LED Power: 7W/ 9W/ 12W/ 13W/ 18W
LED Chip: Bridgelux CRI>97, R9=95, 2-step SDCM
Beam Angle: 10°/ 15°/ 25°/ 35°/ 50°
Standard CCT: 2700K/ 3000K/ 3500K/ 4000K
Optional CCT: 1800K-3000K Warm Dim/ 2700K-6500K Tunable White
Optional Accessory: Honeycomb/ Diffusion Filter/ Linear Spread Filter
Single Asymmetric Filter/ Double Asymmetric Filter

PRO 50



Accessory






Vtrim Trim



LED Module

The Pro50 LED module is a perfect replacement for MR16 halogen modules.
Smart and elegant design.
Versatile for downlight and spotlight applications.
Uniform color for all LED modules within 2 MacAdam steps.
You can use Pro50 LED modules in various fixture designs with no color variability.
Outstanding lumen output, excellent lumen maintenance.
50,000-hour lifetime eliminates frequent re-lamping.
Pro50 5-Year Quality Guarantee.

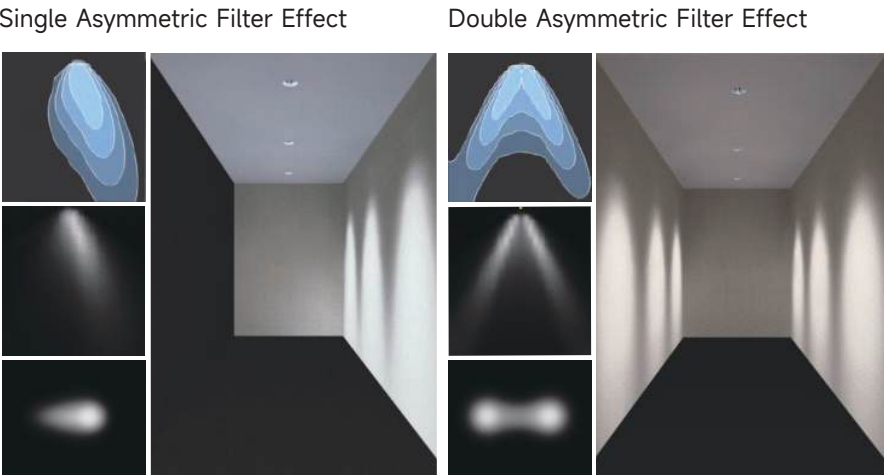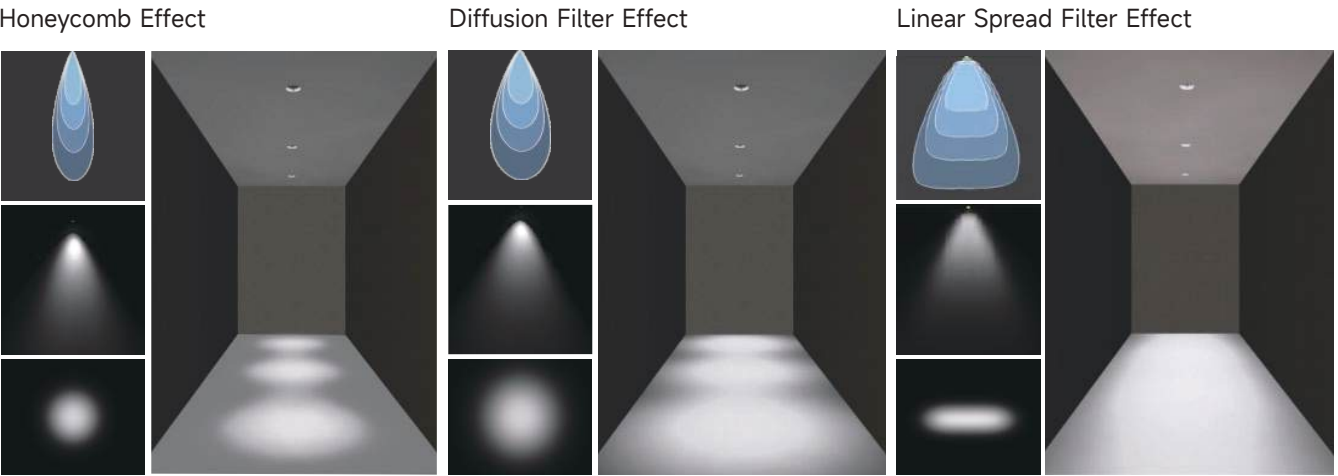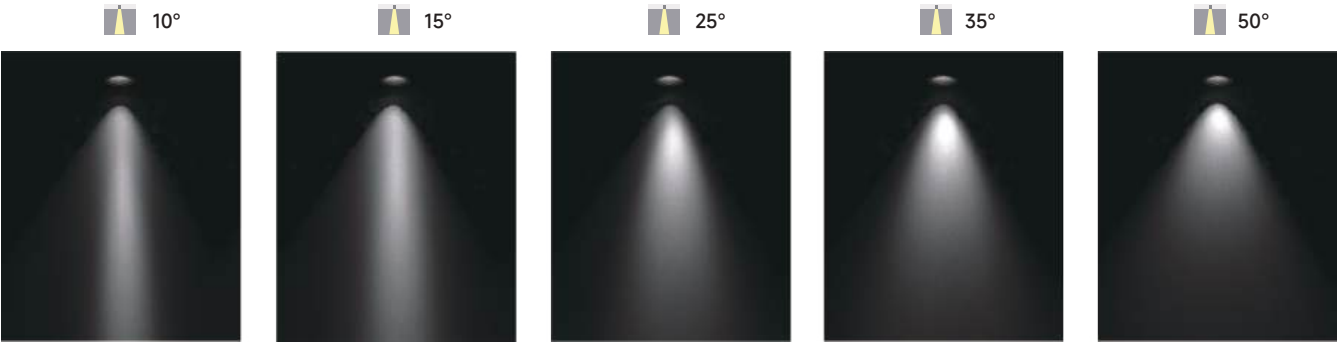

VTRIM / PRO50
DOWNLIGHT



PRO 50

Downlight
PRO50

CE

UK
CA

ETL
Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
44

UGR
<19

CRI
>90

Features

- Higher efficiency.
- Ultra bright in light.
- Smart heatsink design to efficiently dissipate the heat.
- Outstanding lumen output, excellent lumen maintenance.


Specifications

- Dimming modes:Non-Dim, PhaseDIM, 1-10V, Dali
- Beam angle:10°,15°,18°, 24°,30°,36°, 50°
- Physical: Die-casting, powder coating
- Accessories: honeycomb,diffusion filter,linear spread filter, single asymmetric filter,double asymmetric filter

Installation Type



Light distribution



Housing Colour



Balck




Compact heatsink consisting of fins generates optimal heat dissipation



PRO50
DOWNLIGHT
MODULE

Drawing



Order Options

9W 840lm-900lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-7W-930-X	Ø50*76mm	840 lm	35 V	200 mA	7W	9W	90	3000K	10°
Pro50-7W-940-X	Ø50*76mm	900 lm	35 V	200 mA	7W	9W	90	4000K	10°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

14W 1300lm-1400lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-12W-930-15-X	Ø50*76mm	1300 lm	34 V	350 mA	12W	14W	90	3000K	15°
Pro50-12W-940-15-X	Ø50*76mm	1400 lm	34 V	350 mA	12W	14W	90	4000K	15°
Pro50-12W-930-24-X	Ø50*76mm	1300 lm	34 V	350 mA	12W	14W	90	3000K	24°
Pro50-12W-940-24-X	Ø50*76mm	1400 lm	34 V	350 mA	12W	14W	90	4000K	24°
Pro50-12W-930-36-X	Ø50*76mm	1300 lm	34 V	350 mA	12W	14W	90	3000K	36°
Pro50-12W-940-36-X	Ø50*76mm	1400 lm	34 V	350 mA	12W	14W	90	4000K	36°
Pro50-12W-930-50-X	Ø50*76mm	1300 lm	34 V	350 mA	12W	14W	90	3000K	50°
Pro50-12W-940-50-X	Ø50*76mm	1400 lm	34 V	350 mA	12W	14W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


19W 1900lm-2000lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-17W-930-18-X	Ø50*76mm	1900 lm	33 V	500 mA	17W	19W	90	3000K	18°
Pro50-17W-940-18-X	Ø50*76mm	2000 lm	33 V	500 mA	17W	19W	90	4000K	18°
Pro50-17W-930-30-X	Ø50*76mm	1900 lm	33 V	500 mA	17W	19W	90	3000K	30°
Pro50-17W-940-30-X	Ø50*76mm	2000 lm	33 V	500 mA	17W	19W	90	4000K	30°
Pro50-17W-930-36-X	Ø50*76mm	1900 lm	33 V	500 mA	17W	19W	90	3000K	36°
Pro50-17W-940-36-X	Ø50*76mm	2000 lm	33 V	500 mA	17W	19W	90	4000K	36°
Pro50-17W-930-50-X	Ø50*76mm	1900 lm	33 V	500 mA	17W	19W	90	3000K	50°
Pro50-17W-940-50-X	Ø50*76mm	2000 lm	33 V	500 mA	17W	19W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

VTRIM / PRO50
DOWNLIGHT



PRO50-TW
DOWNLIGHT
MODULE

Drawing



Order Options

11W 620lm-850lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-TW-9W-927-65-X	Φ50*76mm	700-850lm	36 V	250 mA	9W	11W	90	2700K-6500K	20°
Pro50-TW-9W-927-65-X	Φ50*76mm	700-850lm	36 V	250 mA	9W	11W	90	2700K-6500K	40°
Pro50-TW-9W-927-65-X	Φ50*76mm	620-750lm	36 V	250 mA	9W	11W	90	2700K-6500K	50°
			Remark: X=F (Non-Dim)	X=P (Phase Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)		

15W 850lm-1100lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
Pro50-TW-13W-927-65-X	Φ50*76mm	900-1100lm	36 V	350 mA	13W	15W	90	2700K-6500K	20°
Pro50-TW-13W-927-65-X	Φ50*76mm	900-1100lm	36 V	350 mA	13W	15W	90	2700K-6500K	40°
Pro50-TW-13W-927-65-X	Φ50*76mm	850-1050lm	36 V	350 mA	13W	15W	90	2700K-6500K	50°
			Remark: X=F (Non-Dim)	X=P (Phase Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)		

Tunable White



VTRIM Series
DOWNLIGHT

VRA1

355°

30°

OPTIONAL:

VRA1 B

Black

VRA1 G

Gray

75

81

99

109

Φ85

Φ85

Φ85

L50-VRA1

L50-H-VRA1

Pro50-VRA1

VRF2

OPTIONAL:

VRF2 B

Black

VRF2 G

Gray

75

76

97

109

Φ85

Φ85

Φ85

L50-VRF2

L50-H-VRF2

Pro50-VRF2

VRA3

355°

30°

OPTIONAL:

VRA3 B

Black

VRA3 G

Gray

75

81

99

109

Φ85

Φ85

Φ85

L50-VRA3

L50-H-VRA3

Pro50-VRA3

VRA4

355°

18°

OPTIONAL:

VRA4 B

Black

VRA4 G

Gray

75

69

89

100

Φ85

Φ85

Φ85

L50-VRA4

L50-H-VRA4

Pro50-VRA4

VRW1

355°

30°

OPTIONAL:

VRA1 B

Black

VRA1 G

Gray

75

69

88

101

Φ90

Φ90

Φ90

L50-VRW1

L50-H-VRW1

Pro50-VRW1

VRF5

355°

OPTIONAL:

VRF5 B

Black

VRF5 G

Gray

75

72

93

105

Φ85

Φ85

Φ85

L50-VRF5

L50-H-VRF5

Pro50-VRF5

VSA1

355°

30°

OPTIONAL:

VSA1 B

Black

VSA1 G

Gray

75X75

84

103

113

85x85

85x85

85x85

L50-VSA1

L50-H-VSA1

Pro50-VSA1

VSF2

OPTIONAL:

VSF2 B

Black

VSF2 G

Gray

75X75

80

101

112

85x85

85x85

85x85

L50-VSF2

L50-H-VSF2

Pro50-VSF2

VSA4

355°

18°

OPTIONAL:

VSA4 B

Black

VSA4 G

Gray

75X75

76

96

107

80X80

85x85

85x85

85x85

L50-VSA4









L50-H-VSA4

Pro50-VSA4

87 IE-lite lighting

88

VTRIM Series
DOWNLIGHT

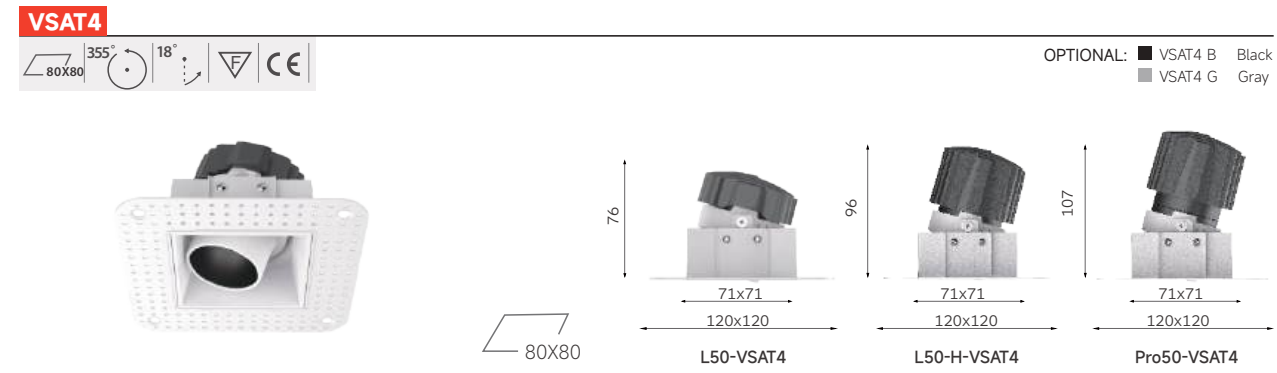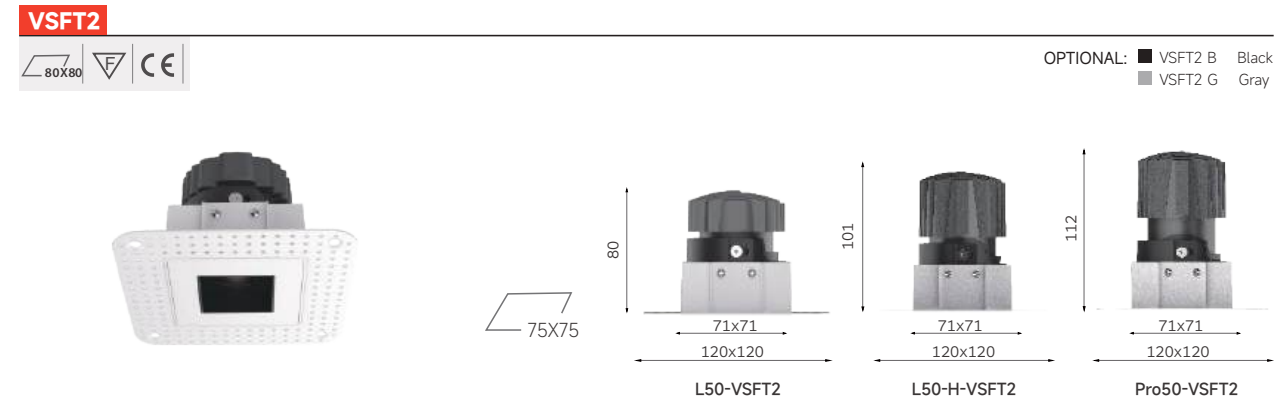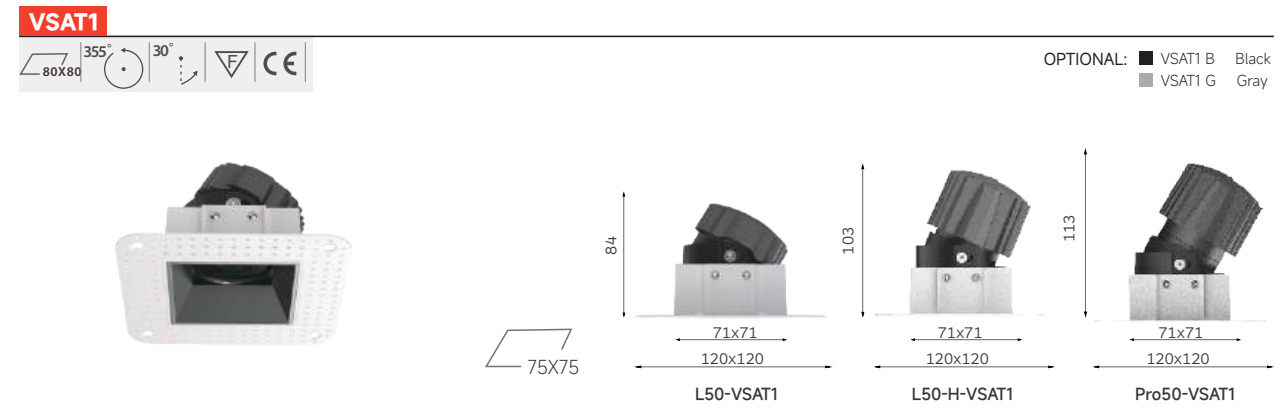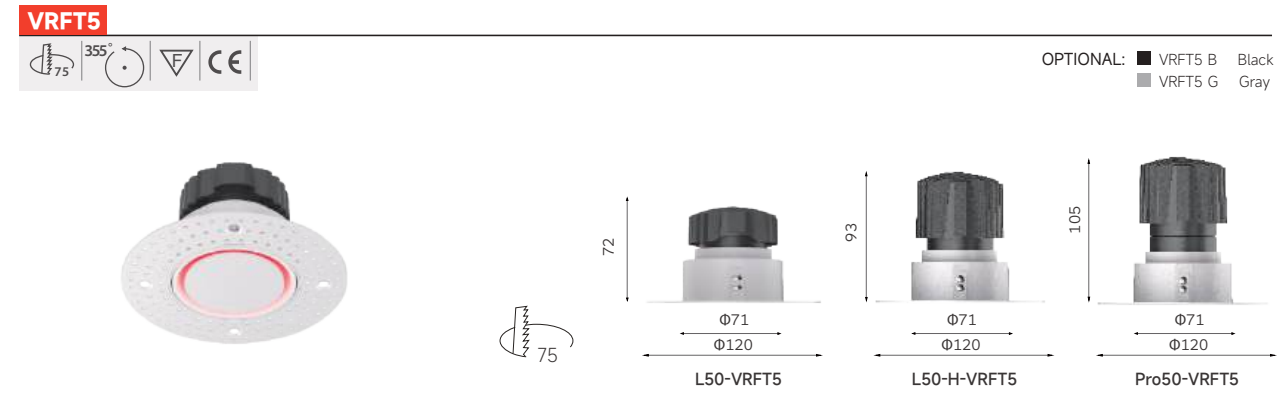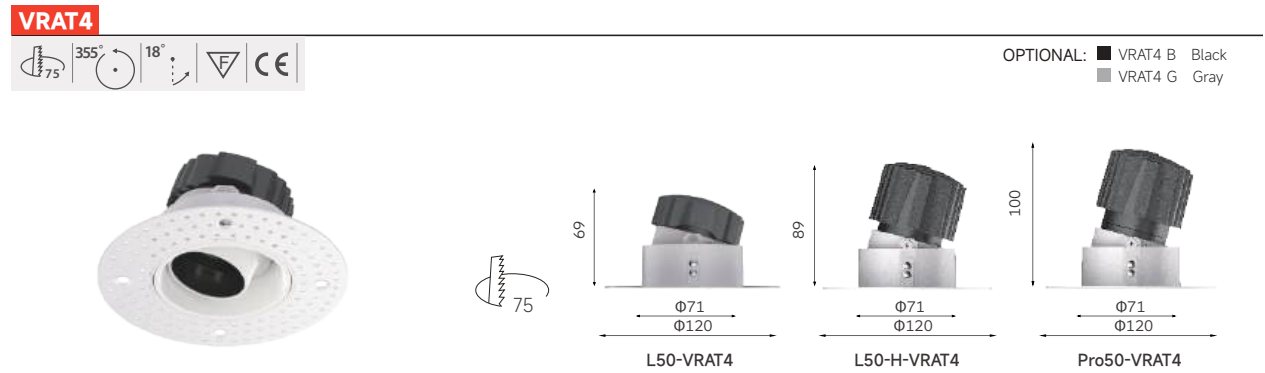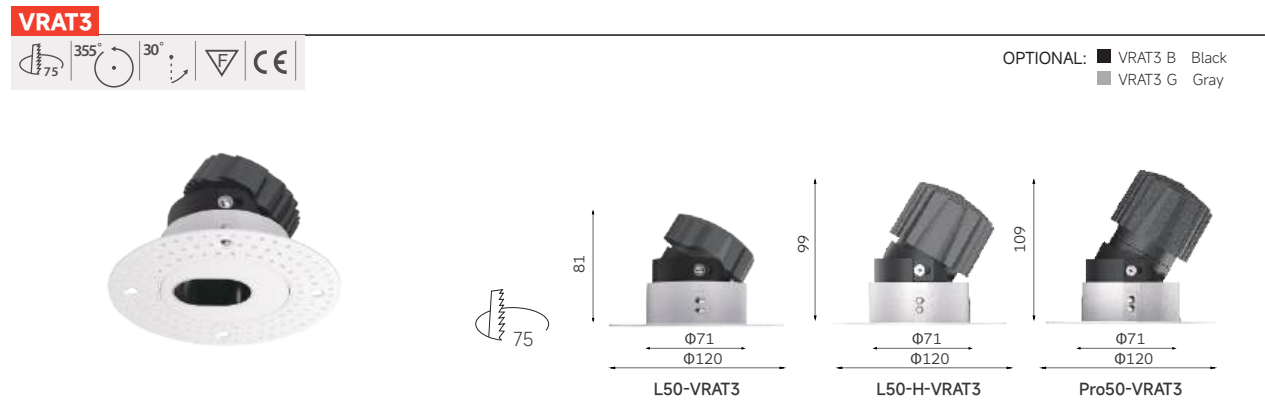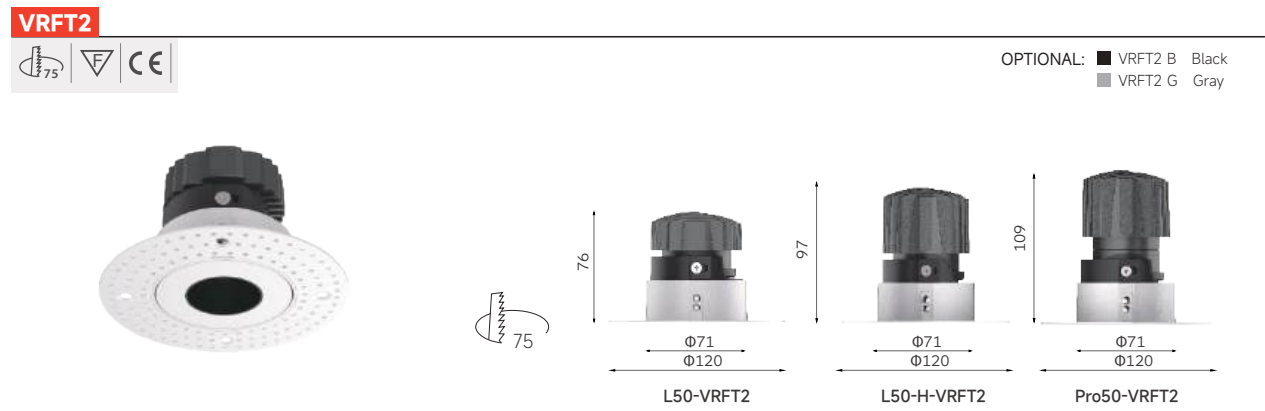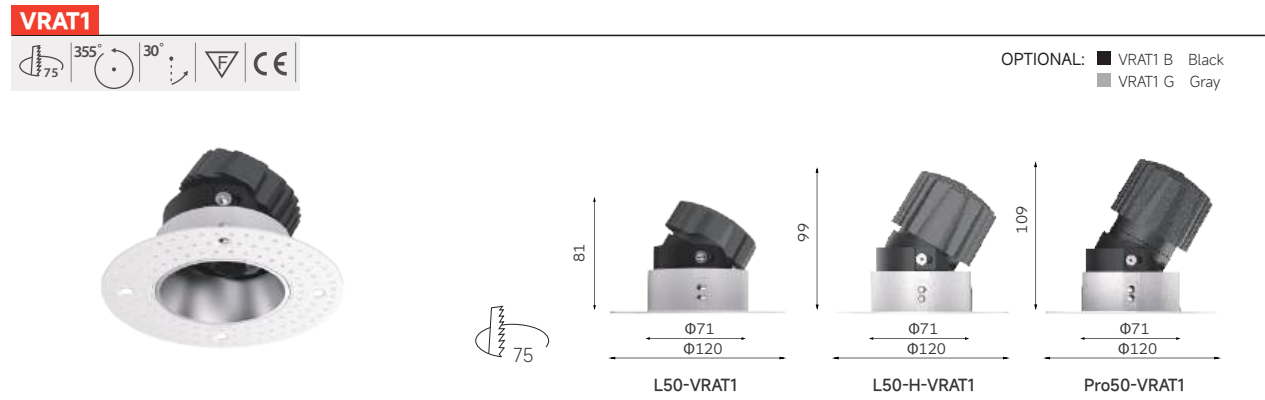

VTRIM Series
DOWNLIGHT

VSA1

145x75

355°

30°

OPTIONAL:

■

VSA1 B

Black

■

VSA1 G

Gray

84

145x75

155x85

L50-VSA1

103

155x85

155x85

L50-H-VSA1

113

155x85

155x85

Pro50-VSA1

VSF2

145x75

OPTIONAL:

■

VSF2 B

Black

■

VSF2 G

Gray

80

145x75

155x85

L50-VSF2

101

155x85

155x85

L50-H-VSF2

112

155x85

155x85

Pro50-VSF2

VSA4

145x75

355°

30°

OPTIONAL:

■

VSA4 B

Black

■

VSA4 G

Gray

76

145x75

155x85

L50-VSA4

96

155x85

155x85

L50-H-VSA4

107

155x85

155x85

Pro50-VSA4

VSAT1

145x80

355°

30°

OPTIONAL:

■

VSAT1 B

Black

■

VSAT1 G

Gray

84

147x80

140x72

187x118

L50-VSAT1

103

140x72

187x118

L50-H-VSAT1

113

140x72

187x118

Pro50-VSAT1

VSFT2

145x80

OPTIONAL:

■

VSFT2 B

Black

■

VSFT2 G

Gray

80

147x80

140x72

187x118

L50-VSFT2

101

140x72

187x118

L50-H-VSFT2

112

140x72

187x118

Pro50-VSFT2

VSAT4

145x80

355°

30°

OPTIONAL:

■

VSAT4 B

Black

■

VSAT4 G

Gray

76

147x80

140x72

187x118

L50-VSAT4

96

140x72

187x118

L50-H-VSAT4

107

140x72

187x118

Pro50-VSAT4

91 IE-lite lighting

92



KAYA
IP65 DOWNLIGHT



K45




K75



K120



K45
Downlight



Downlight
KAYA

CE

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
65

UGR
<19

CRI
>90


Features

- Integrated concisely design for economical purpose.
- IP65 rated for bathroom of wet application.
- Adjustable functionally downlight.
- Low glare for good eye-comfort.
- Stepless regulation 0-30° at any angle.


Specifications

- Dimming modes: Non-Dim, Phase-dim, 1-10V, DALI
- Beam angle: 20°, 25°, 35°, 45° , 50°
- Physical: Die-casting, powder coating

Installation Type



Light Distribution



Housing Colour




Order Options

8W 350lm-490lm									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	BEAM
K45-6W-930-20-X	Φ52*72mm	350lm	32V	180mA	6W	8W	90	3000K	20°
K45-6W-940-20-X	Φ52*72mm	360lm	32V	180mA	6W	8W	90	4000K	20°
K45-6W-930-25-X	Φ52*72mm	380lm	32V	180mA	6W	8W	90	3000K	25°
K45-6W-940-25-X	Φ52*72mm	400lm	32V	180mA	6W	8W	90	4000K	25°
K45-6W-930-35-X	Φ52*72mm	470lm	32V	180mA	6W	8W	90	3000K	35°
K45-6W-940-35-X	Φ52*72mm	490lm	32V	180mA	6W	8W	90	4000K	35°
K45-6W-930-45-X	Φ52*72mm	430lm	32V	180mA	6W	8W	90	3000K	45°
K45-6W-940-45-X	Φ52*72mm	450lm	32V	180mA	6W	8W	90	4000K	45°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)									



K75
Downlight




Order Options

10W 660lm-830lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	BEAM
K75-8W-930-20-X	Ø84*85mm	660lm	33V	250mA	8W	10W	90	3000K	20°
K75-8W-940-20-X	Ø84*85mm	680lm	33V	250mA	8W	10W	90	4000K	20°
K75-8W-930-25-X	Ø84*85mm	720lm	33V	250mA	8W	10W	90	3000K	25°
K75-8W-940-25-X	Ø84*85mm	750lm	33V	250mA	8W	10W	90	4000K	25°
K75-8W-930-35-X	Ø84*85mm	800lm	33V	250mA	8W	10W	90	3000K	35°
K75-8W-940-35-X	Ø84*85mm	830lm	33V	250mA	8W	10W	90	4000K	35°
K75-8W-930-50-X	Ø84*85mm	720lm	33V	250mA	8W	10W	90	3000K	50°
K75-8W-940-50-X	Ø84*85mm	750lm	33V	250mA	8W	10W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)									

14W 870lm-1090lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	BEAM
K75-8W-930-20-X	Ø84*85mm	870lm	34V	350mA	12W	14W	90	3000K	20°
K75-8W-940-20-X	Ø84*85mm	900lm	34V	350mA	12W	14W	90	4000K	20°
K75-8W-930-25-X	Ø84*85mm	930lm	34V	350mA	12W	14W	90	3000K	25°
K75-8W-940-25-X	Ø84*85mm	970lm	34V	350mA	12W	14W	90	4000K	25°
K75-8W-930-35-X	Ø84*85mm	1050lm	34V	350mA	12W	14W	90	3000K	35°
K75-8W-940-35-X	Ø84*85mm	1090lm	34V	350mA	12W	14W	90	4000K	35°
K75-8W-930-50-X	Ø84*85mm	930lm	34V	350mA	12W	14W	90	3000K	50°
K75-8W-940-50-X	Ø84*85mm	970lm	34V	350mA	12W	14W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)									



K120
Downlight



Order Options

20W 1860lm-2380lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	BEAM
K120-17W-930-20-X	Ø130*135mm	1860lm	34V	500mA	17W	20W	90	3000K	20°
K120-17W-940-20-X	Ø130*135mm	1930lm	34V	500mA	17W	20W	90	4000K	20°
K120-17W-930-25-X	Ø130*135mm	2120lm	34V	500mA	17W	20W	90	3000K	25°
K120-17W-940-25-X	Ø130*135mm	2200lm	34V	500mA	17W	20W	90	4000K	25°
K120-17W-930-35-X	Ø130*135mm	2290lm	34V	500mA	17W	20W	90	3000K	35°
K120-17W-940-35-X	Ø130*135mm	2380lm	34V	500mA	17W	20W	90	4000K	35°
K120-17W-930-50-X	Ø130*135mm	2260lm	34V	500mA	17W	20W	90	3000K	50°
K120-17W-940-50-X	Ø130*135mm	2350lm	34V	500mA	17W	20W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)									

27W 2550lm-3290lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	BEAM
K120-24W-930-20-X	Ø130*135mm	2550lm	35V	700mA	24W	27W	90	3000K	20°
K120-24W-940-20-X	Ø130*135mm	2650lm	35V	700mA	24W	27W	90	4000K	20°
K120-24W-930-25-X	Ø130*135mm	2910lm	35V	700mA	24W	27W	90	3000K	25°
K120-24W-940-25-X	Ø130*135mm	3030lm	35V	700mA	24W	27W	90	4000K	25°
K120-24W-930-35-X	Ø130*135mm	3160lm	35V	700mA	24W	27W	90	3000K	35°
K120-24W-940-35-X	Ø130*135mm	3290lm	35V	700mA	24W	27W	90	4000K	35°
K120-24W-930-50-X	Ø130*135mm	3100lm	35V	700mA	24W	27W	90	3000K	50°
K120-24W-940-50-X	Ø130*135mm	3220lm	35V	700mA	24W	27W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)									

35W 3070lm-4140lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	BEAM
K120-32W-930-20-X	Ø130*135mm	3070lm	34V	900mA	32W	35W	90	3000K	20°
K120-32W-940-20-X	Ø130*135mm	3200lm	34V	900mA	32W	35W	90	4000K	20°
K120-32W-930-25-X	Ø130*135mm	3650lm	34V	900mA	32W	35W	90	3000K	25°
K120-32W-940-25-X	Ø130*135mm	3800lm	34V	900mA	32W	35W	90	4000K	25°
K120-32W-930-35-X	Ø130*135mm	3980lm	34V	900mA	32W	35W	90	3000K	35°
K120-32W-940-35-X	Ø130*135mm	4140lm	34V	900mA	32W	35W	90	4000K	35°
K120-32W-930-50-X	Ø130*135mm	3800lm	34V	900mA	32W	35W	90	3000K	50°
K120-32W-940-50-X	Ø130*135mm	3950lm	34V	900mA	32W	35W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)									






TESLA
Downlight


TESLA is a series of compact downlight, which keeps an excellent balance between super light comfort and high efficiency.

TESLA

High-flux PCB LED modules, mid-power SMD LED.
High quality diffuser reaches the higher efficiency and less glare value.
Polycarbonate body with vacuum plated inner reflector surface and die-cast aluminium heat sink.
The light source is deeply integrated for glare control with 30° shielding angle.

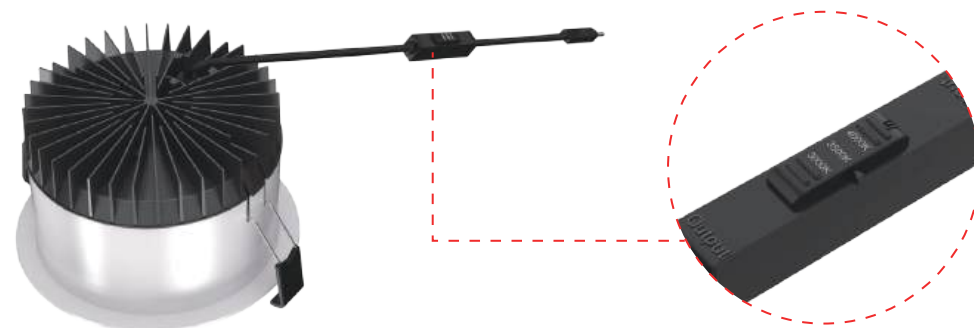

CCT selection optional

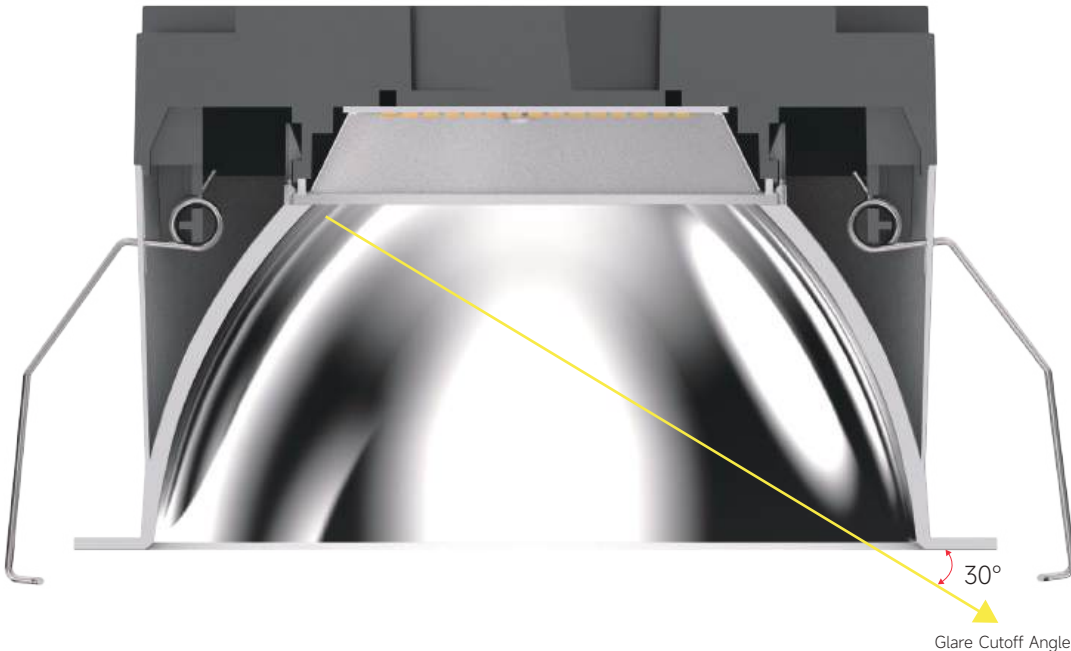

TESLA Series
DOWNLIGHT



Downlight
TESLA3/TESLA4/TESLA6/TESLA8




Features

- Efficiency up to 146Lm/W
- The product is efficient at various heights,
- available with different lumen packages and beam angles.
- CCT Selection for easy stock management


Specifications

- Dimming modes:Non-Dim, Phase Dim, 1-10V, DALI
- Beam angle:60°, 80°
- Physical: Die-casting, Powder coating

Installation Type



Light Distribution




Standard Colour



White Trim & Inner Specular

TESLA3/TESLA4/TESLA6/TESLA8
DOWNLIGHT

Drawing

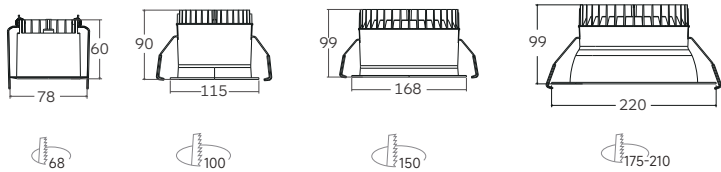

Order Options


Standard Version		7.5W-33W 650lm-4500lm		bridgelux						
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	System Efficacy	CRI	CCT	BEAM
TESLA3-6W-830-X	Φ78*60mm	650lm	17V	350mA	6W	7.5W	93 lm/W	Ra>80	3000K	80°
TESLA3-6W-840-X	Φ78*60mm	700lm	17V	350mA	6W	7.5W	98 lm/W	Ra>80	4000K	80°
TESLA3-8.5W-830-X	Φ78*60mm	900lm	17V	500mA	8.5W	10W	90 lm/W	Ra>80	3000K	80°
TESLA3-8.5W-840-X	Φ78*60mm	950lm	17V	500mA	8.5W	10W	95 lm/W	Ra>80	4000K	80°
TESLA4-8W-830-X	Φ115*90mm	1130lm	33V	250mA	8W	10W	125 lm/W	Ra>80	3000K	60°
TESLA4-8W-840-X	Φ115*90mm	1180lm	33V	250mA	8W	10W	130 lm/W	Ra>80	4000K	60°
TESLA4-12W-830-X	Φ115*90mm	1680lm	33V	350mA	12W	14W	129 lm/W	Ra>80	3000K	60°
TESLA4-12W-840-X	Φ115*90mm	1750lm	33V	350mA	12W	14W	134 lm/W	Ra>80	4000K	60°
TESLA6-12W-830-X	Φ168*99mm	1750lm	33V	350mA	12W	14W	134 lm/W	Ra>80	3000K	60°
TESLA6-12W-840-X	Φ168*99mm	1920lm	33V	350mA	12W	14W	145 lm/W	Ra>80	4000K	60°
TESLA6-16W-830-X	Φ168*99mm	2430lm	33V	500mA	16W	18W	143 lm/W	Ra>80	3000K	60°
TESLA6-16W-840-X	Φ168*99mm	2550lm	33V	500mA	16W	18W	150 lm/W	Ra>80	4000K	60°
TESLA6-23W-830-X	Φ168*99mm	3500lm	33V	700mA	23W	26W	140 lm/W	Ra>80	3000K	60°
TESLA6-23W-840-X	Φ168*99mm	3650lm	33V	700mA	23W	26W	146 lm/W	Ra>80	4000K	60°
TESLA8-23W-830-X	Φ220*99mm	3500lm	33V	700mA	23W	26W	140 lm/W	Ra>80	3000K	60°
TESLA8-23W-840-X	Φ220*99mm	3650lm	33V	700mA	23W	26W	146 lm/W	Ra>80	4000K	60°
TESLA8-30W-830-X	Φ220*99mm	4300lm	33V	900mA	30W	33W	131 lm/W	Ra>80	3000K	60°
TESLA8-30W-840-X	Φ220*99mm	4500lm	33V	900mA	30W	33W	136 lm/W	Ra>80	4000K	60°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

CCT Switchable Version		10W-35W 1100lm-4380lm		bridgelux						
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	System Efficacy	CRI	CCT	BEAM
TESLA4-8W-CCT-830-X	Φ115*90mm	1100lm	33V	250mA	8W	10W	110lm/W	Ra>80	3000K	60°
TESLA4-8W-CCT-835-X	Φ115*90mm	1180lm	33V	250mA	8W	10W	118lm/W	Ra>80	3500K	60°
TESLA4-8W-CCT-840-X	Φ115*90mm	1160lm	33V	250mA	8W	10W	116lm/W	Ra>80	4000K	60°
TESLA4-12W-CCT-830-X	Φ115*90mm	1550lm	33V	250mA	12W	15W	110lm/W	Ra>80	3000K	60°
TESLA4-12W-CCT-835-X	Φ115*90mm	1650lm	33V	250mA	12W	15W	118lm/W	Ra>80	3500K	60°
TESLA4-12W-CCT-840-X	Φ115*90mm	1600lm	33V	250mA	12W	15W	114lm/W	Ra>80	4000K	60°
TESLA6-12W-CCT-830-X	Φ168*99mm	1700lm	33V	350mA	12W	15W	121lm/W	Ra>80	3000K	60°
TESLA6-12W-CCT-835-X	Φ168*99mm	1830lm	33V	350mA	12W	15W	130lm/W	Ra>80	3500K	60°
TESLA6-12W-CCT-840-X	Φ168*99mm	1800lm	33V	350mA	12W	15W	128lm/W	Ra>80	4000K	60°
TESLA6-18W-CCT-830-X	Φ168*99mm	2450lm	33V	500mA	18W	21W	122lm/W	Ra>80	3000K	60°
TESLA6-18W-CCT-835-X	Φ168*99mm	2580lm	33V	500mA	18W	21W	129lm/W	Ra>80	3500K	60°
TESLA6-18W-CCT-840-X	Φ168*99mm	2550lm	33V	500mA	18W	21W	128lm/W	Ra>80	4000K	60°
TESLA6-25W-CCT-830-X	Φ168*99mm	3200lm	33V	700mA	25W	28W	118lm/W	Ra>80	3000K	60°
TESLA6-25W-CCT-835-X	Φ168*99mm	3450lm	33V	700mA	25W	28W	128lm/W	Ra>80	3500K	60°
TESLA6-25W-CCT-840-X	Φ168*99mm	3360lm	33V	700mA	25W	28W	125lm/W	Ra>80	4000K	60°
TESLA8-25W-CCT-830-X	Φ220*99mm	3400lm	33V	700mA	25W	28W	126lm/W	Ra>80	3000K	60°
TESLA8-25W-CCT-835-X	Φ220*99mm	3600lm	33V	700mA	25W	28W	133lm/W	Ra>80	3500K	60°
TESLA8-25W-CCT-840-X	Φ220*99mm	3560lm	33V	700mA	25W	28W	132lm/W	Ra>80	4000K	60°
TESLA8-32W-CCT-830-X	Φ220*99mm	4250lm	33V	900mA	32W	35W	125lm/W	Ra>80	3000K	60°
TESLA8-32W-CCT-835-X	Φ220*99mm	4450lm	33V	900mA	32W	35W	130lm/W	Ra>80	3500K	60°
TESLA8-32W-CCT-840-X	Φ220*99mm	4380lm	35V	900mA	32W	35W	128lm/W	Ra>80	4000K	60°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

TESLA PRO
Highest Efficiency Version

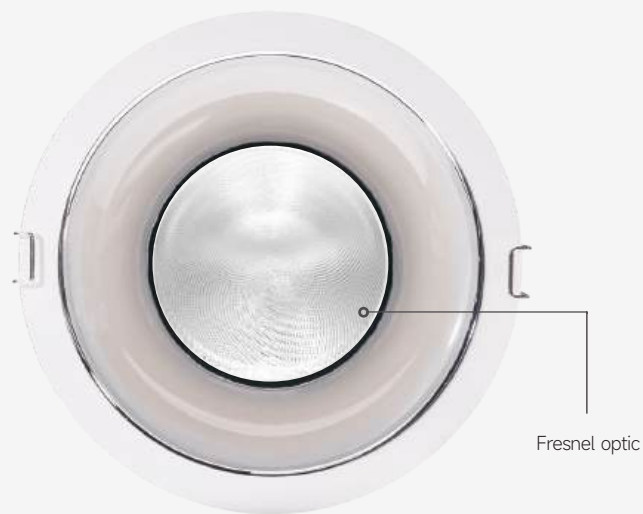


Fresnel optic

UP TO 170LM/W
UGR<19



PRO Version
TESLA3/TESLA4/TESLA6/TESLA8 PRO
DOWNLIGHT

Drawing

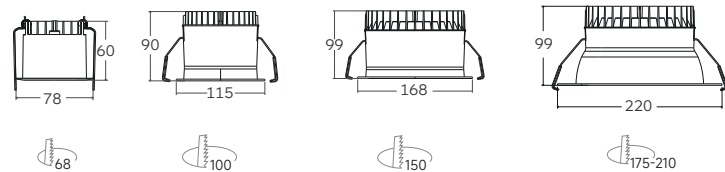

Order Options

PRO Version 7.5W-33W 670lm-5300lm 										
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	System Efficacy	CRI	CCT	BEAM
TESLA3-6W-830-PRO-X	Φ78*60mm	670lm	17V	350mA	6W	7.5W	95lm/W	Ra>80	3000K	60°
TESLA3-6W-840-PRO-X	Φ78*60mm	720lm	17V	350mA	6W	7.5W	102lm/W	Ra>80	4000K	60°
TESLA3-8.5W-830-PRO-X	Φ78*60mm	950lm	17V	500mA	8.5W	10W	95lm/W	Ra>80	3000K	60°
TESLA3-8.5W-840-PRO-X	Φ78*60mm	1000lm	17V	500mA	8.5W	10W	100lm/W	Ra>80	4000K	60°
TESLA4-8W-830-PRO-X	Φ115*90mm	1260lm	33V	250mA	8W	10W	135lm/W	Ra>80	3000K	60°
TESLA4-8W-840-PRO-X	Φ115*90mm	1310lm	33V	250mA	8W	10W	140lm/W	Ra>80	4000K	60°
TESLA4-12W-830-PRO-X	Φ115*90mm	1850lm	33V	350mA	12W	14W	142lm/W	Ra>80	3000K	60°
TESLA4-12W-840-PRO-X	Φ115*90mm	1920lm	33V	350mA	12W	14W	147lm/W	Ra>80	4000K	60°
TESLA6-12W-830-PRO-X	Φ168*99mm	2230lm	33V	350mA	12W	14W	165lm/W	Ra>80	3000K	60°
TESLA6-12W-840-PRO-X	Φ168*99mm	2320lm	33V	350mA	12W	14W	170lm/W	Ra>80	4000K	60°
TESLA6-16W-830-PRO-X	Φ168*99mm	2880lm	33V	500mA	16W	18W	167lm/W	Ra>80	3000K	60°
TESLA6-16W-840-PRO-X	Φ168*99mm	2970lm	33V	500mA	16W	18W	170lm/W	Ra>80	4000K	60°
TESLA6-23W-830-PRO-X	Φ168*99mm	3930lm	33V	700mA	23W	26W	157lm/W	Ra>80	3000K	60°
TESLA6-23W-840-PRO-X	Φ168*99mm	4090lm	33V	700mA	23W	26W	165lm/W	Ra>80	4000K	60°
TESLA8-23W-830-PRO-X	Φ220*99mm	4050lm	33V	700mA	23W	26W	162lm/W	Ra>80	3000K	60°
TESLA8-23W-840-PRO-X	Φ220*99mm	4220lm	33V	700mA	23W	26W	168lm/W	Ra>80	4000K	60°
TESLA8-30W-830-PRO-X	Φ220*99mm	5020lm	33V	900mA	30W	33W	154lm/W	Ra>80	3000K	60°
TESLA8-30W-840-PRO-X	Φ220*99mm	5300lm	33V	900mA	30W	33W	164lm/W	Ra>80	4000K	60°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

PRO CCT Switchable Version 10W-35W 1300lm-5230lm 										
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	System Efficacy	CRI	CCT	BEAM
TESLA4-8W-CCT-PRO-X	Φ115*90mm	1300lm	33V	250mA	8W	10W	130lm/W	Ra>80	3000K	60°
TESLA4-8W-CCT-PRO-X	Φ115*90mm	1350lm	33V	250mA	8W	10W	135lm/W	Ra>80	3500K	60°
TESLA4-8W-CCT-PRO-X	Φ115*90mm	1320lm	33V	250mA	8W	10W	132lm/W	Ra>80	4000K	60°
TESLA4-12W-CCT-PRO-X	Φ115*90mm	1860lm	33V	350mA	12W	15W	133lm/W	Ra>80	3000K	60°
TESLA4-12W-CCT-PRO-X	Φ115*90mm	1920lm	33V	350mA	12W	15W	137lm/W	Ra>80	3500K	60°
TESLA4-12W-CCT-PRO-X	Φ115*90mm	1890lm	33V	350mA	12W	15W	136lm/W	Ra>80	4000K	60°
TESLA6-12W-CCT-PRO-X	Φ168*99mm	1980lm	33V	350mA	12W	15W	141lm/W	Ra>80	3000K	60°
TESLA6-12W-CCT-PRO-X	Φ168*99mm	2100lm	33V	350mA	12W	15W	150lm/W	Ra>80	3500K	60°
TESLA6-12W-CCT-PRO-X	Φ168*99mm	2070lm	33V	350mA	12W	15W	147lm/W	Ra>80	4000K	60°
TESLA6-18W-CCT-PRO-X	Φ168*99mm	2790lm	33V	500mA	18W	21W	139lm/W	Ra>80	3000K	60°
TESLA6-18W-CCT-PRO-X	Φ168*99mm	2960lm	33V	500mA	18W	21W	148lm/W	Ra>80	3500K	60°
TESLA6-18W-CCT-PRO-X	Φ168*99mm	2920lm	33V	500mA	18W	21W	146lm/W	Ra>80	4000K	60°
TESLA6-25W-CCT-PRO-X	Φ168*99mm	3830lm	33V	700mA	25W	28W	142lm/W	Ra>80	3000K	60°
TESLA6-25W-CCT-PRO-X	Φ168*99mm	3990lm	33V	700mA	25W	28W	148lm/W	Ra>80	3500K	60°
TESLA6-25W-CCT-PRO-X	Φ168*99mm	3950lm	33V	700mA	25W	28W	146lm/W	Ra>80	4000K	60°
TESLA8-25W-CCT-PRO-X	Φ220*99mm	3890lm	33V	700mA	25W	28W	144lm/W	Ra>80	3000K	60°
TESLA8-25W-CCT-PRO-X	Φ220*99mm	4150lm	33V	700mA	25W	28W	153lm/W	Ra>80	3500K	60°
TESLA8-25W-CCT-PRO-X	Φ220*99mm	4090lm	33V	700mA	25W	28W	151lm/W	Ra>80	4000K	60°
TESLA8-32W-CCT-PRO-X	Φ220*99mm	5065lm	33V	900mA	32W	35W	148lm/W	Ra>80	3000K	60°
TESLA8-32W-CCT-PRO-X	Φ220*99mm	5300lm	33V	900mA	32W	35W	156lm/W	Ra>80	3500K	60°
TESLA8-32W-CCT-PRO-X	Φ220*99mm	5230lm	35V	900mA	32W	35W	153lm/W	Ra>80	4000K	60°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



DOME Series
DOWNLIGHT



DOME

UGR<19 Super Comfort
Deep recessed design to achieve super eye comfort.
Attractive appearance with high efficacy.

DOME Series
DOWNLIGHT





DOME68
8W 930lm
11W 1260lm




D75
8.5W 860 lm
13W 1270 lm

D100
10W 1130Lm
14W 1500Lm

D150
20W 2390Lm
27W 3100Lm

D200
27W 3120Lm
41W 4890Lm
56W 6150Lm





DS65
8.5W 880 lm
13W 1300 lm

DS100
10W 880Lm
14W 1200Lm

DS150
20W 1950Lm
27W 2500Lm

DS200
26W 2650Lm
41W 3550Lm




- Deep recessed design to achieve super eye comfort.
- Attractive appearance with high efficacy and functionality.
- Passive cooling management ensures durability.
- Optimal lens technology with narrow, medium and flood beam angles guarantee light quality.
- Interchangeable reflectors of matt, white and black colours. provide maximum design freedom.

DOME Series
DOWNLIGHT





Installation

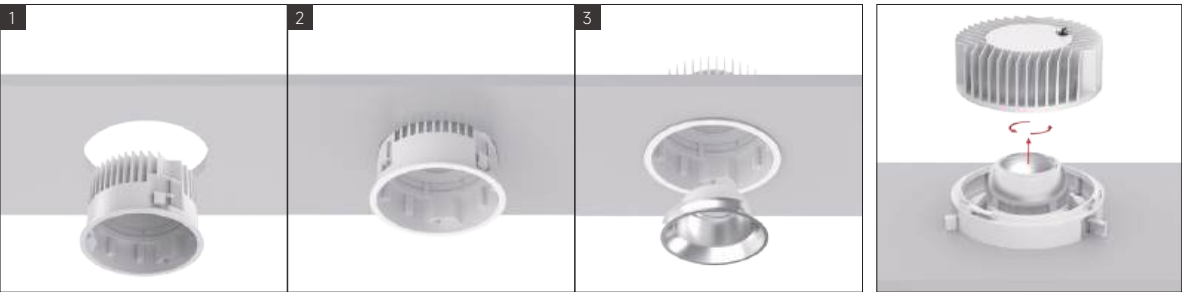


D200 fixture can be taken off from the back of the ceiling, which is easy and convenient for maintenance.

Creative Ceiling Treatment

Suitable for 1-25mm thickness ceiling board.

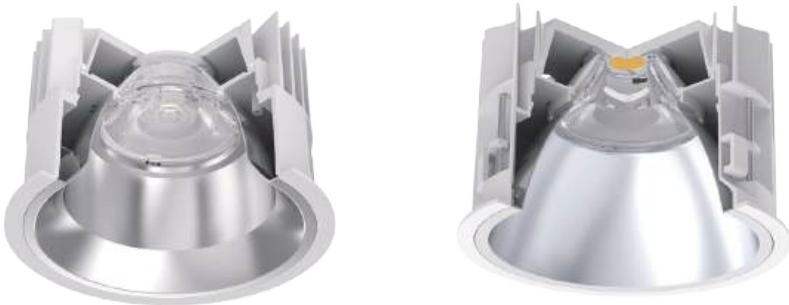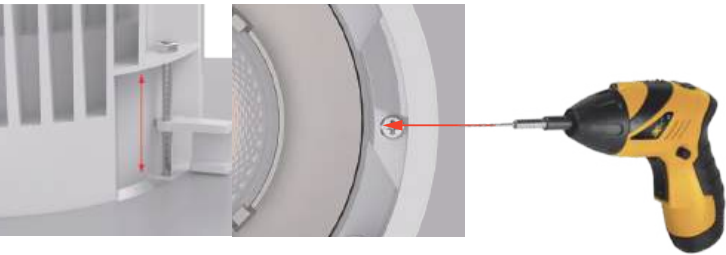

UGR<19

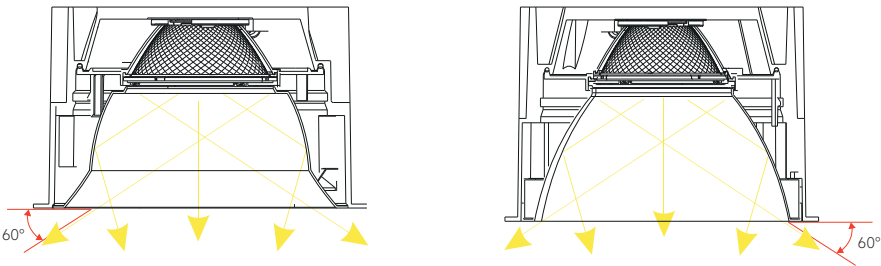

DOME 68 Series
DOWNLIGHT/ ROUND



Downlight
DOME 68



Features

- Cutout of 68mm
- Integrated mechanicals of heatsink and mounting ring to reduce components
- Deep recessed design achieves super eye comfort
- Attractive appearance with efficiency and functionality
- Passive cooling heatsink design ensures durability

Installation Type

trim



Housing Colour




White Balck

Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Beam angle: 15°, 20°, 35°, 55°
- Physical: aluminium, powder coating
- Accessories: Secondary reflector, Lens

Light Distribution



Secondary Reflector Colour




Specular Matt White Balck



DOME 68
DOWNLIGHT

Drawing



Order Options

8W 850lm-930lm (with Matt color reflector) 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DOME68-6W-930-15-X	Φ78*60mm	850lm	35V	180mA	6W	8W	90	3000K	15°
DOME68-6W-940-15-X	Φ78*60mm	880lm	35V	180mA	6W	8W	90	4000K	15°
DOME68-6W-930-20-X	Φ78*60mm	900lm	35V	180mA	6W	8W	90	3000K	20°
DOME68-6W-940-20-X	Φ78*60mm	930lm	35V	180mA	6W	8W	90	4000K	20°
DOME68-6W-930-35-X	Φ78*60mm	900lm	35V	180mA	6W	8W	90	3000K	35°
DOME68-6W-940-35-X	Φ78*60mm	930lm	35V	180mA	6W	8W	90	3000K	35°
DOME68-6W-930-55-X	Φ78*60mm	850lm	35V	180mA	6W	8W	90	3000K	55°
DOME68-6W-940-55-X	Φ78*60mm	880lm	35V	180mA	6W	8W	90	3000K	55°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

11W 1180lm-1260lm (with Matt color reflector) 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DOME68-9W-930-15-X	Φ78*60mm	1160lm	35V	250mA	9W	11W	90	3000K	15°
DOME68-9W-940-15-X	Φ78*60mm	1200lm	35V	250mA	9W	11W	90	4000K	15°
DOME68-9W-930-20-X	Φ78*60mm	1220lm	35V	250mA	9W	11W	90	3000K	20°
DOME68-9W-940-20-X	Φ78*60mm	1260lm	35V	250mA	9W	11W	90	4000K	20°
DOME68-9W-930-35-X	Φ78*60mm	1220lm	35V	250mA	9W	11W	90	3000K	35°
DOME68-9W-940-35-X	Φ78*60mm	1260lm	35V	250mA	9W	11W	90	3000K	35°
DOME68-9W-930-55-X	Φ78*60mm	1180lm	35V	250mA	9W	11W	90	3000K	55°
DOME68-9W-940-55-X	Φ78*60mm	1220lm	35V	250mA	9W	11W	90	3000K	55°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

DOME Series
DOWNLIGHT/ ROUND



Downlight
D75/D100/D150/D200




Features

- Cutout of 75mm/100mm/150mm/200mm
- Integrated mechanicals of heatsink and mounting ring to reduce components
- Deep recessed design achieves super eye comfort
- Attractive appearance with efficiency and functionality
- Passive cooling heatsink design ensures durability

Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Beam angle:18°,24°,30°,36°,50°,65°
- Physical: aluminium, powder coating
- Accessories: Secondary reflector, Lens


Installation Type



Housing Colour




Light Distribution



Secondary Reflector Colour



Drawing
D75
DOWNLIGHT




Order Options

8.5W 810lm-860lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D75-7W-930-30-X	Ø84*72mm	810lm	34 V	200mA	7W	8.5W	90	3000K	30°
D75-7W-940-30-X	Ø84*72mm	840lm	34 V	200mA	7W	8.5W	90	4000K	30°
D75-7W-930-50-X	Ø84*72mm	830lm	34 V	200mA	7W	8.5W	90	3000K	50°
D75-7W-940-50-X	Ø84*72mm	860lm	34 V	200mA	7W	8.5W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

13W 1180lm-1270lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D75-11W-930-30-X	Ø84*72mm	1180lm	34 V	300mA	11W	13W	90	3000K	30°
D75-11W-940-30-X	Ø84*72mm	1230lm	34 V	300mA	11W	13W	90	4000K	30°
D75-11W-930-50-X	Ø84*72mm	1220lm	34 V	300mA	11W	13W	90	3000K	50°
D75-11W-940-50-X	Ø84*72mm	1270lm	34 V	300mA	11W	13W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									



D100
DOWNLIGHT



Order Options

10W 980lm-1130lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D100-8.5W-930-30-X	Ø110*79mm	1090lm	34V	250mA	8.5W	10W	90	3000K	30°
D100-8.5W-940-30-X	Ø110*79mm	1130lm	34V	250mA	8.5W	10W	90	4000K	30°
D100-8.5W-930-50-X	Ø110*79mm	980lm	34V	250mA	8.5W	10W	90	3000K	50°
D100-8.5W-940-50-X	Ø110*79mm	1020lm	34V	250mA	8.5W	10W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


14W 1300lm-1500lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D100-12W-930-30-X	Ø110*79mm	1450 lm	34V	350mA	12W	14W	90	3000K	30°
D100-12W-940-30-X	Ø110*79mm	1500 lm	34V	350mA	12W	14W	90	4000K	30°
D100-12W-930-50-X	Ø110*79mm	1300 lm	34V	350mA	12W	14W	90	3000K	50°
D100-12W-940-50-X	Ø110*79mm	1350 lm	34V	350mA	12W	14W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

DOME Series
DOWNLIGHT



D150
DOWNLIGHT

Drawing



Order Options

20W 1900lm-2390lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D150-17W-930-30-X	Ø162*100mm	2300lm	34 V	500mA	17W	20W	90	3000K	30°
D150-17W-940-30-X	Ø162*100mm	2390lm	34 V	500mA	17W	20W	90	4000K	30°
D150-17W-930-65-X	Ø162*100mm	1900lm	34 V	500mA	17W	20W	90	3000K	65°
D150-17W-940-65-X	Ø162*100mm	1980lm	34 V	500mA	17W	20W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)


27W 2700lm-3100lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D150-24W-930-30-X	Ø162*100mm	3000lm	35 V	700mA	24W	27W	90	3000K	30°
D150-24W-940-30-X	Ø162*100mm	3100lm	35 V	700mA	24W	27W	90	4000K	30°
D150-24W-930-65-X	Ø162*100mm	2700lm	35 V	700mA	24W	27W	90	3000K	65°
D150-24W-940-65-X	Ø162*100mm	2800lm	35 V	700mA	24W	27W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



D200
DOWNLIGHT

Drawing



Order Options

27W 2600lm-3120lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D200-24W-930-18-X	Ø216*131mm	3000lm	35 V	700mA	24W	27W	90	3000K	18°
D200-24W-940-18-X	Ø216*131mm	3120lm	35 V	700mA	24W	27W	90	4000K	18°
D200-24W-930-30-X	Ø216*131mm	3000lm	35 V	700mA	24W	27W	90	3000K	30°
D200-24W-940-30-X	Ø216*131mm	3120lm	35 V	700mA	24W	27W	90	4000K	30°
D200-24W-930-65-X	Ø216*131mm	2600lm	35 V	700mA	24W	27W	90	3000K	65°
D200-24W-940-65-X	Ø216*131mm	2700lm	35 V	700mA	24W	27W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)


41W 4000lm-4890lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D200-37W-930-24-X	Ø216*131mm	4700lm	35 V	1050mA	37W	41W	90	3000K	24°
D200-37W-940-24-X	Ø216*131mm	4890lm	35 V	1050mA	37W	41W	90	4000K	24°
D200-37W-930-36-X	Ø216*131mm	4700lm	35 V	1050mA	37W	41W	90	3000K	36°
D200-37W-940-36-X	Ø216*131mm	4890lm	35 V	1050mA	37W	41W	90	4000K	36°
D200-37W-930-65-X	Ø216*131mm	4000lm	35 V	1050mA	37W	41W	90	3000K	65°
D200-37W-940-65-X	Ø216*131mm	4160lm	35 V	1050mA	37W	41W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

56W 5000lm-6150lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D200-51W-930-24-X	Ø216*131mm	5900lm	36 V	1400mA	51W	56W	90	3000K	24°
D200-51W-940-24-X	Ø216*131mm	6150lm	36 V	1400mA	51W	56W	90	4000K	24°
D200-51W-930-36-X	Ø216*131mm	5900lm	36 V	1400mA	51W	56W	90	3000K	36°
D200-51W-940-36-X	Ø216*131mm	6150lm	36 V	1400mA	51W	56W	90	4000K	36°
D200-51W-930-65-X	Ø216*131mm	5000lm	36 V	1400mA	51W	56W	90	3000K	65°
D200-51W-940-65-X	Ø216*131mm	5200lm	36 V	1400mA	51W	56W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

DOME Series
DOWNLIGHT

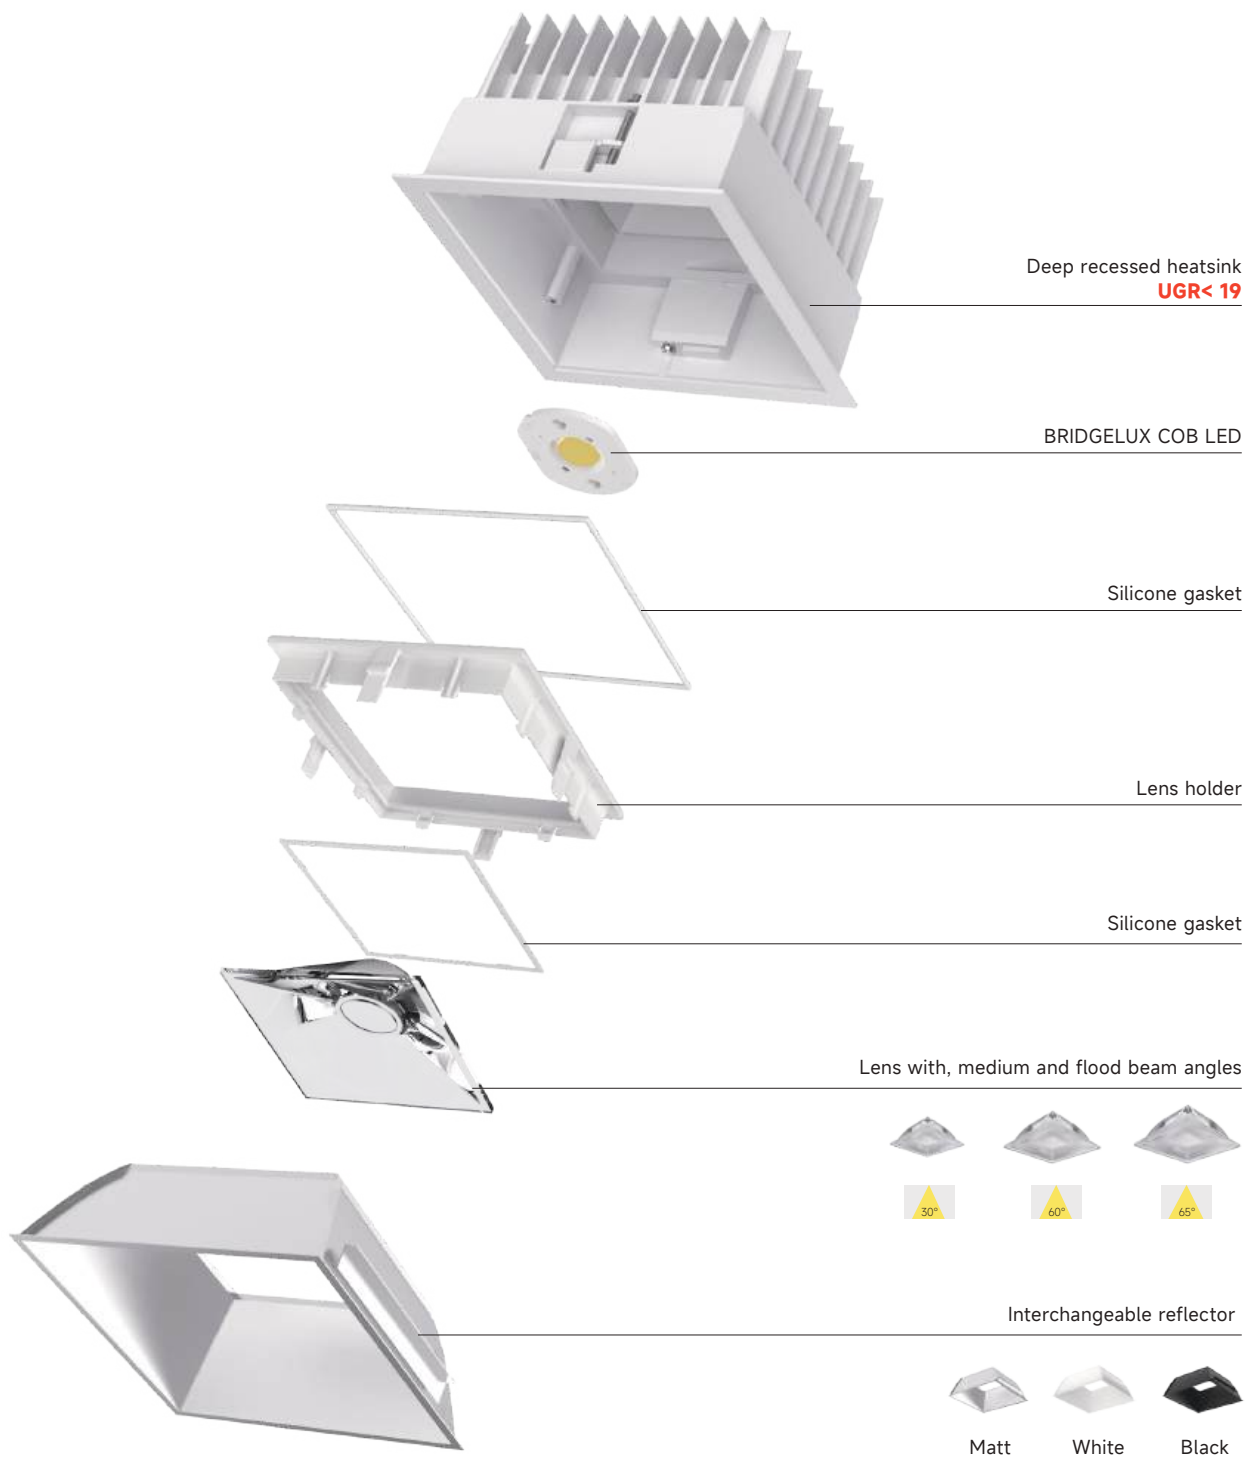

Installation



Creative Ceiling Treatment


Installed easily and securely in the ceiling, using two screw fixing mechanisms. Applying to 12-25mm thickness ceiling and to 1-12mm thickness ceiling with a fallen clip.



fit for ceiling thickness
12mm to 25mm




fit for ceiling thickness
1mm to 12mm




Foucs on every detail
Low glare for optimal eye comfort

DOME Series
DOWNLIGHT / SQUARE

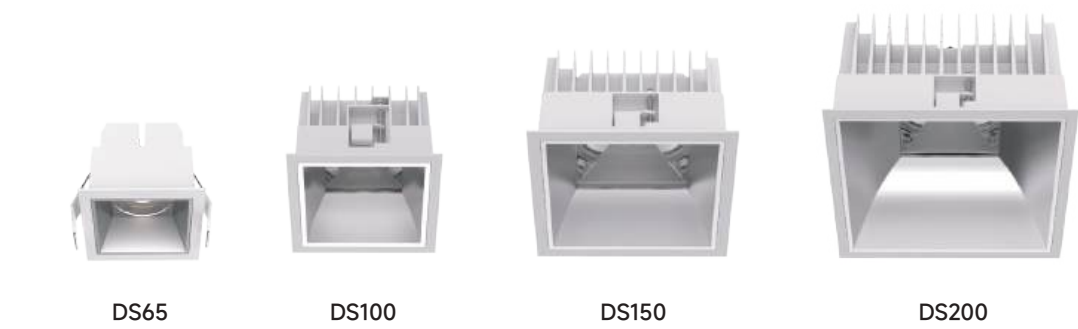

Downlight
DS65/DS100/DS150/DS200



Features

- Cutout of 65mm/ 100mm/150mm/200mm
- Integrated mechanicals of heatsink and mounting ring to reduce components
- Deep recessed design achieves super eye comfort
- Attractive appearance with efficiency and functionality
- Passive cooling heatsink design ensures durability

Installation Type




Housing Colour




Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, DALI
- Beam angle:30°,60°,65°.
- Physical: aluminium, powder coating
- Accessories: Secondary reflector, Lens

Light Distribution




Secondary Reflector Colour

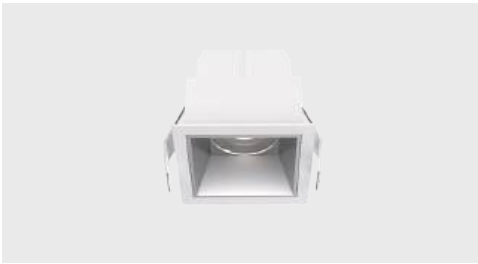

DS65
DOWNLIGHT

Drawing



Order Options

8.5W 800lm-880lm 										
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
DS65-7W-930-30-X	75*75*61mm	800lm	34 V	200mA	7W	8.5W	90	3000K	30°	
DS65-7W-940-30-X	75*75*61mm	830lm	34 V	200mA	7W	8.5W	90	4000K	30°	
DS65-7W-930-60-X	75*75*61mm	850lm	34 V	200mA	7W	8.5W	90	3000K	60°	
DS65-7W-940-60-X	75*75*61mm	880lm	34 V	200mA	7W	8.5W	90	4000K	60°	


Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

13W 1200lm-1300lm 										
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
DS65-11W-930-30-X	75*75*61mm	1200lm	34 V	300mA	11W	13W	90	3000K	30°	
DS65-11W-940-30-X	75*75*61mm	1250lm	34 V	300mA	11W	13W	90	4000K	30°	
DS65-11W-930-60-X	75*75*61mm	1250lm	34 V	300mA	11W	13W	90	3000K	60°	
DS65-11W-940-60-X	75*75*61mm	1300lm	34 V	300mA	11W	13W	90	4000K	60°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



DS100
DOWNLIGHT



Order Options

10W 850lm-880lm 										
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
DS100-8.5W-930-60-X	110*110*79mm	850lm	34 V	250mA	8.5W	10W	90	3000K	60°	
DS100-8.5W-940-60-X	110*110*79mm	880lm	34 V	250mA	8.5W	10W	90	4000K	60°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)


14W 1150lm-1200lm 										
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
DS100-12W-930-60-X	110*110*79mm	1150lm	34 V	350mA	12W	14W	90	3000K	60°	
DS100-12W-940-60-X	110*110*79mm	1200lm	34 V	350mA	12W	14W	90	4000K	60°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



DS150
DOWNLIGHT

Drawing



Order Options

20W 1880lm-1950lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS150-17W-930-65-X	167*167*100mm	1880lm	34 V	500mA	17W	20W	90	3000K	65°
DS150-17W-940-65-X	167*167*100mm	1950lm	34 V	500mA	17W	20W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)


27W 2400lm-2500lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS150-24W-930-65-X	167*167*100mm	2400lm	35 V	700mA	24W	27W	90	3000K	65°
DS150-24W-940-65-X	167*167*100mm	2500lm	35 V	700mA	24W	27W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



DS200
DOWNLIGHT

Drawing



Order Options

26W 2550lm-2650lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS200-24W-930-65-X	220*220*132mm	2550lm	35 V	700mA	24W	26W	90	3000K	65°
DS200-24W-940-65-X	220*220*132mm	2650lm	35 V	700mA	24W	26W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

41W 2650lm-3550lm 									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DS200-37W-930-65-X	220*220*132mm	3550lm	35 V	1050mA	37W	41W	90	3000K	65°
DS200-37W-940-65-X	220*220*132mm	2650lm	35 V	1050mA	37W	41W	90	4000K	65°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



DOME L

Attractive appearance with high efficacy.



DOME D100L
12W 1560Lm(3000K)



DOME D150L
18W 2650Lm(3000K)



D100L



D150L

Downlight
D100L/D150L

CE

CB

UK
CA

Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
54

CRI
>80


Features

- Cutout of 100mm,150mm
- Integrated mechanicals of heatsink and mounting ring to reduce components
- Attractive appearance with efficiency and functionality
- Passive cooling heatsink design ensures durability


Specifications

- Dimming modes:Non-Dim , Phase Dim, 1-10V, Dali
- Beam angle: 90°
- Physical: aluminium, powder coating
- Accessories: Secondary reflector

Installation Type



Light Distribution



Housing Colour



White Balck

Secondary Reflector Colour




White Balck Matt



D100L
DOWNLIGHT

Drawing



Order Options


14W 1560lm-1600lm		LUMILEDS							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D100L-12W-830-90-X	Φ112*53mm	1560lm	34V	350mA	12W	14W	80	3000K	90°
D100L-12W-840-90-X	Φ112*53mm	1600lm	34V	350mA	12W	14W	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



D150L
DOWNLIGHT

Drawing



Order Options

21W 2650-lm2850lm		LUMILEDS							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
D150L-18W-830-90-X	Φ162*60mm	2650lm	26 V	700mA	18W	21W	80	3000K	90°
D150L-18W-840-90-X	Φ162*60mm	2850lm	26 V	700mA	18W	21W	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

V68 Series
DOWNLIGHT





V68



V68W



Deep recessed design for supreme anti-glare

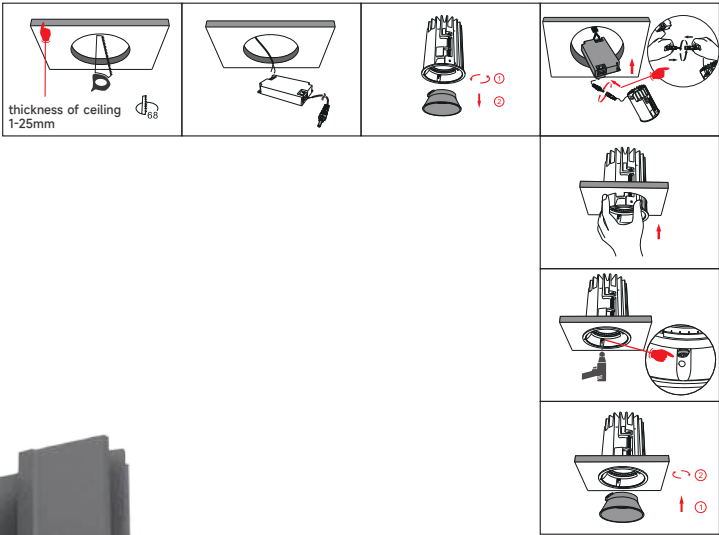

Different secondary reflectors for anti-glare and decorative function

V68 Series
DOWNLIGHT



V68

Downlight
V68

CE

UK
CA

Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>90


Features

- Powerful LED engine 13W at 350mA and 18W at 500mA.
- Miniaturized LED downlight for high performance accent lighting.
- Precise light distribution with no stray light and excellent glare control thanks to the optimized optic with double reflectors.
- Installed easily and securely in the ceiling using two screw fixing mechanisms.
- Three different beam angles with different primary reflectors. Six different colours of secondary reflector for anti-glare and decorative functions.


Specifications

- Dimming modes:Non-Dim, Phase dim, 1-10V, DALI
- Beam angle: 18°, 40°

Installation Type



Light Distribution



Housing Colour




Decoration Ring Colour



V68
Downlight

Drawing



Order Options

15W 1200lm-1300lm		CITIZEN							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
V68-CB930R18S-X	Φ77*100mm	1200 lm	36V	350mA	13W	15W	90	3000K	18°
V68-CB940R18S-X	Φ77*100mm	1300 lm	36V	350mA	13W	15W	90	4000K	18°
V68-CB930R40S-X	Φ77*100mm	1200 lm	36V	350mA	13W	15W	90	3000K	40°
V68-CB940R40S-X	Φ77*100mm	1300 lm	36V	350mA	13W	15W	90	4000K	40°
Remark:			X=F (Non-Dim)	X=P (Phase Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)		

21W 1600lm-1700lm		CITIZEN							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
V68-CB930R18S-X	Φ77*100mm	1600 lm	36V	500mA	18W	21W	90	3000K	18°
V68-CB940R18S-X	Φ77*100mm	1700 lm	36V	500mA	18W	21W	90	4000K	18°
V68-CB930R40S-X	Φ77*100mm	1600 lm	36V	500mA	18W	21W	90	3000K	40°
V68-CB940R40S-X	Φ77*100mm	1700 lm	36V	500mA	18W	21W	90	4000K	40°
Remark:			X=F (Non-Dim)	X=P (Phase Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)		

V68 Series
DOWNLIGHT / WALL WASHER



V68W

Downlight
V68W

CE

UK
CA

Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>90


Features

- Asymmetric wall washer reflector evenly illuminates walls.
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Anti-glare accessory provides maximum eye comfort.
- Trimless installation downlight and accessory are available.

Specifications

- Dimming modes:Non-Dim, Phase dim, 1-10V, DALI
- Beam angle: wall washer


Installation Type



Housing Colour




Light Distribution



Wall Washer Reflector




Matt

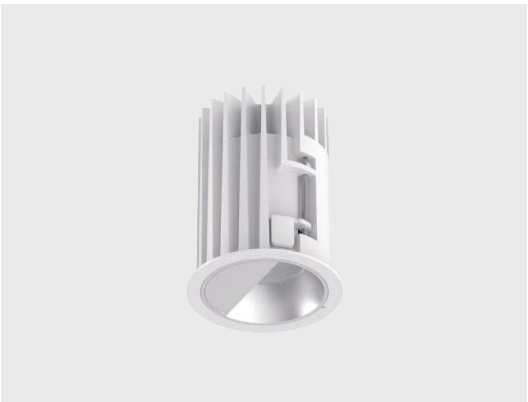

V68W
Downlight / WALL WASHER

Drawing



Order Options


15W 820lm-880lm		CITIZEN							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
V68W-CC930RW1M-X	Φ77*100mm	820 lm	36V	350mA	13W	15W	90	3000K	Wall Washer
V68W-CC940RW1M-X	Φ77*100mm	880 lm	36V	350mA	13W	15W	90	4000K	Wall Washer

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

18W 1100lm-1200lm		CITIZEN							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
V68W-CC930RW1M-X	Φ77*100mm	1100 lm	36V	500mA	18W	21W	90	3000K	Wall Washer
V68W-CC940RW1M-X	Φ77*100mm	1200 lm	36V	500mA	18W	21W	90	4000K	Wall Washer

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

Suggestions on Installation Distance for Uniform Lighting Effects

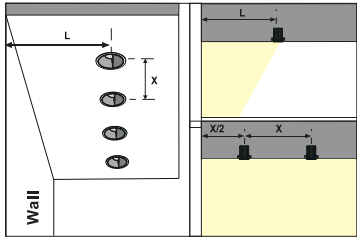

MODEL	X(mm) \ L(mm)		500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
			500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm
V68W			500 mm	550 mm	600 mm	650 mm	700 mm	750 mm	800 mm	850 mm	900 mm	950 mm	1000 mm	1050 mm	1100 mm	1150 mm	1200 mm



DOT

Exquisite and minimal aesthetic recessed light
Maximum visual comfort with low UGR
Tool free change different decorative reflectors

DOT-G

Economic Version



DOT-H

Premium Version



DOT Series
DOWNLIGHT



DOT35-G



DOT45-G

Minimal LED Downlight
DOT35,45-G

CE

CB

UK
CA

5 Year's Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>90


Features

- Minimalistic design with cutoutof 35mm, 45mm.
- Deep recessed LED Soft curved design
- With complete glare control and visual comfort
- Broad choices of different beam angle lens by tool free change.


Specifications

- Dimming modes:Non-Dim, Phase dim, 1-10V, DALI
- Beam angle: 18°, 25°,30°
- Physical: heatsink-cold forging, Trim-die casting

Installation Type



Light Distribution




Housing Colour



DOT
Downlight

Drawing

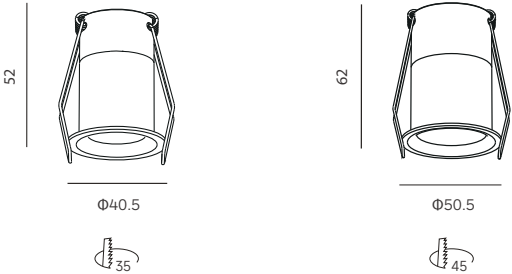

Order Options

2.5W 100lm-110lm		OSRAM							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DOT35-G-930-18-X	Φ40.5*52mm	100 lm	3V	500mA	1.5W	2.5W	90	3000K	18°
DOT35-G-940-18-X	Φ40.5*52mm	110 lm	3V	500mA	1.5W	2.5W	90	4000K	18°
DOT35-G-930-30-X	Φ40.5*52mm	100 lm	3V	500mA	1.5W	2.5W	90	3000K	30°
DOT35-G-940-30-X	Φ40.5*52mm	110 lm	3V	500mA	1.5W	2.5W	90	4000K	30°
8W 450lm-480lm		CITIZEN							
DOT45-G-930-25-X	Φ50.5*62mm	450 lm	12V	500mA	6W	8W	90	3000K	25°
DOT45-G-940-25-X	Φ50.5*62mm	480 lm	12V	500mA	6W	8W	90	4000K	25°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

DOT Series
DOWNLIGHT



DOT35-H



DOT45-H

Minimal LED Downlight
DOT35,45-H

CE

CB

UK
CA

5

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>90


Features

- Minimalistic design with cutoutof 35mm, 45mm.
- Deep recessed LEDSoft curved design
- With complete glare control andvisual comfort
- Broad choices of different beamangle lens by tool free change.

Specifications

- Dimming modes:Non-Dim, Phase dim, 1-10V, DALI
- Beam angle: 18°, 25°, 30°
- Physical: heatsink-cold forging, Trim-die casting


Installation Type



Housing Colour



Light Distribution




Decoration Ring Colour



DOT
Downlight

Drawing

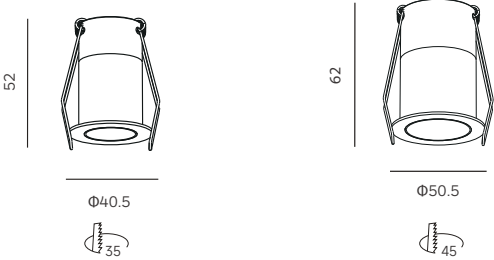


Order Options

2.5W 100lm-110lm		OSRAM							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
DOT35-H-930-18-X	Φ40.5*52mm	100 lm	3V	500mA	1.5W	2.5W	90	3000K	18°
DOT35-H-940-18-X	Φ40.5*52mm	110 lm	3V	500mA	1.5W	2.5W	90	4000K	18°
DOT35-H-930-30-X	Φ40.5*52mm	100 lm	3V	500mA	1.5W	2.5W	90	3000K	30°
DOT35-H-940-30-X	Φ40.5*52mm	110 lm	3V	500mA	1.5W	2.5W	90	4000K	30°
8W 450lm-480lm		CITIZEN							
DOT45-H-930-25-X	Φ50.5*62mm	450 lm	12V	500mA	6W	8W	90	3000K	25°
DOT45-H-940-25-X	Φ50.5*62mm	480 lm	12V	500mA	6W	8W	90	4000K	25°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



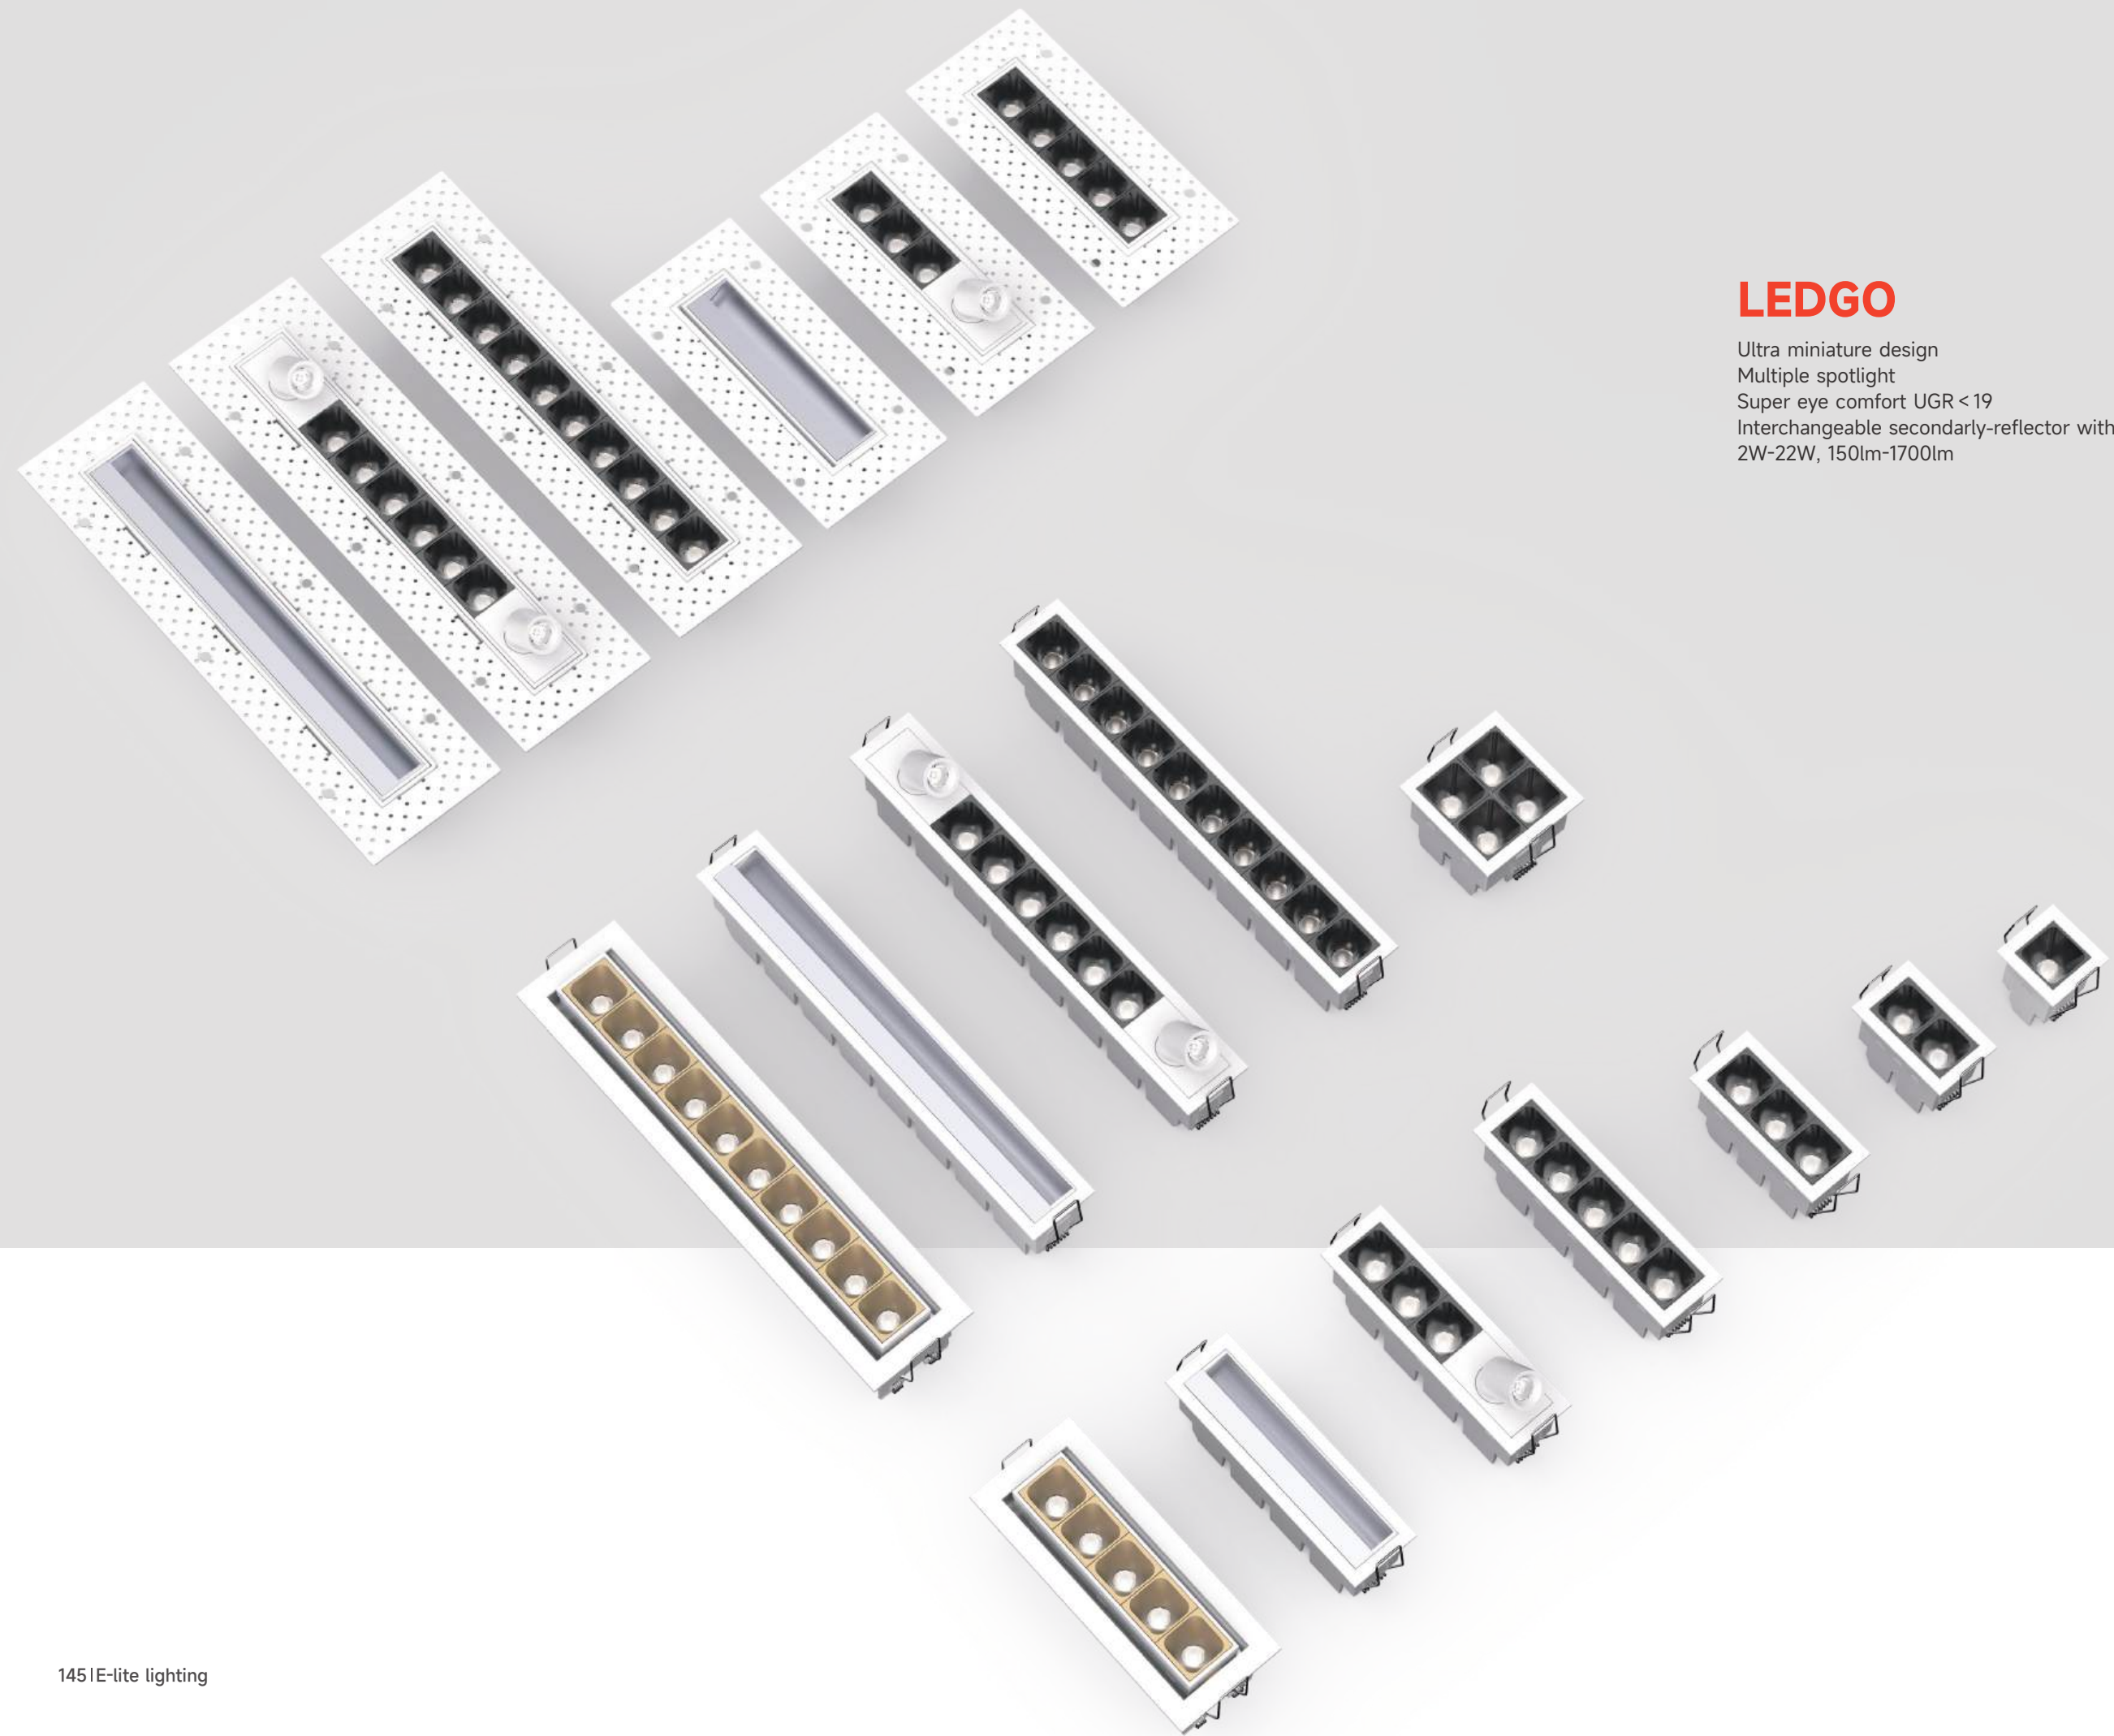

LEDGO

Ultra miniature design
Multiple spotlight
Super eye comfort UGR < 19
Interchangeable secondary-reflector with different colors
2W-22W, 150lm-1700lm

LEDGO Series
DOWNLIGHT

Fixed



Adjustable



Wall Washer



Trimless



LF1
37X37
2W 170-180Lm



LF2
62X37
4W 300-350Lm



LF3
90X37
6W 500-550Lm



LX4
65X65
8W 650-700Lm




LF5
144X37
10W 800-850Lm



LF10
282X37
20W 1600-1700Lm



LF3-LS1
144X37
8W 600-650Lm



LF6-LS2
282X37
16W 1200-1300Lm



LA5
160X53
10 W 800-850Lm



LA10
298X53
20W 1600-1700Lm



LFT5
154X47
10W 800-850Lm



LFT10
292X47
20W 1600-1700Lm



LFT3-LS1
154X47
8W 600-650Lm



LFT6-LS2
292X47
16W 1200-1300Lm



LWT5
154X47
10W 500-550Lm



LWT10
292X47
20W 1000-1100Lm



LEDGO

Fixed

A combination of deep recessed secondary reflector and soft lens creates visual comfort

Adjustable

Four sizes with LED wattages 10W-20W. 20°, 40° beam angles are available 30° tilt and 355° rotation.

Wall Washer

Asymmetric wall washer reflector evenly illuminates walls

Housing Colour



White



Black

Secondary Reflector Colour



White



Matt




Gold




Black

LEDGO Series
DOWNLIGHT/ FIXED

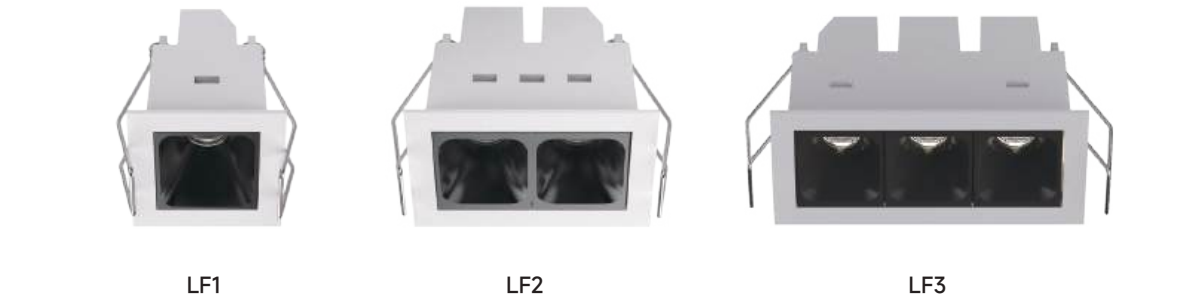

Downlight
LF1/LF2/LF3



Features

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control

Installation Type




Housing Colour




Specifications

- Dimming modes: Non-Dim, Phase Dim, 1-10V, DALI
- Beam angle: 24°, 40°
- Physical: aluminium, wet painting
- Accessories: secondary reflector plastic

Light Distribution




Secondary Reflector Colour

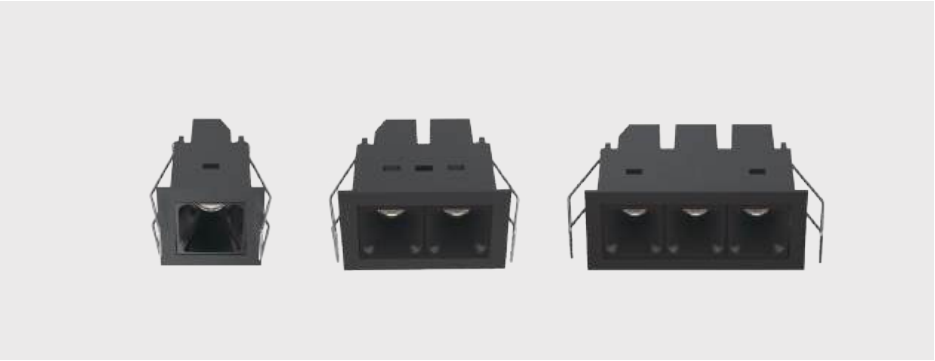

LF1/LF2
LF3
DOWNLIGHT

Drawing

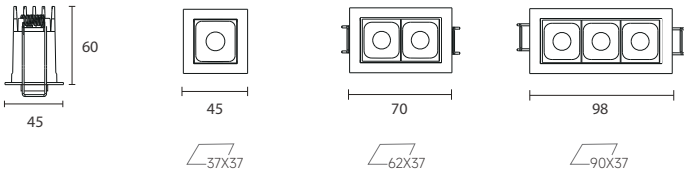

Order Options

3W	150lm-160lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF1-2W-930-24-X	45*45*60mm	150lm	3V	700mA	2W	3W	90	3000K	24°	
LF1-2W-940-24-X	45*45*60mm	160lm	3V	700mA	2W	3W	90	4000K	24°	
LF1-2W-930-40-X	45*45*60mm	150lm	3V	700mA	2W	3W	90	3000K	40°	
LF1-2W-940-40-X	45*45*60mm	160lm	3V	700mA	2W	3W	90	4000K	40°	
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)										

6W	300lm-320lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF2-4W-930-24-X	45*70*60mm	300lm	6V	700mA	4W	6W	90	3000K	24°	
LF2-4W-940-24-X	45*70*60mm	320lm	6V	700mA	4W	6W	90	4000K	24°	
LF2-4W-930-40-X	45*70*60mm	300lm	6V	700mA	4W	6W	90	3000K	40°	
LF2-4W-940-40-X	45*70*60mm	320lm	6V	700mA	4W	6W	90	4000K	40°	
RRemark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)										


8W	500lm-550lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF3-6W-930-24-X	45*98*60mm	500lm	9V	700mA	6W	8W	90	3000K	24°	
LF3-6W-940-24-X	45*98*60mm	550lm	9V	700mA	6W	8W	90	4000K	24°	
LF3-6W-930-40-X	45*98*60mm	500lm	9V	700mA	6W	8W	90	3000K	40°	
LF3-6W-940-40-X	45*98*60mm	550lm	9V	700mA	6W	8W	90	4000K	40°	
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)										

LEDGO Series
DOWNLIGHT



LX4/LF5
LFT5
DOWNLIGHT

Drawing

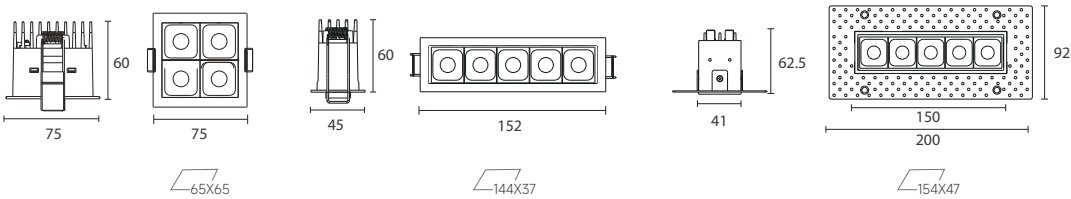


Order Options

10W 650lm-700lm OSRAM									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LX4-8W-930-24-X	75*75*60mm	650lm	12 V	700mA	8W	10W	90	3000K	24°
LX4-8W-940-24-X	75*75*60mm	700lm	12 V	700mA	8W	10W	90	4000K	24°
LX4-8W-930-40-X	75*75*60mm	650lm	12 V	700mA	8W	10W	90	3000K	40°
LX4-8W-940-40-X	75*75*60mm	700lm	12 V	700mA	8W	10W	90	4000K	40°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


12W 800lm-850lm OSRAM									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF5-10W-930-24-X	45*152*60mm	800lm	15 V	700mA	10W	12W	90	3000K	24°
LF5-10W-940-24-X	45*152*60mm	850lm	15 V	700mA	10W	12W	90	4000K	24°
LF5-10W-930-40-X	45*152*60mm	800lm	15 V	700mA	10W	12W	90	3000K	40°
LF5-10W-940-40-X	45*152*60mm	850lm	15 V	700mA	10W	12W	90	4000K	40°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

12W 800lm-850lm OSRAM									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT5-10W-930-24-X	92*200*62.5mm	800lm	15 V	700mA	10W	12W	90	3000K	24°
LFT5-10W-940-24-X	92*200*62.5mm	850lm	15 V	700mA	10W	12W	90	4000K	24°
LFT5-10W-930-40-X	92*200*62.5mm	800lm	15 V	700mA	10W	12W	90	3000K	40°
LFT5-10W-940-40-X	92*200*62.5mm	850lm	15 V	700mA	10W	12W	90	4000K	40°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

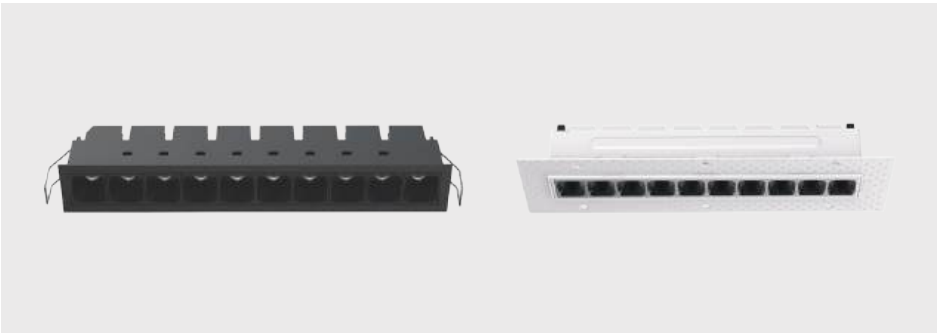

LF10
LFT10
DOWNLIGHT

Drawing

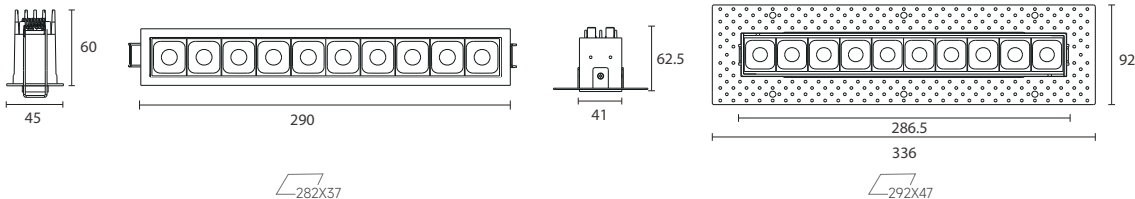


Order Options

23W 1600lm-1700lm OSRAM									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LF10-20W-930-24-X	45*290*60mm	1600lm	29V	700mA	20W	23W	90	3000K	24°
LF10-20W-940-24-X	45*290*60mm	1700lm	29V	700mA	20W	23W	90	4000K	24°
LF10-20W-930-40-X	45*290*60mm	1600lm	29V	700mA	20W	23W	90	3000K	40°
LF10-20W-940-40-X	45*290*60mm	1700lm	29V	700mA	20W	23W	90	4000K	40°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


23W 1600lm-1700lm OSRAM									
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LFT10-20W-930-24-X	92*336*62.5mm	1600lm	29V	700mA	20W	23W	90	3000K	24°
LFT10-20W-940-24-X	92*336*62.5mm	1700lm	29V	700mA	20W	23W	90	4000K	24°
LFT10-20W-930-40-X	92*336*62.5mm	1600lm	29V	700mA	20W	23W	90	3000K	40°
LFT10-20W-940-40-X	92*336*62.5mm	1700lm	29V	700mA	20W	23W	90	4000K	40°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

LEDGO Series
DOWNLIGHT

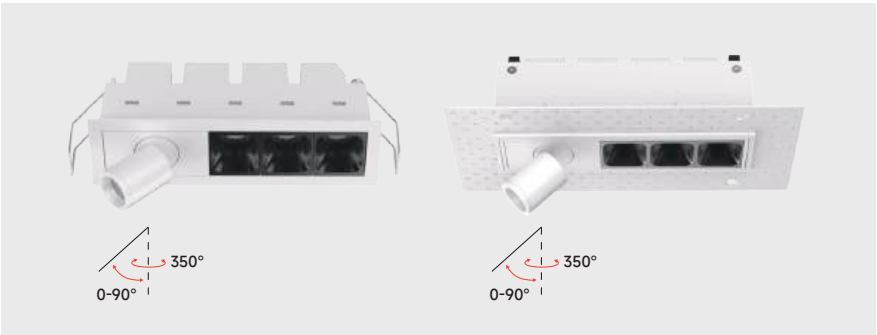

LF3-LS1
LFT3-LS1
DOWNLIGHT


Drawing

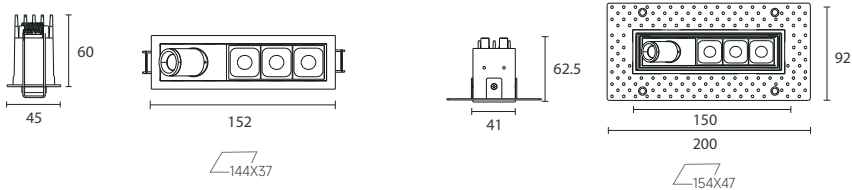

Order Options


10W	600lm-650lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF3-LS1-8W-930-24-X	45*152*60mm	600lm	12V	700mA	8W	10W	90	3000K	24°+15°	
LF3-LS1-8W-940-24-X	45*152*60mm	650lm	12V	700mA	8W	10W	90	4000K	24°+15°	
LF3-LS1-8W-930-40-X	45*152*60mm	600lm	12V	700mA	8W	10W	90	3000K	40°+25°	
LF3-LS1-8W-940-40-X	45*152*60mm	650lm	12V	700mA	8W	10W	90	4000K	40°+25°	
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)										

10W	600lm-650lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LFT3-LS1-8W-930-24-X	92*200*62.5mm	600lm	12V	700mA	8W	10W	90	3000K	24°+15°	
LFT3-LS1-8W-940-24-X	92*200*62.5mm	650lm	12V	700mA	8W	10W	90	4000K	24°+15°	
LFT3-LS1-8W-930-40-X	92*200*62.5mm	600lm	12V	700mA	8W	10W	90	3000K	40°+25°	
LFT3-LS1-8W-940-40-X	92*200*62.5mm	650lm	12V	700mA	8W	10W	90	4000K	40°+25°	
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)										

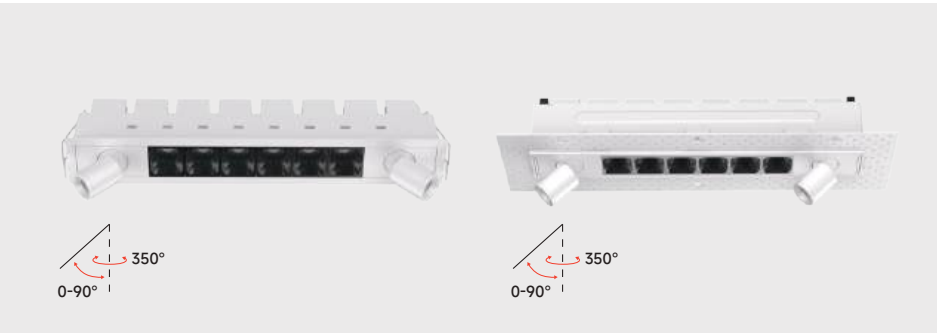

LF6-LS2
LFT6-LS2
DOWNLIGHT

Drawing

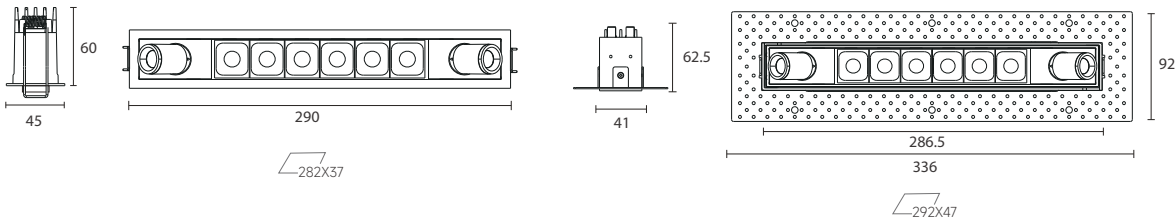

Order Options

19W	1200lm-1300lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF6-LS2-16W-930-24-X	45*290*60mm	1200lm	23V	700mA	16W	19W	90	3000K	24°+15°	
LF6-LS2-16W-940-24-X	45*290*60mm	1300lm	23V	700mA	16W	19W	90	4000K	24°+15°	
LF6-LS2-16W-930-40-X	45*290*60mm	1200lm	23V	700mA	16W	19W	90	3000K	40°+25°	
LF6-LS2-16W-940-40-X	45*290*60mm	1300lm	23V	700mA	16W	19W	90	4000K	40°+25°	
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)										


19W	1200lm-1300lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LFT6-LS2-16W-930-24-X	92*336*62.5mm	1200lm	23V	700mA	16W	19W	90	3000K	24°+15°	
LFT6-LS2-16W-940-24-X	92*336*62.5mm	1300lm	23V	700mA	16W	19W	90	4000K	24°+15°	
LFT6-LS2-16W-930-40-X	92*336*62.5mm	1200lm	23V	700mA	16W	19W	90	3000K	40°+25°	
LFT6-LS2-16W-940-40-X	92*336*62.5mm	1300lm	23V	700mA	16W	19W	90	4000K	40°+25°	
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)										

LEDGO Series
DOWNLIGHT



LA5
LA10
DOWNLIGHT

Drawing

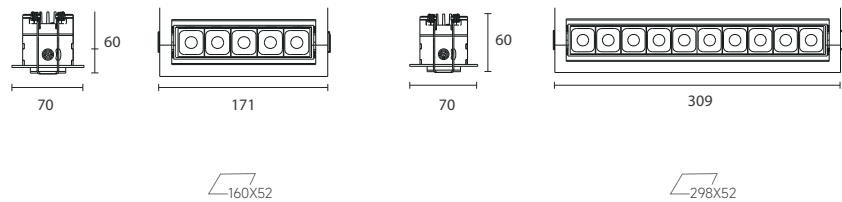

Order Options


12W 800lm-850lm		OSRAM							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LA5-11W-930-24-X	70*171*60mm	800lm	15 V	700mA	10W	12W	90	3000K	24°
LA5-11W-940-24-X	70*171*60mm	850lm	15 V	700mA	10W	12W	90	4000K	24°
LA5-11W-930-40-X	70*171*60mm	800lm	15 V	700mA	10W	12W	90	3000K	40°
LA5-11W-940-40-X	70*171*60mm	850lm	15 V	700mA	10W	12W	90	4000K	40°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

23W 1600lm-1700lm		OSRAM							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LA10-22W-930-24-X	70*309*60mm	1600lm	29V	700mA	20W	23W	90	3000K	24°
LA10-22W-940-24-X	70*309*60mm	1700lm	29V	700mA	20W	23W	90	4000K	24°
LA10-22W-930-40-X	70*309*60mm	1600lm	29V	700mA	20W	23W	90	3000K	40°
LA10-22W-940-40-X	70*309*60mm	1700lm	29V	700mA	20W	23W	90	4000K	40°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									



LW5
LWT5
DOWNLIGHT

Drawing

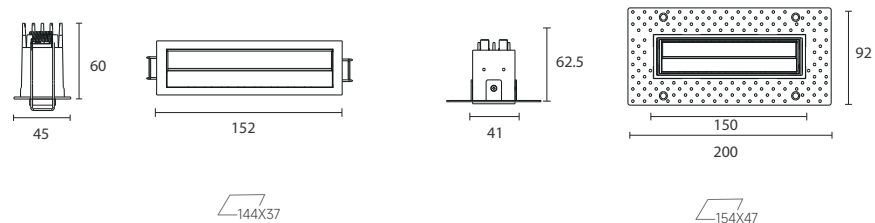

Order Options

12W 500lm-550lm		OSRAM							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LW5-10W-930-X	45*152*60mm	500lm	15V	700mA	10W	12W	90	3000K	／
LW5-10W-940-X	45*152*60mm	550lm	15V	700mA	10W	12W	90	4000K	／
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									


12W 500lm-550lm		OSRAM							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LWT5-10W-930-X	92*200*62.5mm	500lm	15V	700mA	10W	12W	90	3000K	／
LWT5-10W-940-X	92*200*62.5mm	550lm	15V	700mA	10W	12W	90	4000K	／
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)									

LEDGO Series
DOWNLIGHT



LW10
LWT10
DOWNLIGHT

Drawing

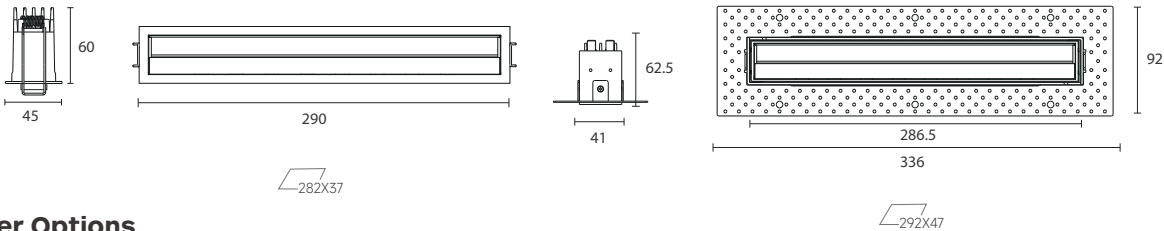

Order Options

23W 1000lm-1100lm		OSRAM							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LW10-20W-930-X	45*290*60mm	1000lm	29V	700mA	20W	23W	90	3000K	/
LW10-20W-940-X	45*290*60mm	1100lm	29V	700mA	20W	23W	90	4000K	/

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

23W 1000lm-1100lm		OSRAM							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
LWT10-20W-930-X	92*336*62.5mm	1000lm	29V	700mA	20W	23W	90	3000K	/
LWT10-20W-940-X	92*336*62.5mm	1100lm	29V	700mA	20W	23W	90	4000K	/

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



LEDGO Series
DOWNLIGHT/ FIXED



LF2-IP65

LF3-IP65

LF5-IP65

LF10-IP65

Downlight
LF2-IP65/LF3-IP65/LF5-IP65/LF10-IP65



Features

- Ultra miniature recessed LED downlight
- Perfect combination of lens & reflector
- Superior glare control

Specifications

- Dimming modes:Non-Dim, Phase Dim, 1-10V, DALI
- Beam angle:24°,40°
- Physical: aluminium, wet painting
- Accessories: Secondary reflector, Lens

Installation Type




Housing Colour



White

Balck

Light Distribution



Secondary Reflector Colour




White

Matt


Gold

Balck

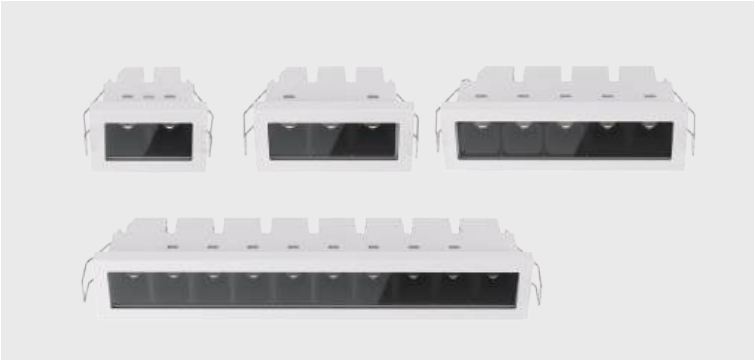

LF2-IP65 | LF5-IP65
LF3-IP65 | LF10-IP65
DOWNLIGHT

Drawing

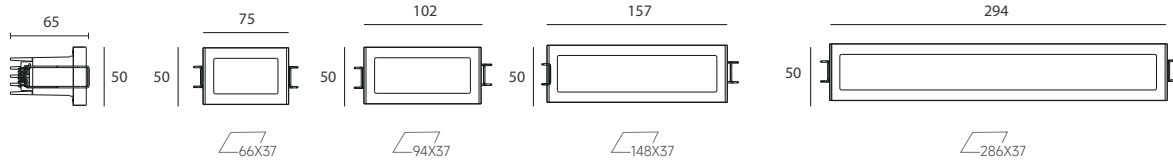

Order Options

6W	210lm-270lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF2-IP65-4W-930-24-X	50*75*65mm	250lm	6V	700mA	4W	6W	90	3000K	24°	
LF2-IP65-4W-940-24-X	50*75*65mm	270lm	6V	700mA	4W	6W	90	4000K	24°	
LF2-IP65-4W-930-40-X	50*75*65mm	210lm	6V	700mA	4W	6W	90	3000K	40°	
LF2-IP65-4W-940-40-X	50*75*65mm	230lm	6V	700mA	4W	6W	90	4000K	40°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

8W	330lm-400lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF3-IP65-6W-930-24-X	50*102*65mm	380lm	9V	700mA	6W	8W	90	3000K	24°	
LF3-IP65-6W-940-24-X	50*102*65mm	400lm	9V	700mA	6W	8W	90	4000K	24°	
LF3-IP65-6W-930-40-X	50*102*65mm	330lm	9V	700mA	6W	8W	90	3000K	40°	
LF3-IP65-6W-940-40-X	50*102*65mm	350lm	9V	700mA	6W	8W	90	4000K	40°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

12W	650lm-850lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF5-IP65-10W-930-24-X	50*157*65mm	780lm	15V	700mA	10W	12W	90	3000K	24°	
LF5-IP65-10W-940-24-X	50*157*65mm	850lm	15V	700mA	10W	12W	90	4000K	24°	
LF5-IP65-10W-930-40-X	50*157*65mm	650lm	15V	700mA	10W	12W	90	3000K	40°	
LF5-IP65-10W-940-40-X	50*157*65mm	700lm	15V	700mA	10W	12W	90	4000K	40°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

23W	1200lm-1400lm	OSRAM								
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
LF10-IP65-20W-930-24-X	50*294*65mm	1300lm	29V	700mA	20W	23W	90	3000K	24°	
LF10-IP65-20W-940-24-X	50*294*65mm	1400lm	29V	700mA	20W	23W	90	4000K	24°	
LF10-IP65-20W-930-40-X	50*294*65mm	1200lm	29V	700mA	20W	23W	90	3000K	40°	
LF10-IP65-20W-940-40-X	50*294*65mm	1300lm	29V	700mA	20W	23W	90	4000K	40°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

Low Voltage System

Low Voltage System

LINE X 05 ----- 163-178

LINE X 11 ----- 179-192

LINE X 26 ----- 193-246



LINE X 05

Low Voltage System


Thin extruded aluminum profile with 5mm width groove
24VDC Version
Good application for residential lighting projects
Available for Triac-dimming

LINE X 05 Series
Low Voltage System





Line X 05 is a low voltage track system with an ultra-narrow widths of 5mm. It includes trimless recessed, suspended, and surface-mounted styles. This extensive range makes it versatile enough for almost any lighting application, from residential spaces to hospitality and retail environments. The system also features a variety of modules that seamlessly integrate with the tracks. These modules attach effortlessly via mechanical clips.


Line X 05 DC24V Track

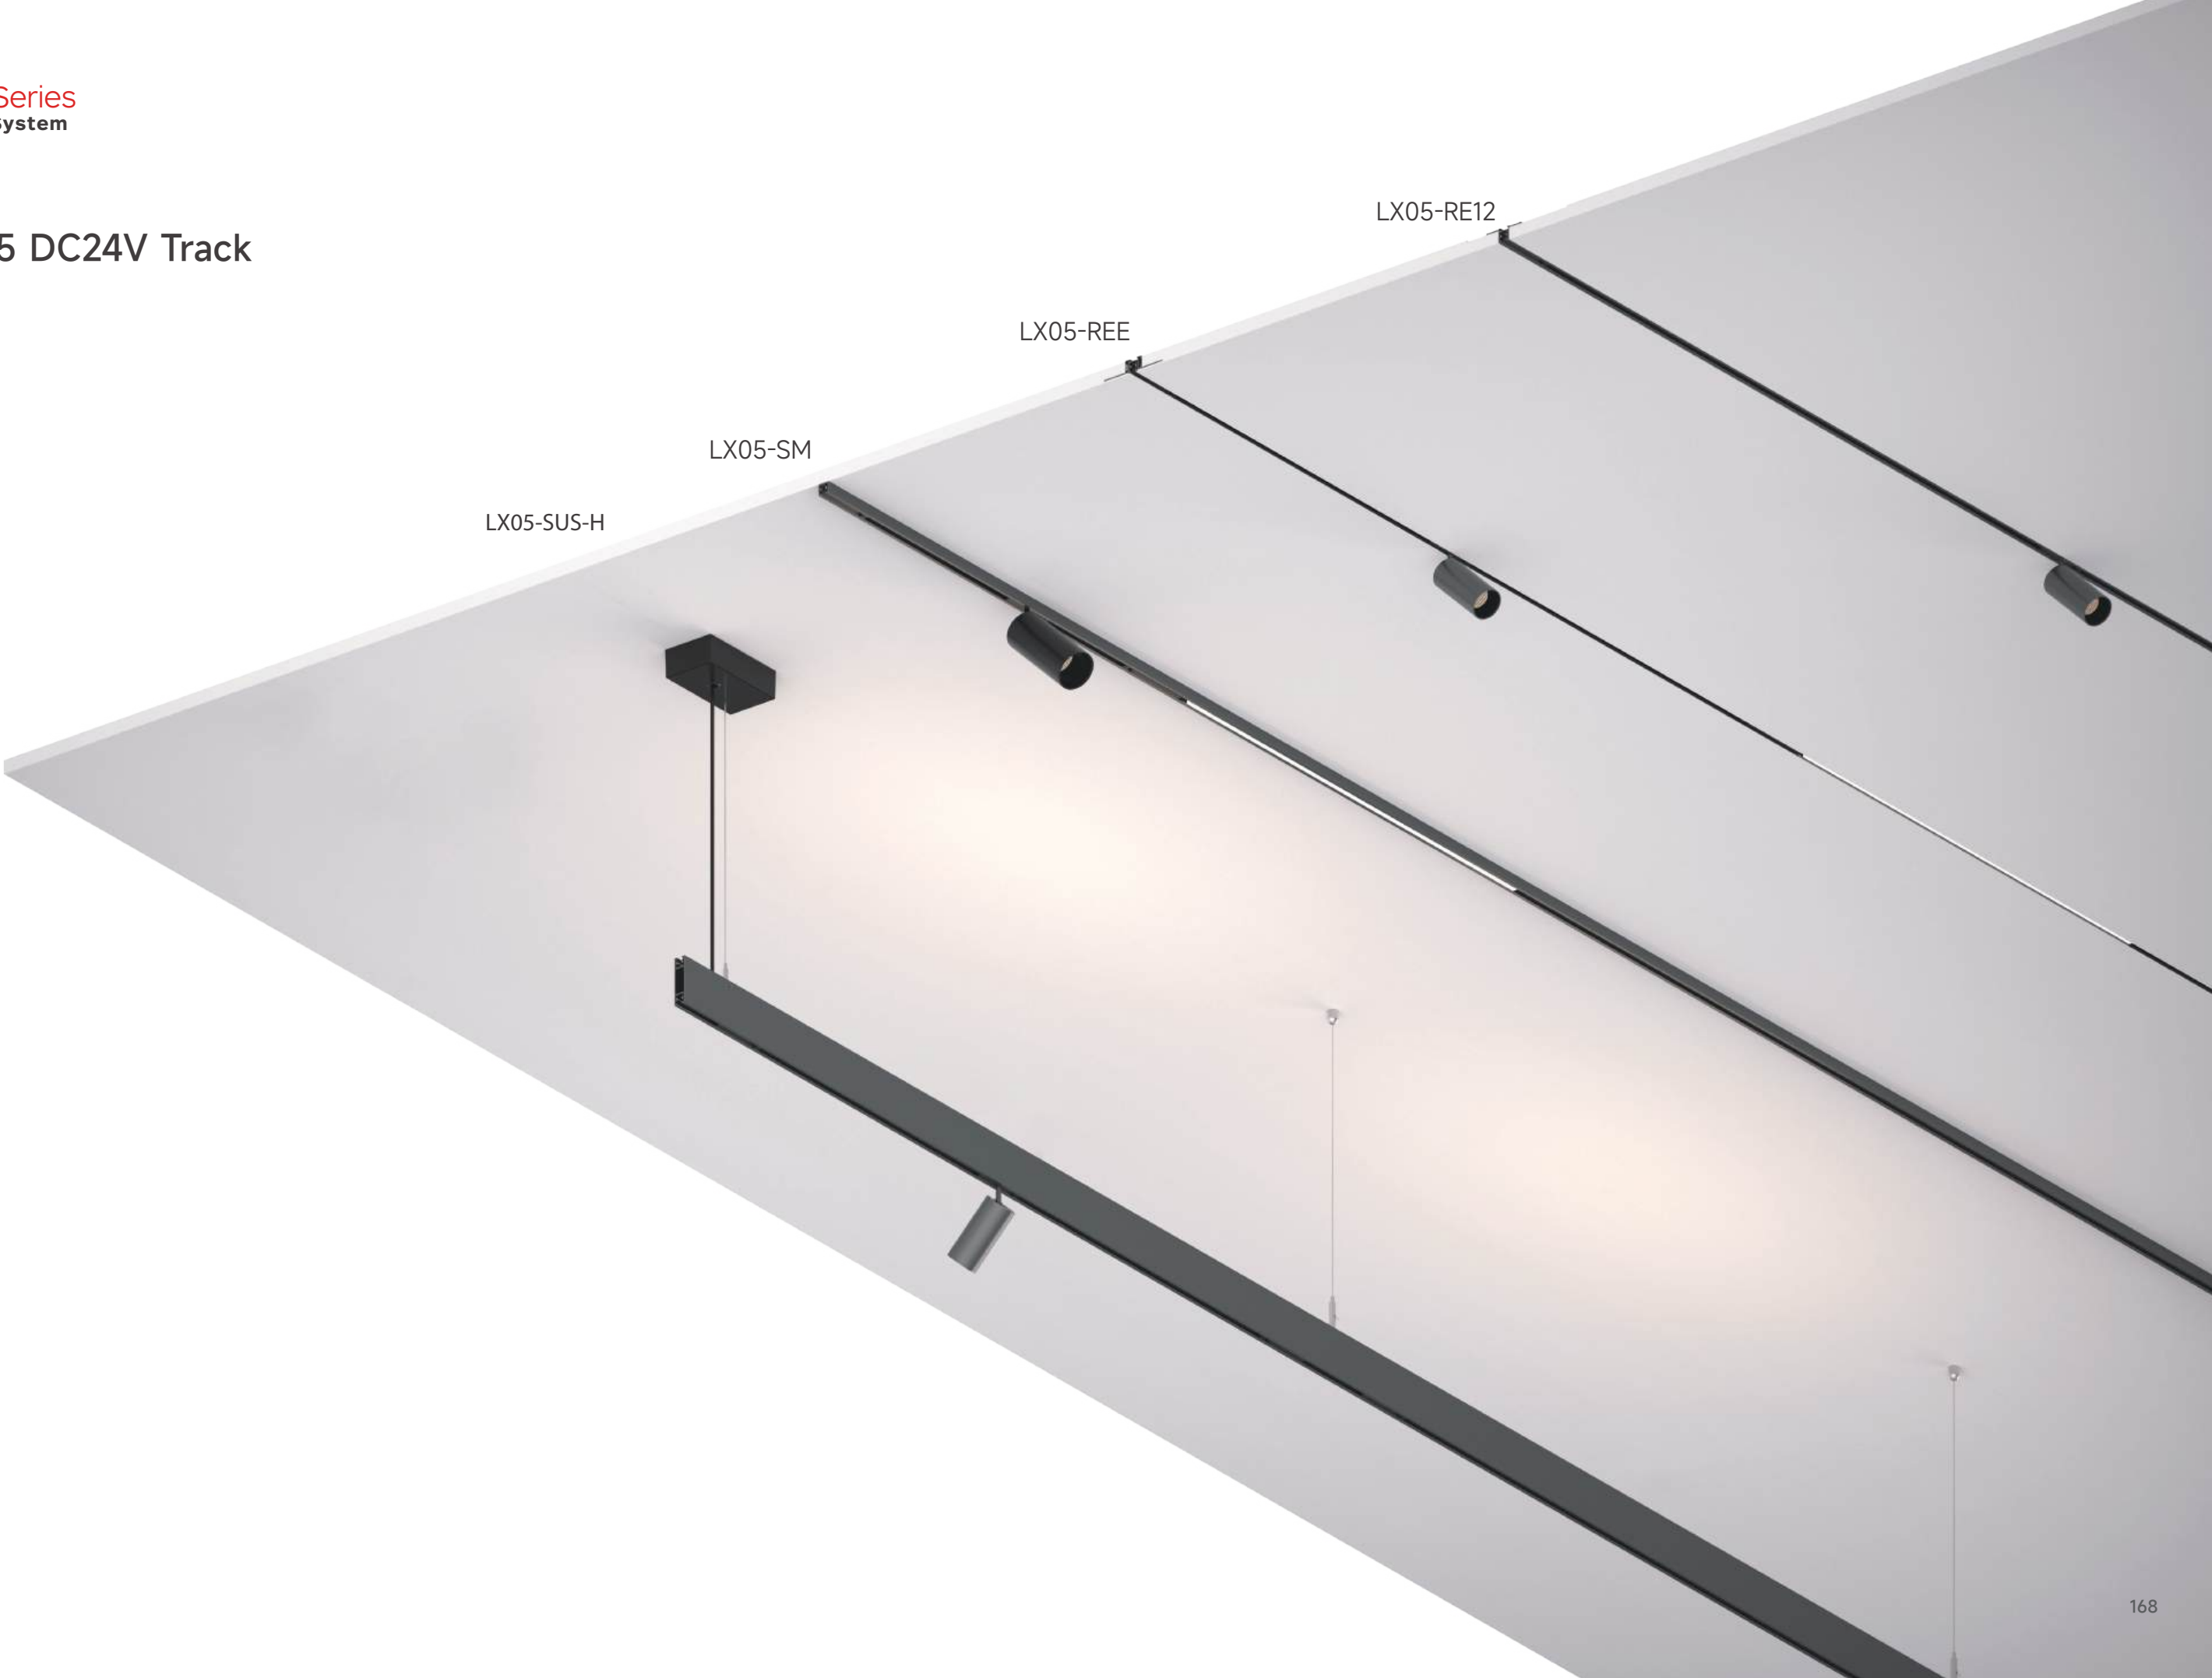


LINE X 05 Series
Low Voltage System

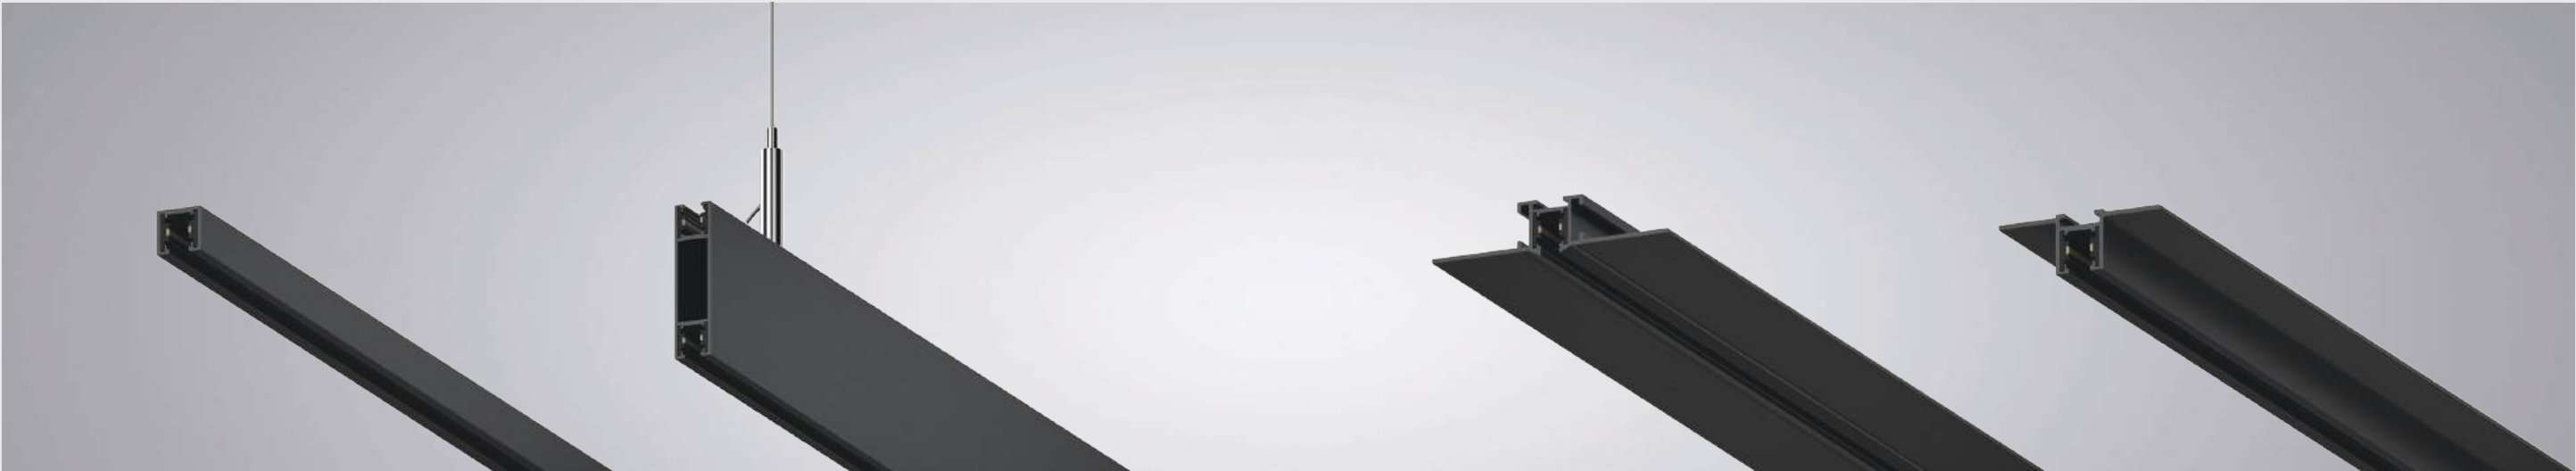


LX05-SM

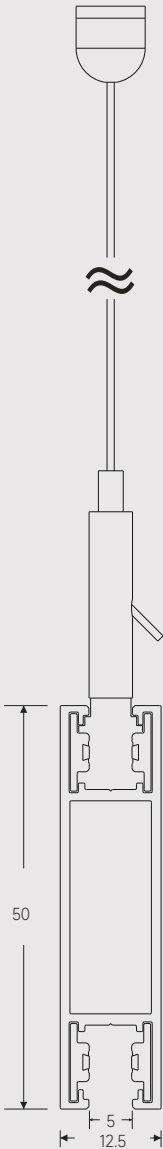

LX05-SUS-H

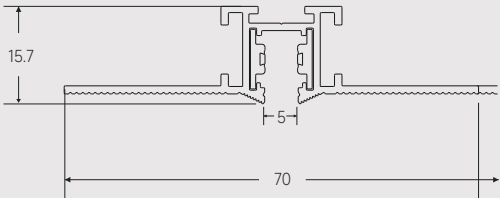


LX05-REE

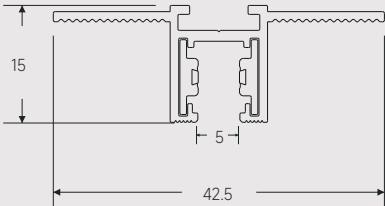

LX05-RE12

Surface-mounted Track

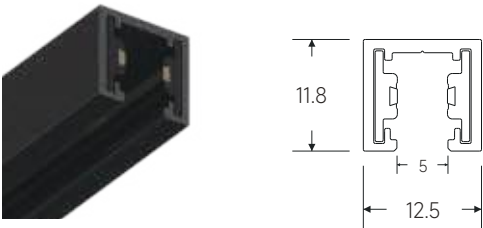

Order Options


Code	Description	Length(mm)	Power supply	Installation	Housing Color
LX05-SM	Surface-Mounted	1000/2000	Remote	Surface-Mounted	White(Optional)

Accessories

LX05-SM




Curve Corner

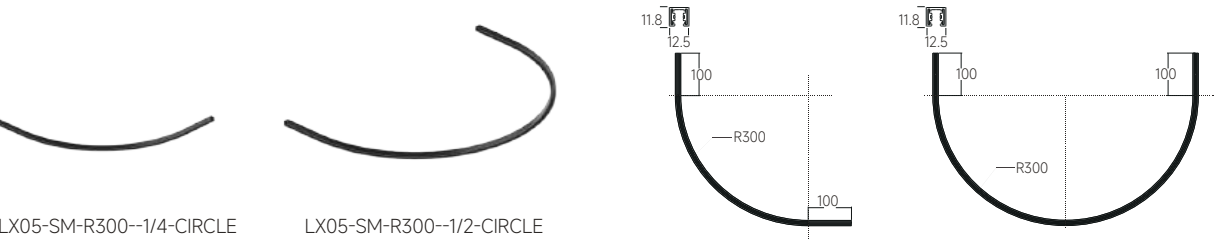

Order Options

Code	Description	Radian	Installation	Housing Color
LX05-SM-R300-1/4-CIRCLE	1/4 Curve Corner	R300	Surface-Mounted	White(Optional)
LX05-SM-R300-1/2-CIRCLE	1/2 Curve Corner	R300	Surface-Mounted	White(Optional)

Suspended Track

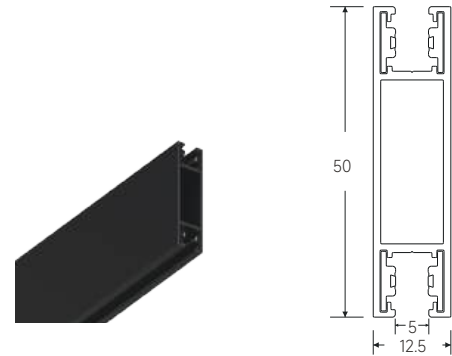


Order Options


Code	Description	Length(mm)	Power supply	Installation	Housing Color
LX05-SUS-H	Downward & Upward lighting	1000/2000	Remote	Suspended	White(Optional)

Accessories

LX05-SUS-H

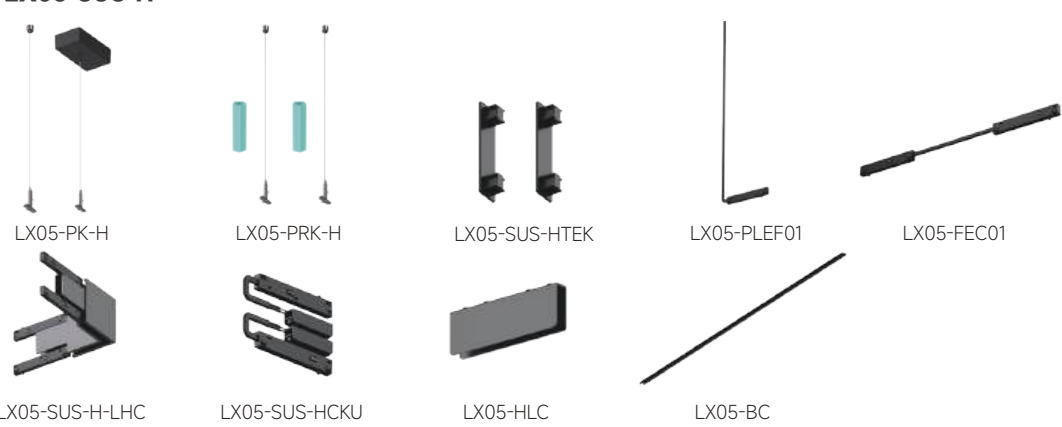


Curve Corner

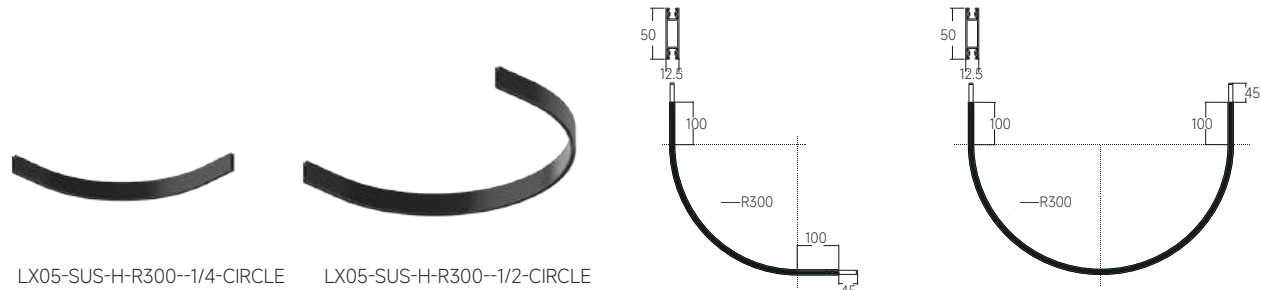

Order Options

Code	Description	Radian	Installation	Housing Color
LX05-SUS-H-R300-1/4-CIRCLE	1/4 Curve Corner	R300	Suspended	White(Optional)
LX05-SUS-H-R300-1/2-CIRCLE	1/2 Curve Corner	R300	Suspended	White(Optional)

Recessed Track

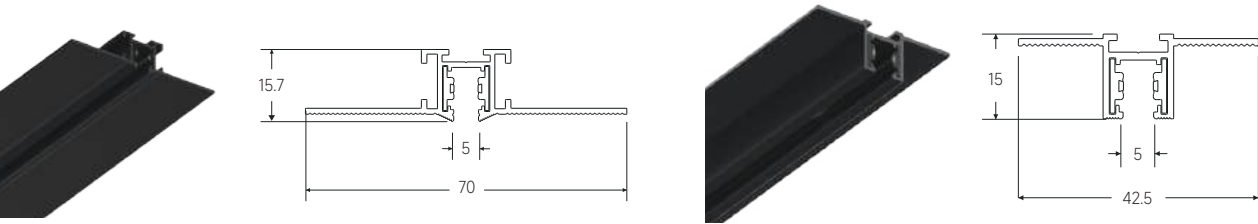

Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Color
LX05-REE	Easy Installation	1000/2000	Remote	Trimless Recessed	White(Optional)
LX05-RE12	Compatible With ½" Ceiling	1000/2000	Remote	Trimless Recessed	White(Optional)

Accessories

LX05-REE




LX05-RE12



Inserts For Track


Spotlight Insert

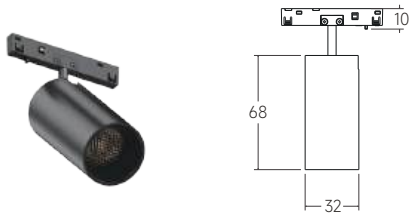

LX05-RS30-4W

System Lumen Output:250lm
System wattage:4W
Beam:18°/24°/36°/55°
CCT:2700K/3000K/4000K
CRI: > 90
Size:68mm x Φ32mm
Housing Colour:Black/White
Option


Spotlight Insert

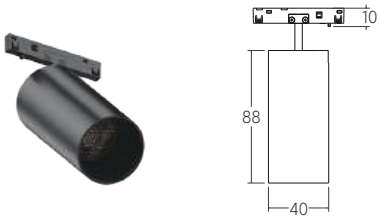

LX05-RS40-8W

System Lumen Output:600lm
System wattage:8W
Beam:18°/24°/36°/45°
CCT:2700K/3000K/4000K
CRI: > 90
Size:88mm x Φ40mm
Housing Colour:Black/White
Option

GIMI Decorative Pendant

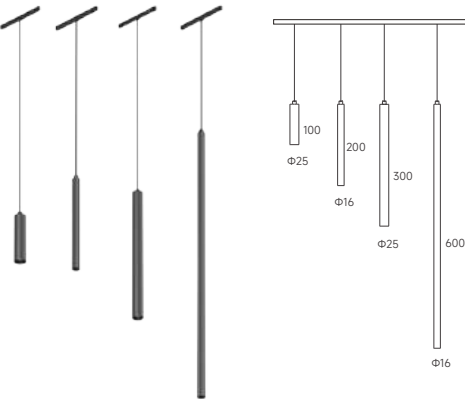

LX05-PS16/PS25

System Lumen Output:270lm
System wattage:3W/5W
Beam:20°/40°
CCT:2700K/3000K/4000K
CRI: > 90
Size:Φ16mm/25mm
Housing Colour:Black/White/Brushed gold/Brushed bronze
Option

FARA Decorative Pendant



LX05-SCD80-P
LX05-SCD80-T

System Lumen Output:270lm
System wattage:4W
Beam:180°
CCT:2700K/3000K/4000K
CRI: > 90
Size:Φ80mm
Housing Colour:Black/White/Golden
Option

LINE X 05 Series
Low Voltage System

FINO Decorative Pendant




LX05-SPD80-P
LX05-SPD80-T

System Lumen Output:170lm
System wattage:2W
Beam:360°
CCT:2700K/3000K/4000K
CRI: > 90
Size:Φ80mm
Housing Colour:Black/White
Option



Accent Light Insert

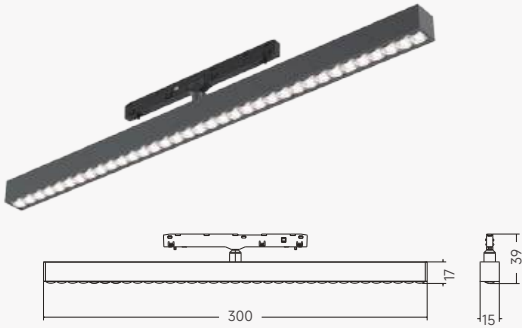


LX05-A-AL300

System Lumen Output:1350lm
System wattage:12W
Beam:45°/80°
CCT:2700K/3000K/4000K
CRI: > 90
Size:Φ15mm/300mm
Housing Colour:Black/White
Option



Decorative Pendant

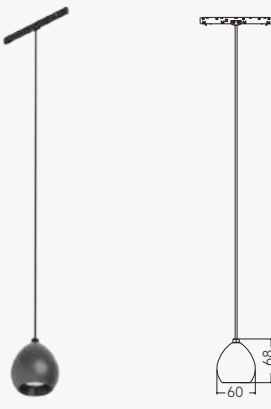


LX05-SURI 60

System Lumen Output:380lm
System wattage:4W
Beam:30°
CCT:2700K/3000K/4000K
CRI: > 90
Size:Φ60mm/60mm
Housing Colour:Black/White
Option



General Light LED Strip

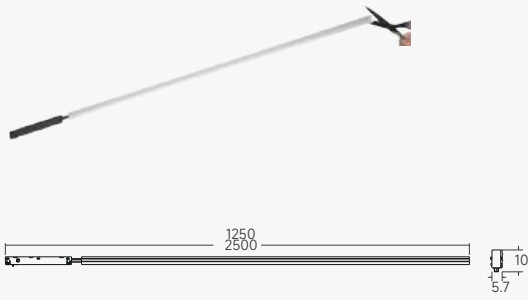

LX05-GL1250-6W
LX05-GL2500-12W

System Lumen Output:250lm/500lm
System wattage:6W/12W
Beam:110°
CCT:2700K/3000K/4000K
CRI: > 90
Size:Φ1250mm/2500mm


Line X System-modular track kit,
easy installation package



LX05-DL-TK-1200
General Lighting

White Black


Drawing

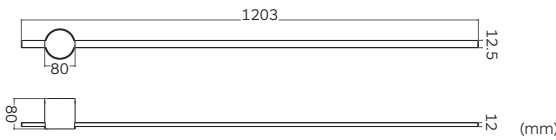

5W 200lm						
Code	Size	System LM	System W	CRI	CCT	Beam
LX05-DL-TK-1200-930-110-P	1203mm*12.5mm	200lm	5W	90	3000K Optional 2700K/4000K	110°

Remark: P =Phase Dim


LINE X 05 Series
Low Voltage System

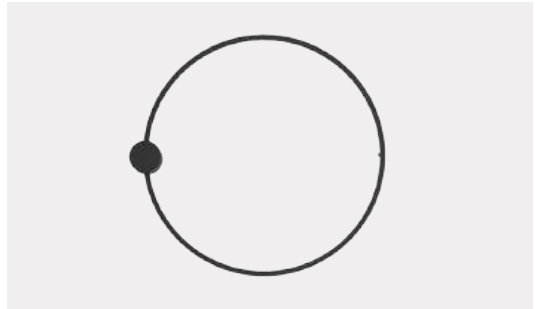

LX05-CDK-600
General Lighting


White Black

Drawing



10W 500lm						
Code	Size	System LM	System W	CRI	CCT	Beam
LX05-CDK-600-930-110-P	612mm	500lm	10W	90	3000K Optional 2700K/4000K	110°


Remark: P =Phase Dim

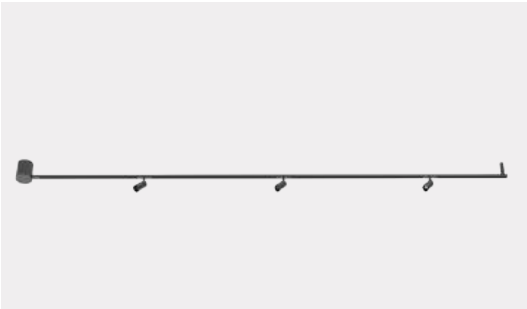

LX05-SL-TK-1000
Spot Lighting

White Black

Drawing

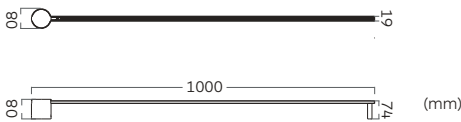

12W 750lm						
Code	Size	System LM	System W	CRI	CCT	Beam
LX05-SL-TK-1000-930-18-P	1000mm*19mm	750lm	12W	90	3000K Optional 2700K/4000K	18°
LX05-SL-TK-1000-930-24-P	1000mm*19mm	750lm	12W	90		24°
LX05-SL-TK-1000-930-35-P	1000mm*19mm	750lm	12W	90		36°

Remark: P =Phase Dim



LINE X 11

179 IE-lite lighting

LINE X 11


Low Voltage System

Extruded aluminum profile with 11mm width groove.
24VDC Version
Good application for residential lighting projects
Available for Triac-dimming



180

LineX 11 DC24V Track

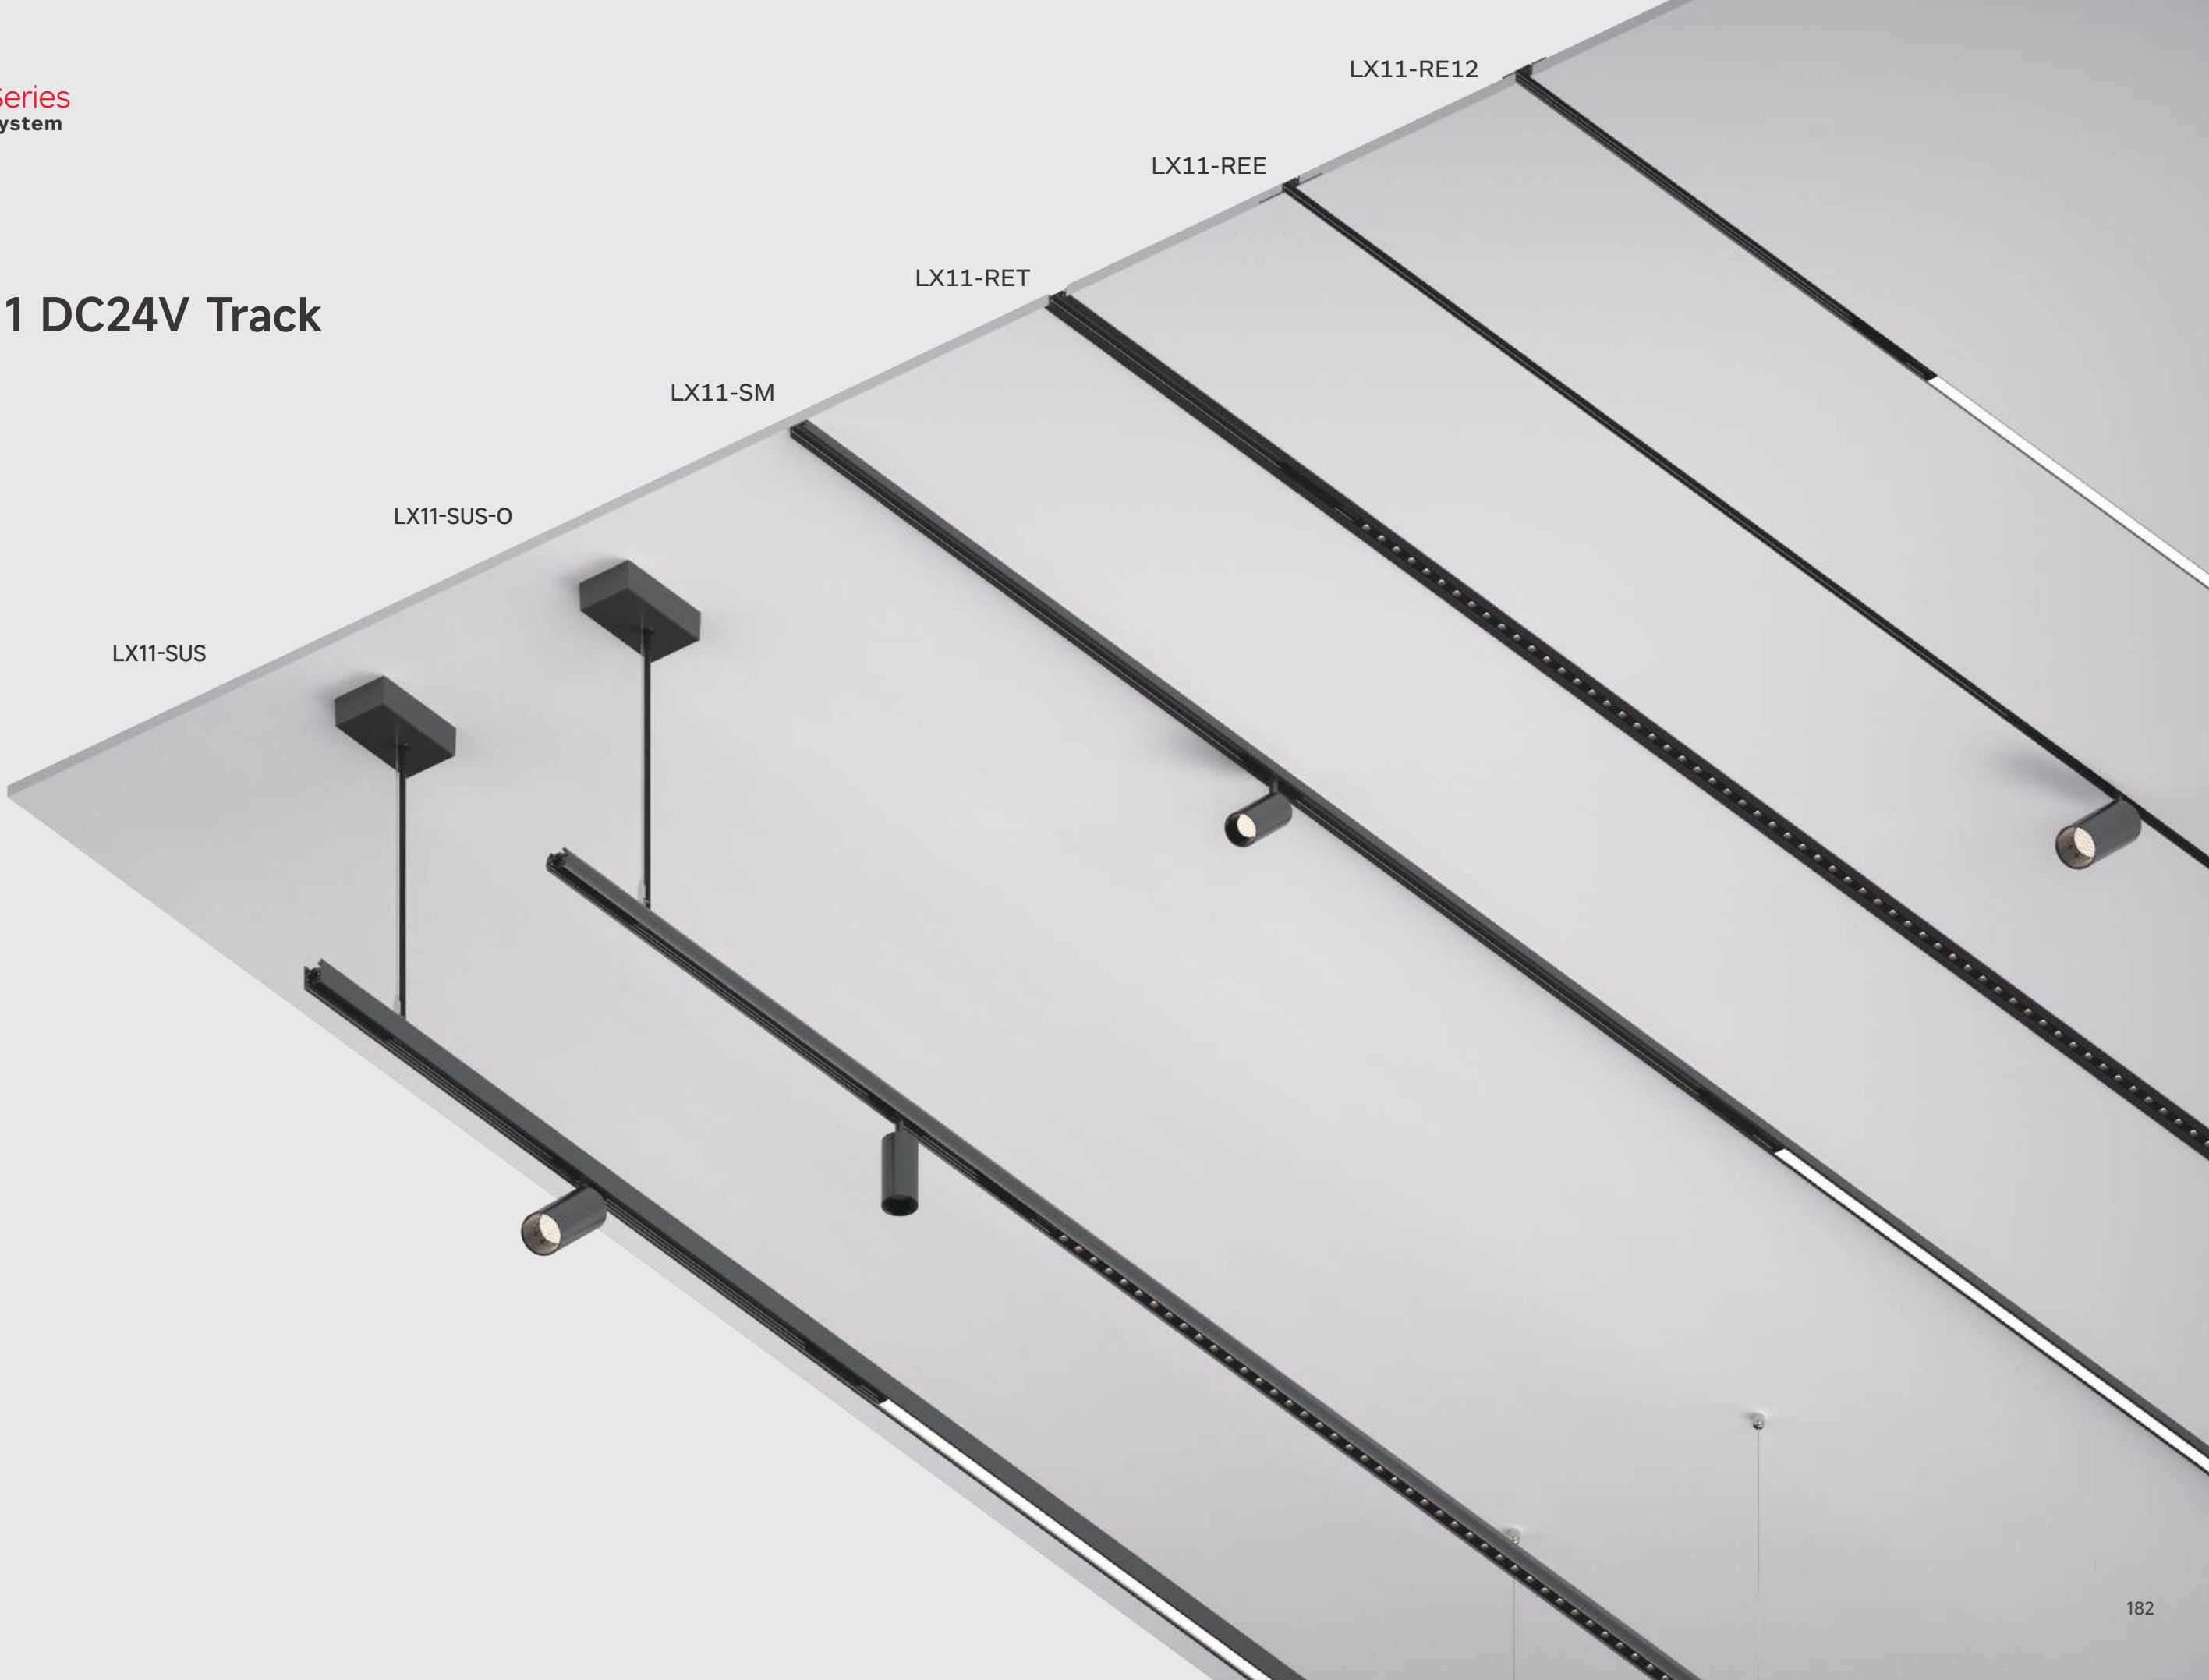

LX11-SUS

LX11-SUS-O


LX11-SM

LX11-RET

LX11-REE

LX11-RE12

Surface-mounted Track

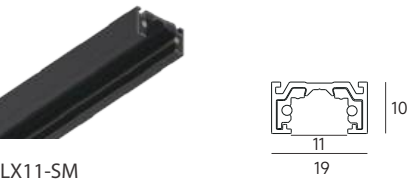


Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Colour
LX11-SM	surface-mounted	1000/2000	Remote	surface-mounted	 White(Optional)

Accessories



LX11-SM

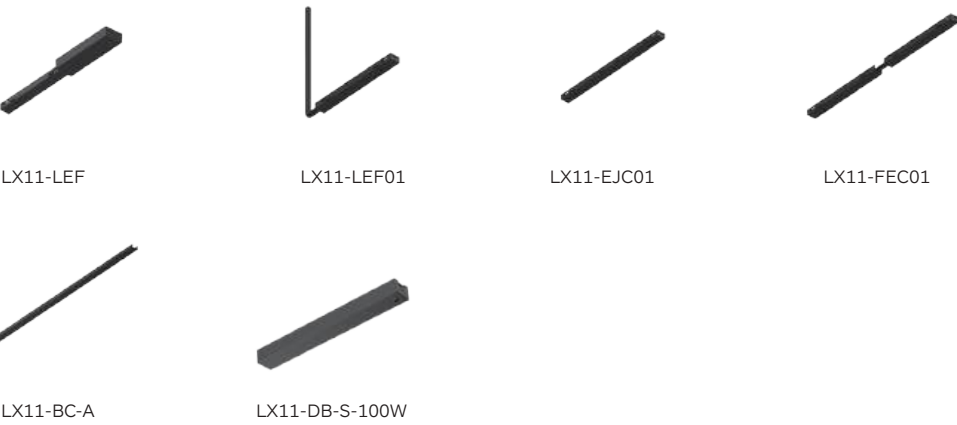

Suspended Track



Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Colour
LX11-SUS	standard	1000/2000	Remote	suspended	 White(Optional)
LX11-SUS-O		1000/2000	Remote	suspended	 White(Optional)

Accessories




LX11-SUS



LX11-SUS-O



Recessed Track

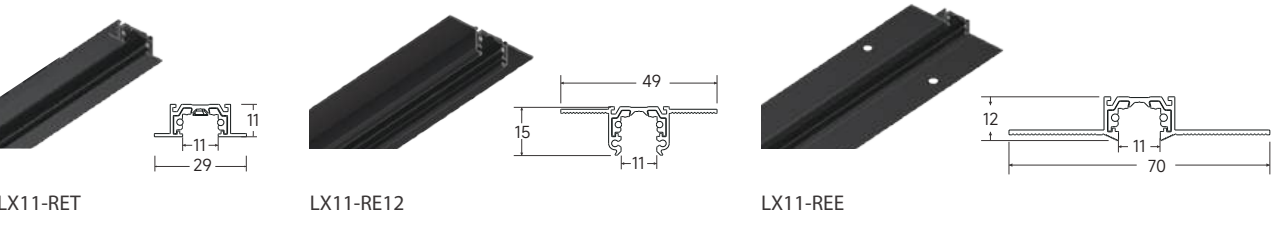

Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Colour
LX11-RET	with trim	1000/2000	Remote	trimless recessed	 White(Optional)
LX11-RE12	compatible with ½" ceiling	1000/2000	Remote	trimless recessed	 White(Optional)
LX11-REE	easy installation	1000/2000	Remote	trimless recessed	 White(Optional)

Accessories White Black

LX11-RET



LX11-RE12



LX11-REE



Inserts for track

Spotlight Insert




LX11-RS30-4W

System Lumen Output: 250Lm (3000K)
System Wattage: 4W
Beam: 18°/24°/36°/55°
CCT: 2700K/3000K/4000K
CRI: >90
Size: Φ32mm
Housing Colour: Black/White
Option 

LX11-RS40-8W

System Lumen Output: 600Lm (3000K)
System Wattage: 8W
Beam: 18°/24°/36°/45°
CCT: 2700K/3000K/4000K
CRI: >90
Size: Φ40mm
Housing Colour: Black/White
Option 

GIMI Decorative Pendant

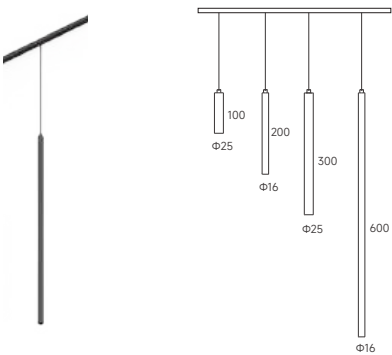

LX11-PS16/PS25

System Lumen Output: 160lm/230 Lm
System Wattage: 3W/5W
Beam: 20°/40° (PS16)
30°/40°/50° (PS25)
Size: Φ16mm/25mm
CCT: 2700K/3000K/4000K
CRI: >90
Housing Colour: Black/White/Brushed gold/Brushed bronze
Option   

FARA Decorative Pendant



LX11-SCD80-P
LX11-SCD80-T

System Lumen Output: 270lm
System Wattage: 4W
Beam: 180°
CCT: 2700K/3000K/4000K
CRI: >90
Size: Φ80mm
Housing Colour: Black/White/Gold
Option  

FINO Decorative Pendant




LX11-SPD80-P / LX11-SPD120-P
LX11-SPD80-T / LX11-SPD120-T

System Lumen Output: 170lm/350lm
System Wattage: 2W/4W
Beam: 360°
CCT: 2700K/3000K/4000K
CRI: >90
Size: Φ80mm/Φ120mm
Housing Colour: Black/White
Option



General Light Insert

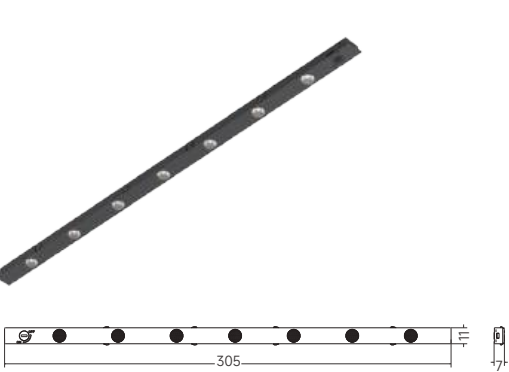


LX11-AL300-5W

System W: 5W
Lumen: 350lm
Beam: 45°
CCT: 2700K/3000K/4000K
CRI: >90
Housing Colour : White/Black
Option




Decorative Pendant

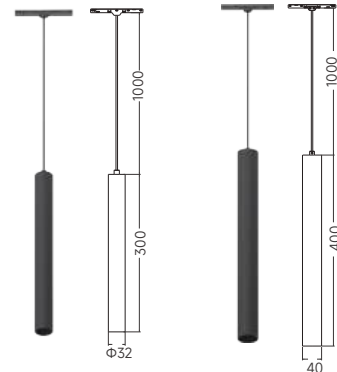

LX11-PS30/LX11-PS40

System: 5W/8W
Lumen: 350lm/600lm
Beam: 35°/55° (PS30)
18°/24°/36°/45° (PS40)
CCT: 2700K/3000K/4000K
CRI: >90
Size: Φ30mm/Φ40mm
Housing Colour: White/Black
Option

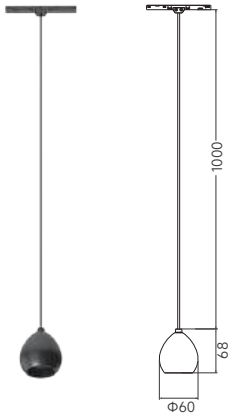


LX11-SURI 60

System W: 4W
Lumen: 380lm
Beam: 30°
CRI: >90
CCT: 2700K/3000K/4000K
Size: Φ60mm
Housing Colour: White/Black
Option



Accent Light Insert

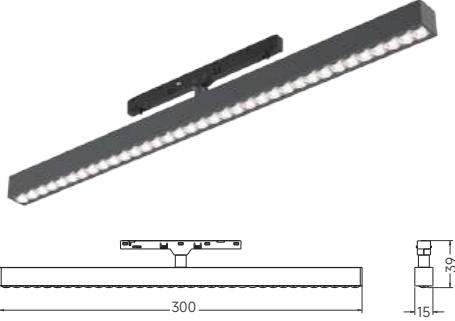


LX11-A-AL300

System W: 12W
Lumen: 1350lm
Beam: 45°/80°
CCT: 2700K/3000K/4000K
CRI: >90
Housing Colour: White/Black
Option




LX11-GL1250-13W
LX11-GL2500-25W

System Lumen Output: 480lm/920lm
System Wattage: 13W/25W
Beam: 110°
CCT: 2700K/3000K/4000K
CRI: >90
With Opal Cover

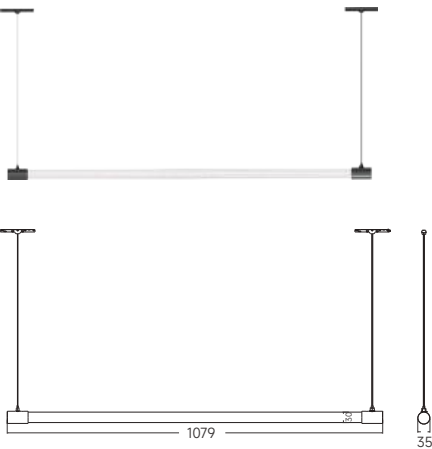


LX11-NHP10

System: 12W
Lumen: 800lm
Beam: 360°
CCT: 2700K/3000K/4000K
CRI: >90
Housing Colour: White/Black
Option



LX11-NVP06

System: 8W
Lumen: 500lm
Beam: 360°
CCT: 2700K/3000K/4000K
CRI: >90
Size: Φ31mm
Housing Colour: White/Black
Option

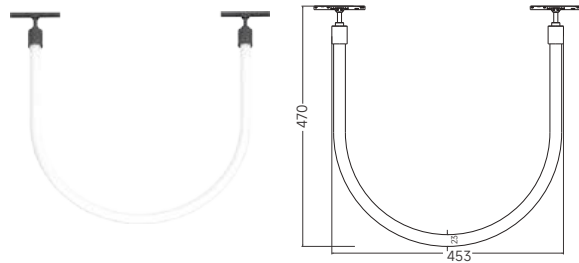

LX11-NHU12

System: 16W
Lumen: 1150lm
Beam: 360°
CCT: 2700K/3000K/4000K
CRI: >90
Housing Colour: White/Black
Option






Line X System-modular track kit,
easy installation package



LX11-DL-TK-1200
General Lighting


White Black

Drawing

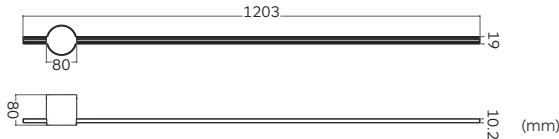

10W 550lm						
Code	Size	System LM	System W	CRI	CCT	Beam
LX11-DL-TK-1200-930-110-P	1203mm*19mm	550lm	10W	90	3000K Optional 2700K/4000K	110°


Remark: P =Phase Dim

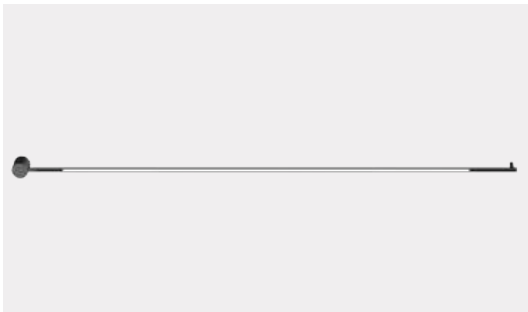

LX11-DL-TK-2000
General Lighting

White Black

Drawing

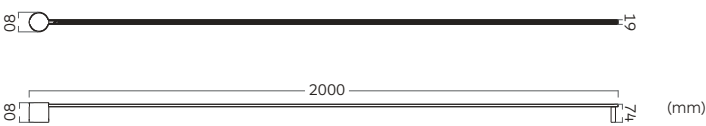


20W 2200lm						
Code	Size	System LM	System W	CRI	CCT	Beam
LX11-DL-TK-2000-930-110-P	2000mm*19mm	2200lm	20W	90	3000K Optional 2700K/4000K	110°

Remark: P =Phase Dim



LINE X 11 Series
Low Voltage System

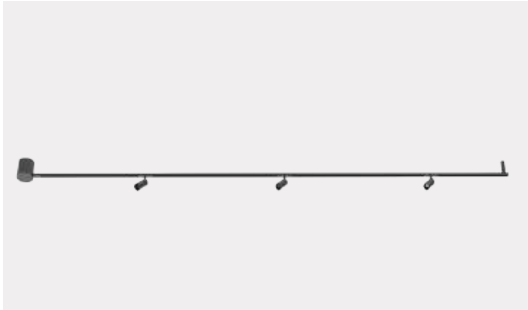


LX11-SL-TK-1000

Spot Lighting

White Black

Drawing



12W 750lm

Code	Size	System LM	System W	CRI	CCT	Beam
LX11-SL-TK-1000-930-18-P	1005mm*19mm	750lm	12W	90	3000K	18°
LX11-SL-TK-1000-930-24-P	1005mm*19mm	750lm	12W	90	Optional 2700K/4000K	24°
LX11-SL-TK-1000-930-35-P	1005mm*19mm	750lm	12W	90		36°


Remark: P =Phase Dim





LINE X 26

Line X 26 DC48V Track

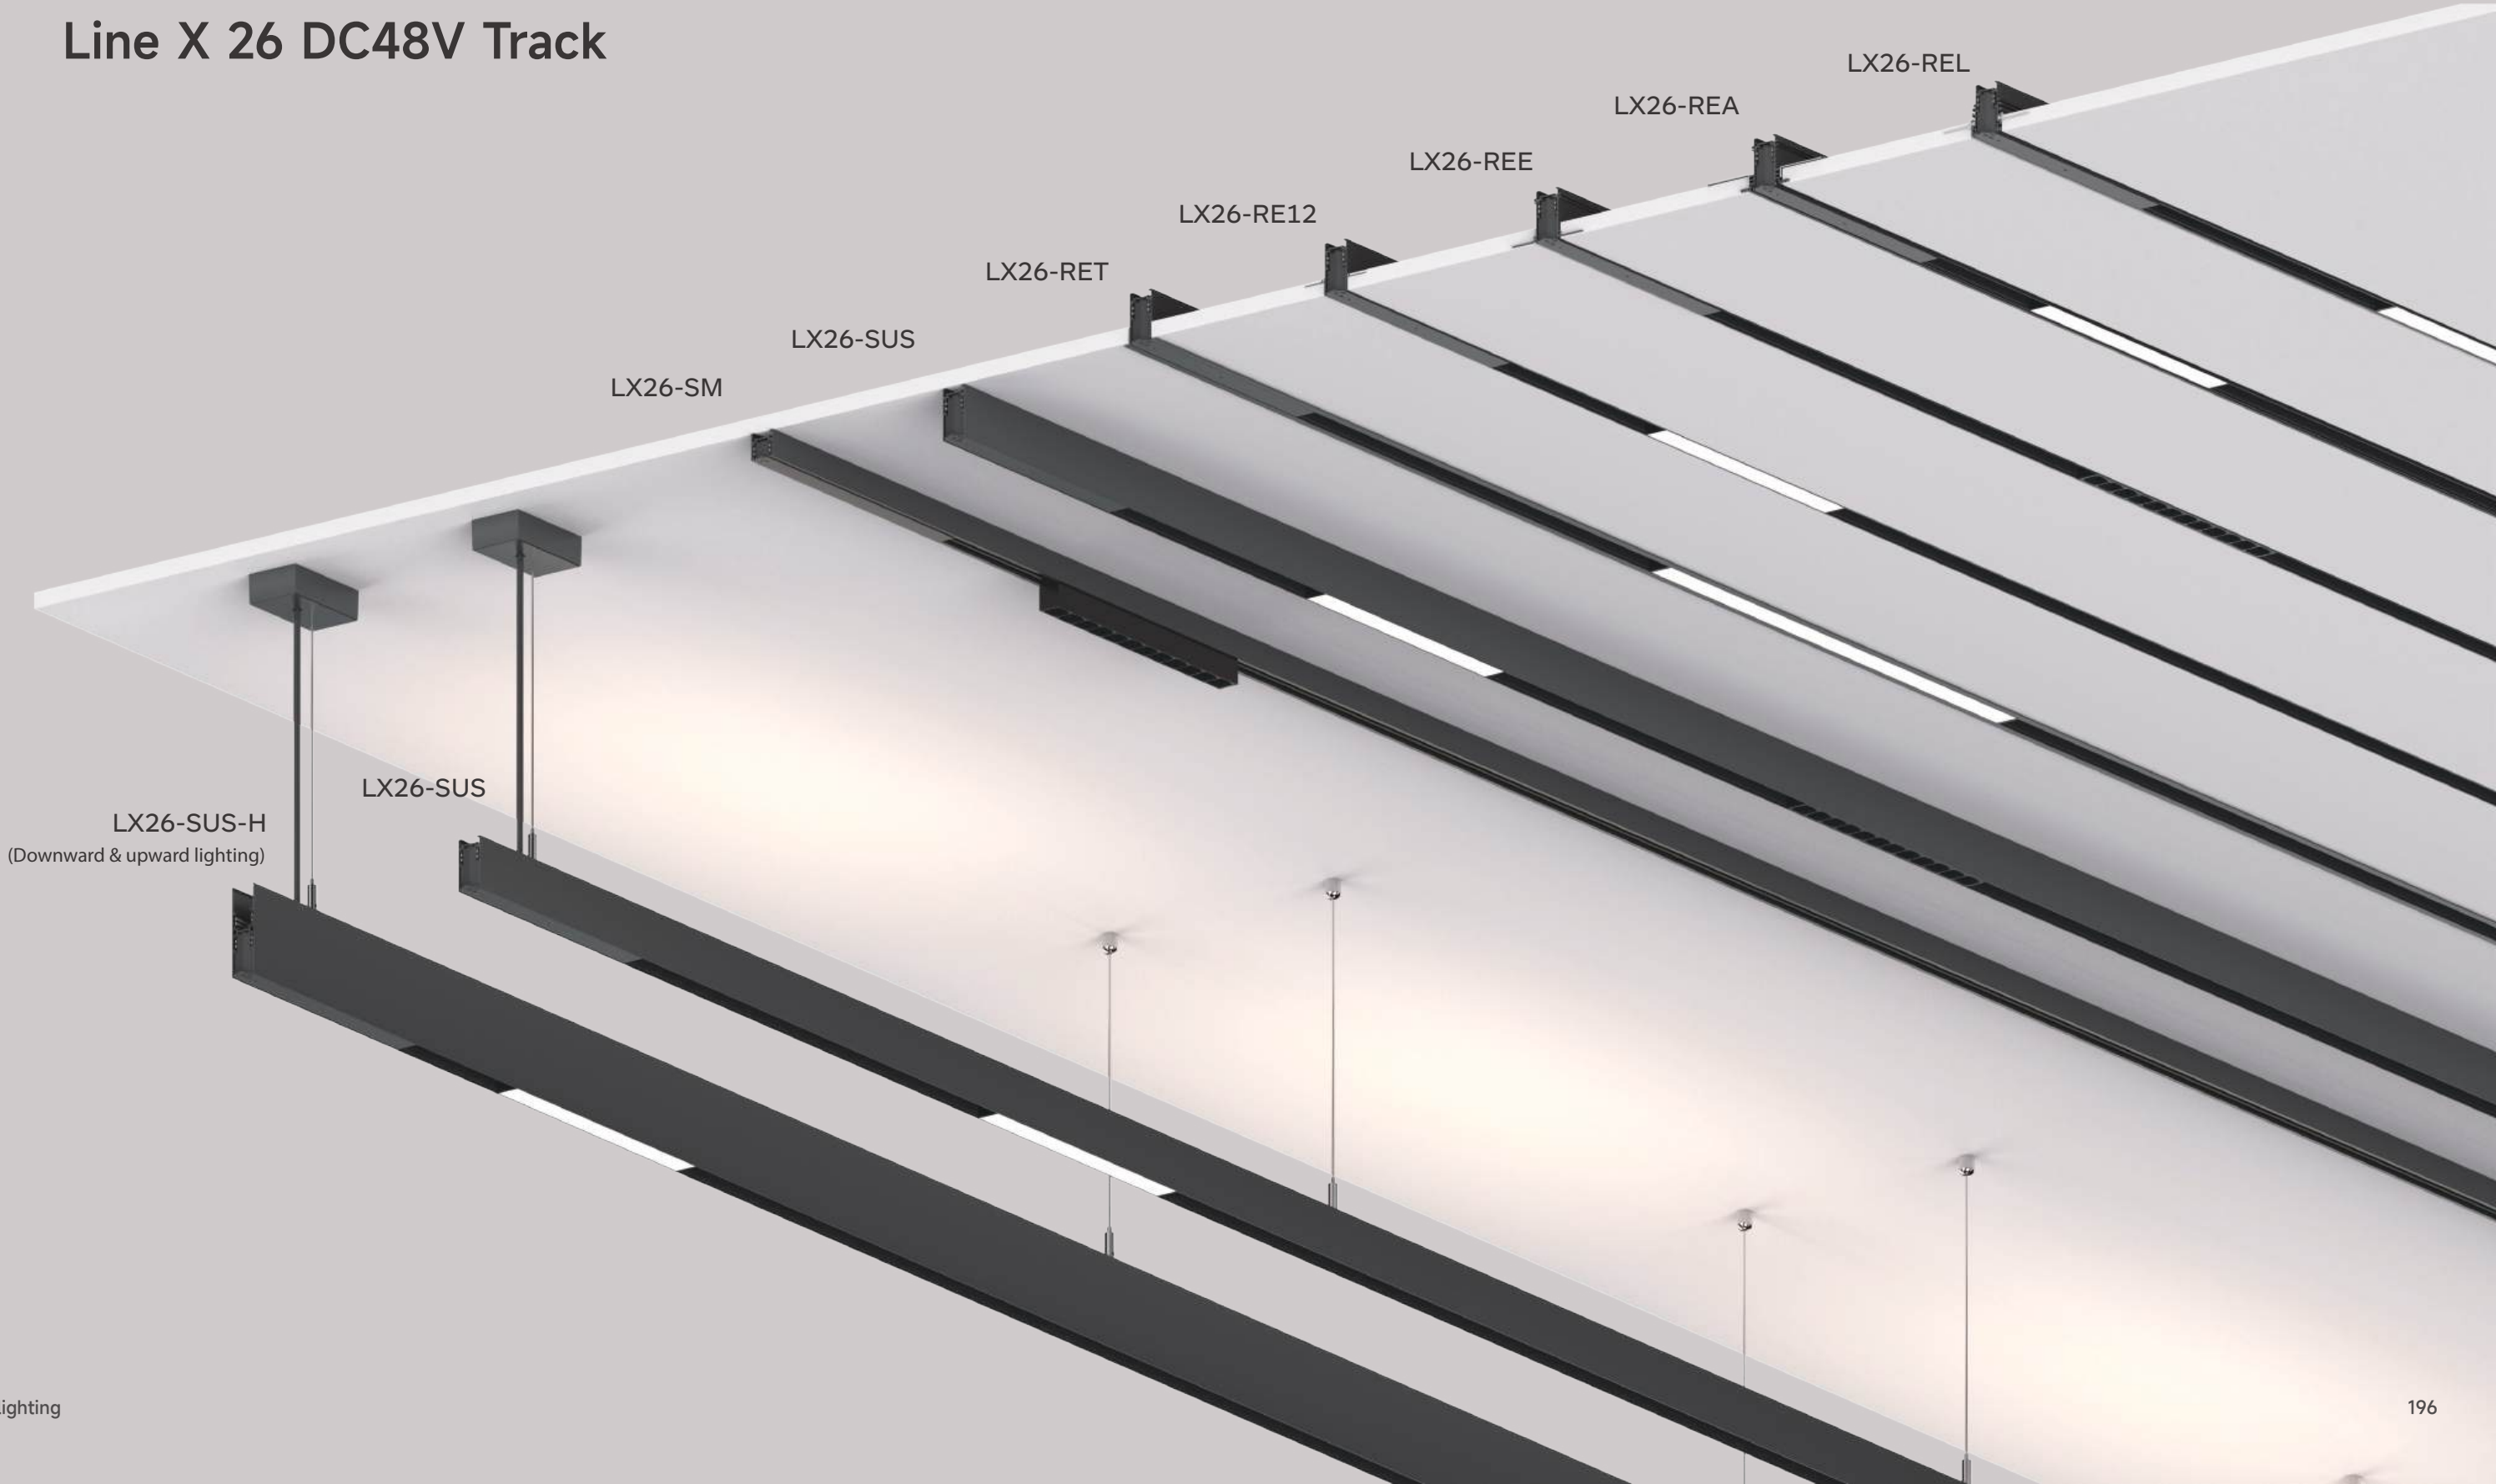

LX26-SUS-H
(Downward & upward lighting)

LX26-SUS

LX26-SM

LX26-SUS


LX26-RET

LX26-RE12

LX26-REE


LX26-REA

LX26-REL

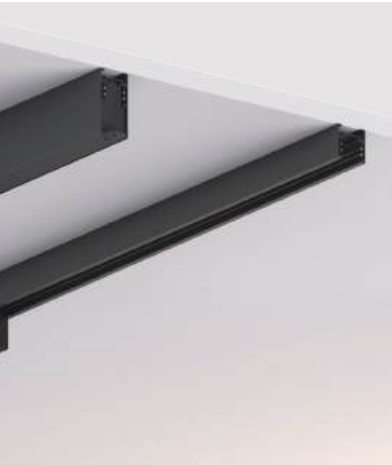

1

Surface-mounted
Track



LX26-SM
Surface-mounted




LX26-SUS
Standard track



2

Suspended
Track



LX26-SUS-H
Downward & upward lighting



LX26-SUS
Standard track



3

Recessed
Track



LX26-RET
With trim



LX26-RE12
Compatible with ½" ceiling
Trimless



LX26-REE
Easy installation
Trimless



LX26-REA
Compatible with conventional
thickness of ceiling
Adjustable trimless



LX26-REL
Compatible with various
thickness of ceiling
Adjustable trimless

Line X 26 DC48V Track






Surface-mounted

Surface-mounted Track

Slim Track

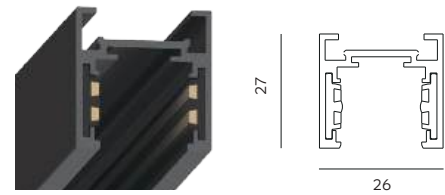

Accessories



LX26-SM



Power supply

Build-in Remote



Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Colour
LX26-SM	surface-mounted	1000/2000	Remote/Built-in	surface-mounted	White(Optional)

LINE X 26 Series
DC48V Low Voltage System



Surface-mounted Track

High Track



White Black

Accessories


White Black

LX26-SUS



Power supply

Build-in Remote

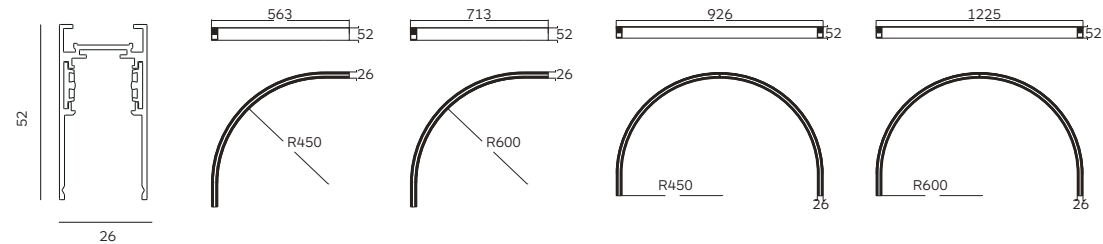

Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Colour
LX26-SUS	standard	1000/2000	Remote/Built-in	surface-mounted, suspended	 White(Optional)
Code	Description	Radian	Installation	Housing Colour	
LX26-SUS-R450-1/4 CIRCLE	1/4 Curve Corner	R450	surface-mounted	 White(Optional)	
LX26-SUS-R450-1/2 CIRCLE	1/2 Curve Corner	R450	surface-mounted		
LX26-SUS-R600-1/4 CIRCLE	1/4 Curve Corner	R600	surface-mounted		
LX26-SUS-R600-1/2 CIRCLE	1/2 Curve Corner	R600	surface-mounted		


LINE X 26 Series
DC48V Low Voltage System



Suspended Track

White Black

High Track

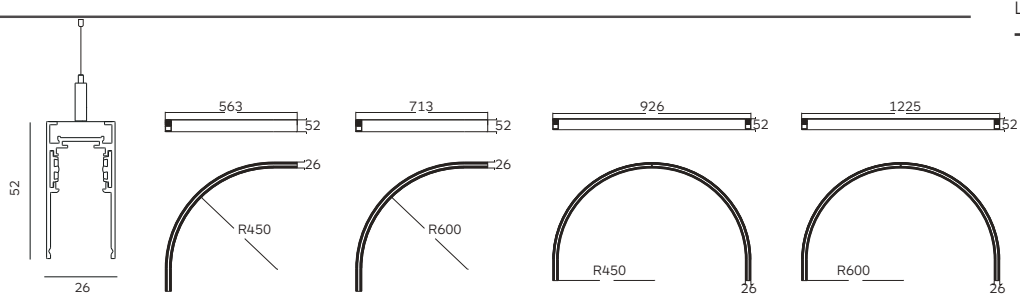

Accessories

White Black

LX26-SUS



LX26-SUS-TEK LX26-SUS-TEKO LX26-PK




LX26-PRK LX26 CIRCLE PK Suspended Curve Corner Suspended Kits



LX26-SUS-LHC LX26-SUS-LVC LX26-SUS-LOC LX26-SUS-TC-Left LX26-SUS-TC-Right LX26-SUS-XC LX26-PLF01 LX26-LEF01 LX26-EJC01 LX26-FEC01 LX26-LC LX26-BC

Power supply




KGP-100V48N KGP-150V48N KGP-250V48N ELG-75-48-3Y ELG-100-48-3Y ELG-140-48-3Y ELG-200-48-3Y

Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Colour
LX26-SUS	standard	1000/2000	Remote/Built-in	surface-mounted, suspended	White(Optional)

Code	Description	Radian	Installation	Housing Colour
LX26-SUS-R450-1/4 CIRCLE	1/4 Curve Corner	R450	Suspended	White(Optional)
LX26-SUS-R450-1/2 CIRCLE	1/2 Curve Corner	R450	Suspended	
LX26-SUS-R600-1/4 CIRCLE	1/4 Curve Corner	R600	Suspended	
LX26-SUS-R600-1/2 CIRCLE	1/2 Curve Corner	R600	Suspended	

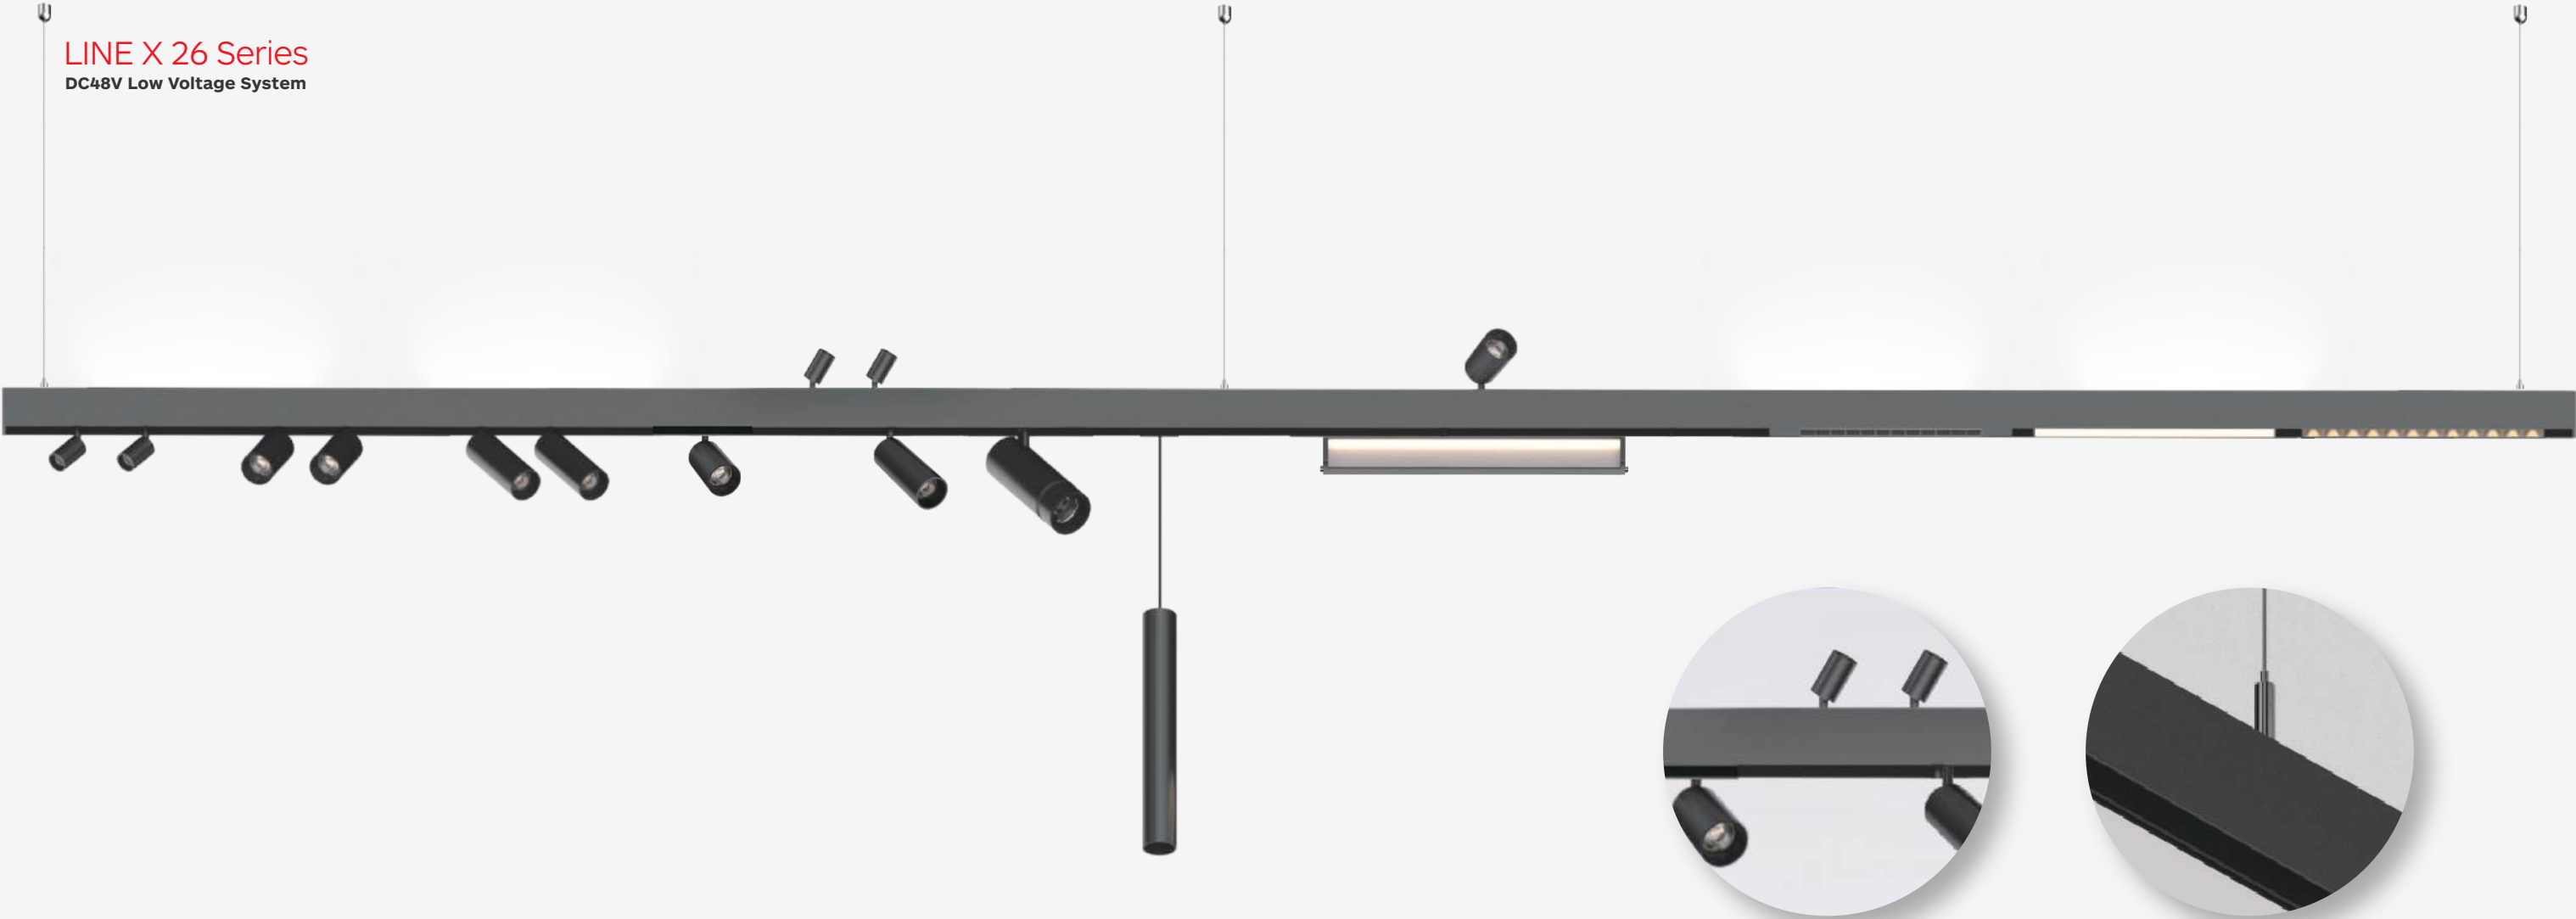

LINE X 26 Series
DC48V Low Voltage System



Downward & upward lighting




Suspended

Suspended Track

○ White ● Black

H Track




Accessories

○ White ● Black

LX26-SUS-H



LX26-SUS-H-TEK LX26-SUS-H-TEKO

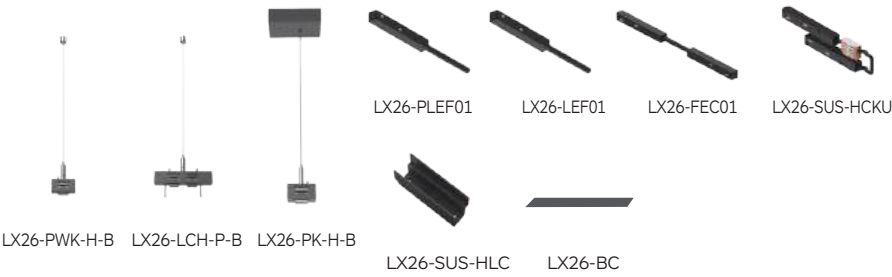

LX26-PWK-H-B LX26-LCH-P-B LX26-PK-H-B LX26-SUS-HLC LX26-BC

Power supply

Build-in

Remote




KGP-100V48N
KGP-150V48N
KGP-250V48N

ELG-75-48-3Y
ELG-100-48-3Y
ELG-140-48-3Y
ELG-200-48-3Y

Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Colour
LX26-SUS-H	downward & upward lighting	1000/2000	Remote/Built-in	suspended	 White(Optional)

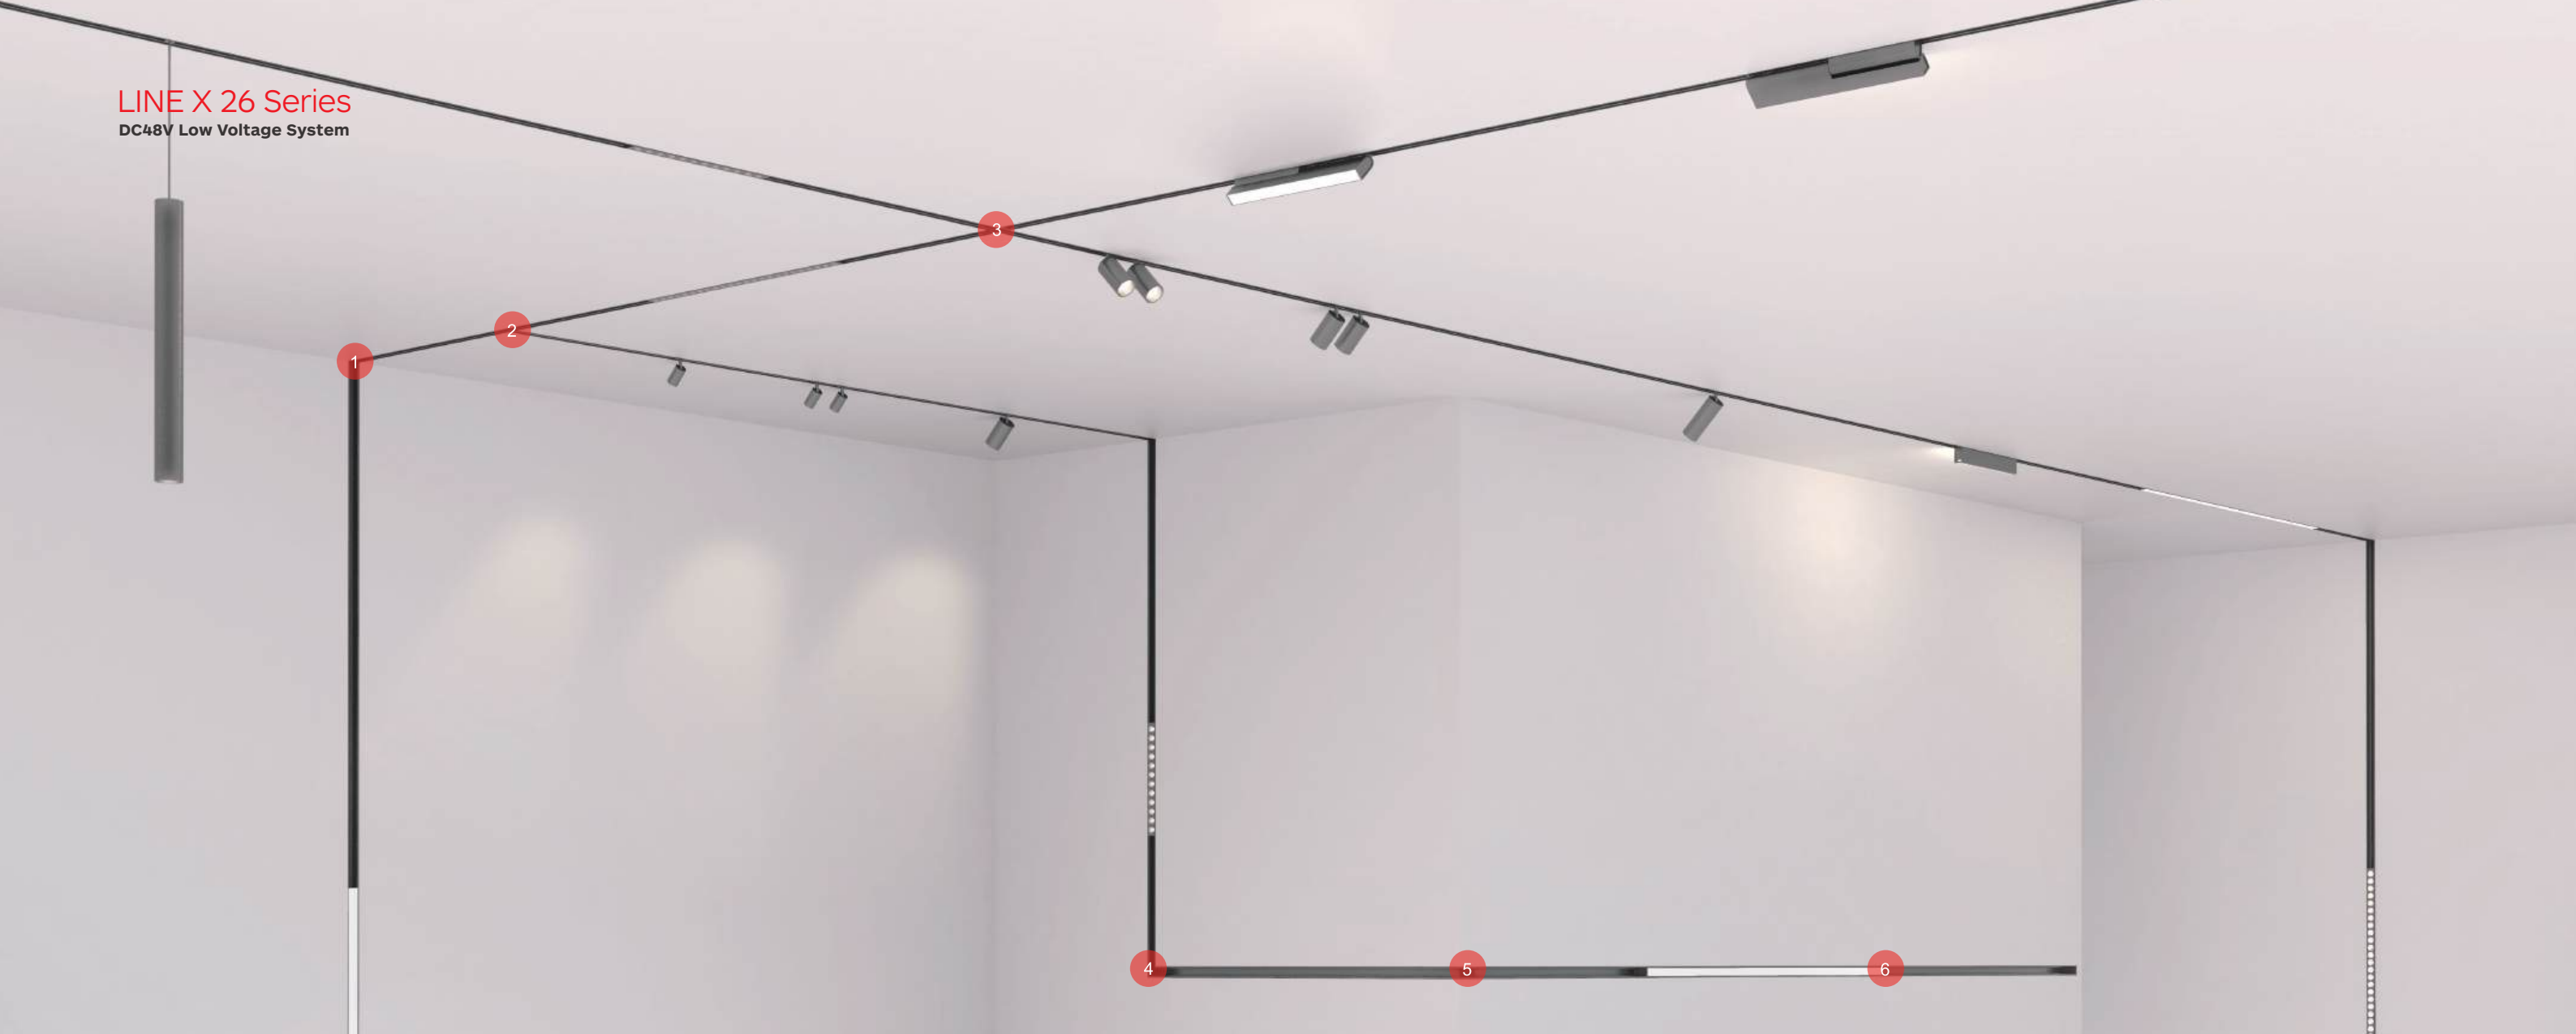

Recessed Track



LX26-RET



LX26-RE12



LX26-REE



LX26-REA



LX26-REL

Order Options

Code	Description	Length(mm)	Power supply	Installation	Housing Colour
LX26-RET	with trim	1000/2000	Remote/Built-in	recessed with trim	 White(Optional)
LX26-RE12	compatible with 1/2" ceiling	1000/2000	Remote/Built-in	trimless recessed	 White(Optional)
LX26-REE	easy installation	1000/2000	Remote/Built-in	trimless recessed	 White(Optional)
LX26-REA	Compatible with conventional thickness of ceiling	1000/2000	Remote/Built-in	trimless recessed	 White(Optional)
LX26-REL	Compatible with various thickness of ceiling	1000/2000	Remote/Built-in	trimless recessed	 White(Optional)

DC48V Low Voltage System

Accessories

White Black



Accessories

White Black




Power supply



*Several plastic anti-deformation accessories have been put into the tracks to help each track can remain the original shape before installation.


Installation

Surface-mounted track




Code: LX26-SM
Description: surface-mounted
Length: 1000/2000(mm)
Color: RAL9005 black, RAL9016 white

Surface-mounted track

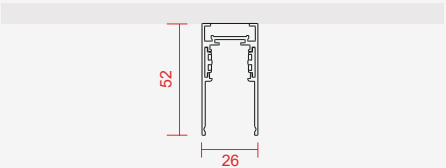


Code: LX26-SUS
Description: standard
Length: 1000/2000(mm)
Color:RAL9005 black, RAL9016 white

Suspended track

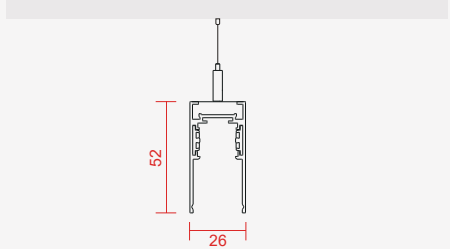


Code: LX26-SUS
Description: standard
Length: 1000/2000(mm)
Color: RAL9005 black, RAL9016 white

Suspended track

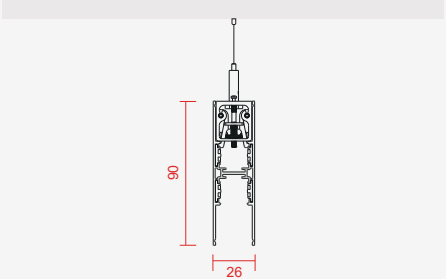


Code: LX26-SUS-H
Description: downward & upward lighting
Length: 1000/2000(mm)
Color: RAL9005 black, RAL9016 white

Recessed track/Trim




Code: LX26-RET
Description: with trim
Length: 1000/2000(mm)
Color: RAL9005 black, RAL9016 white


Recessed track/Trimless

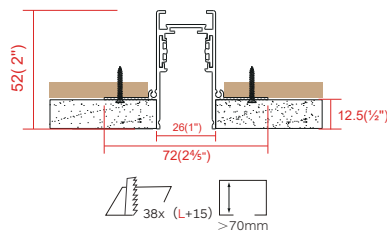


Code: LX26-RE12
Description: compatible with ½" ceiling
Length: 1000/2000(mm)
Color: RAL9005 black, RAL9016 white



Code: LX26-REE
Description: easy installation
Length: 1000/2000(mm)
Color: RAL9005 black, RAL9016 white



Code: LX26-REA
Description: compatible with conventional thickness of ceiling
Length: 1000/2000(mm)
Color: RAL9005 black, RAL9016 white
*Compatible with the ceiling of thickness between 12.5mm/14.5mm/16.5mm/18.5mm/20.5mm



Code: LX26-REL
Description: compatible with various thickness of ceiling
Length: 1000/2000(mm)
Color: RAL9005 black, RAL9016 white
*Compatible with the ceiling of thickness: 5mm/9mm/12mm/15mm/18.5mm/20.5mm/25mm

**All dimensions in the catalogue in mm*

Inserts for track

Spotlight Insert



LX26-RS25-3W



LX26-RS25-5W



LX26-RS40-8W



LX26-RS40-16W



LX26-RS40-12W



LX26-RS40-24W



LX26-RS55-14W



LX26-RT55-10W



LX26-RS72-19W
LX26-RS72-26W



LX26-WRS96-9W


Accent Light Insert




LX26-AL190-S2-3W



LX26-AL190-S6-7W



LX26-AL280-S8-9W



LX26-AL280-S12-13W



LX26-AL560-S24-26W



LX26-SA280-13W



LX26-Rita315-15W

Inserts for track


General Light Insert



Decorative Light Insert



Comfort Light Insert Wall Washer Insert

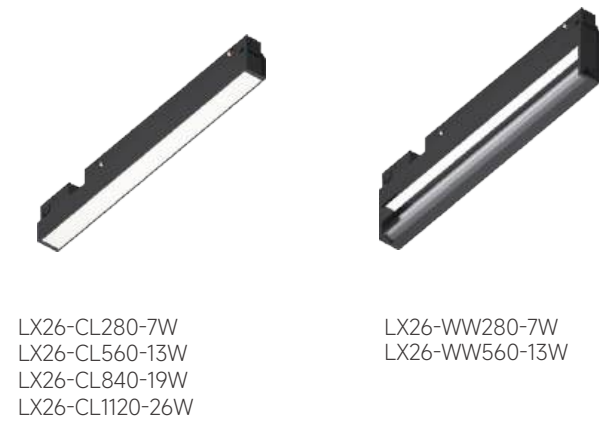

Pendant Insert



Downlight Insert



LINE X 26 Series


DC48V Low Voltage System



Spotlight

LOW VOLTAGE SYSTEM

Drawings

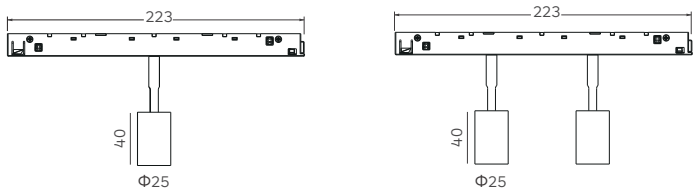

Order Options



3W 180lm-190lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS25-3W-930-18-X	180lm	2W	3W	DC48V	90	3000K	18°
LX26-RS25-3W-940-18-X	190lm					4000K	
LX26-RS25-3W-930-30-X	180lm	2W	3W	DC48V	90	3000K	30°
LX26-RS25-3W-940-30-X	190lm					4000K	
LX26-RS25-3W-930-45-X	180lm	2W	3W	DC48V	90	3000K	45°
LX26-RS25-3W-940-45-X	190lm					4000K	
5W 350lm-380lm		OSRAM					
LX26-RS25-5W-930-18-X	350lm	4W	5W	DC48V	90	3000K	18°
LX26-RS25-5W-940-18-X	380lm					4000K	
LX26-RS25-5W-930-30-X	350lm	4W	5W	DC48V	90	3000K	30°
LX26-RS25-5W-940-30-X	380lm					4000K	
LX26-RS25-5W-930-45-X	350lm	4W	5W	DC48V	90	3000K	45°
LX26-RS25-5W-940-45-X	380lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)


Optional Colour



Spotlight

LOW VOLTAGE SYSTEM

Drawings

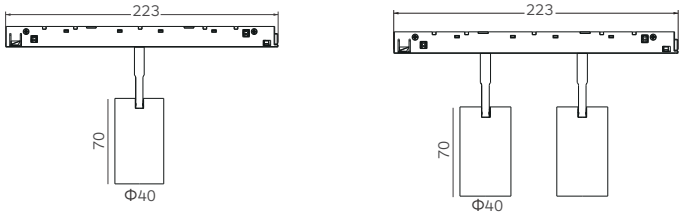

Order Options



8W 420lm-470lm	CITIZEN						
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
X26-RS40-8W-930-18-X	420lm	7.5W	8W	DC48V	90	3000K	18°
X26-RS40-8W-940-18-X	470lm					4000K	
X26-RS40-8W-930-30-X	420lm	7.5W	8W	DC48V	90	3000K	30°
X26-RS40-8W-940-30-X	470lm					4000K	
X26-RS40-8W-930-45-X	420lm	7.5W	8W	DC48V	90	3000K	45°
X26-RS40-8W-940-45-X	470lm					4000K	
16W 850lm-1200lm	CITIZEN						
X26-RS40-16W-930-18-X	1100lm	15W	16W	DC48V	90	3000K	18°
X26-RS40-16W-940-18-X	1200lm					4000K	
X26-RS40-16W-930-30-X	1100lm	15W	16W	DC48V	90	3000K	30°
X26-RS40-16W-940-30-X	1200lm					4000K	
X26-RS40-16W-930-45-X	850lm	15W	16W	DC48V	90	3000K	45°
X26-RS40-16W-940-45-X	900lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour



LINE X 26 Series


DC48V Low Voltage System



Spotlight

LOW VOLTAGE SYSTEM

Drawings

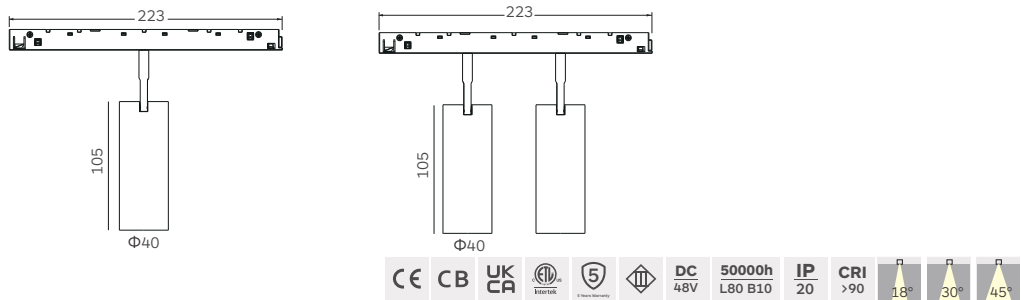

Order Options

12W 600lm-800lm		CITIZEN					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS40-12W-930-18-X	750lm	11W	12W	DC48V	90	3000K	18°
LX26-RS40-12W-940-18-X	800lm					4000K	
LX26-RS40-12W-930-30-X	750lm	11W	12W	DC48V	90	3000K	30°
LX26-RS40-12W-940-30-X	800lm					4000K	
LX26-RS40-12W-930-45-X	600lm	11W	12W	DC48V	90	3000K	45°
LX26-RS40-12W-940-45-X	650lm					4000K	
24W 1200lm-1600lm		CITIZEN					
LX26-RS40-24W-930-18-X	1500lm	22W	24W	DC48V	90	3000K	18°
LX26-RS40-24W-940-18-X	1600lm					4000K	
LX26-RS40-24W-930-30-X	1500lm	22W	24W	DC48V	90	3000K	30°
LX26-RS40-24W-940-30-X	1600lm					4000K	
LX26-RS40-24W-930-45-X	1200lm	22W	24W	DC48V	90	3000K	45°
LX26-RS40-24W-940-45-X	1300lm					4000K	


Optional Colour



Spotlight

LOW VOLTAGE SYSTEM

Drawings

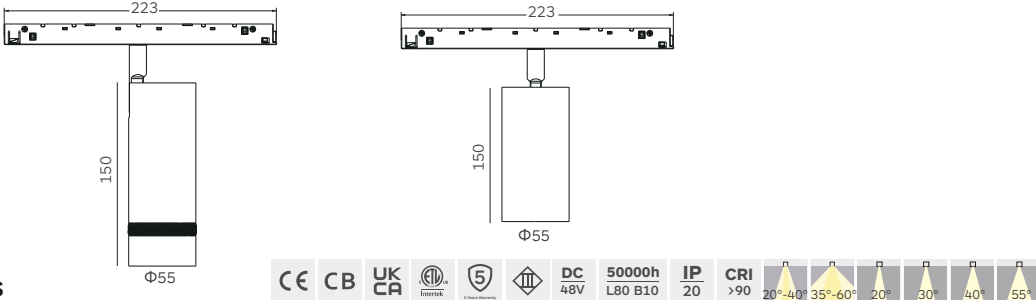

Order Options

10W 750lm-850lm		CITIZEN					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RT55-10W-930-X	800lm	9W	10W	DC48V	90	3000K	20°~40°
LX26-RT55-10W-940-X	850lm					4000K	
LX26-RT55-10W-930-X	750lm	9W	10W	DC48V	90	3000K	35°~60°
LX26-RT55-10W-940-X	800lm					4000K	
14W 1050lm-1200lm		CITIZEN					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS55-14W-930-20-X	1100lm	12W	14W	DC48V	90	3000K	20°
LX26-RS55-14W-940-20-X	1200lm					4000K	
LX26-RS55-14W-930-30-X	1100lm	12W	14W	DC48V	90	3000K	30°
LX26-RS55-14W-940-30-X	1200lm					4000K	
LX26-RS55-14W-930-40-X	1050lm	12W	14W	DC48V	90	3000K	40°
LX26-RS55-14W-940-40-X	1150lm					4000K	
LX26-RS55-14W-930-50-X	1050lm	12W	14W	DC48V	90	3000K	50°
LX26-RS55-14W-940-50-X	1150lm					4000K	

Optional Colour



Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

LINE X 26 Series


DC48V Low Voltage System



Spotlight

LOW VOLTAGE SYSTEM

Drawings



Order Options

Order Options

CE

CB

UK
CA

ETL

5 Year Warranty



DC
48V

50000h
L80 B10

IP
20

CRI
>90

20°-40°

35°-60°

20°

35°

55°

19W 1700lm-1800lm		CITIZEN					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS72-19W-930-20-X	1700lm	18W	19W	DC48V	90	3000K	20°
LX26-RS72-19W-940-20-X	1800lm					4000K	
LX26-RS72-19W-930-35-X	1700lm	18W	19W	DC48V	90	3000K	35°
LX26-RS72-19W-940-35-X	1800lm					4000K	
LX26-RS72-19W-930-55-X	1700lm	18W	19W	DC48V	90	3000K	55°
LX26-RS72-19W-940-55-X	1800lm					4000K	
26W 2300lm-2500lm		CITIZEN					
LX26-RS72-26W-930-20-X	2300lm	25W	26W	DC48V	90	3000K	20°
LX26-RS72-26W-940-20-X	2500lm					4000K	
LX26-RS72-26W-930-35-X	2300lm	25W	26W	DC48V	90	3000K	35°
LX26-RS72-26W-940-35-X	2500lm					4000K	
LX26-RS72-26W-930-55-X	2300lm	25W	26W	DC48V	90	3000K	55°
LX26-RS72-26W-940-55-X	2500lm					4000K	

Optional Colour


Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)



Spotlight

LOW VOLTAGE SYSTEM

Drawings

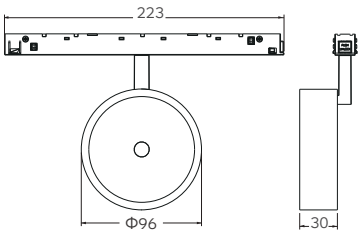

Order Options

CECBUKCAEUK5DC48V50000hL80 B10IP20CRI>9015°25°35°							
9W 720lm-830lm		CITIZEN					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-WRS96-9W-930-15-X	720lm	8W	9W	DC48V	90	3000K	15°
LX26-WRS96-9W-940-15-X	780lm					4000K	
LX26-WRS96-9W-930-25-X	750lm	8W	9W	DC48V	90	3000K	25°
LX26-WRS96-9W-940-25-X	830lm					4000K	
LX26-WRS96-9W-930-35-X	750lm	8W	9W	DC48V	90	3000K	35°
LX26-WRS96-9W-940-35-X	830lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour




White



Accent Light
LOW VOLTAGE SYSTEM

Drawings

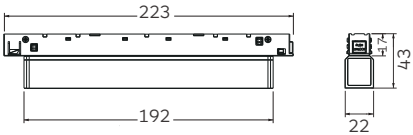

Order Options




3W 160lm-200lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-AL190-S2-3W-930-20-X	180lm	2W	3W	DC48V	90	3000K	20°
LX26-AL190-S2-3W-940-20-X	200lm					4000K	
LX26-AL190-S2-3W-930-35-X	180lm	2W	3W	DC48V	90	3000K	35°
LX26-AL190-S2-3W-940-35-X	200lm					4000K	
LX26-AL190-S2-3W-930-55-X	160lm	2W	3W	DC48V	90	3000K	55°
LX26-AL190-S2-3W-940-55-X	180lm					4000K	

6W 500lm-600lm		OSRAM					
LX26-AL190-S6-7W-930-20-X	550lm	6W	7W	DC48V	90	3000K	20°
LX26-AL190-S6-7W-940-20-X	600lm					4000K	
LX26-AL190-S6-7W-930-35-X	550lm	6W	7W	DC48V	90	3000K	35°
LX26-AL190-S6-7W-940-35-X	600lm					4000K	
LX26-AL190-S6-7W-930-55-X	500lm	6W	7W	DC48V	90	3000K	55°
LX26-AL190-S6-7W-940-55-X	550lm					4000K	


Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour

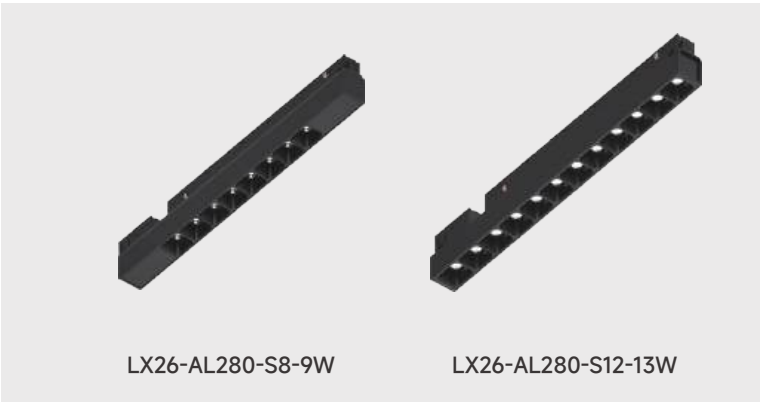

Accent Light
LOW VOLTAGE SYSTEM

Drawings

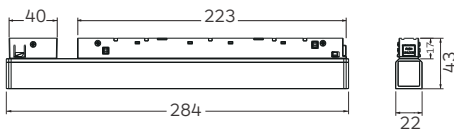

Order Options



9W 750lm-1100lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-AL280-S8-9W-930-20-X	750lm	8W	9W	DC48V	90	3000K	20°
LX26-AL280-S8-9W-940-20-X	800lm					4000K	
LX26-AL280-S8-9W-930-35-X	750lm	8W	9W	DC48V	90	3000K	35°
LX26-AL280-S8-9W-940-35-X	800lm					4000K	
LX26-AL280-S8-9W-930-55-X	1000lm	8W	9W	DC48V	90	3000K	55°
LX26-AL280-S8-9W-940-55-X	1100lm					4000K	

13W 680lm-1200m		OSRAM					
LX26-AL280-S12-13W-930-20-X	1100lm	12W	13W	DC48V	90	3000K	20°
LX26-AL280-S12-13W-940-20-X	1200lm					4000K	
LX26-AL280-S12-13W-930-35-X	1100lm	12W	13W	DC48V	90	3000K	35°
LX26-AL280-S12-13W-940-35-X	1200lm					4000K	
LX26-AL280-S12-13W-930-55-X	680lm	12W	13W	DC48V	90	3000K	55°
LX26-AL280-S12-13W-940-55-X	730lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour




LINE X 26 Series
DC48V Low Voltage System



Accent Light
LOW VOLTAGE SYSTEM

Drawings



Order Options



26W 2000lm-2300lm OSRAM							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-AL560-S24-26W-930-20-X	2200lm	24W	26W	DC48V	90	3000K	20°
LX26-AL560-S24-26W-940-20-X	2300lm					4000K	
LX26-AL560-S24-26W-930-35-X	2200lm	24W	26W	DC48V	90	3000K	35°
LX26-AL560-S24-26W-940-35-X	2300lm					4000K	
LX26-AL560-S24-26W-930-55-X	2000lm	24W	26W	DC48V	90	3000K	55°
LX26-AL560-S24-26W-940-55-X	2100lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)


Optional Colour






Accent Light
LOW VOLTAGE SYSTEM

Drawings

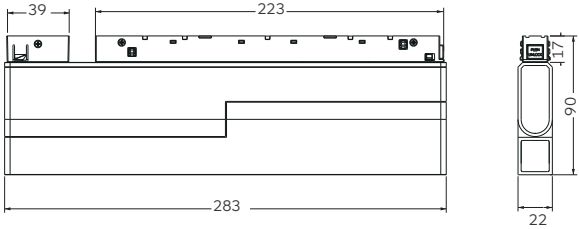

Order Options



13W 1100lm-1200lm OSRAM							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SA280-S12-13W-930-20-X	1100lm	12W	13W	DC48V	90	3000K	20°
LX26-SA280-S12-13W-940-20-X	1200lm					4000K	
LX26-SA280-S12-13W-930-35-X	1100lm	12W	13W	DC48V	90	3000K	35°
LX26-SA280-S12-13W-940-35-X	1200lm					4000K	


Optional Colour

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)



Accent Light
LOW VOLTAGE SYSTEM

Drawings

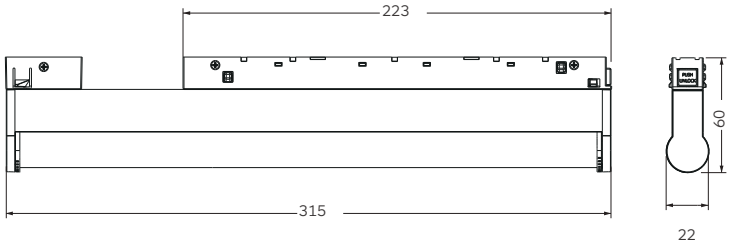

Order Options



15W 1100lm-1180lm SAMSUNG							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-Rita315-15W-930-30-X	1100lm	13W	15W	DC48V	90	3000K	30°
LX26-Rita315-15W-940-30-X	1180lm					4000K	


Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour



LINE X 26 Series


DC48V Low Voltage System

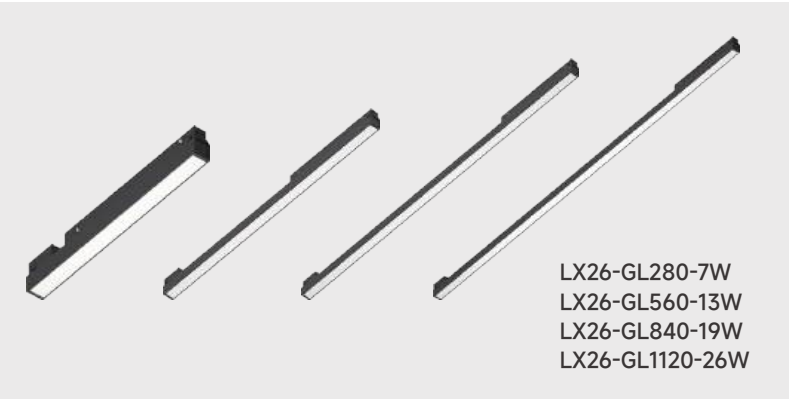

General Light

LOW VOLTAGE SYSTEM

Drawings

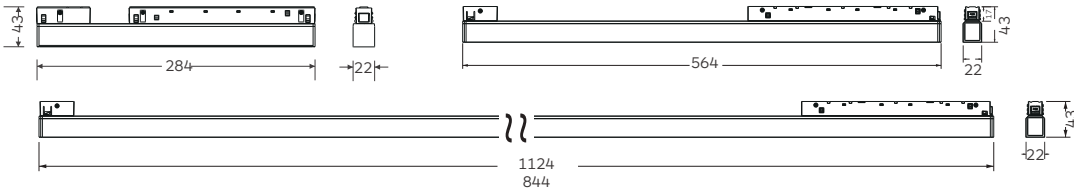

Order Options

7W 400lm-450lm 							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -GL280-7W-930-110-X	400lm	6W	7W	DC48V	90	3000K	110°
LX26 -GL280-7W-940-110-X	450lm	6W	7W	DC48V	90	4000K	110°
13W 800lm-850lm 							
LX26 -GL560-13W-930-110-X	800lm	12W	13W	DC48V	90	3000K	110°
LX26 -GL560-13W-940-110-X	850lm	12W	13W	DC48V	90	4000K	110°
19W 1200m-1300lm 							
LX26 -GL840-19W-930-110-X	1200lm	18W	19W	DC48V	90	3000K	110°
LX26 -GL840-19W-940-110-X	1300lm	18W	19W	DC48V	90	4000K	110°
24W 1600lm-1700lm 							
LX26 -GL1120-26W-930-110-X	1600lm	24W	26W	DC48V	90	3000K	110°
LX26 -GL1120-26W-940-110-X	1700lm	24W	26W	DC48V	90	4000K	110°


Optional Colour



General Light

LOW VOLTAGE SYSTEM

Drawings

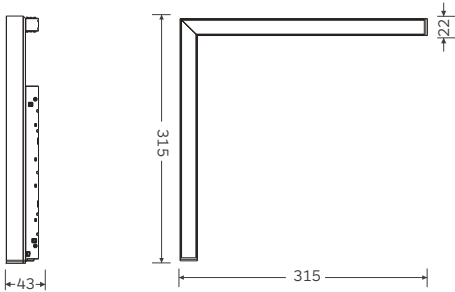

Order Options

14W 1050lm-1100lm 							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-GL280-L-14W-930-110-X	1050lm	12W	14W	DC48V	90	3000K	110°
LX26-GL280-L-14W-940-110-X	1100lm	12W	14W	DC48V	90	4000K	110°

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)


Optional Colour





General Light
LOW VOLTAGE SYSTEM

Drawings

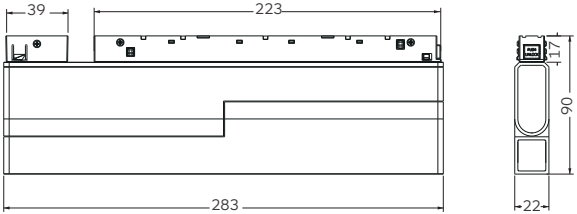


Order Options



7W 400lm-450lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -SG280-7W-930-110-X	400lm	6W	7W	DC48V	90	3000K	110°
LX26 -SG280-7W-940-110-X	450lm					4000K	


Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour

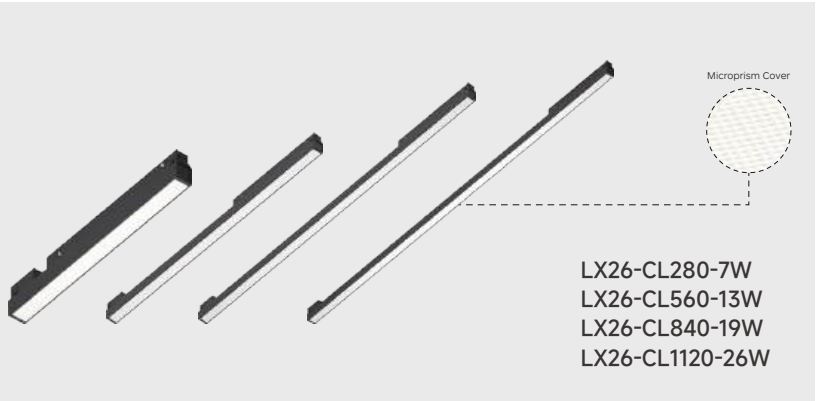

Comfort Light
LOW VOLTAGE SYSTEM

Drawings

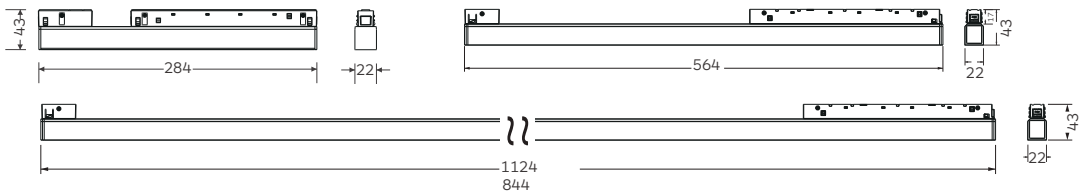

Order Options



7W 380lm-420lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -CL280-7W-930-65-X	380lm	6W	7W	DC48V	90	3000K	65°
LX26 -CL280-7W-940-65-X	420lm					4000K	

13W 750lm-800lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -CL560-13W-930-65-X	750lm	12W	13W	DC48V	90	3000K	65°
LX26 -CL560-13W-940-65-X	800lm					4000K	

19W 1100lm-1200lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -CL840-19W-930-65-X	1100lm	18W	19W	DC48V	90	3000K	65°
LX26 -CL840-19W-940-65-X	1200lm					4000K	

26W 1500lm-1600lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -CL1120-26W-930-65-X	1500lm	24W	26W	DC48V	90	3000K	65°
LX26 -CL1120-26W-940-65-X	1600lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour



LINE X 26 Series


DC48V Low Voltage System



Wall Washer

LOW VOLTAGE SYSTEM

Drawings

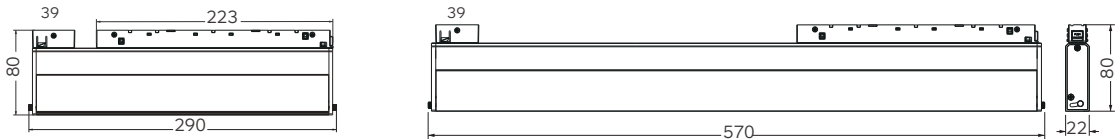

Order Options



7W 350lm-380lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-WW280-7W-930-X	350lm	6W	7W	DC48V	90	3000K	Wall Washer
LX26-WW280-7W-940-X	380lm					4000K	Wall Washer
13W 700lm-750lm							
LX26-WW560-13W-930-X	700lm	12W	13W	DC48V	90	3000K	Wall Washer
LX26-WW560-13W-940-X	750lm					4000K	Wall Washer

Optional Colour




Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)



Downlight

LOW VOLTAGE SYSTEM

Drawings

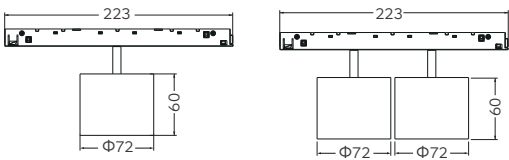

Order Options



10W 650lm-750lm		CITIZEN					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-WRD72-10W-930-25-X	650lm	9W	10W	DC48V	90	3000K	25°
LX26-WRD72-10W-940-25-X	700lm					4000K	
LX26-WRD72-10W-930-36-X	700lm	9W	10W	DC48V	90	3000K	36°
LX26-WRD72-10W-940-36-X	750lm					4000K	
LX26-WRD72-10W-930-50-X	700lm	9W	10W	DC48V	90	3000K	50°
LX26-WRD72-10W-940-50-X	750lm					4000K	
20W 1300lm-1500lm		CITIZEN					
LX26-WRD72-T2-20W-930-25-X	1300lm	18W	20W	DC48V	90	3000K	25°
LX26-WRD72-T2-20W-940-25-X	1400lm					4000K	
LX26-WRD72-T2-20W-930-36-X	1400lm	18W	20W	DC48V	90	3000K	36°
LX26-WRD72-T2-20W-940-36-X	1500lm					4000K	
LX26-WRD72-T2-20W-930-50-X	1400lm	18W	20W	DC48V	90	3000K	50°
LX26-WRD72-T2-20W-940-50-X	1500lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Accessory



Honeycomb



White

Reflector



Black



White



Chrome Black



Gold

LINE X 26 Series


DC48V Low Voltage System



Downlight

LOW VOLTAGE SYSTEM

Drawings

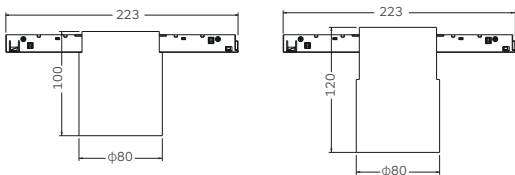

Order Options



10W 950lm-1000lm	CITIZEN						
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS80-SL-10W-930-X	950lm	9W	10W	DC48V	90	3000K	30°
LX26-RS80-SL-10W-940-X	1000lm	9W	10W	DC48V	90	4000K	30°

10W 950lm-1000lm	CITIZEN						
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-RS80-ST-10W-930-X	950lm	9W	10W	DC48V	90	3000K	30°
LX26-RS80-ST-10W-940-X	1000lm	9W	10W	DC48V	90	4000K	30°

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)


Optional Colour



Downlight

LOW VOLTAGE SYSTEM

Drawings

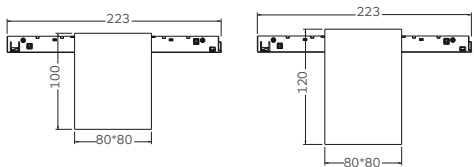

Order Options



10W 1000lm-1100lm	CITIZEN						
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SS80-SL-10W-930-X	1000lm	9W	10W	DC48V	90	3000K	30°
LX26-SS80-SL-10W-940-X	1100lm	9W	10W	DC48V	90	4000K	30°

10W 1000lm-1100lm	CITIZEN						
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SS80-ST-10W-930-X	1000lm	9W	10W	DC48V	90	3000K	30°
LX26-SS80-ST-10W-940-X	1100lm	9W	10W	DC48V	90	4000K	30°

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)


Optional Colour





LINE X 26 Series


DC48V Low Voltage System

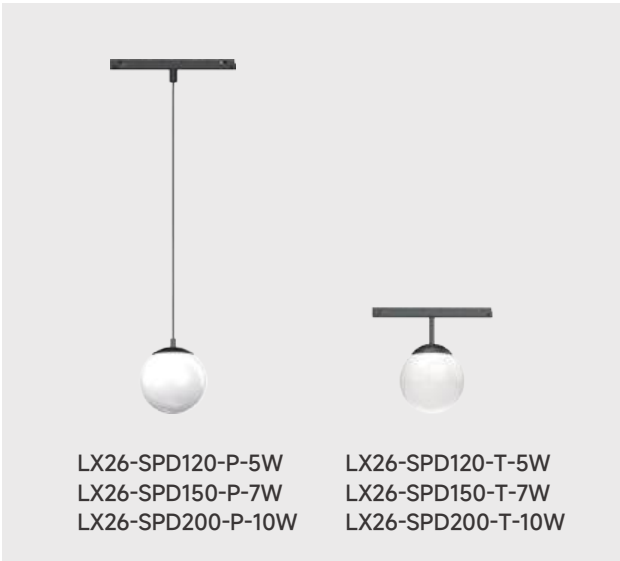

Decorative light

LOW VOLTAGE SYSTEM

Drawings

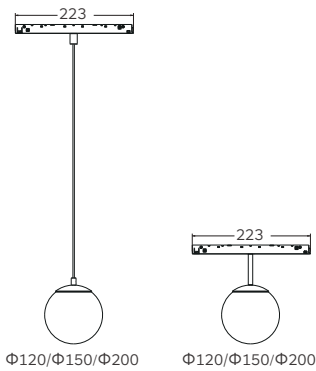

Order Options

5W 350lm-760lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SPD120-P/T-5W-930-X	350lm	4W	5W	DC48V	90	3000K	300°
LX26-SPD120-P/T-5W-940-X	380lm					4000K	
LX26-SPD150-P/T-7W-930-X	560lm	4W	5W	DC48V	90	3000K	300°
LX26-SPD150-P/T-7W-940-X	600lm					4000K	
LX26-SPD200-P/T-10W-930-X	710lm	4W	5W	DC48V	90	3000K	300°
LX26-SPD200-P/T-10W-940-X	760lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)


Optional Colour



Decorative light

LOW VOLTAGE SYSTEM

Drawings



Order Options

19W 1200lm-1300lm		CITIZEN					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26 -PD300-19W-930-60-X	1200lm	18W	19W	DC48V	90	3000K	60°
LX26 -PD300-19W-940-60-X	1300lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour



White

LINE X 26 Series


DC48V Low Voltage System



Decorative light

LOW VOLTAGE SYSTEM

Drawings



Order Options



12W 600lm-800lm	CITIZEN						
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-PS40-12W-930-18-X	750lm	11W	12W	DC48V	90	3000K	18°
LX26-PS40-12W-940-18-X	800lm					4000K	
LX26-PS40-12W-930-30-X	750lm	11W	12W	DC48V	90	3000K	30°
LX26-PS40-12W-940-30-X	800lm					4000K	
LX26-PS40-12W-930-45-X	600lm	11W	12W	DC48V	90	3000K	45°
LX26-PS40-12W-940-45-X	650lm					4000K	
14W 950lm-1000lm	CITIZEN						
LX26-PS55-14W-930-18-X	950lm	13W	14W	DC48V	90	3000K	18°
LX26-PS55-14W-940-18-X	1000lm					4000K	
LX26-PS55-14W-930-24-X	950lm	13W	14W	DC48V	90	3000K	24°
LX26-PS55-14W-940-24-X	1000lm					4000K	
LX26-PS55-14W-930-36-X	950lm	13W	14W	DC48V	90	3000K	36°
LX26-PS55-14W-940-36-X	1000lm					4000K	


Optional Colour




Decorative light

LOW VOLTAGE SYSTEM

Drawings



Order Options



13W 820lm-900lm		CITIZEN		LUMILEDS			
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-PDS40-12W-930-15-X	820lm	12W	13W	DC48V	90	3000K	15°
LX26-PDS40-12W-940-15-X	870lm					4000K	
LX26-PDS40-12W-930-35-X	850lm	12W	13W	DC48V	90	3000K	35°
LX26-PDS40-12W-940-35-X	900lm					4000K	
LX26-PDS40-12W-930-45-X	820lm	12W	13W	DC48V	90	3000K	45°
LX26-PDS40-12W-940-45-X	870lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour



LINE X 26 Series


DC48V Low Voltage System



Decorative light

LOW VOLTAGE SYSTEM

Drawings




Order Options



5W 500lm-550lm CREE							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-SURI60-5W-930-18-X	500lm	4W	5W	DC48V	90	3000K	18°
LX26-SURI60-5W-940-18-X	550lm					4000K	
LX26-SURI60-5W-930-24-X	500lm	4W	5W	DC48V	90	3000K	24°
LX26-SURI60-5W-940-24-X	550lm					4000K	
LX26-SURI60-5W-930-36-X	500lm	4W	5W	DC48V	90	3000K	36°
LX26-SURI60-5W-940-36-X	550lm					4000K	
LX26-SURI60-5W-930-50-X	500lm	4W	5W	DC48V	90	3000K	50°
LX26-SURI60-5W-940-50-X	550lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)


Optional Colour

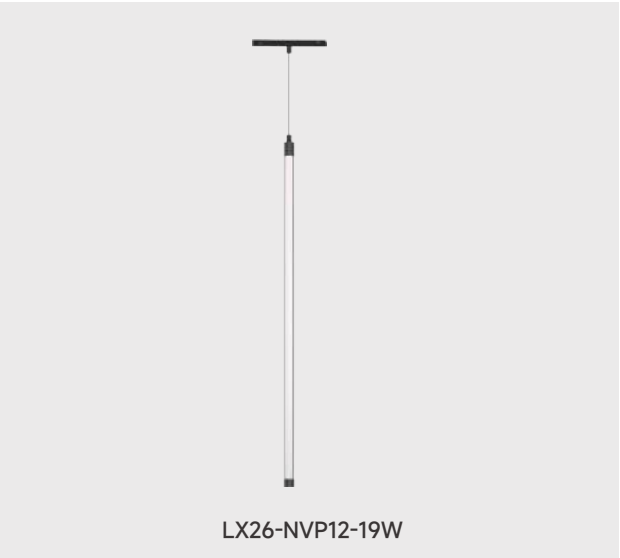

Decorative light

LOW VOLTAGE SYSTEM

Drawings



Order Options



19W 1050lm-1150lm OSRAM							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-NVP12-19W-930-X	1050lm					3000K	
LX26-NVP12-19W-940-X	1150lm	17W	19W	DC48V	90	4000K	360°

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour



LINE X 26 Series


DC48V Low Voltage System



Decorative light

LOW VOLTAGE SYSTEM

Drawings

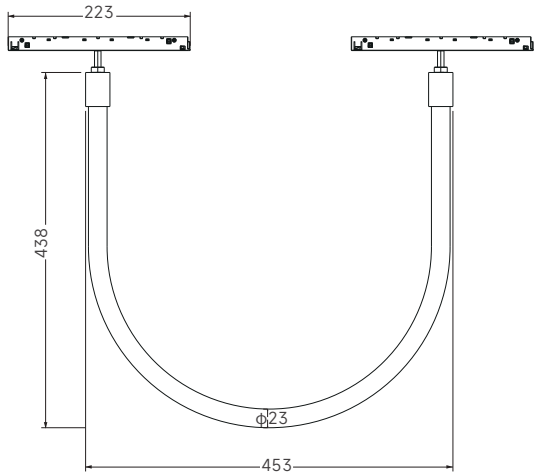

Order Options

CE

CB

UK
CA

DC
48V

50000h
L80 B10


IP
20

CRI
>90

19W 1050lm-1150lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-NHU12-19W-930-X	1050lm	17W	19W	DC48V	90	3000K	360°
LX26-NHU12-19W-940-X	1150lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)


Optional Colour

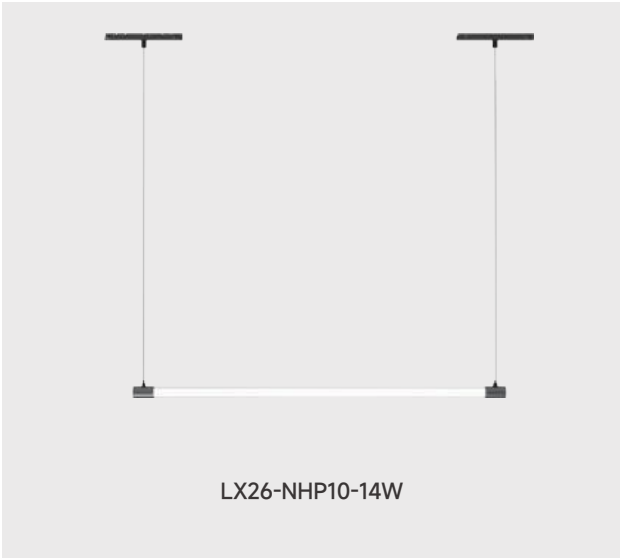

Decorative light

LOW VOLTAGE SYSTEM

Drawings

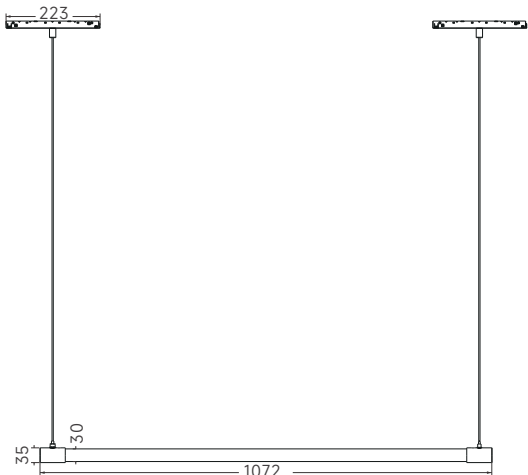

Order Options

CE

CB

UK
CA

DC
48V

50000h
L80 B10

IP
20

CRI
>90

14W 1000lm-1100lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
LX26-NHP10-14W-930-X	1000lm	13W	14W	DC48V	90	3000K	360°
LX26-NHP10-14W-940-X	1100lm					4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI)

Optional Colour



3 Spotlight

Spotlight

YOKO	249-252
DARLO	253-260
BINGO	261-272
GRACE	273-278
FELLOW	279-286
ALPHA	287-294
BINGO C	295-302
KIWI	303-312





High Efficiency Track Light

YOKO

High luminous efficiency helps energy-saving by using 98% German Alanod Material for reflector, the luminous efficiency can reach **up to 170lm/W**, saving more energy than traditional track light, effectively reducing the operating costs.



YOKO Series
HIGH EFFICIENCY SPOTLIGHT



Spotlight
YOKO




Features

- High efficiency lighting solution
- Efficiency up to 170Lm/W
- In-Track LED driver for simplified design
- Integrated installation effect
- Reflector: 98% German Alanod Material

Specifications

- Dimming modes:Non-Dim,DALI
- Beam angle: 15°, 18°, 30°, 35°, 40°, 45°, 60°, 65°
- Physical: aluminium, powder coating

Light Distribution



Track Adapter




3-Circuits

Housing Colour



YOKO
SPOTLIGHT

Drawing

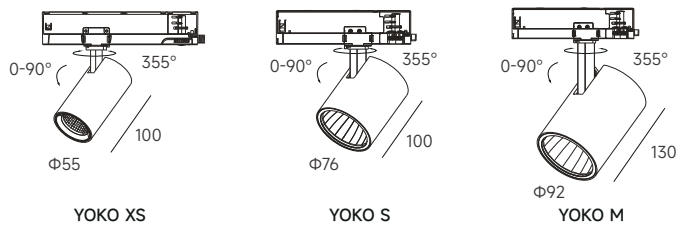

Order Options

14W 1650lm-1720lm 								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
YOKO XS-14W-930-18-X	Φ55*H100mm	1720lm	35V	12W	14W	90	3000K	18°
YOKO XS-14W-930-30-X	Φ55*H100mm	1650lm	35V	12W	14W	90	3000K	30°
YOKO XS-14W-930-40-X	Φ55*H100mm	1650lm	35V	12W	14W	90	3000K	40°

20W 2800lm-2850lm 								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
YOKO S-20W-930-15-X	Φ76*100mm	2800lm	34V	17W	20W	90	3000K	15°
YOKO S-20W-930-24-X	Φ76*100mm	2800lm	34V	17W	20W	90	3000K	24°
YOKO S-20W-930-40-X	Φ76*100mm	2850lm	34V	17W	20W	90	3000K	40°
YOKO S-20W-930-65-X	Φ76*100mm	2800lm	34V	17W	20W	90	3000K	65°

27W 3500lm-3550lm 								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
YOKO S-27W-930-15-X	Φ76*100mm	3500lm	34V	24W	27W	90	3000K	15°
YOKO S-27W-930-24-X	Φ76*100mm	3550lm	34V	24W	27W	90	3000K	24°
YOKO S-27W-930-40-X	Φ76*100mm	3500lm	34V	24W	27W	90	3000K	40°
YOKO S-27W-930-65-X	Φ76*100mm	3500lm	34V	24W	27W	90	3000K	65°

27W 3700lm-3760lm 								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
YOKO M-27W-930-20-X	Φ92*130mm	3760lm	34V	24W	27W	90	3000K	20°
YOKO M-27W-930-35-X	Φ92*130mm	3720lm	34V	24W	27W	90	3000K	35°
YOKO M-27W-930-45-X	Φ92*130mm	3720lm	34V	24W	27W	90	3000K	45°
YOKO M-27W-930-60-X	Φ92*130mm	3700lm	34V	24W	27W	90	3000K	60°

35W 4600lm-4720lm 								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
YOKO M-35W-930-20-X	Φ92* 130mm	4720lm	34V	31W	35W	90	3000K	20°
YOKO M-35W-930-35-X	Φ92* 130mm	4600lm	34V	31W	35W	90	3000K	35°
YOKO M-35W-930-45-X	Φ92* 130mm	4600lm	34V	31W	35W	90	3000K	45°
YOKO M-35W-930-60-X	Φ92* 130mm	4600lm	34V	31W	35W	90	3000K	60°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



DARLO Series
SPOTLIGHT

coming soon

DARLO

Spotlight

Darlo is a stylish track system with narrow design and attractive matt finish, which matches the ceiling perfectly. It includes spotlights, pendants and rectangular surface mounted downlight. It is ideal for illuminating in both residential environments and hospitality areas.

DARLO Series
SPOTLIGHT



Spotlight
DARLO40/55

Features

- Ultra-slim housing design with LED driver inside.
- The minimalist and cylindrical shape.
- The head rotates through 355° and pivots through 90°.
- Therm-optinal design ensures low temperature and long lifetime.

Specifications

- Dimming modes:Phase Dim
- Beam angle: 18°,24°,36°,50°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh
- Adjustable temperature Switch: 2700K/3000K

Installation Type



Light Distribution



Housing Colour



Anti-glare Accessory



Anti Glary Ring Colour




Track Adapter



DARLO
SPOTLIGHT

Drawing


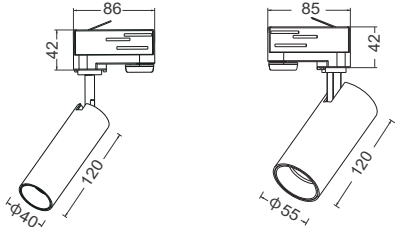


Order Options

Standard Version									
Code	Size	LED LM	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
Darlo40-6W-930-P	Φ40*H120mm	670lm	500lm	17V	4W	6W	90	3000K	20°
Darlo40-6W-930-P	Φ40*H120mm	670lm	540lm	17V	4W	6W	90	3000K	30°
Darlo40-6W-930-P	Φ40*H120mm	670lm	540lm	17V	4W	6W	90	3000K	45°
Darlo40-6W-930-P	Φ40*H120mm	670lm	550lm	17V	4W	6W	90	3000K	55°
Darlo55-7W-930-P	Φ55*H120mm	950lm	620lm	32V	5W	7W	90	3000K	18°
Darlo55-7W-930-P	Φ55*H120mm	950lm	640lm	32V	5W	7W	90	3000K	24°
Darlo55-7W-930-P	Φ55*H120mm	950lm	720lm	32V	5W	7W	90	3000K	36°
Darlo55-7W-930-P	Φ55*H120mm	950lm	710lm	32V	5W	7W	90	3000K	50°
Darlo55-11W-930-P	Φ55*H120mm	1300lm	850lm	35V	9W	11W	90	3000K	18°
Darlo55-11W-930-P	Φ55*H120mm	1300lm	870lm	35V	9W	11W	90	3000K	24°
Darlo55-11W-930-P	Φ55*H120mm	1300lm	980lm	35V	9W	11W	90	3000K	36°
Darlo55-11W-930-P	Φ55*H120mm	1300lm	990lm	35V	9W	11W	90	3000K	50°

CCT Switchable Version									
Code	Size	LED LM	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
Darlo40-6W-CCT-P	Φ40*H120mm	580lm-630lm	350lm-370lm	17V	4W	6W	90	2700K/3000K	20°
Darlo40-6W-CCT-P	Φ40*H120mm	580lm-630lm	340lm-460lm	17V	4W	6W	90	2700K/3000K	24°
Darlo40-6W-CCT-P	Φ40*H120mm	580lm-630lm	350lm-380lm	17V	4W	6W	90	2700K/3000K	36°
Darlo40-6W-CCT-P	Φ40*H120mm	580lm-630lm	330lm-350lm	17V	4W	6W	90	2700K/3000K	45°
Darlo55-7W-CCT-P	Φ55*H120mm	610lm-650lm	440lm-460lm	36V	5W	7W	90	2700K/3000K	20°
Darlo55-7W-CCT-P	Φ55*H120mm	610lm-650lm	430lm-450lm	36V	5W	7W	90	2700K/3000K	24°
Darlo55-7W-CCT-P	Φ55*H120mm	610lm-650lm	460lm-480lm	36V	5W	7W	90	2700K/3000K	36°
Darlo55-7W-CCT-P	Φ55*H120mm	610lm-650lm	410lm-430lm	36V	5W	7W	90	2700K/3000K	45°
Darlo55-11W-CCT-P	Φ55*H120mm	950lm-1000lm	670lm-690lm	36V	9W	11W	90	2700K/3000K	20°
Darlo55-11W-CCT-P	Φ55*H120mm	950lm-1000lm	650lm-680lm	36V	9W	11W	90	2700K/3000K	24°
Darlo55-11W-CCT-P	Φ55*H120mm	950lm-1000lm	700lm-740lm	36V	9W	11W	90	2700K/3000K	36°
Darlo55-11W-CCT-P	Φ55*H120mm	950lm-1000lm	570lm-600lm	36V	9W	11W	90	2700K/3000K	45°

DARLO Series
SPOTLIGHT

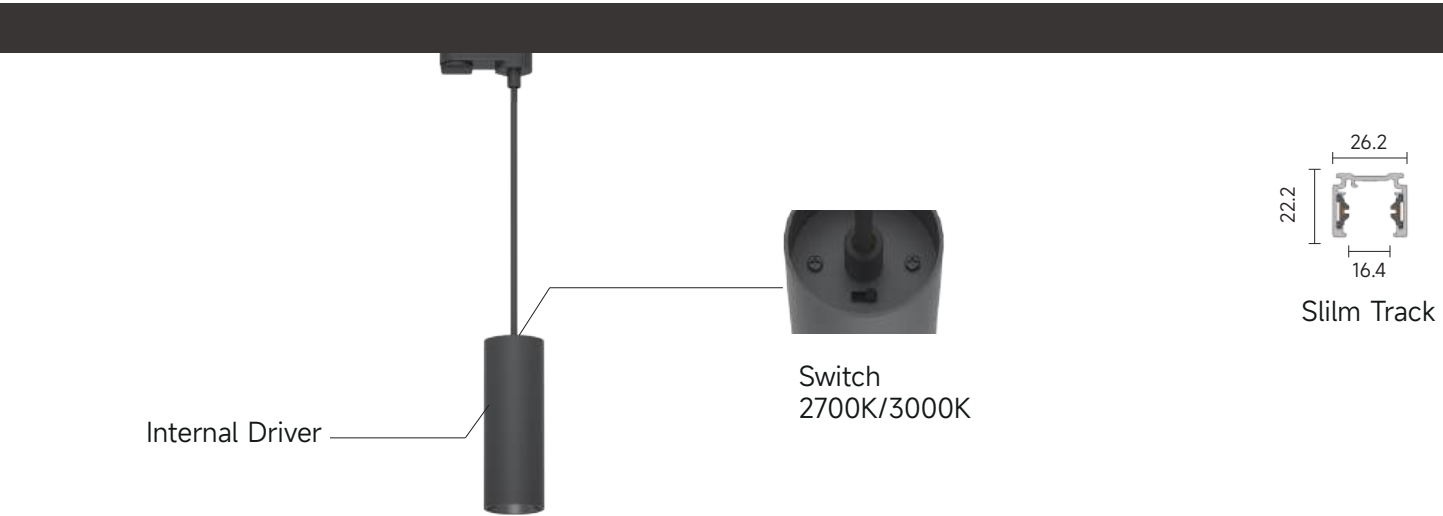

Slim Track

Spotlight
DARLO-P55

CE

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

CRI
>90

Features

- Ultra-slim housing design with LED driver inside.
- The minimalist and cylindrical shape.
- Therm-optimal design ensures low temperature and long lifetime.

Specifications

Installation Type



Φ55

Light Distribution



Housing Colour



White





Black

Anti Glary Ring Colour




Black

Track Adapter



DARLO
SPOTLIGHT

Drawing



Order Options

Standard Version									
Code	Size	LED LM	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
Darlo-P55-7W-930-P	Φ55*H250mm	950lm	620lm	32V	5W	7W	90	3000K	18°
Darlo-P55-7W-930-P	Φ55*H250mm	950lm	640lm	32V	5W	7W	90	3000K	24°
Darlo-P55-7W-930-P	Φ55*H250mm	950lm	720lm	32V	5W	7W	90	3000K	36°
Darlo-P55-7W-930-P	Φ55*H250mm	950lm	710lm	32V	5W	7W	90	3000K	50°
Darlo-P55-11W-930-P	Φ55*H250mm	1300lm	850lm	35V	9W	11W	90	3000K	18°
Darlo-P55-11W-930-P	Φ55*H250mm	1300lm	870lm	35V	9W	11W	90	3000K	24°
Darlo-P55-11W-930-P	Φ55*H250mm	1300lm	980lm	35V	9W	11W	90	3000K	36°
Darlo-P55-11W-930-P	Φ55*H250mm	1300lm	990lm	35V	9W	11W	90	3000K	50°

CCT Switchable Version									
Code	Size	LED LM	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
Darlo-P55-7W-CCT-P	Φ55*H250mm	610lm-650lm	440lm-460lm	36V	5W	7W	90	2700K/3000K	20°
Darlo-P55-7W-CCT-P	Φ55*H250mm	610lm-650lm	430lm-450lm	36V	5W	7W	90	2700K/3000K	24°
Darlo-P55-7W-CCT-P	Φ55*H250mm	610lm-650lm	460lm-480lm	36V	5W	7W	90	2700K/3000K	36°
Darlo-P55-7W-CCT-P	Φ55*H250mm	610lm-650lm	410lm-430lm	36V	5W	7W	90	2700K/3000K	45°
Darlo-P55-11W-CCT-P	Φ55*H250mm	950lm-1000lm	670lm-690lm	36V	9W	11W	90	2700K/3000K	20°
Darlo-P55-11W-CCT-P	Φ55*H250mm	950lm-1000lm	650lm-680lm	36V	9W	11W	90	2700K/3000K	24°
Darlo-P55-11W-CCT-P	Φ55*H250mm	950lm-1000lm	700lm-740lm	36V	9W	11W	90	2700K/3000K	36°
Darlo-P55-11W-CCT-P	Φ55*H250mm	950lm-1000lm	570lm-600lm	36V	9W	11W	90	2700K/3000K	45°






BINGO

Spotlight

Concise structure with in-track LED driver
Optical choices in fixed or adjustable lens

Narrow, medium and wide beam angles are available for different lighting applications

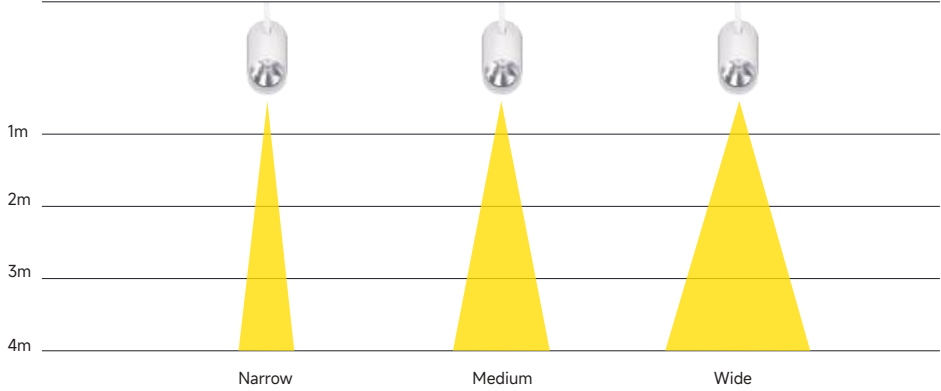

BINGO Series
SPOTLIGHT




BINGO S-E-F

15W 950lm-1000lm

BINGO M-E-F

15W 900lm-1300lm
21W 1200lm-1700lm




BINGO S-E-Z

15W 1100lm-1200lm



BINGO M-E-Z

15W 1300lm-1400lm
21W 1700lm-1800lm



BINGO K

28W 2200lm-2400lm



BINGO PRO

21W 1500lm-1600lm

BINGO
SPOTLIGHT



BINGO Series
SPOTLIGHT



Spotlight
BINGO

CE

CB

UK
CA

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

CRI
>90


Features

- High efficiency lighting solution
- In-Track LED driver for simplified design
- Integrated installation effect
- Aluminium extrusion with optimal heat dissipation

Specifications

- Dimming modes: Non-Dim,Phase Dim,DALI
- Beam angle: 20°,35°,55°
- Physical: aluminium, powder coating
- Accessories: plastic secondary reflector

Light Distribution



Track Adapter



3-Circuits

Housing Colour



Anti-glare Accessory



Honycomb

Anti Glary Ring Colour





Black



BINGO S-E-F
BINGO M-E-F
SPOTLIGHT

Drawing



Order Options

15W 950lm-1000lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO S-E-F-15W-930-18-X	Ø55*150mm	950lm	36V	13W	15W	90	3000K	18°
BINGO S-E-F-15W-940-18-X	Ø55*150mm	1000lm	36V	13W	15W	90	4000K	18°
BINGO S-E-F-15W-930-25-X	Ø55*150mm	950lm	36V	13W	15W	90	3000K	24°
BINGO S-E-F-15W-940-25-X	Ø55*150mm	1000lm	36V	13W	15W	90	4000K	24°
BINGO S-E-F-15W-930-36-X	Ø55*150mm	950lm	36V	13W	15W	90	3000K	36°
BINGO S-E-F-15W-940-36-X	Ø55*150mm	1000lm	36V	13W	15W	90	4000K	36°
BINGO S-E-F-15W-930-36-X	Ø55*150mm	950lm	36V	13W	15W	90	3000K	50°
BINGO S-E-F-15W-940-36-X	Ø55*150mm	1000lm	36V	13W	15W	90	4000K	50°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=D (DALI)

15W 900lm-1300lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO M-E-F-15W-930-15-X	Ø72*150mm	1200lm	36V	13W	15W	90	3000K	15°
BINGO M-E-F-15W-940-15-X	Ø72*150mm	1300lm	36V	13W	15W	90	4000K	15°
BINGO M-E-F-15W-930-25-X	Ø72*150mm	1200lm	36V	13W	15W	90	3000K	25°
BINGO M-E-F-15W-940-25-X	Ø72*150mm	1300lm	36V	13W	15W	90	4000K	25°
BINGO M-E-F-15W-930-30-X	Ø72*150mm	1200lm	36V	13W	15W	90	3000K	30°
BINGO M-E-F-15W-940-30-X	Ø72*150mm	1300lm	36V	13W	15W	90	4000K	30°
BINGO M-E-F-15W-930-50-X	Ø72*150mm	900lm	36V	13W	15W	90	3000K	50°
BINGO M-E-F-15W-940-50-X	Ø72*150mm	950lm	36V	13W	15W	90	4000K	50°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=D (DALI)

21W 1200lm-1700lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO M-E-F-21W-930-15-X	Ø72*150mm	1600lm	36V	18W	21W	90	3000K	15°
BINGO M-E-F-21W-940-15-X	Ø72*150mm	1700lm	36V	18W	21W	90	4000K	15°
BINGO M-E-F-21W-930-25-X	Ø72*150mm	1600lm	36V	18W	21W	90	3000K	25°
BINGO M-E-F-21W-940-25-X	Ø72*150mm	1700lm	36V	18W	21W	90	4000K	25°
BINGO M-E-F-21W-930-30-X	Ø72*150mm	1600lm	36V	18W	21W	90	3000K	30°
BINGO M-E-F-21W-940-30-X	Ø72*150mm	1700lm	36V	18W	21W	90	4000K	30°
BINGO M-E-F-21W-930-50-X	Ø72*150mm	1200lm	36V	18W	21W	90	3000K	50°
BINGO M-E-F-21W-940-50-X	Ø72*150mm	1300lm	36V	18W	21W	90	4000K	50°


Remark: X=F (Non-Dim) X=P (Phase Dim) X=D (DALI)

BINGO Series
SPOTLIGHT



BINGO S-E-Z
BINGO M-E-Z
SPOTLIGHT

Drawing

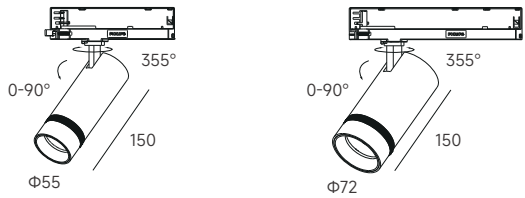

Order Options

15W 1100lm-1200lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO S-E-Z-15W-930-X	Φ55*150mm	1100lm	36V	13W	15W	90	3000K	20°-40°
BINGO S-E-Z-15W-940-X	Φ55*150mm	1200lm	36V	13W	15W	90	4000K	20°-40°
BINGO S-E-Z-15W-930-X	Φ55*150mm	1000lm	36V	13W	15W	90	3000K	35°-60°
BINGO S-E-Z-15W-940-X	Φ55*150mm	1100lm	36V	13W	15W	90	4000K	35°-60°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=D (DALI)								


15W 1200lm-1400lm		CITIZEN							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
BINGO M-E-Z-15W-930-X	Φ72*150mm	1300lm	36V	300mA	13W	15W	90	3000K	18°-35°
BINGO M-E-Z-15W-940-X	Φ72*150mm	1400lm	36V	300mA	13W	15W	90	4000K	18°-35°
BINGO M-E-Z-15W-930-X	Φ72*150mm	1100lm	36V	300mA	13W	15W	90	3000K	35°-60°
BINGO M-E-Z-15W-940-X	Φ72*150mm	1200lm	36V	300mA	13W	15W	90	4000K	35°-60°
					Remark:	X=F (Non-Dim)	X=P (Phase Dim)	X=D (DALI)	

21W 1500lm-1800lm		CITIZEN							
Code	Size	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam
BINGO M-E-Z-21W-930-X	Φ72*150mm	1700lm	36V	500mA	18W	21W	90	3000K	18°-35°
BINGO M-E-Z-21W-940-X	Φ72*150mm	1800lm	36V	500mA	18W	21W	90	4000K	18°-35°
BINGO M-E-Z-21W-930-X	Φ72*150mm	1500lm	36V	500mA	18W	21W	90	3000K	35°-60°
BINGO M-E-Z-21W-940-X	Φ72*150mm	1600lm	36V	500mA	18W	21W	90	4000K	35°-60°
Remark:						X=F (Non-Dim)	X=P (Phase Dim)	X=D (DALI)	



BINGO K
SPOTLIGHT

Drawing



Order Options

28W 2200lm-2600lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO K-28W-930-20-X	Φ54*72mm	2200lm	36V	25W	28W	90	3000K	20°
BINGO K-28W-940-20-X	Φ54*72mm	2400lm	36V	25W	28W	90	4000K	20°
BINGO K-28W-930-35-X	Φ54*72mm	2400lm	36V	25W	28W	90	3000K	35°
BINGO K-28W-940-35-X	Φ54*72mm	2600lm	36V	25W	28W	90	4000K	35°
BINGO K-28W-930-55-X	Φ54*72mm	2400lm	36V	25W	28W	90	3000K	55°
BINGO K-28W-940-55-X	Φ54*72mm	2600lm	36V	25W	28W	90	4000K	55°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=D (DALI)								

BINGO PRO Series
SPOTLIGHT



Spotlight
BINGO PRO

AC

220-240V

50000h

L80 B10

IP

20

CRI

>90

Features

- BINGO PRO is a compact track spotlight with high heat dissipation effect heatsink,using 3 circuits in-track driver
- Widely used for shop,museum.etc

Specifications

- Dimming modes: Non-Dim,Phase Dim,DALI
- Beam angle: 20°,35°,55°
- Physical: heatsink-CNC, LENS&reflector: injection molding
- Heatsink color: white, black

Light Distribution



Housing Colour



White Black

Anti-glare Accessory



Honycomb

Track Adapter



3 circuits


Anti Glary Ring Colour



Black




BINGO PRO
SPOTLIGHT



White Black

Drawing



Order Options

21W 1500lm-1600lm		CITIZEN								
Code	Size	LED LM	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	
BINGO PRO-21W-930-20D-X	Φ53*115mm	1900lm	1500lm	36V	18W	21W	90	3000K	20°	
BINGO PRO-21W-930-35D-X	Φ53*115mm	1900lm	1600lm	36V	18W	21W	90	3000K	30°	
BINGO PRO-21W-930-55D-X	Φ53*115mm	1900lm	1600lm	36V	18W	21W	90	3000K	55°	


Remark: X=F (Non-Dim) X=P (Phase Dim) X=D (DALI)



GRACE Series
SPOTLIGHT



Narrow, medium and wide beam angles are available for different lighting applications

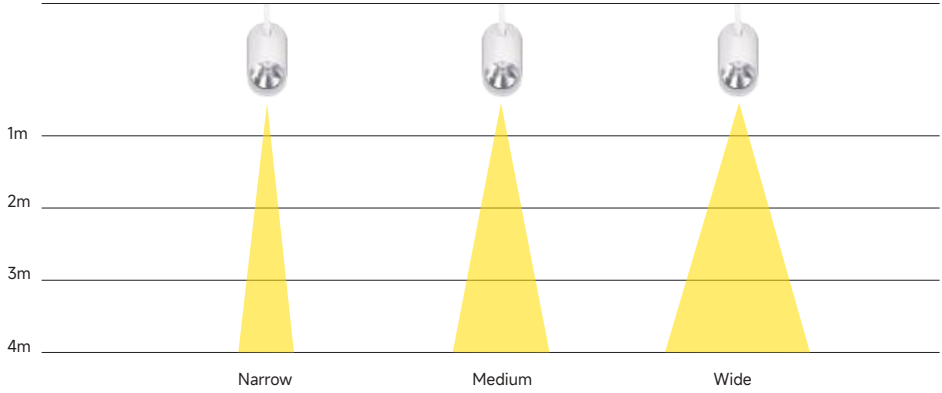

GRACE
Spotlight

Concise structure with driver inside housing
High quality optical lens ensures precise lighting distribution

GRACE Series
SPOTLIGHT



Internal Driver

GRACE S

Spotlight

GRACE S

CE

CB

5

5 Years Warranty

⏏

AC

220-240V

50000h

L80 B10

IP

20

CRI

>90

Features

- Ultra-slim housing design with LED driver inside
- The minimalist and cylindrical shape
- The head rotates through 355° and pivots through 90°
- Therm-optimal design ensures low temperature and long lifetime

Specifications

- Dimming modes: Non-Dim , Phase Dim , 1-10V
- Beam angle: 8°,18°,24°,36°,50°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Light Distribution



Housing Colour



White

Black

Anti-glare Accessory



Honycomb

Track Adapter



3-Circuits

Anti Glary Ring Colour




Black



GRACE S
SPOTLIGHT

Drawing



Order Options

15W 950lm-1000lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
GRACE S-15W-930-18-X	Φ55*150mm	950lm	36V	13W	15W	90	3000K	18°
GRACE S-15W-940-18-X	Φ55*150mm	1000lm	36V	13W	15W	90	4000K	18°
GRACE S-15W-930-24-X	Φ55*150mm	950lm	36V	13W	15W	90	3000K	24°
GRACE S-15W-940-24-X	Φ55*150mm	1000lm	36V	13W	15W	90	4000K	24°
GRACE S-15W-930-36-X	Φ55*150mm	950lm	36V	13W	15W	90	3000K	36°
GRACE S-15W-940-36-X	Φ55*150mm	1000lm	36V	13W	15W	90	4000K	36°
GRACE S-15W-930-50-X	Φ55*150mm	950lm	36V	13W	15W	90	3000K	50°
GRACE S-15W-940-50-X	Φ55*150mm	1000lm	36V	13W	15W	90	4000K	50°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V)

10W 450lm-500lm		CREE						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
GRACE S-10W-930-8-X	Φ55*150mm	450lm	12V	8.5W	10W	90	3000K	8°
GRACE S-10W-940-8-X	Φ55*150mm	500lm	12V	8.5W	10W	90	4000K	8°

Remark: X=F (Non-Dim) X=P (Phase Dim)



FELLOW

FELLOW M

28W 2700lm-2900lm

FELLOW S

15W 900lm-1300lm
21W 1200lm-1700lm

FELLOW MINI

7W 450lm-480lm
8W 550lm-650lm




FELLOW

Spotlight

Concise structure with in-track LED driver
Optical choices in fixed or adjustable lens

Narrow, medium and wide beam angles are available for different lighting applications

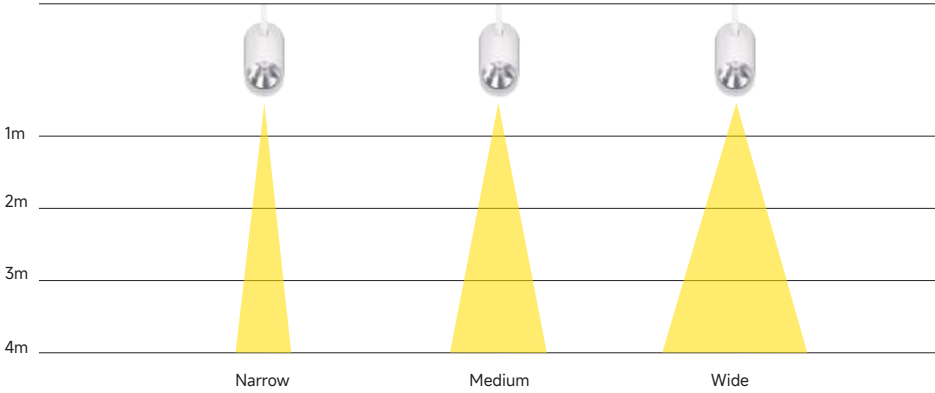

FELLOW Series
SPOTLIGHT



Spotlight

CE

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

CRI
>90


Features

- FELLOW Mini perfectly combines functionality and esthetics.
- Elegant design with LED driver inside housing
- The head rotates through 355° and pivots through 90°.
- Optimized passive cooling system ensures low temperature and long lifetime of LED.

Specifications

- Dimming modes: Non-Dim, Phase Dim
- Beam angle: 15°, 24°, 35°, 45°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Light Distribution



Track Adapter



3-Circuits

Housing Colour



Anti-glare Accessory




Anti Glary Ring Colour



FELLOW MINI
SPOTLIGHT

Drawing




Order Options

7W 450lm-480lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
FELLOW Mini-7W-930-15-X	Φ45*153mm	450lm	30V	5W	7W	90	3000K	15°
FELLOW Mini-7W-930-24-X	Φ45*153mm	480lm	30V	5W	7W	90	3000K	24°
FELLOW Mini-7W-930-35-X	Φ45*153mm	450lm	30V	5W	7W	90	3000K	35°
FELLOW Mini-7W-930-45-X	Φ45*153mm	450lm	30V	5W	7W	90	3000K	45°
		Remark:	X=F (Non-Dim)	X=P (Phase Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)	

8W 550lm-650lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
FELLOW Mini-8W-930-15-X	Φ45*153mm	550lm	30V	6W	8W	90	3000K	15°
FELLOW Mini-8W-930-24-X	Φ45*153mm	600lm	30V	6W	8W	90	3000K	24°
FELLOW Mini-8W-930-35-X	Φ45*153mm	550lm	30V	6W	8W	90	3000K	35°
FELLOW Mini-8W-930-45-X	Φ45*153mm	550lm	30V	6W	8W	90	3000K	45°
		Remark:	X=F (Non-Dim)	X=P (Phase Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)	

FELLOW Series
SPOTLIGHT

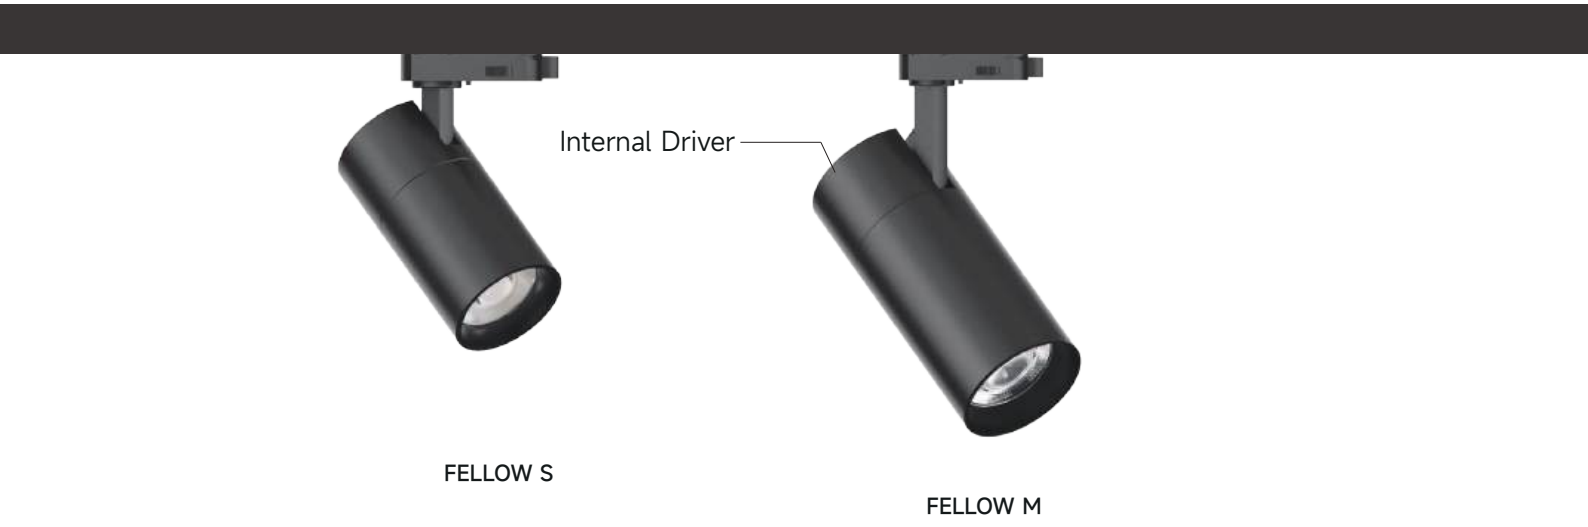

Spotlight
FELLOW S/M

CE

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

CRI

>90

Features

- FELLOW S/M perfectly combines functionality and esthetics.
- Elegant design with LED driver inside housing
- The head rotates through 355° and pivots through 90°.
- Optimized passive cooling system ensures low temperature and long lifetime of LED.


Specifications

- Dimming modes: Non-Dim, Phase Dim, 1-10V
- Beam angle: 15°, 25°, 30°, 50°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Track Adapter



3-Circuits



Housing Colour



White Balck

Anti-glare Accessory



Honycomb

Anti Glary Ring Colour




Black



FELLOW S/M
SPOTLIGHT

Drawing

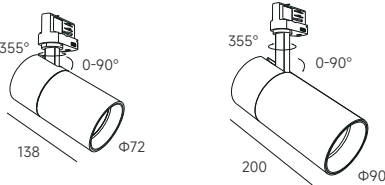

Order Options

15W 900lm-1300lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
FELLOW S-15W-930-15-X	Φ72*138mm	1200lm	36V	13W	15W	90	3000K	15°
FELLOW S-15W-940-15-X	Φ72*138mm	1300lm	36V	13W	15W	90	4000K	15°
FELLOW S-15W-930-25-X	Φ72*138mm	1200lm	36V	13W	15W	90	3000K	25°
FELLOW S-15W-940-25-X	Φ72*138mm	1300lm	36V	13W	15W	90	4000K	25°
FELLOW S-15W-930-30-X	Φ72*138mm	1200lm	36V	13W	15W	90	3000K	30°
FELLOW S-15W-940-30-X	Φ72*138mm	1300lm	36V	13W	15W	90	4000K	30°
FELLOW S-15W-930-50-X	Φ72*138mm	900lm	36V	13W	15W	90	3000K	50°
FELLOW S-15W-940-50-X	Φ72*138mm	1000lm	36V	13W	15W	90	4000K	50°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

21W 1200lm-1700lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
FELLOW S-21W-930-15-X	Φ72*138mm	1600lm	36V	18W	21W	90	3000K	15°
FELLOW S-21W-940-15-X	Φ72*138mm	1700lm	36V	18W	21W	90	4000K	15°
FELLOW S-21W-930-25-X	Φ72*138mm	1600lm	36V	18W	21W	90	3000K	25°
FELLOW S-21W-940-25-X	Φ72*138mm	1700lm	36V	18W	21W	90	4000K	25°
FELLOW S-21W-930-30-X	Φ72*138mm	1600lm	36V	18W	21W	90	3000K	30°
FELLOW S-21W-940-30-X	Φ72*138mm	1700lm	36V	18W	21W	90	4000K	30°
FELLOW S-21W-930-50-X	Φ72*138mm	1200lm	36V	18W	21W	90	3000K	50°
FELLOW S-21W-940-50-X	Φ72*138mm	1300lm	36V	18W	21W	90	4000K	50°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

28W 2700lm-2900lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
FELLOW M-28W-930-18-X	Φ90*200mm	2700lm	36V	25W	28W	90	3000K	18°
FELLOW M-28W-940-18-X	Φ90*200mm	2900lm	36V	25W	28W	90	4000K	18°
FELLOW M-28W-930-30-X	Φ90*200mm	2700lm	36V	25W	28W	90	3000K	30°
FELLOW M-28W-940-30-X	Φ90*200mm	2900lm	36V	25W	28W	90	4000K	30°
FELLOW M-28W-930-45-X	Φ90*200mm	2700lm	36V	25W	28W	90	3000K	45°
FELLOW M-28W-940-45-X	Φ90*200mm	2900lm	36V	25W	28W	90	4000K	45°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



287IE-lite lighting




ALPHA

ALPHA Series
SPOTLIGHT



Accessories are interchangeable,owing to Zhaga concept.
Thanks to the twist & lock design,reflectors can be
changed without tool,so as to achieve spot, medium,
flood and wideflood light distribution.

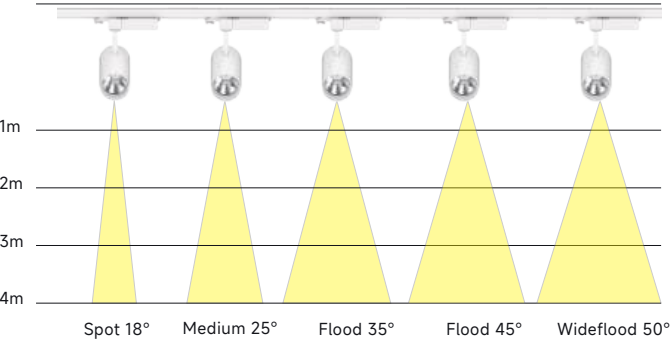

ALPHA Series
SPOTLIGHT



Spotlight
ALPHA S

CE

CB

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

CRI

>90

Features

- ALPHA S perfectly combines design and function
- The head rotates through 355° and pivots through 90°
- Optimized passive cooling system ensures low temperature and longlifetime of LED
- Front ring provides good glare control.
- A combination of perfectly developed lens and reflector provides highly precise lightdistribution
- The rotating position can be read by the scale marked on LED driver box



Transparent gear box cover makes it easy for driver maintenance
Delicate detail for scale markings

Specifications

- Dimming modes: Non-Dim , Phase Dim (15W&21W), 1-10V, DALI
- Beam angle: 18°,25°,35°,45°,50°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Light Distribution



Housing Colour



Anti-glare Accessory



Anti Glary Ring Colour



Track Adapter




3-Circuits



ALPHA S
SPOTLIGHT

Drawing



Order Options

15W 1100lm-1200lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
ALPHA S-15W-930-18-X	Ø72*137mm	1100 lm	36V	13W	15W	90	3000K	18°
ALPHA S-15W-940-18-X	Ø72*137mm	1200 lm	36V	13W	15W	90	4000K	18°
ALPHA S-15W-930-35-X	Ø72*137mm	1100 lm	36V	13W	15W	90	3000K	35°
ALPHA S-15W-940-35-X	Ø72*137mm	1200 lm	36V	13W	15W	90	4000K	35°
ALPHA S-15W-930-50-X	Ø72*137mm	1100 lm	36V	13W	15W	90	3000K	50°
ALPHA S-15W-940-50-X	Ø72*137mm	1200 lm	36V	13W	15W	90	4000K	50°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI)

21W 1500lm-1600lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
ALPHA S-21W-930-18-X	Ø72*137mm	1500 lm	36V	18W	21W	90	3000K	18°
ALPHA S-21W-940-18-X	Ø72*137mm	1600 lm	36V	18W	21W	90	4000K	18°
ALPHA S-21W-930-35-X	Ø72*137mm	1500 lm	36V	18W	21W	90	3000K	35°
ALPHA S-21W-940-35-X	Ø72*137mm	1600 lm	36V	18W	21W	90	4000K	35°
ALPHA S-21W-930-50-X	Ø72*137mm	1500 lm	36V	18W	21W	90	3000K	50°
ALPHA S-21W-940-50-X	Ø72*137mm	1600 lm	36V	18W	21W	90	4000K	50°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI)

28W 2000lm-2200lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
ALPHA S-28W-930-25-X	Ø72*137mm	2000 lm	36V	25W	28W	90	3000K	25°
ALPHA S-28W-940-25-X	Ø72*137mm	2200 lm	36V	25W	28W	90	4000K	25°
ALPHA S-28W-930-35-X	Ø72*137mm	2000 lm	36V	25W	28W	90	3000K	35°
ALPHA S-28W-940-35-X	Ø72*137mm	2200 lm	36V	25W	28W	90	4000K	35°
ALPHA S-28W-930-45-X	Ø72*137mm	2000 lm	36V	25W	28W	90	3000K	45°
ALPHA S-28W-940-45-X	Ø72*137mm	2200 lm	36V	25W	28W	90	4000K	45°

Remark: X=F (Non-Dim) X=A (1-10V Dim) X=D (DALI)

ALPHA Series
SPOTLIGHT



Spotlight
ALPHA M

CE

CB

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

CRI

>90

Features

- ALPHA S perfectly combines design and function
- The head rotates through 355° and pivots through 90°
- Optimized passive cooling system ensures low temperature and longlifetime of LED
- Front ring provides good glare control
- A combination of perfectly developed lens and reflector provides highly precise lightdistribution
- The rotating position can be read by the scale marked on LED driver box

Specifications

- Dimming modes: Non-Dim , Phase Dim, DALI
- Beam angle: 18°,25°,35°,50°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Light Distribution



Transparent gear box cover makes it easy for driver maintenance
Delicate detail for scale markings

Housing Colour




Anti-glare Accessory



Anti Glary Ring Colour




Track Adapter



ALPHA M
SPOTLIGHT

Drawing



Order Options

42W 2700lm-2900lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
ALPHA M-42W-930-18-X	Ø90*200mm	2700 lm	36V	38W	42W	90	3000K	18°
ALPHA M-42W-940-18-X	Ø90*200mm	2900 lm	36V	38W	42W	90	4000K	18°
ALPHA M-42W-930-25-X	Ø90*200mm	2700 lm	36V	38W	42W	90	3000K	25°
ALPHA M-42W-940-25-X	Ø90*200mm	2900 lm	36V	38W	42W	90	4000K	25°
ALPHA M-42W-930-35-X	Ø90*200mm	2700 lm	36V	38W	42W	90	3000K	35°
ALPHA M-42W-940-35-X	Ø90*200mm	2900 lm	36V	38W	42W	90	4000K	35°
ALPHA M-42W-930-50-X	Ø90*200mm	2700 lm	36V	38W	42W	90	3000K	50°
ALPHA M-42W-940-50-X	Ø90*200mm	2900 lm	36V	38W	42W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=D (DALI)

BINGO C


Spotlight/Adjustable



BINGO C

Spotlight/Adjustable

Optical choices in fixed or adjustable beam angle
Installation options have surface mounted, recessed, and recessed trimless

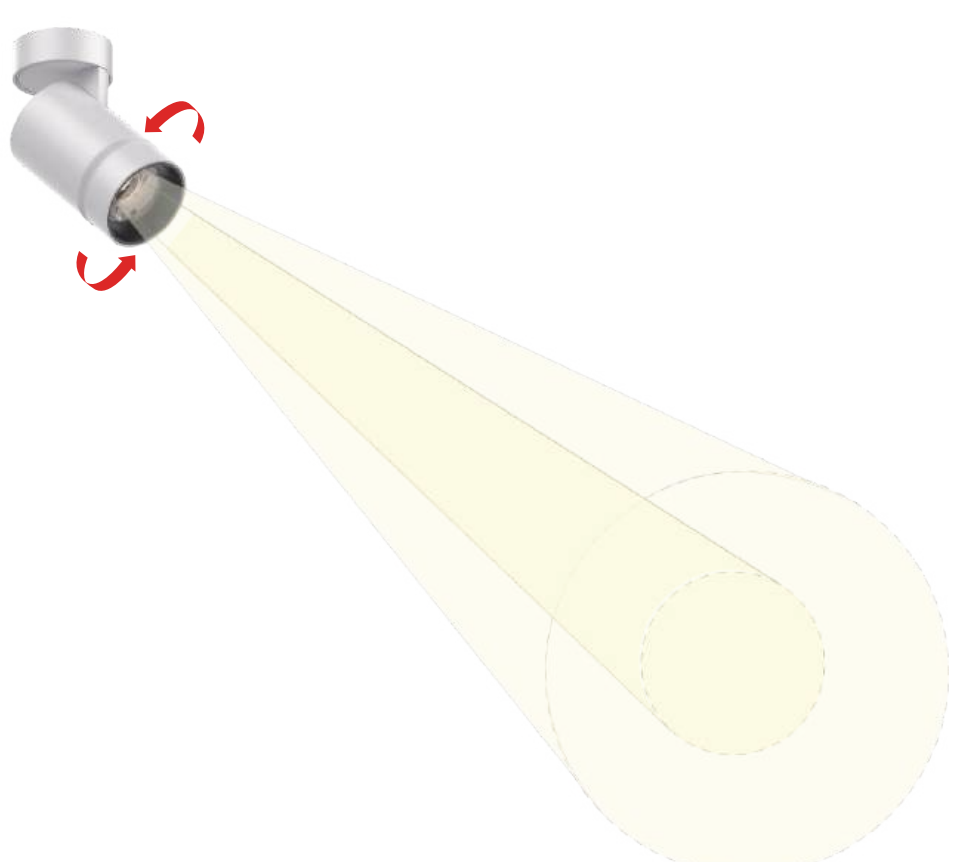


Beam angle 20°- 40° (BINGO C S-I-Z)
35°-60°
Beam angle 18°- 35° (BINGO C S-I-Z)
35°-60°




ZOOM Lens from narrow beam
angle 18°to wide beam angle 60°


BINGO Series
SPOTLIGHT




BINGO C S-I-F
11W 720lm-800lm



BINGO C M-I-F
15W 900lm-1300lm



BINGO C S-I-Z
11W 900lm-950lm



BINGO C M-I-Z
15W 1300lm-1400lm

BINGO C
SPOTLIGHT/Adjustable



BINGO Series
SPOTLIGHT



Spotlight
BINGO C



Features

- Fixed beam angle
- Installation options have surface mounting, recessed, and recessed trimless

Specifications

- Dimming modes:Non-Dim
- Beam angle: 15°, 18°, 24°, 25°, 30°, 36°, 50°
- Physical: aluminium, wet painting
- Accessories: Secondary reflector, Lens

Light Distribution



Housing Colour



Anti-glare Accessory




Anti Glary Ring Colour



BINGO C S-I-F
BINGO C M-I-F
SPOTLIGHT

Drawing

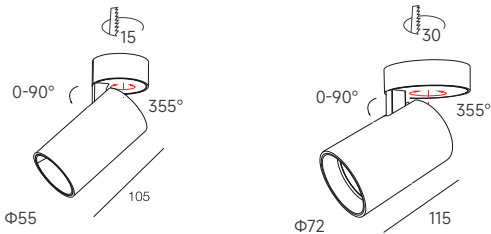

Order Options

11W 720lm-800lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO C S-I-F-1-11W-930-18-X	Φ55*105mm	720lm	36V	9W	11W	90	3000K	18°
BINGO C S-I-F-1-11W-940-18-X	Φ55*105mm	800lm	36V	9W	11W	90	4000K	18°
BINGO C S-I-F-1-11W-930-24-X	Φ55*105mm	720lm	36V	9W	11W	90	3000K	24°
BINGO C S-I-F-1-11W-940-24-X	Φ55*105mm	800lm	36V	9W	11W	90	4000K	24°
BINGO C S-I-F-1-11W-930-36-X	Φ55*105mm	720lm	36V	9W	11W	90	3000K	36°
BINGO C S-I-F-1-11W-940-36-X	Φ55*105mm	800lm	36V	9W	11W	90	4000K	36°
BINGO C S-I-F-1-11W-930-50-X	Φ55*105mm	720lm	36V	9W	11W	90	3000K	50°
BINGO C S-I-F-1-11W-940-50-X	Φ55*105mm	800lm	36V	9W	11W	90	4000K	50°

S=Small size, I=Internal Driver, F=Fixed beam, -1: ceiling version -2:recessed version -3:trimless version

Remark: X=F (Non-Dim) X=P (Phase Dim)

15W 900lm-1300lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO C M-I-F-1-15W-930-15-X	Φ72*115mm	1200lm	36V	13W	15W	90	3000K	15°
BINGO C M-I-F-1-15W-940-15-X	Φ72*115mm	1300lm	36V	13W	15W	90	4000K	15°
BINGO C M-I-F-1-15W-930-25-X	Φ72*115mm	1200lm	36V	13W	15W	90	3000K	25°
BINGO C M-I-F-1-15W-940-25-X	Φ72*115mm	1300lm	36V	13W	15W	90	4000K	25°
BINGO C M-I-F-1-15W-930-30-X	Φ72*115mm	1200lm	36V	13W	15W	90	3000K	30°
BINGO C M-I-F-1-15W-940-30-X	Φ72*115mm	1300lm	36V	13W	15W	90	4000K	30°
BINGO C M-I-F-1-15W-930-50-X	Φ72*115mm	900lm	36V	13W	15W	90	3000K	50°
BINGO C M-I-F-1-15W-940-50-X	Φ72*115mm	950lm	36V	13W	15W	90	4000K	50°

M=Medium size, I=Internal Driver, F=Fixed beam, 1=-1: ceiling version -2:recessed version -3:trimless version

Remark: X=F (Non-Dim) X=P (Phase Dim)

BINGO Series
SPOTLIGHT



Spotlight
BINGO C

CE

CB

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

CRI

>90

Features

- Adjustable beam angle or adjustable beam angle
- Installation options have surface mounting, recessed, and recessed trimless

Specifications

- Dimming modes: Non-Dim,Phase Dim
- Beam angle: 20°~40°, 35°~60; 18°~35°, 35~60°
- Physical: aluminium, wet painting
- Accessories: Secondary reflector

Light Distribution



Housing Colour



White Black

Anti-glare Accessory



Honycomb

Anti Glary Ring Colour




Black



BINGO C S-I-Z
BINGO C M-I-Z
SPOTLIGHT

Drawing

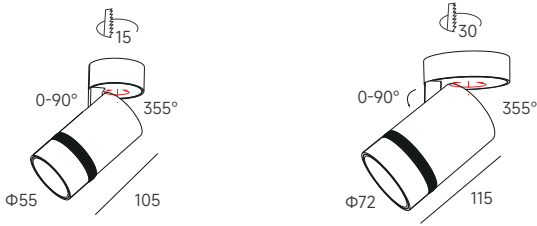

Order Options

11W 800lm-950lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO C S-I-Z-11W-930-X	Φ55*105mm	900lm	36V	9W	11W	90	3000K	20°~40°
BINGO C S-I-Z-11W-940-X	Φ55*105mm	950lm	36V	9W	11W	90	4000K	20°~40°
BINGO C S-I-Z-11W-930-X	Φ55*105mm	800lm	36V	9W	11W	90	3000K	35°~60°
BINGO C S-I-Z-11W-940-X	Φ55*105mm	850lm	36V	9W	11W	90	4000K	35°~60°

S=Small size, I=Internal Driver, Z=Zoomable beam -1: ceiling version -2:recessed version -3:trimless version
Remark: X=F (Non-Dim) X=P (Phase Dim)

15W 1300lm-1400lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BINGO C M-I-Z-15W-930-X	Φ72*115mm	1300lm	36V	13W	15W	90	3000K	18°~35°
BINGO C M-I-Z-15W-940-X	Φ72*115mm	1400lm	36V	13W	15W	90	4000K	18°~35°
BINGO C M-I-Z-15W-930-X	Φ72*115mm	1100lm	36V	13W	15W	90	3000K	35°~60°
BINGO C M-I-Z-15W-940-X	Φ72*115mm	1200lm	36V	13W	15W	90	4000K	35°~60°

M=Medium size, I=Internal Driver, Z=Zoomable beam -1: ceiling version -2:recessed version -3:trimless version
Remark: X=F (Non-Dim) X=P (Phase Dim)



KIWI



K1X30 Ø=30
K1X55 Ø=55
K1X70 Ø=70




KIWI


Extensive collection features minimalism, functionality and versatility. Flexible for lighting schemes in retail or residential spaces.



Delicate light engine,
 High quality anti-glare ring



Installation
 LED engine can be removed separately

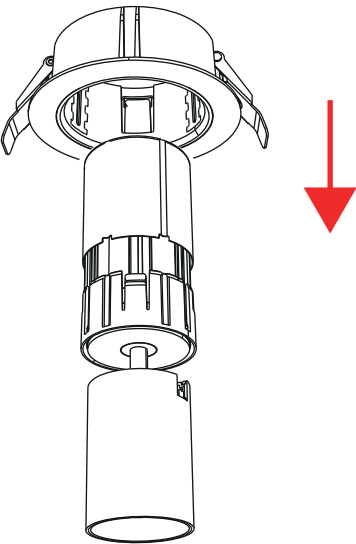

KIWI

Adjustable

350° rotatable and 90° tiltable.
 High quality optical lens with spot, narrow and medium beam angles.
 Interchangeable decoration ring with choice of black, white and gold colours.



Downlight
K1X30/K1X55/K1X70

CE

CB

UK
CA

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

UGR

<19

CRI

>90

Features

- Miniature size with cutout of 46mm .
- Extensive collection features minimalism, functionality and versatility.
- 350° rotatable and 90° tiltable.
- Interchangeable decoration ring with choice of black, white and gold colours.


Specifications

- Dimming modes:Non-Dim, Phase Dim, 1-10V,DALI
- Beam angle: 15°, 18°, 24°, 25°, 30°, 36°, 50°, 55°
- Physical: aluminium, powder coating
- Accessories: secondary reflector plastic

Installation Type




Light Distribution



Housing Colour



Anti-glare Accessory




Secondary Reflector Colour



K1X30/K1X55
DOWNLIGHT

Drawing

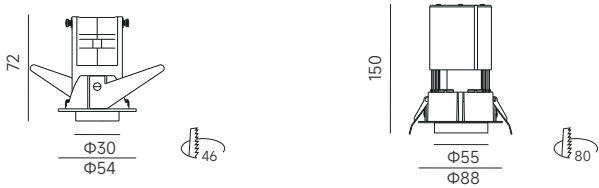


Order Options

6W 280lm-320lm CREE								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X30-4W-930-15-X	Ø54*72mm	300lm	12V	4W	6W	90	3000K	15°
K1X30-4W-940-15-X	Ø54*72mm	320lm	12V	4W	6W	90	4000K	15°
K1X30-4W-930-30-X	Ø54*72mm	300lm	12V	4W	6W	90	3000K	30°
K1X30-4W-940-30-X	Ø54*72mm	320lm	12V	4W	6W	90	4000K	30°
K1X30-4W-930-55-X	Ø54*72mm	280lm	12V	4W	6W	90	3000K	55°
K1X30-4W-930-55-X	Ø54*72mm	300lm	12V	4W	6W	90	4000K	55°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								
10W 450lm-500lm CREE								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X55-9W-930-10-X	Ø88*150mm	450lm	12V	9W	10W	90	3000K	10°
K1X55-9W-940-10-X	Ø88*150mm	500lm	12V	9W	10W	90	4000K	10°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								
11W 700lm-850lm CITIZEN								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X55-9W-930-18-X	Ø88*150mm	700lm	36V	9W	11W	90	3000K	18°
K1X55-9W-940-18-X	Ø88*150mm	750lm	36V	9W	11W	90	4000K	18°
K1X55-9W-930-24-X	Ø88*150mm	750lm	36V	9W	11W	90	3000K	24°
K1X55-9W-940-24-X	Ø88*150mm	800lm	36V	9W	11W	90	4000K	24°
K1X55-9W-930-36-X	Ø88*150mm	800lm	36V	9W	11W	90	3000K	36°
K1X55-9W-940-36-X	Ø88*150mm	850lm	36V	9W	11W	90	4000K	36°
K1X55-9W-930-50-X	Ø88*150mm	800lm	36V	9W	11W	90	3000K	50°
K1X55-9W-940-50-X	Ø88*150mm	850lm	36V	9W	11W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								



K1X70
DOWNLIGHT

Drawing



Order Options

15W 1100lm-1450lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X70-13W-930-15-X	Φ110*165mm	1100lm	36V	13W	15W	90	3000K	15°
K1X70-13W-940-15-X	Φ110*165mm	1200lm	36V	13W	15W	90	4000K	15°
K1X70-13W-930-25-X	Φ110*165mm	1200lm	36V	13W	15W	90	3000K	25°
K1X70-13W-940-25-X	Φ110*165mm	1300lm	36V	13W	15W	90	4000K	25°
K1X70-13W-930-30-X	Φ110*165mm	1350lm	36V	13W	15W	90	3000K	30°
K1X70-13W-940-30-X	Φ110*165mm	1450lm	36V	13W	15W	90	4000K	30°
K1X70-13W-930-50-X	Φ110*165mm	900lm	36V	13W	15W	90	3000K	50°
K1X70-13W-940-50-X	Φ110*165mm	950lm	36V	13W	15W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

21W 1200lm-1900lm		CITIZEN						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
K1X70-18W-930-15-X	Φ110*165mm	1500lm	36V	18W	21W	90	3000K	15°
K1X70-18W-940-15-X	Φ110*165mm	1600lm	36V	18W	21W	90	4000K	15°
K1X70-18W-930-25-X	Φ110*165mm	1600lm	36V	18W	21W	90	3000K	25°
K1X70-18W-940-25-X	Φ110*165mm	1700lm	36V	18W	21W	90	4000K	25°
K1X70-18W-930-30-X	Φ110*165mm	1800lm	36V	18W	21W	90	3000K	30°
K1X70-18W-940-30-X	Φ110*165mm	1900lm	36V	18W	21W	90	4000K	30°
K1X70-18W-930-50-X	Φ110*165mm	1200lm	36V	18W	21W	90	3000K	50°
K1X70-18W-940-50-X	Φ110*165mm	1300lm	36V	18W	21W	90	4000K	50°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)								

Linear Profile


Linear Profile

LINK6080	315-328
LINK60	329-340
LINK50	341-358
LINK30	359-370



LINK6080

315 IE-lite lighting

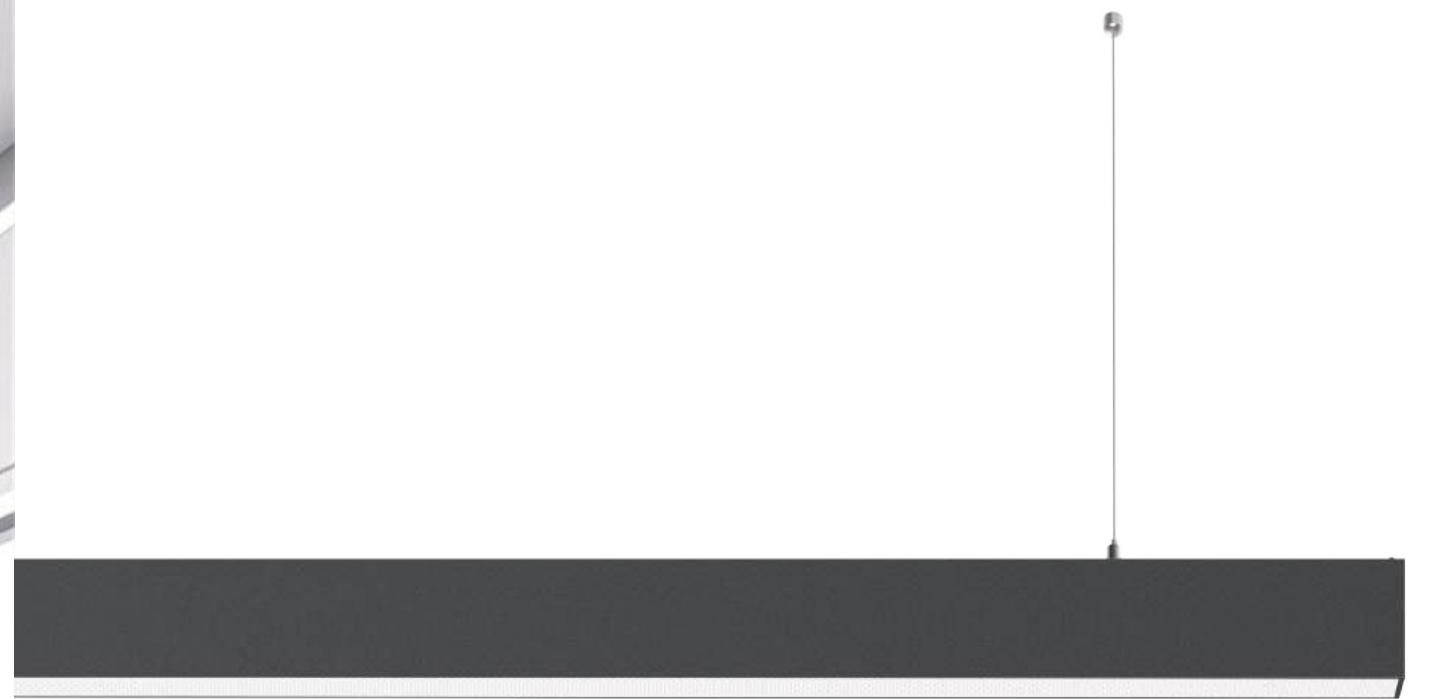

LINK6080

Linear Profile

Adopt Microprism mask with **UGR<19**, provide comfortable lighting

Surface treatment process of high-quality profiles


The end cap is no visible screws

Pre-wired gear tray for quick installation


LINK6080 Series
LINEAR PROFILE

LINK6080 is an ideal profile system for any office lighting project, thanks to its wide range of configura-tion options. The profile is specially made with a 60mm width to ensure strict glare control (UGR<19) and homogeneous lighting. Available profile lengths include 560mm, 1196mm, 1476mm, 1826mm, which can be used individually or connected continuously to meet different spatial needs. Combined with L-shaped, T-shaped, and X-shaped R-shaped modules, LINK6080 opens up more possibilities for optimal integration in every project.


STANDARD LENGTHS:

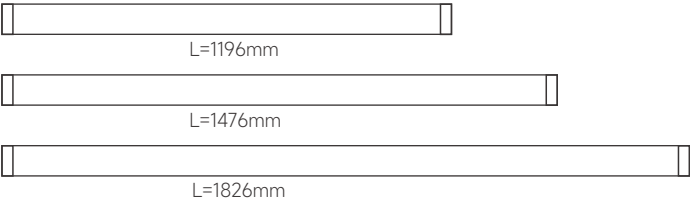


Customized Lengths Available:
Endcap Kit=2X3mm




STANDARD LENGTHS Trim Recessed:

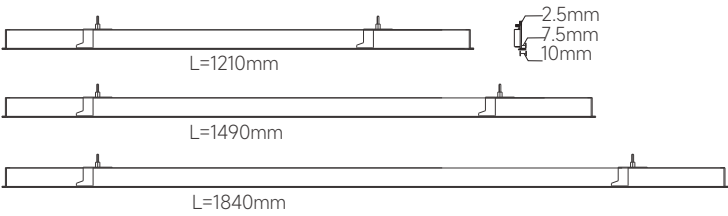


Customized Lengths Available Trim Recessed:
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5)=10mm

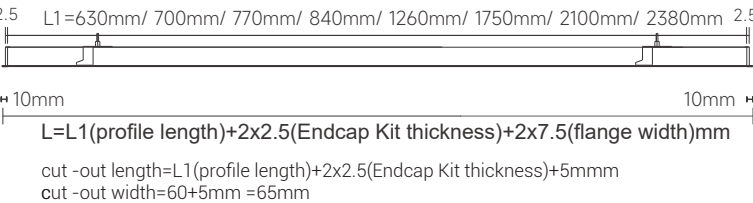


CORNER MODULES / Trim Recessed no rounded corner:

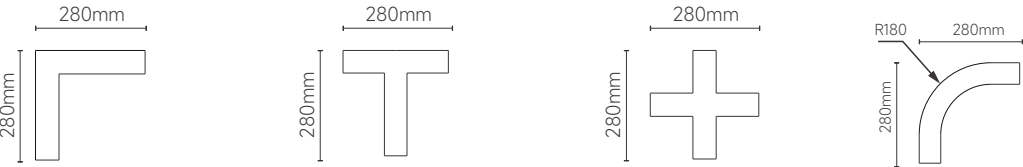


MODULE LENGTHS:




MOUNTINGS:

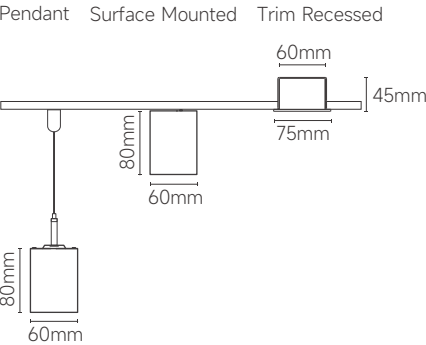

MODULE LENGTHS Trim Recessed:



LINK6080 Series
LINEAR PROFILE

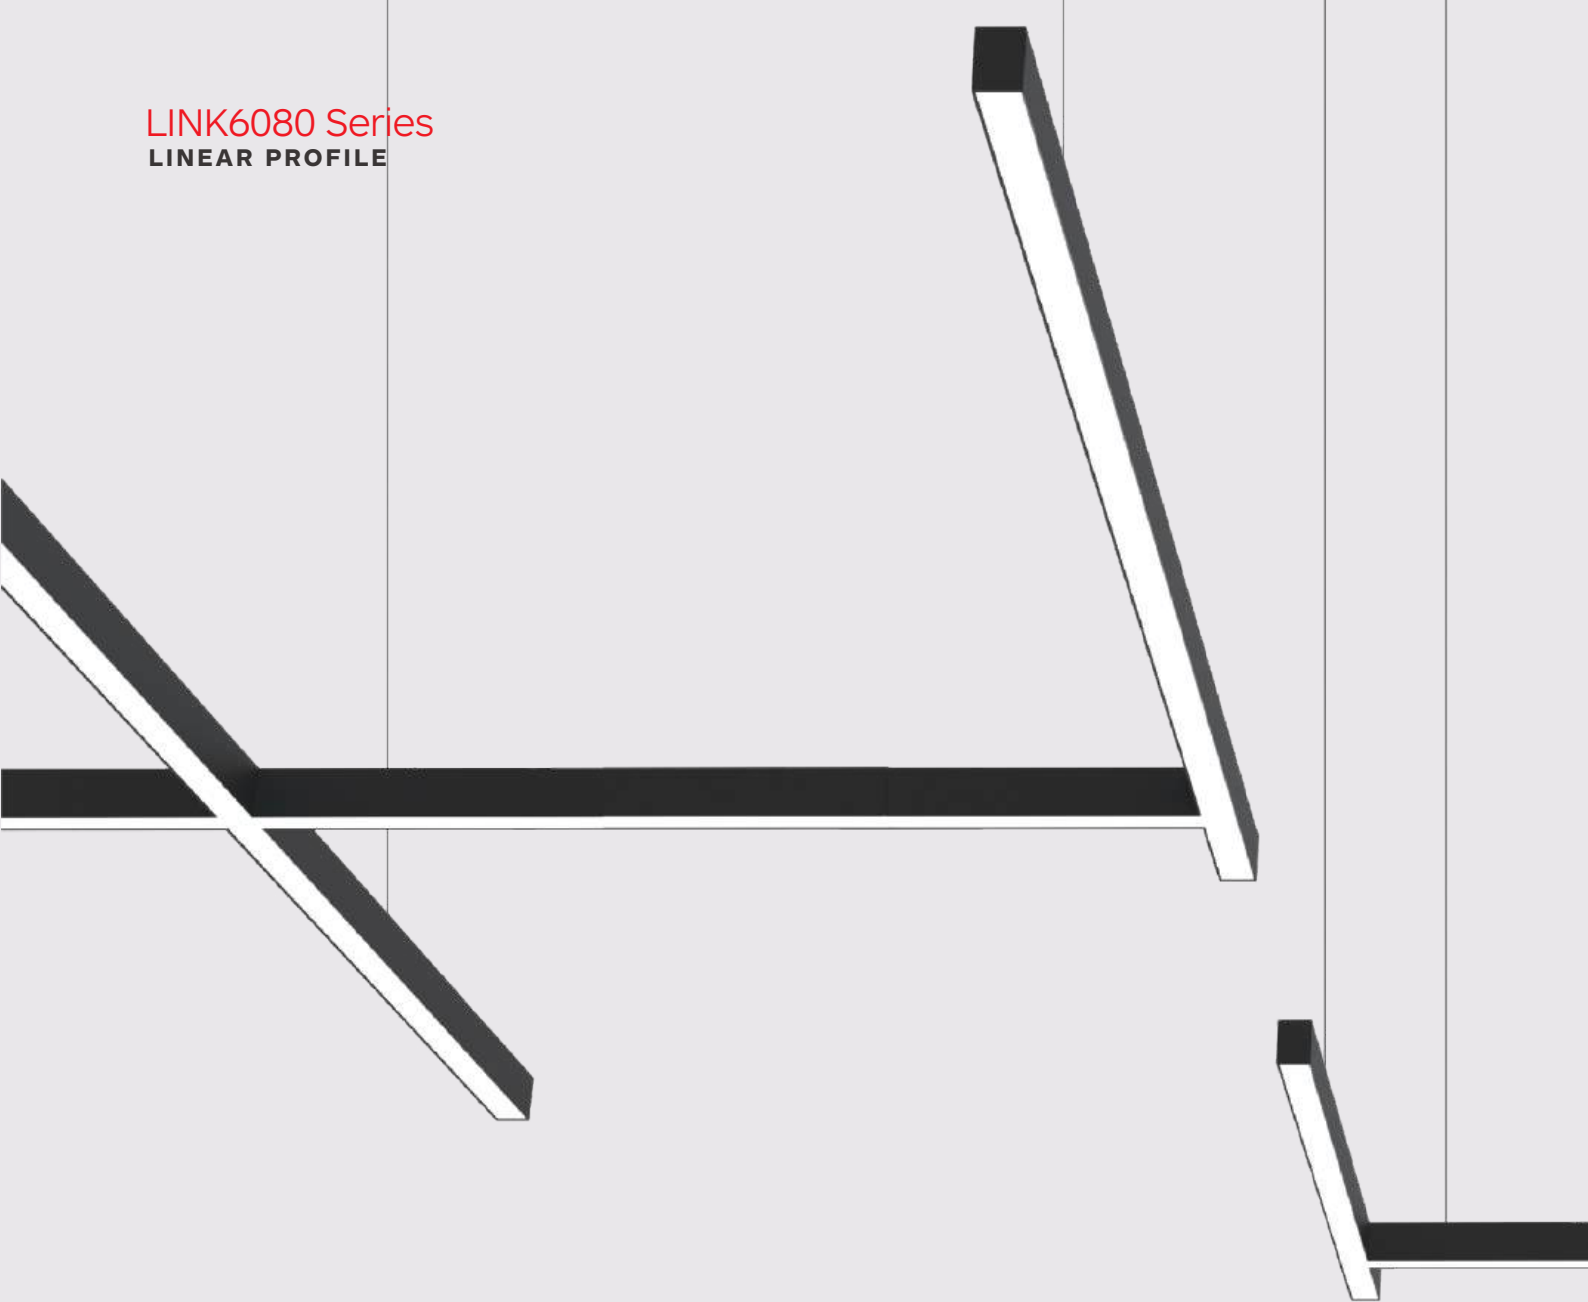


LINK6080 standard version features a microprismatic cover to enhance visual comfort (UGR<19) combined with homogeneous lighting. Opal cover version is available as an option, offering even lighting and a wider beam angle (UGR<25).

Besides its elegant appearance, its detail-oriented design makes it favored by designers, electricians and users. All the profile connection joints and profile end caps (NO visible screw) are designed with anti-leakage measures, ensuring optimal & clean light performance. All profiles are equipped with quick-connectors, allowing for fast, easy installation and maintenance.


Mounting options include pendant direct, pendant direct & indirect, surface-mounted, trim recessed. The LED driver, available in either ON-OFF or DALI Dim, is integrated into the light channel. Other dimming LED drivers are also available on demand.

It's elegant appearance and detail-oriented design make LINK6080 an ideal profile system for office lighting or any profile-based basic lighting


Quick Connector for Fast Installation

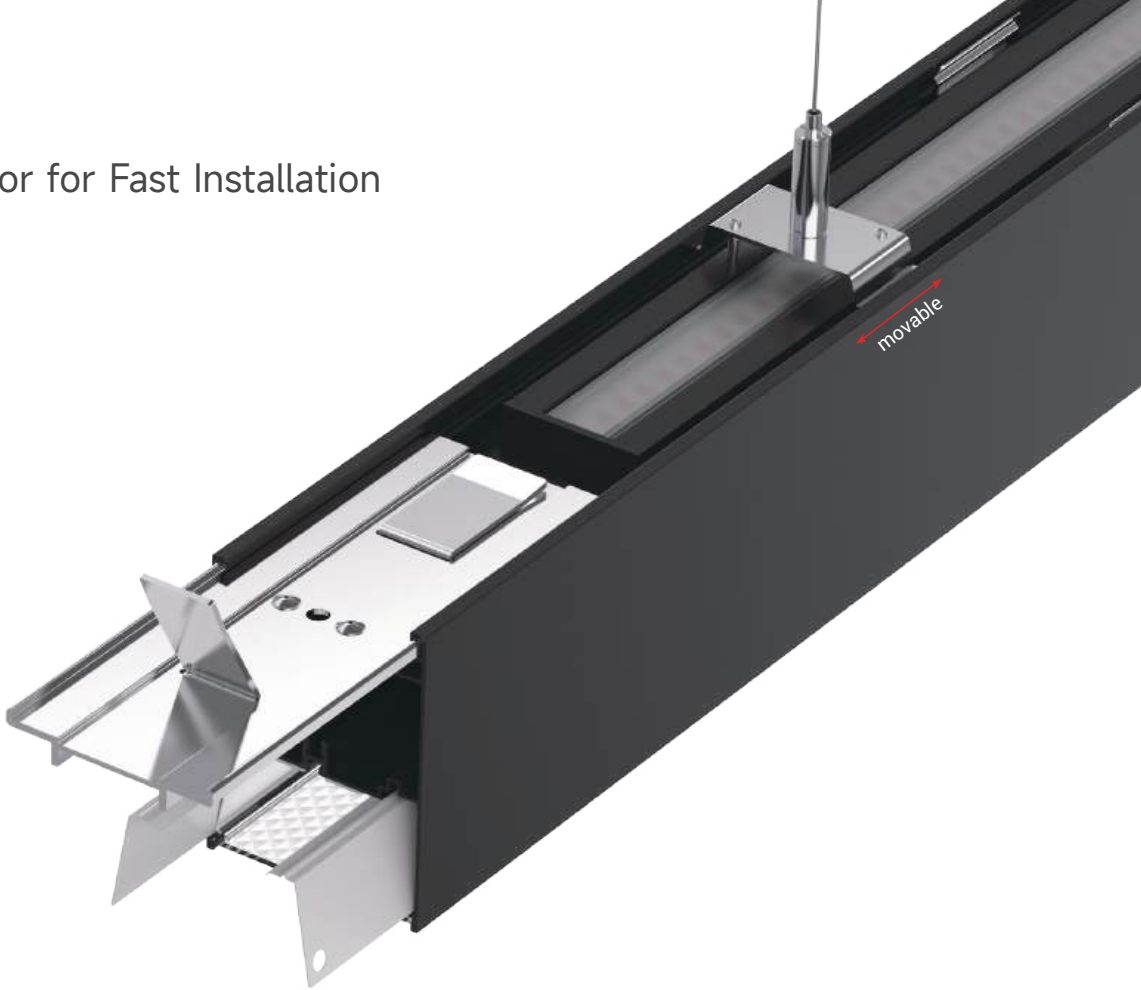

Product Features:

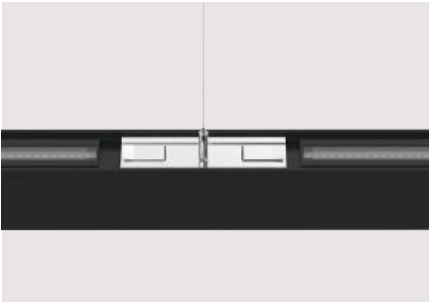


Seamless joints with no light leakage

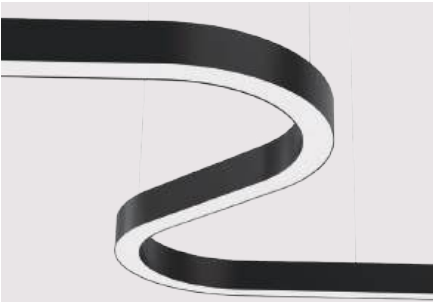

Curve shape module



Custom lengths available in 70mm increments

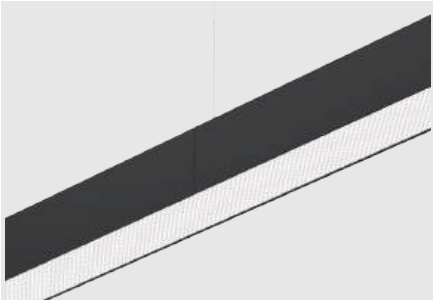

Microprismatic diffuser for visual comfort (UGR<19)

LINK6080 Series
LINEAR PROFILE



Construction

- 1 Pendant Installation Steel Wire Kit
- 2 Surface Mounted Installation Brackets
- 3 Trim Recessed Installation Brackets
- 4 End Cap Set (no light leakage, no visible screw)
- 5 Profile Channel without Trim
- 6 Profile Channel with Trim
- 7 Linear Connector
- 8 Light Leakage Prevention Cover
- 9 LED Module
- 10 Opal Diffuser Cover
- 11 Microprismatic Film
- 12 Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
30 meters per run, in-field cuttable

LINK6080 Series
LINEAR PROFILE



UGR<19


LINK6080 Linear System

- The profile is specially made with a 60mm width together with clever triple-layer optical design to ensure strict glare control (UGR<19), homogeneous lighting and efficiency.
- High quality surface treatment
- The end cap is no visible screw
- Quick-connector allows fast connection


Visual comfort




UGR<19




Photometric curves of
LINK6080 P-CL1500U-47W-840-80° ↓ 105° ↑

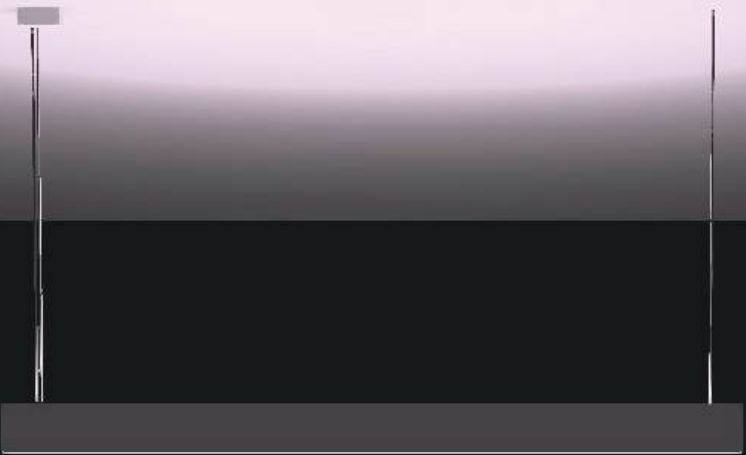

Product: LINK6080 P-CL1500U-47W-840-80° ↓ 105° ↑
Worktop dimensions: (L x W x H) 1800 x 900 x 800 mm
Ceiling height: 3000 mm
Lamp height from worktop: 1300 mm
Average illuminance: 535 lx
Uniformity: 0.64 UGR: <19

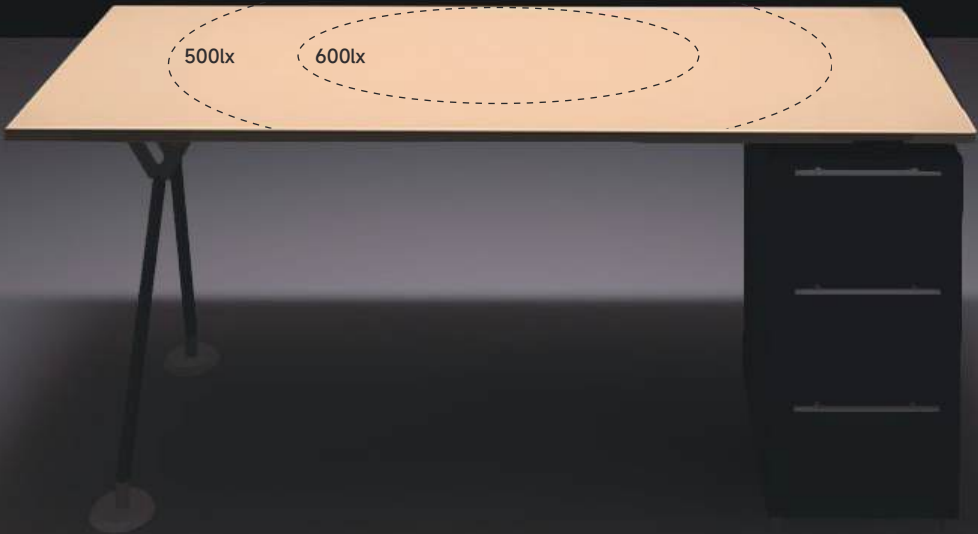

LINK6080 Series
LINEAR PROFILE

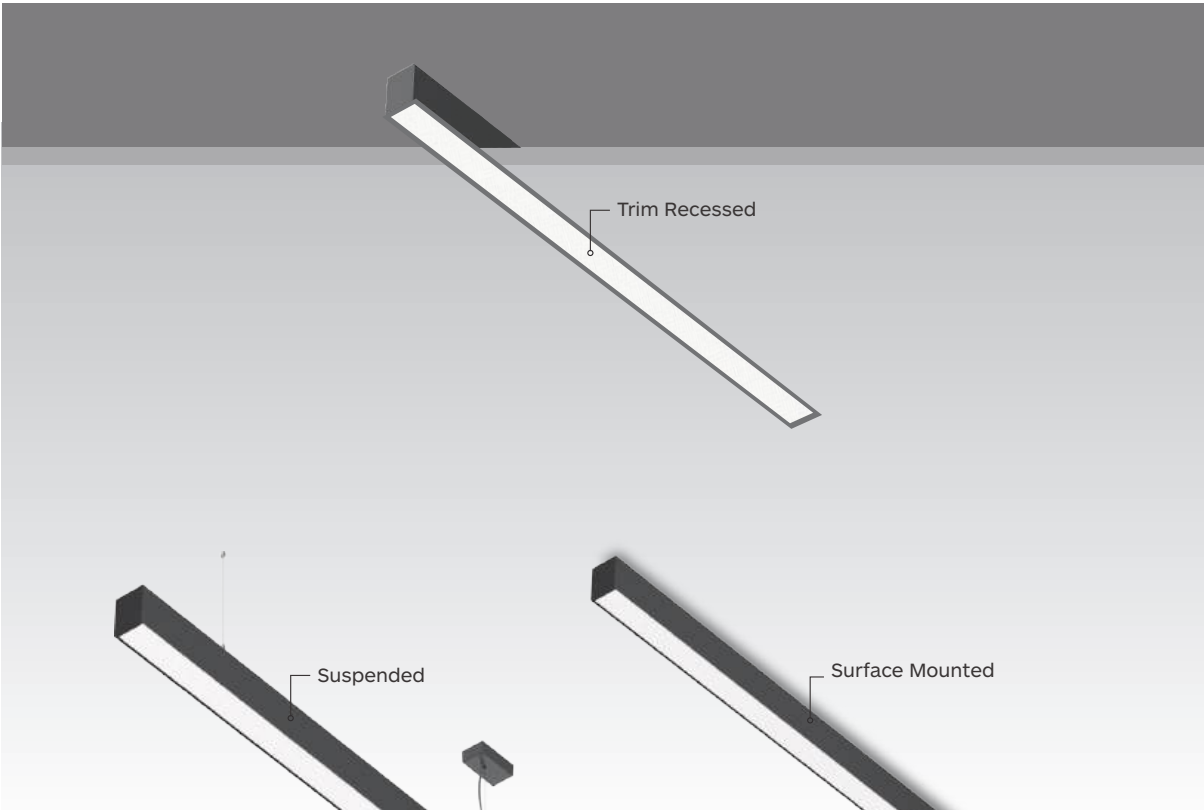

LINK6080 Series

CE

CCC

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

UGR

<19

CRI

>80


Features

- Adopt Microprism diffuser with UGR<19,provide comfortable lighting
- Total system lighting Efficacy is up to 120LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation

Installation Type



Housing Colour




White Black

Specifications


- Illumination type: Downward & upward lighting
- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: Non-Dim, 1-10V, DALI
- LUMILEDS LEDs
- Length options: 0.07m, 0.28m, 0.56m, 1.2m, 1.5m, 1.8m
- Installation: surface mounted, suspended and recessed

Light Distribution

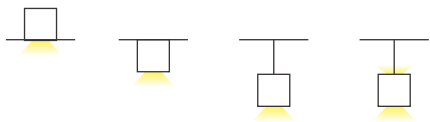

LINK6080
Linear Profile

Drawing

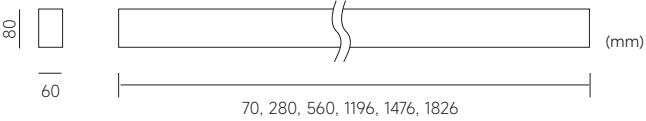


Downward lightingLUMILEDS							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
70MM							
LINK6080-CL70-2W-840-X	70*60*80mm	170lm	1.4W	1.6W	>80	4000K	80°
280MM							
LINK6080-CL280-7W-840-X	280*60*80mm	700lm	5.6W	6.5W	>80	4000K	80°
560MM							
LINK6080-CL560-13W-840-X	566*60*80mm	1430lm	11W	13W	>80	4000K	80°
1190MM							
LINK6080-CL1190-27W-840-X	1196*60*80mm	2970lm	24W	27W	>80	4000K	80°
1470MM							
LINK6080-CL1470-32W-840-X	1476*60*80mm	3520lm	29W	32W	>80	4000K	80°
1820MM							
LINK6080-CL1820-40W-840-X	1826*60*80mm	4400lm	36W	40W	>80	4000K	80°
Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							


Downward and upward lightingLUMILEDS							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
560MM							
LINK6080-CL560U-4W-13W-840-X	566*60*80mm	1900lm	3W↑12W↓	4W↑13W↓	>80	4000K	80°↓105°↑
1190MM							
LINK6080-CL1190U-10W-27W-840-X	1196*60*80mm	4450lm	9W↑25W↓	10W↑27W↓	>80	4000K	80°↓105°↑
1470MM							
LINK6080-CL1470U-12W-32W-840-X	1476*60*80mm	5570lm	11W↑30W↓	12W↑32W↓	>80	4000K	80°↓105°↑
1820MM							
LINK6080-CL1820U-17W-40W-840-X	1826*60*80mm	7000lm	16W↑36W↓	17W↑40W↓	>80	4000K	80°↓105°↑
Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

Trim RecessedLUMILEDS							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
560MM							
LINK6045-CL560-13W-840-T-X	580*75*45mm	1430lm	11W	13W	>80	4000K	80°
1190MM							
LINK6045-CL1190-27W-840-T-X	1210*75*45mm	2970lm	24W	27W	>80	4000K	80°
1470MM							
LINK6045-CL1470-32W-840-T-X	1490*75*45mm	3520lm	29W	32W	>80	4000K	80°
1820MM							
LINK6045-CL1820-40W-840-T-X	1840*75*45mm	4400lm	36W	40W	>80	4000K	80°
Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

LINK6080 Series
LINEAR PROFILE

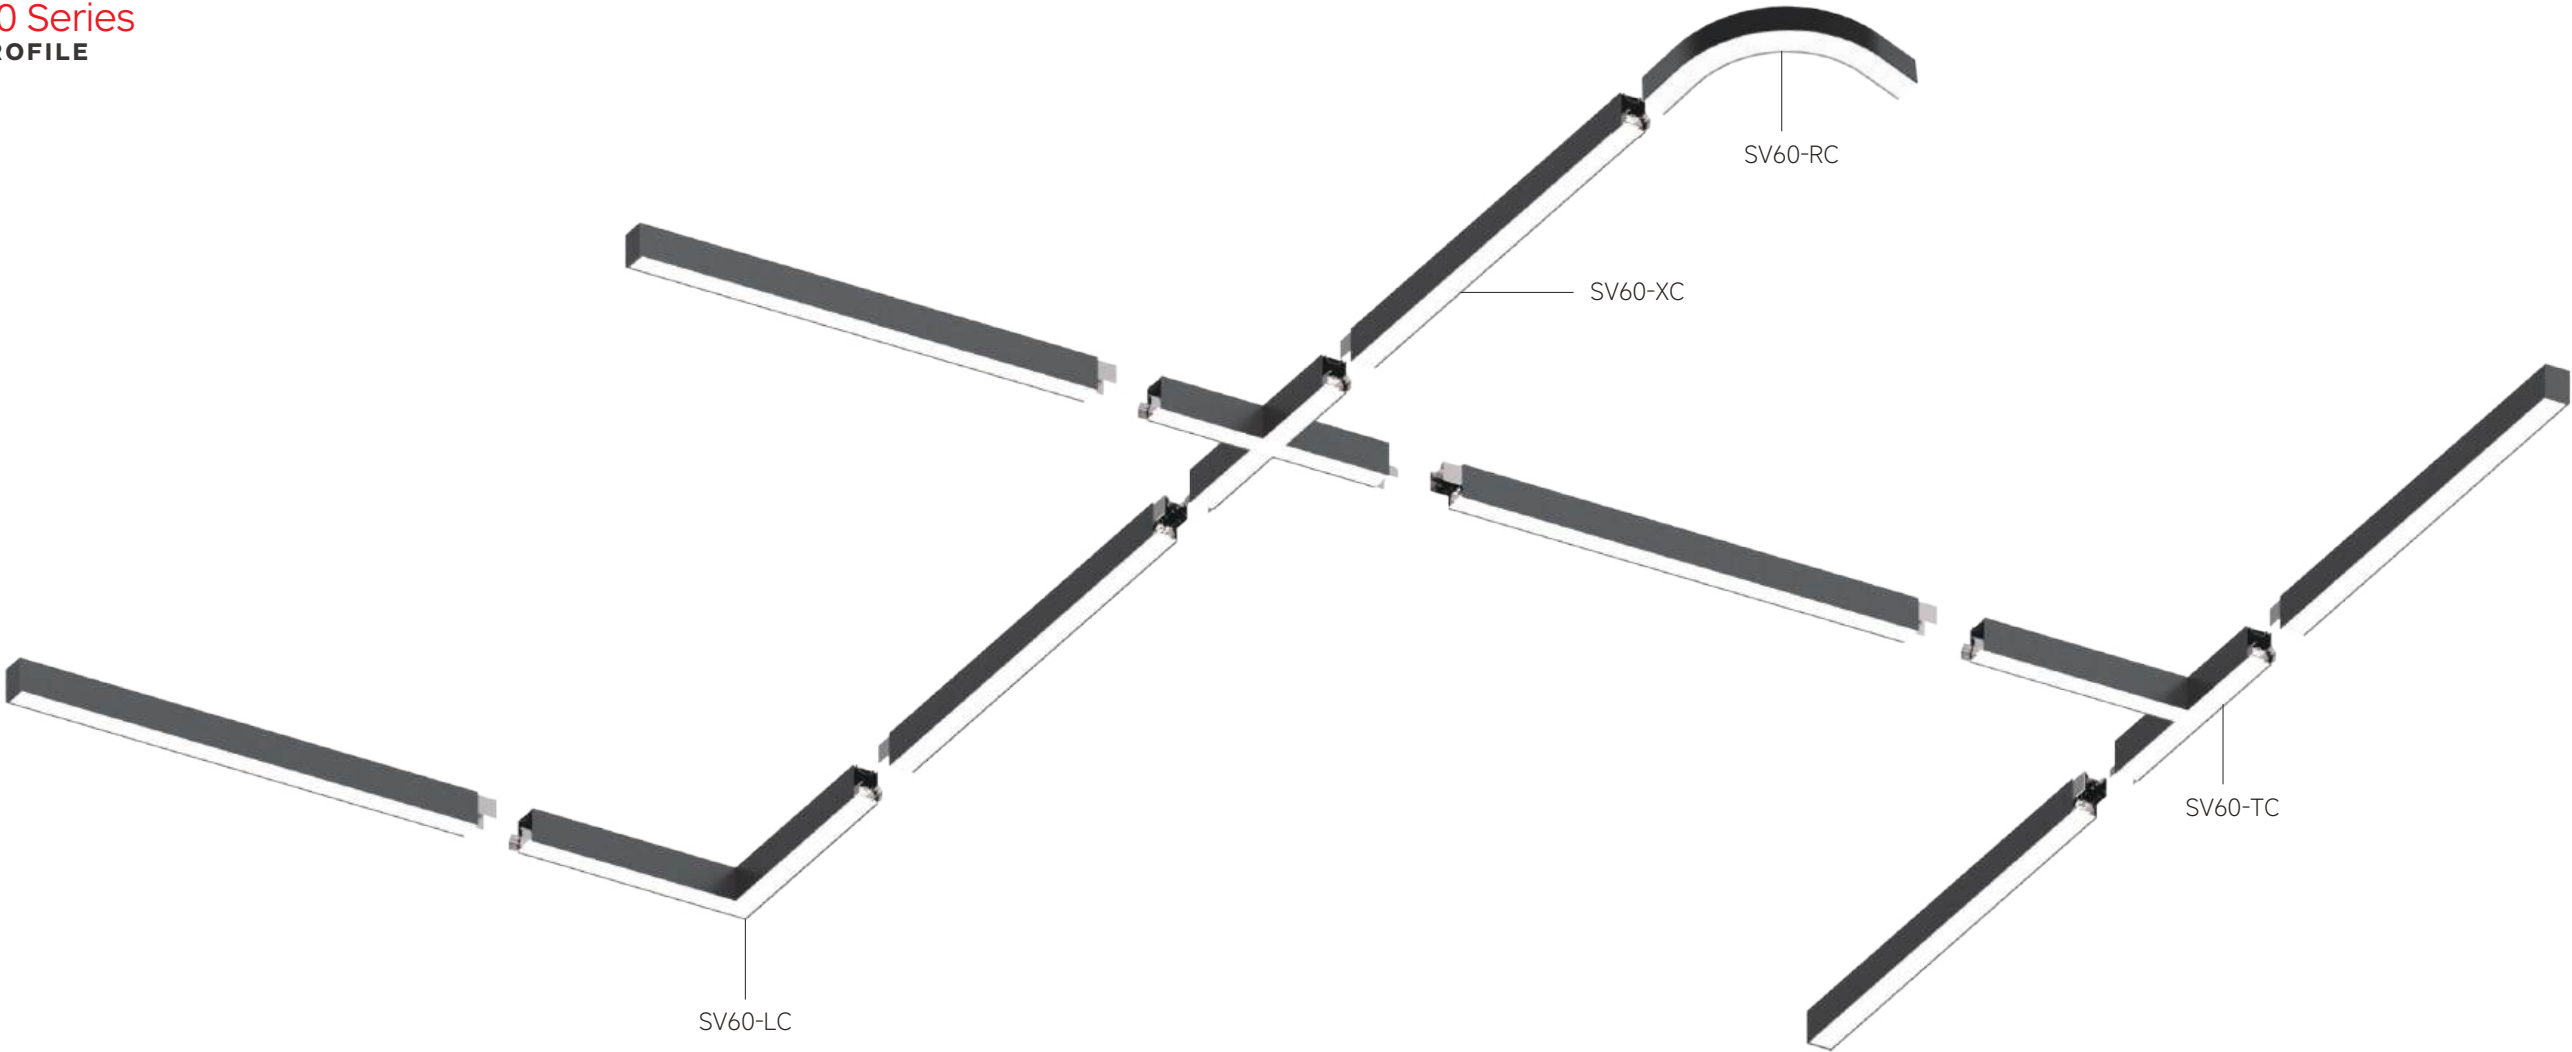

Corner Module of LINK6080 Linear System

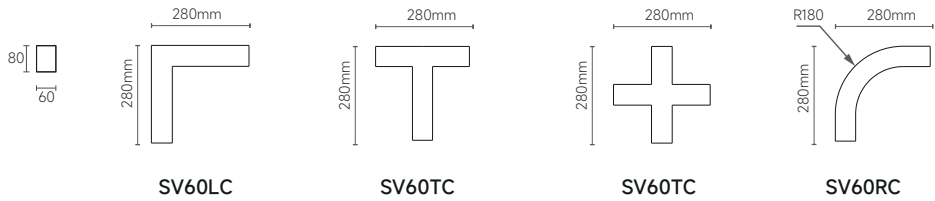

	SV60-PK	Pendnat Installation Kit (with Ceiling Box)
	SV60-PWK	Pendnat Steel Wire Kit (no Ceiling Box)
	SV60-SMK	Surface Mounted Kit
	SV60-LCK	Linear Connector Kit
	SV60-EFK	LINK6080 Trim Recessed Endcap Kit White/ Black Two unit for two side
	SV60-FXPC-30M SV60-FMPC-30M SV60-FOPC-30M	Flexible Microprismatic Cover, in 30 Meters per Roll Flexible Opal Cover, in 30 Meters per Roll
	SV60-FCK	2.5-meter three-core input wire&Quick-connect for ON/OFF
	SV60-DCK	2.5-meter five-core input wire&Quick-connect for Dimming control


Corner Module LUMILEDS							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
L							
LINK6080-L Corner-12W-840-X	280*280mm	1320lm	10W	12W	>80	4000K	80°
T							
LINK6080-T Corner-12W-840-X	280*280mm	1320lm	10W	12W	>80	4000K	80°
X							
LINK6080-X Corner-12W-840-X	280*280mm	1320lm	10W	12W	>80	4000K	80°
R							
LINK6080-R Corner-12W-840-X	280*280mm	1320lm	10W	12W	>80	4000K	80°

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)



LINK60

3291E-lite lighting

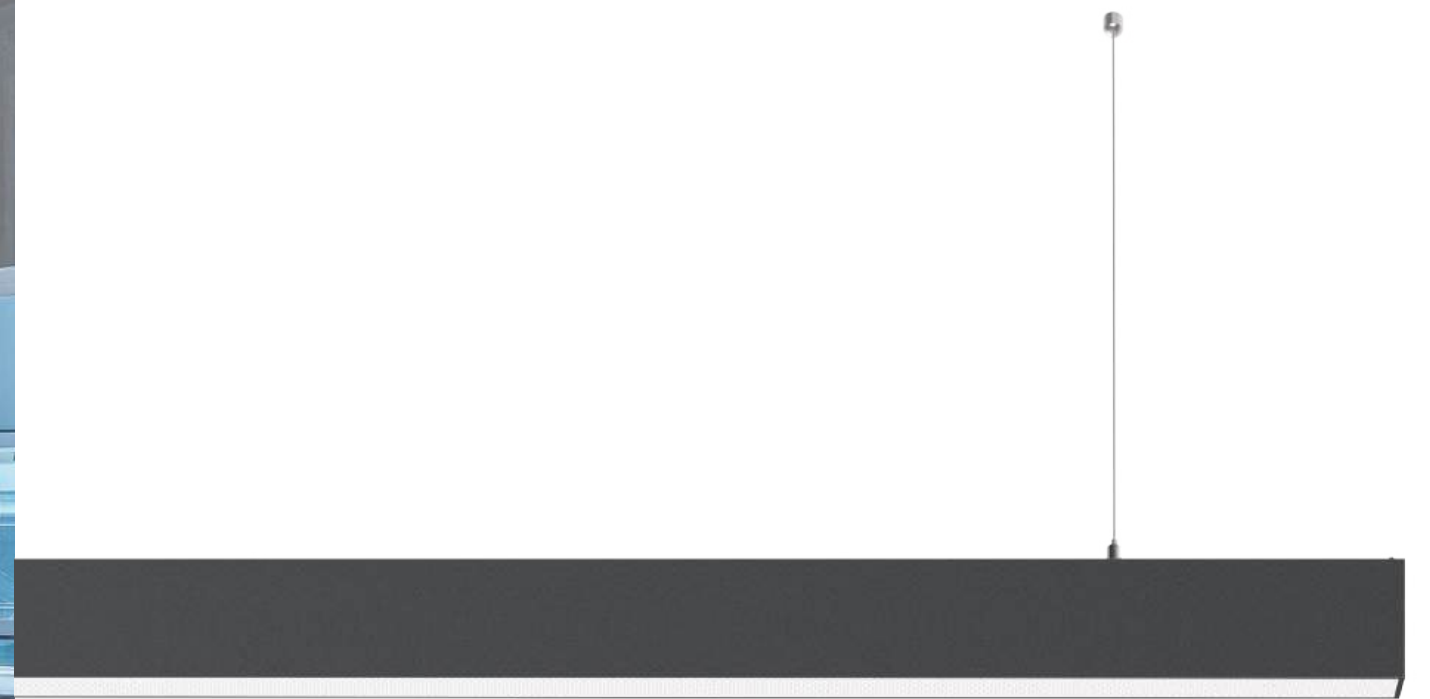

LINK60


Linear Profile

Adopt Microprism mask with **UGR<19**, provide comfortable lighting
Surface treatment process of high-quality profiles
The end cap is no visible screws
Pre-wired gear tray for quick installation


LINK60 Series
LINEAR PROFILE

LINK60 is an ideal profile system for any office lighting project, thanks to its wide range of configuration options. The profile is specially made with a 65mm width to ensure strict glare control (UGR<19)and homogeneous lighting. Available profile lengths include 614mm, 914mm, 1214mm, 1514mm, and 1814mm, which can be used individually or connected continuously to meet different spatial needs. Combined with L-shaped, T-shaped, and X-shaped modules, LINK60 opens up more possibilities for optimal integration in every project.

STANDARD LENGTHS (Trimless):

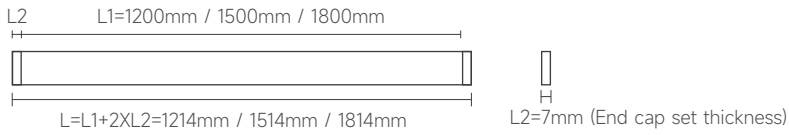

STANDARD LENGTHS (Trim recessed):

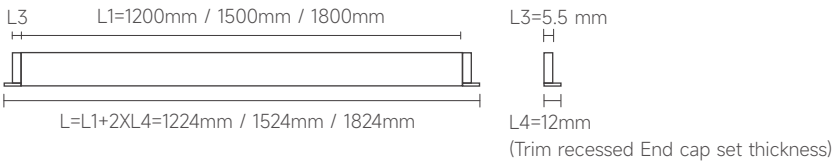


MODULE LENGTHS (Trimless):




MODULE LENGTHS (Trim recessed):




MOUNTINGS:

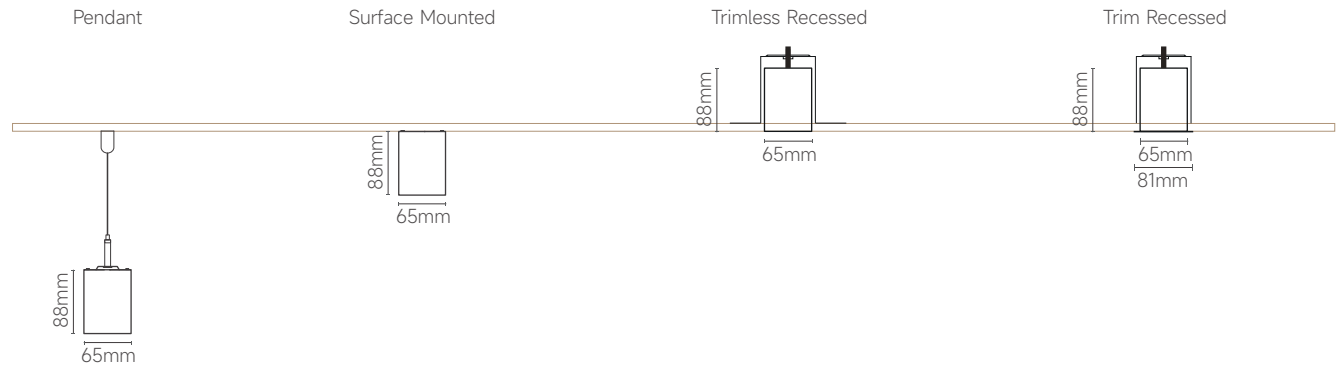

CORNER MODULES:

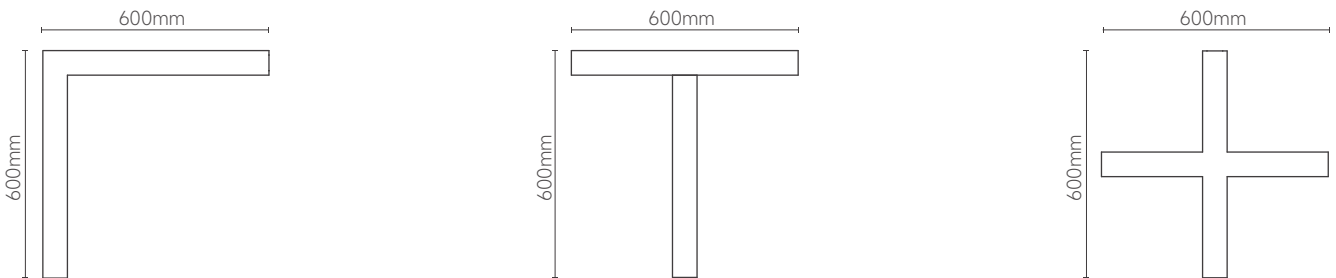

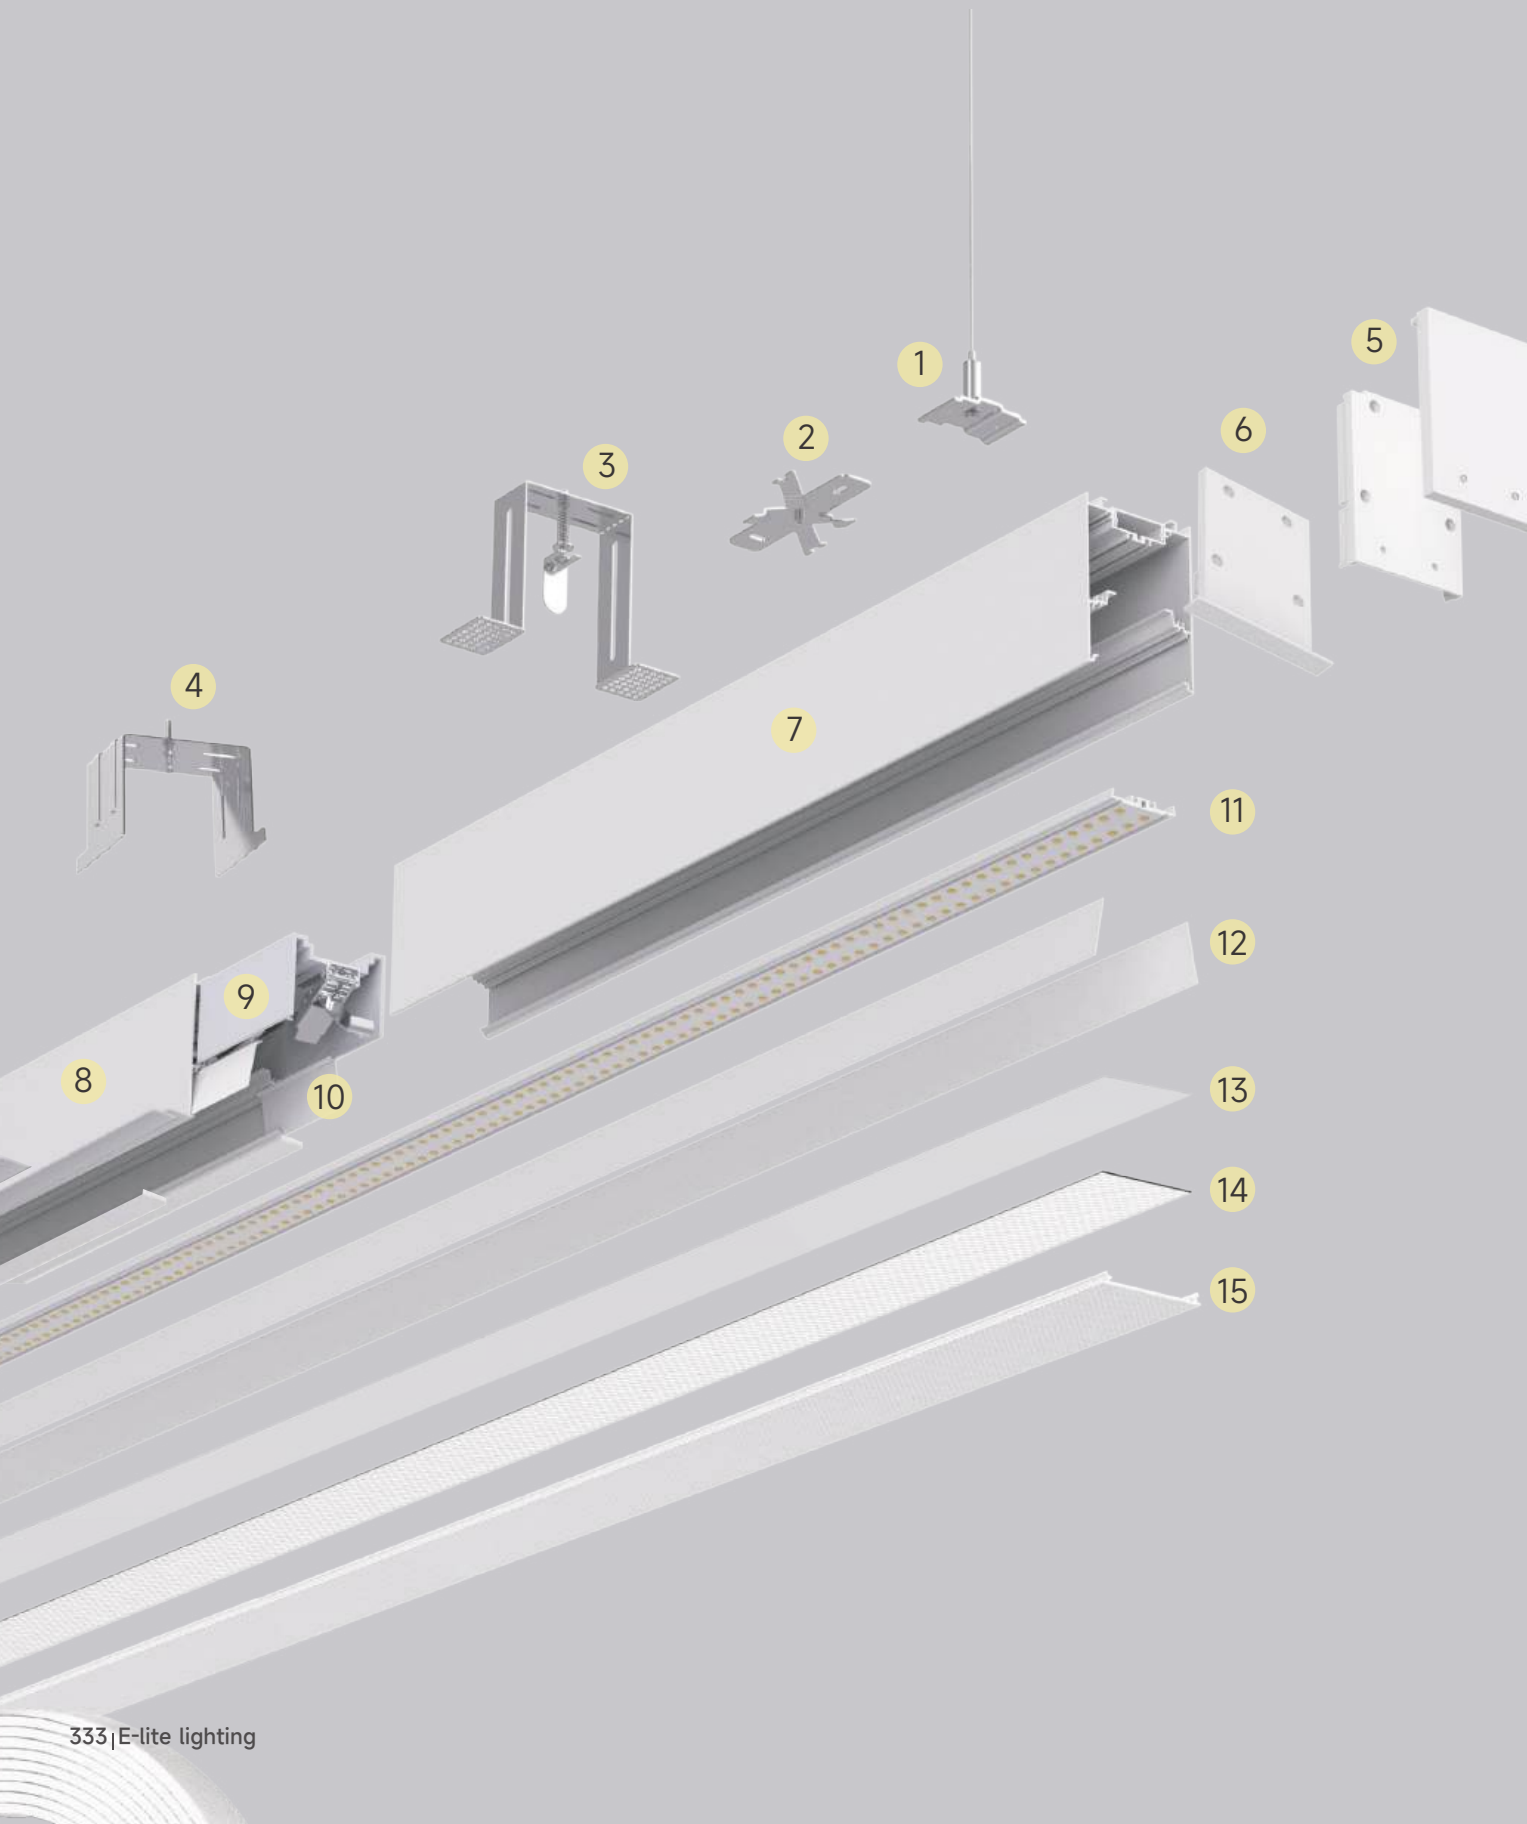

Construction

- 1 Pendant Installation Steel Wire Kit
- 2 Surface Mounted Installation Brackets
- 3 Trimless Recessed Installation Brackets
- 4 Trim Recessed Installation Brackets
- 5 End Cap Set without Trim (no light leakage, no visible screw)
- 6 End Cap with Trim
- 7 Profile Channel without Trim
- 8 Profile Channel with Trim
- 9 Quick Linear Connector
- 10 Light Leakage Prevention Cover
- 11 LED Module
- 12 Light Reflection Film
- 13 Opal Diffuser Film
- 14 Microprismatic Film
- 15 Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
30 meters per run, in-eld cuttable

LINK60 Series
LINEAR PROFILE


Ultra-long flexible diffuser

Up to 30m long without light leakage.
Microprism craftsmanship,uniform and soft light.




No light leakage

Double end cap design without light leakage and visible screws.
Easy disassembly for continuous connection.

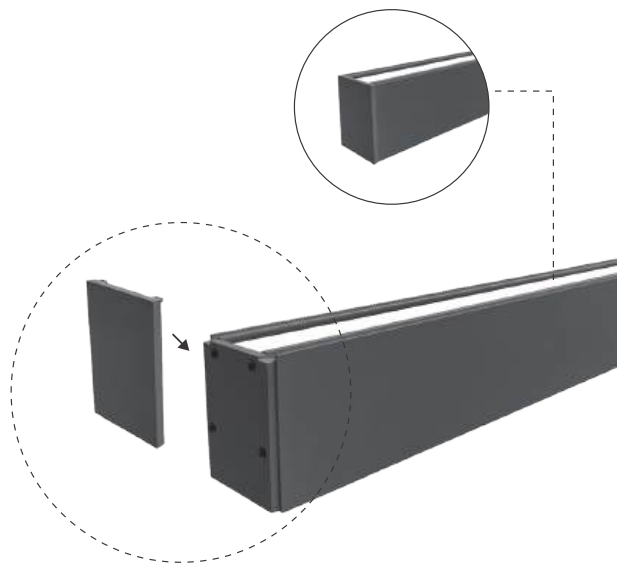



Canopy BOX

Aesthetics of appearance.

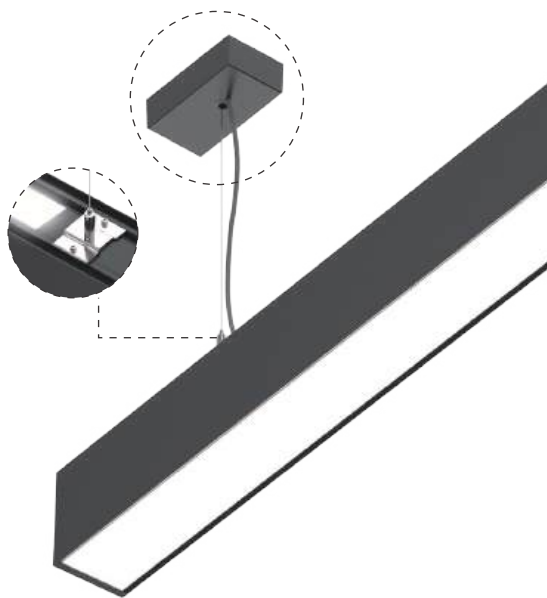


Surface mounted accessories

Rotary clip design for convenient installation.

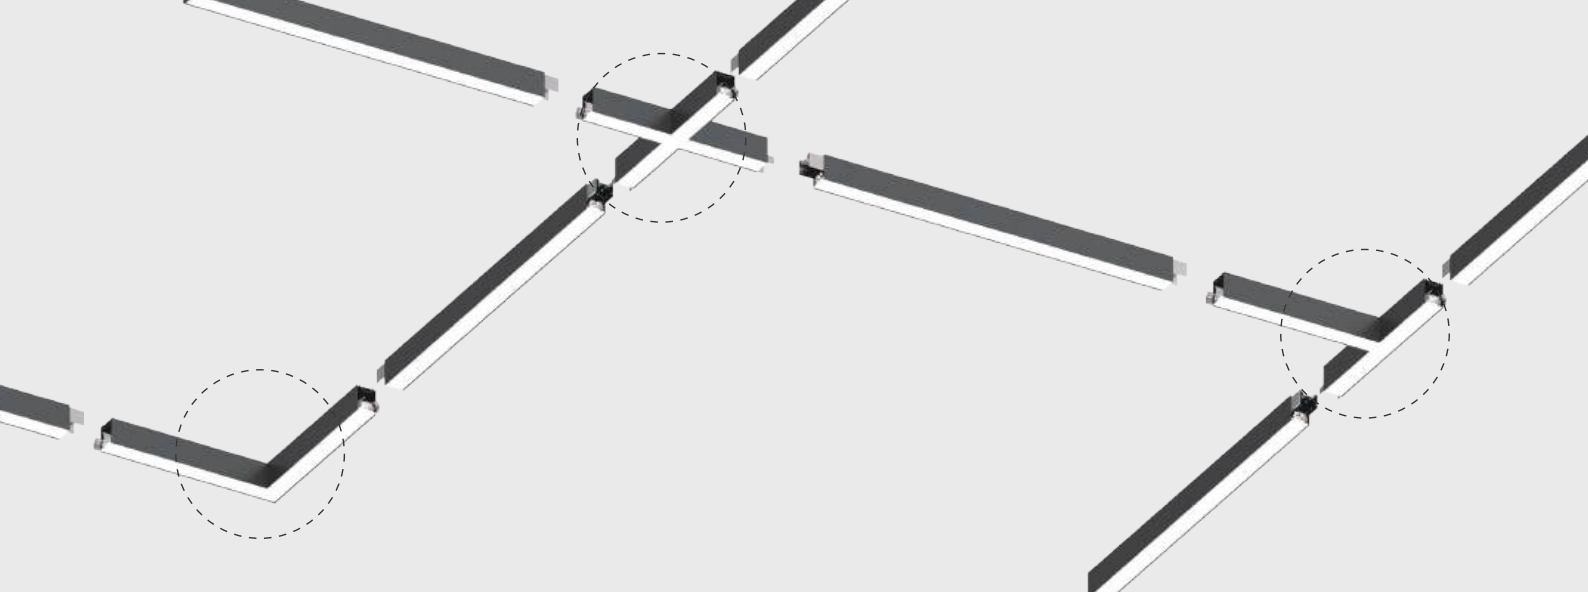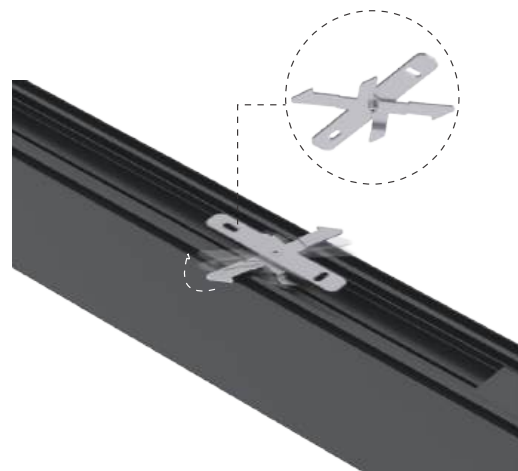

Seamless connection

Standard accessories,tight connection
without light leakage.

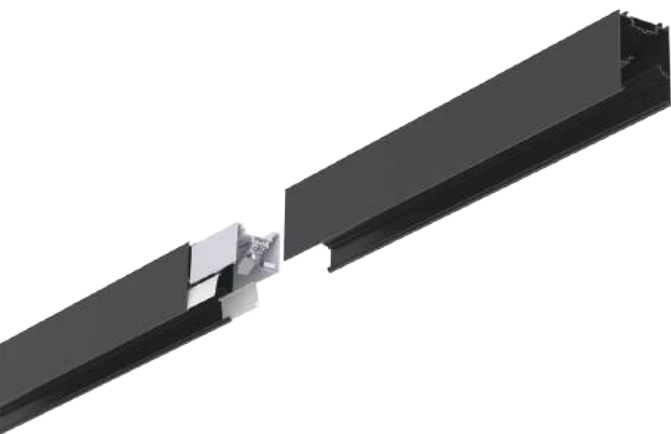



Connection accessories


Four kinds of corner,
No need complex cutting.



UGR<19


Profile system made of extruded aluminum with 65mm width,
3 installation way: surface mounted, suspended and recessed.

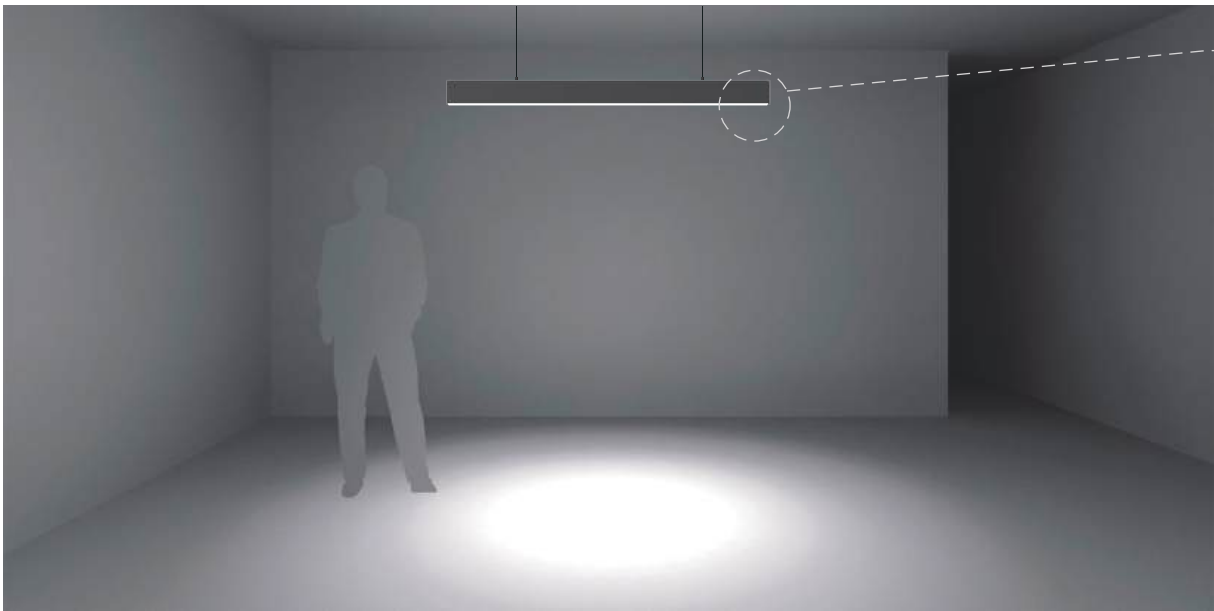

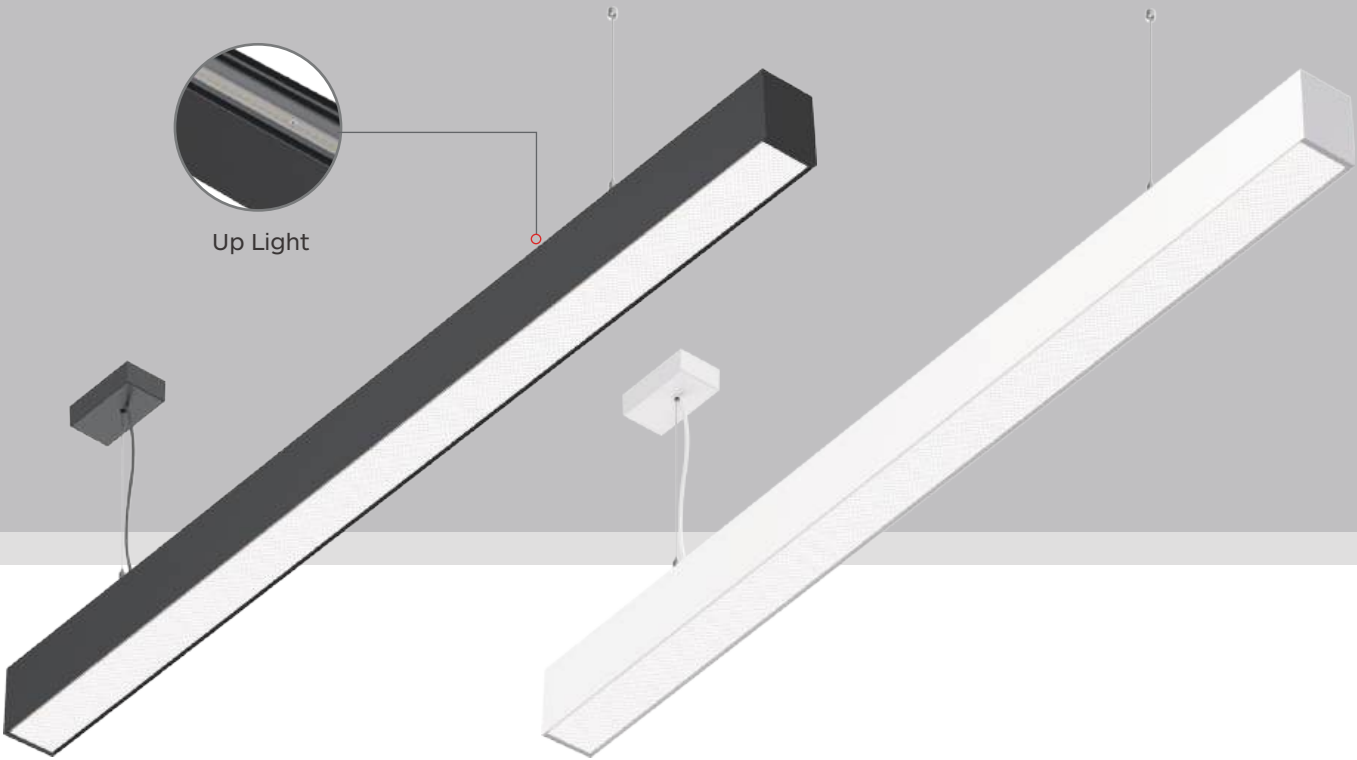

Always the right light
distribution

Whatever you wish to illuminate,
with E-lite you'll find the right light distribution.

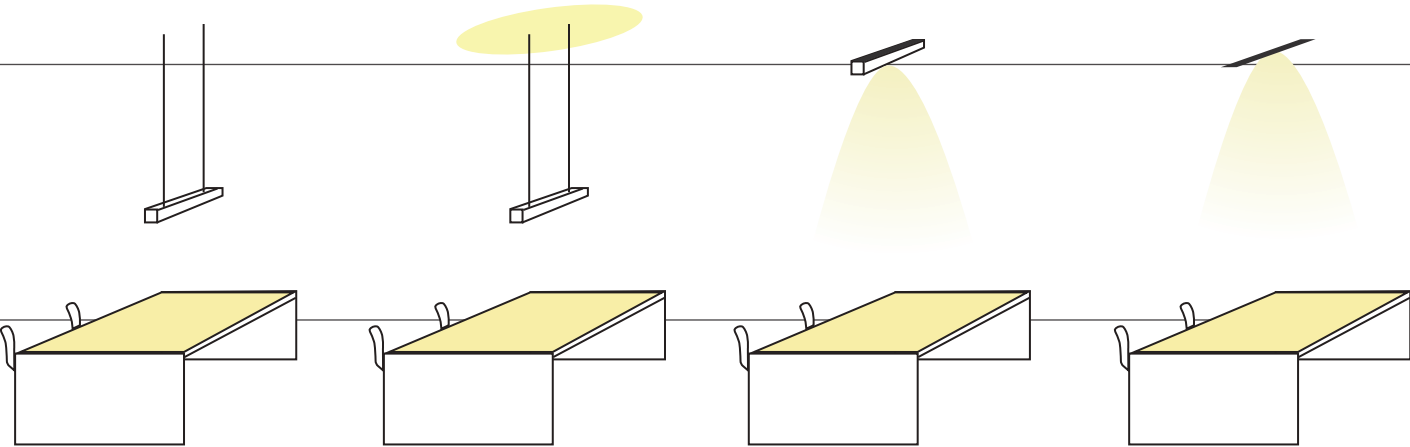


Suspended
Downward lighting

Suspended
Downward &
upward lighting

Surface Mounted


Recessed

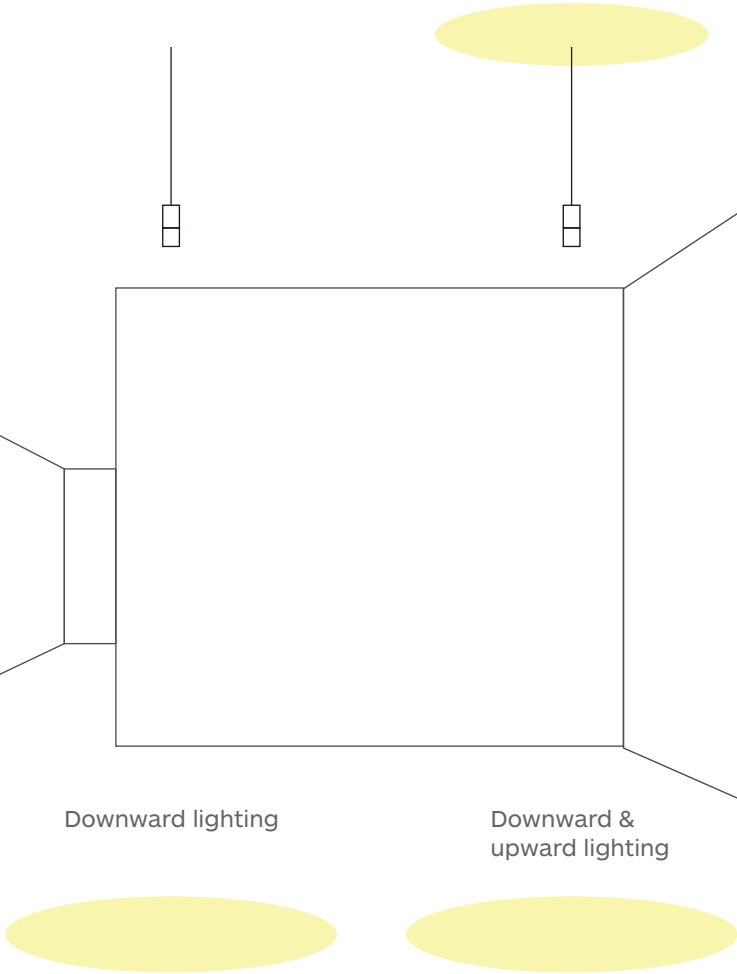

Downward lighting

Downward &
upward lighting

LINK60 Series
LINEAR PROFILE

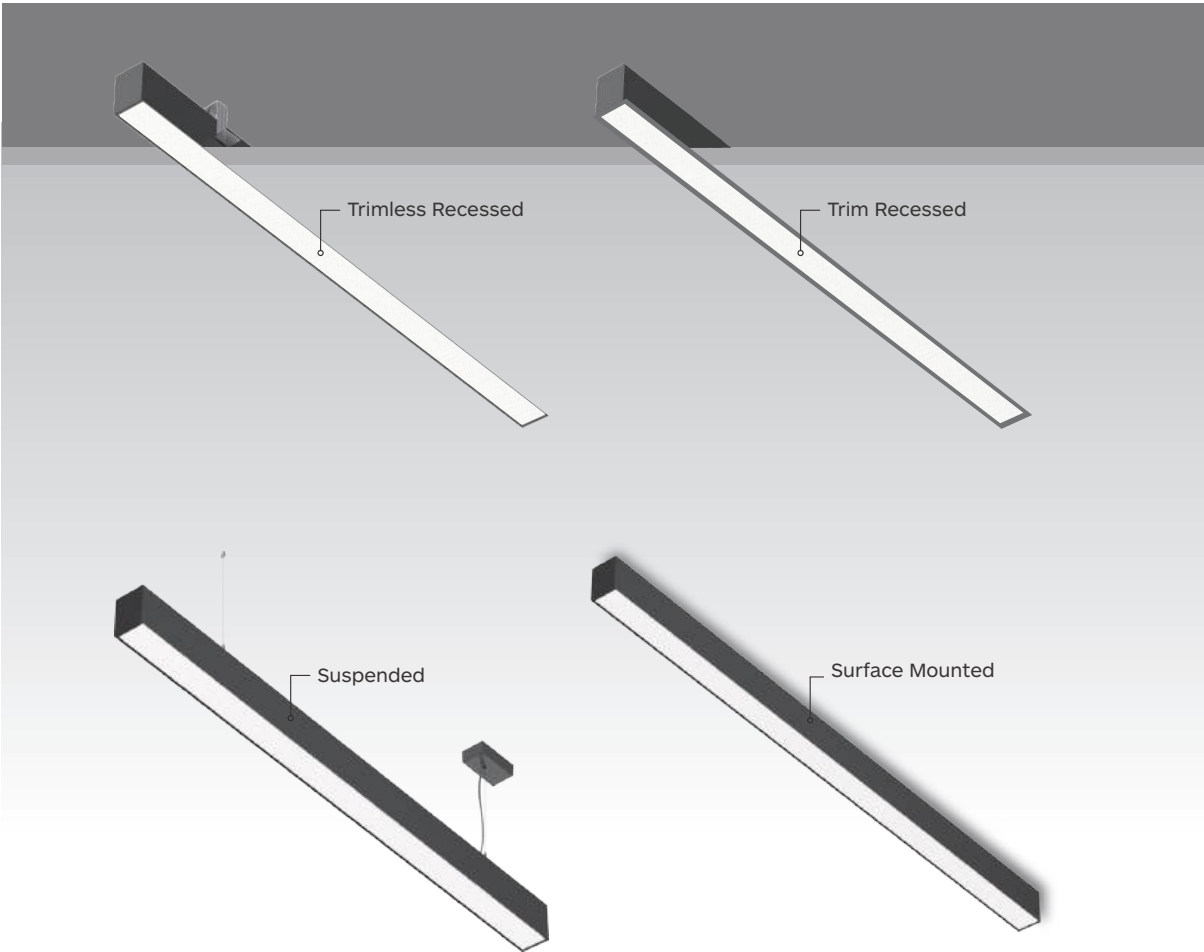

LINK60 Series

CE

CCC

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

UGR

<19

CRI

>80

Features

- Adopt Microprism mask with UGR<19,provide comfortable lighting
- Total system lighting Efficacy is up to 120LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation


Specifications

- Illumination type: Downward & upward lighting
- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: Non-Dim, 1-10V, DALI
- LUMILEDS LEDs
- Length options: 0.6m, 0.9m, 1.2m, 1.5m, 1.8m
- Installation: surface mounted, suspended and recessed

Installation Type




Housing Colour




White Balck

Light Distribution



LINK60
Linear Profile

Drawing



Downward lighting		LUMILEDS					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
600MM							
LINK60-CL600-13W-830-X	614*65*88mm	1300lm	11W	13W	>80	3000K	80°
LINK60-CL600-13W-840-X		1430m	11W	13W		4000K	
900MM							
LINK60-CL900-21W-830-X	914*65*88mm	2100lm	19W	21W	>80	3000K	80°
LINK60-CL900-21W-840-X		2300m	19W	21W		4000K	
1200MM							
LINK60-CL1200-26W-830-X	1214*65*88mm	2600lm	23W	26W	>80	3000K	80°
LINK60-CL1200-26W-840-X		2860m	23W	26W		4000K	
1500MM							
LINK60-CL1500-33W-830-X	1514*65*88mm	3300lm	30W	33W	>80	3000K	80°
LINK60-CL1500-33W-840-X		3630m	30W	33W		4000K	
1800MM							
LINK60-CL1800-38W-830-X	1514*65*88mm	3800lm	34W	38W	>80	3000K	80°
LINK60-CL1800-38W-840-X		4200m	34W	38W		4000K	
			Remark: X=F (Non-Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)	


Downward and upward lighting		LUMILEDS					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
600MM							
LINK60-CL600U-7W-14W-830-X	614*65*88mm	2250lm	6W↑ 12W ↓	7W↑ 14W ↓	>80	3000K	80° ↓ 105° ↑
LINK60-CL600U-7W-14W-840-X		2500lm	6W↑ 12W ↓	7W↑ 14W ↓		4000K	80° ↓ 105° ↑
900MM							
LINK60-CL900U-10W-21W-830-X	914*65*88mm	3300lm	8W↑ 18W ↓	10W↑ 21W ↓	>80	3000K	80° ↓ 105° ↑
LINK60-CL900U-10W-21W-840-X		3700lm	8W↑ 18W ↓	10W↑ 21W ↓		4000K	80° ↓ 105° ↑
1200MM							
LINK60-CL1200U-13W-26W-830-X	1214*65*88mm	4100lm	11W↑ 23W ↓	13W↑ 26W ↓	>80	3000K	80° ↓ 105° ↑
LINK60-CL1200U-13W-26W-840-X		4560lm	11W↑ 23W ↓	13W↑ 26W ↓		4000K	80° ↓ 105° ↑
1500MM							
LINK60-CL1500U-16W-31W-830-X	1514*65*88mm	5050lm	14W↑ 28W ↓	16W↑ 31W ↓	>80	3000K	80° ↓ 105° ↑
LINK60-CL1500U-16W-31W-840-X		5600lm	14W↑ 28W ↓	16W↑ 31W ↓		4000K	80° ↓ 105° ↑
1800MM							
LINK60-CL1800U-20W-38W-830-X	1514*65*88mm	6300lm	18W↑ 35W ↓	20W↑ 38W ↓	>80	3000K	80° ↓ 105° ↑
LINK60-CL1800U-20W-38W-840-X		7000lm	18W↑ 35W ↓	20W↑ 38W ↓		4000K	80° ↓ 105° ↑
			Remark: X=F (Non-Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)	

Corner Module		LUMILEDS					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
L							
LINK60-L Corner-26W-830-X	600*600mm	2600lm	23W	26W	>80	3000K	80°
LINK60-L Corner-26W-840-X		2860lm	23W	26W		4000K	
T							
LINK60-T Corner-26W-830-X	600*600mm	2600lm	23W	26W	>80	3000K	80°
LINK60-T Corner-26W-840-X		2860lm	23W	26W		4000K	
X							
LINK60-X Corner-26W-830-X	600*600mm	2600lm	23W	26W	>80	3000K	80°
LINK60-X Corner-26W-840-X		2860lm	23W	26W		4000K	
			Remark:	X=F (Non-Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)



LINK50

341 IE-lite lighting

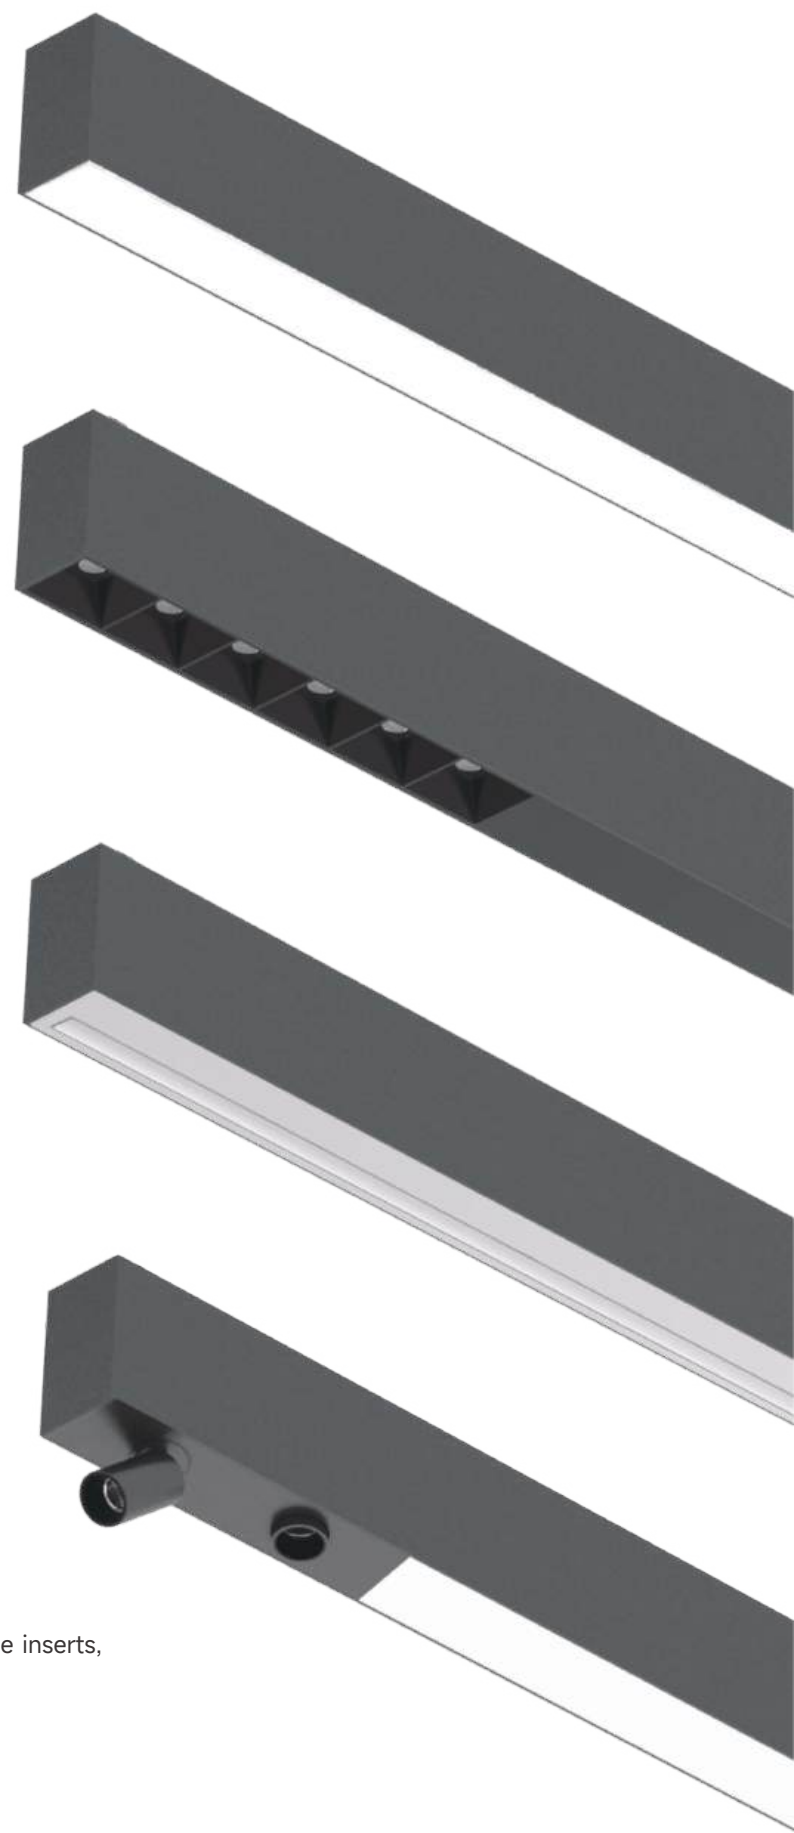

LINK 50

Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology

Channels



Inserts




Covers





LINK 50



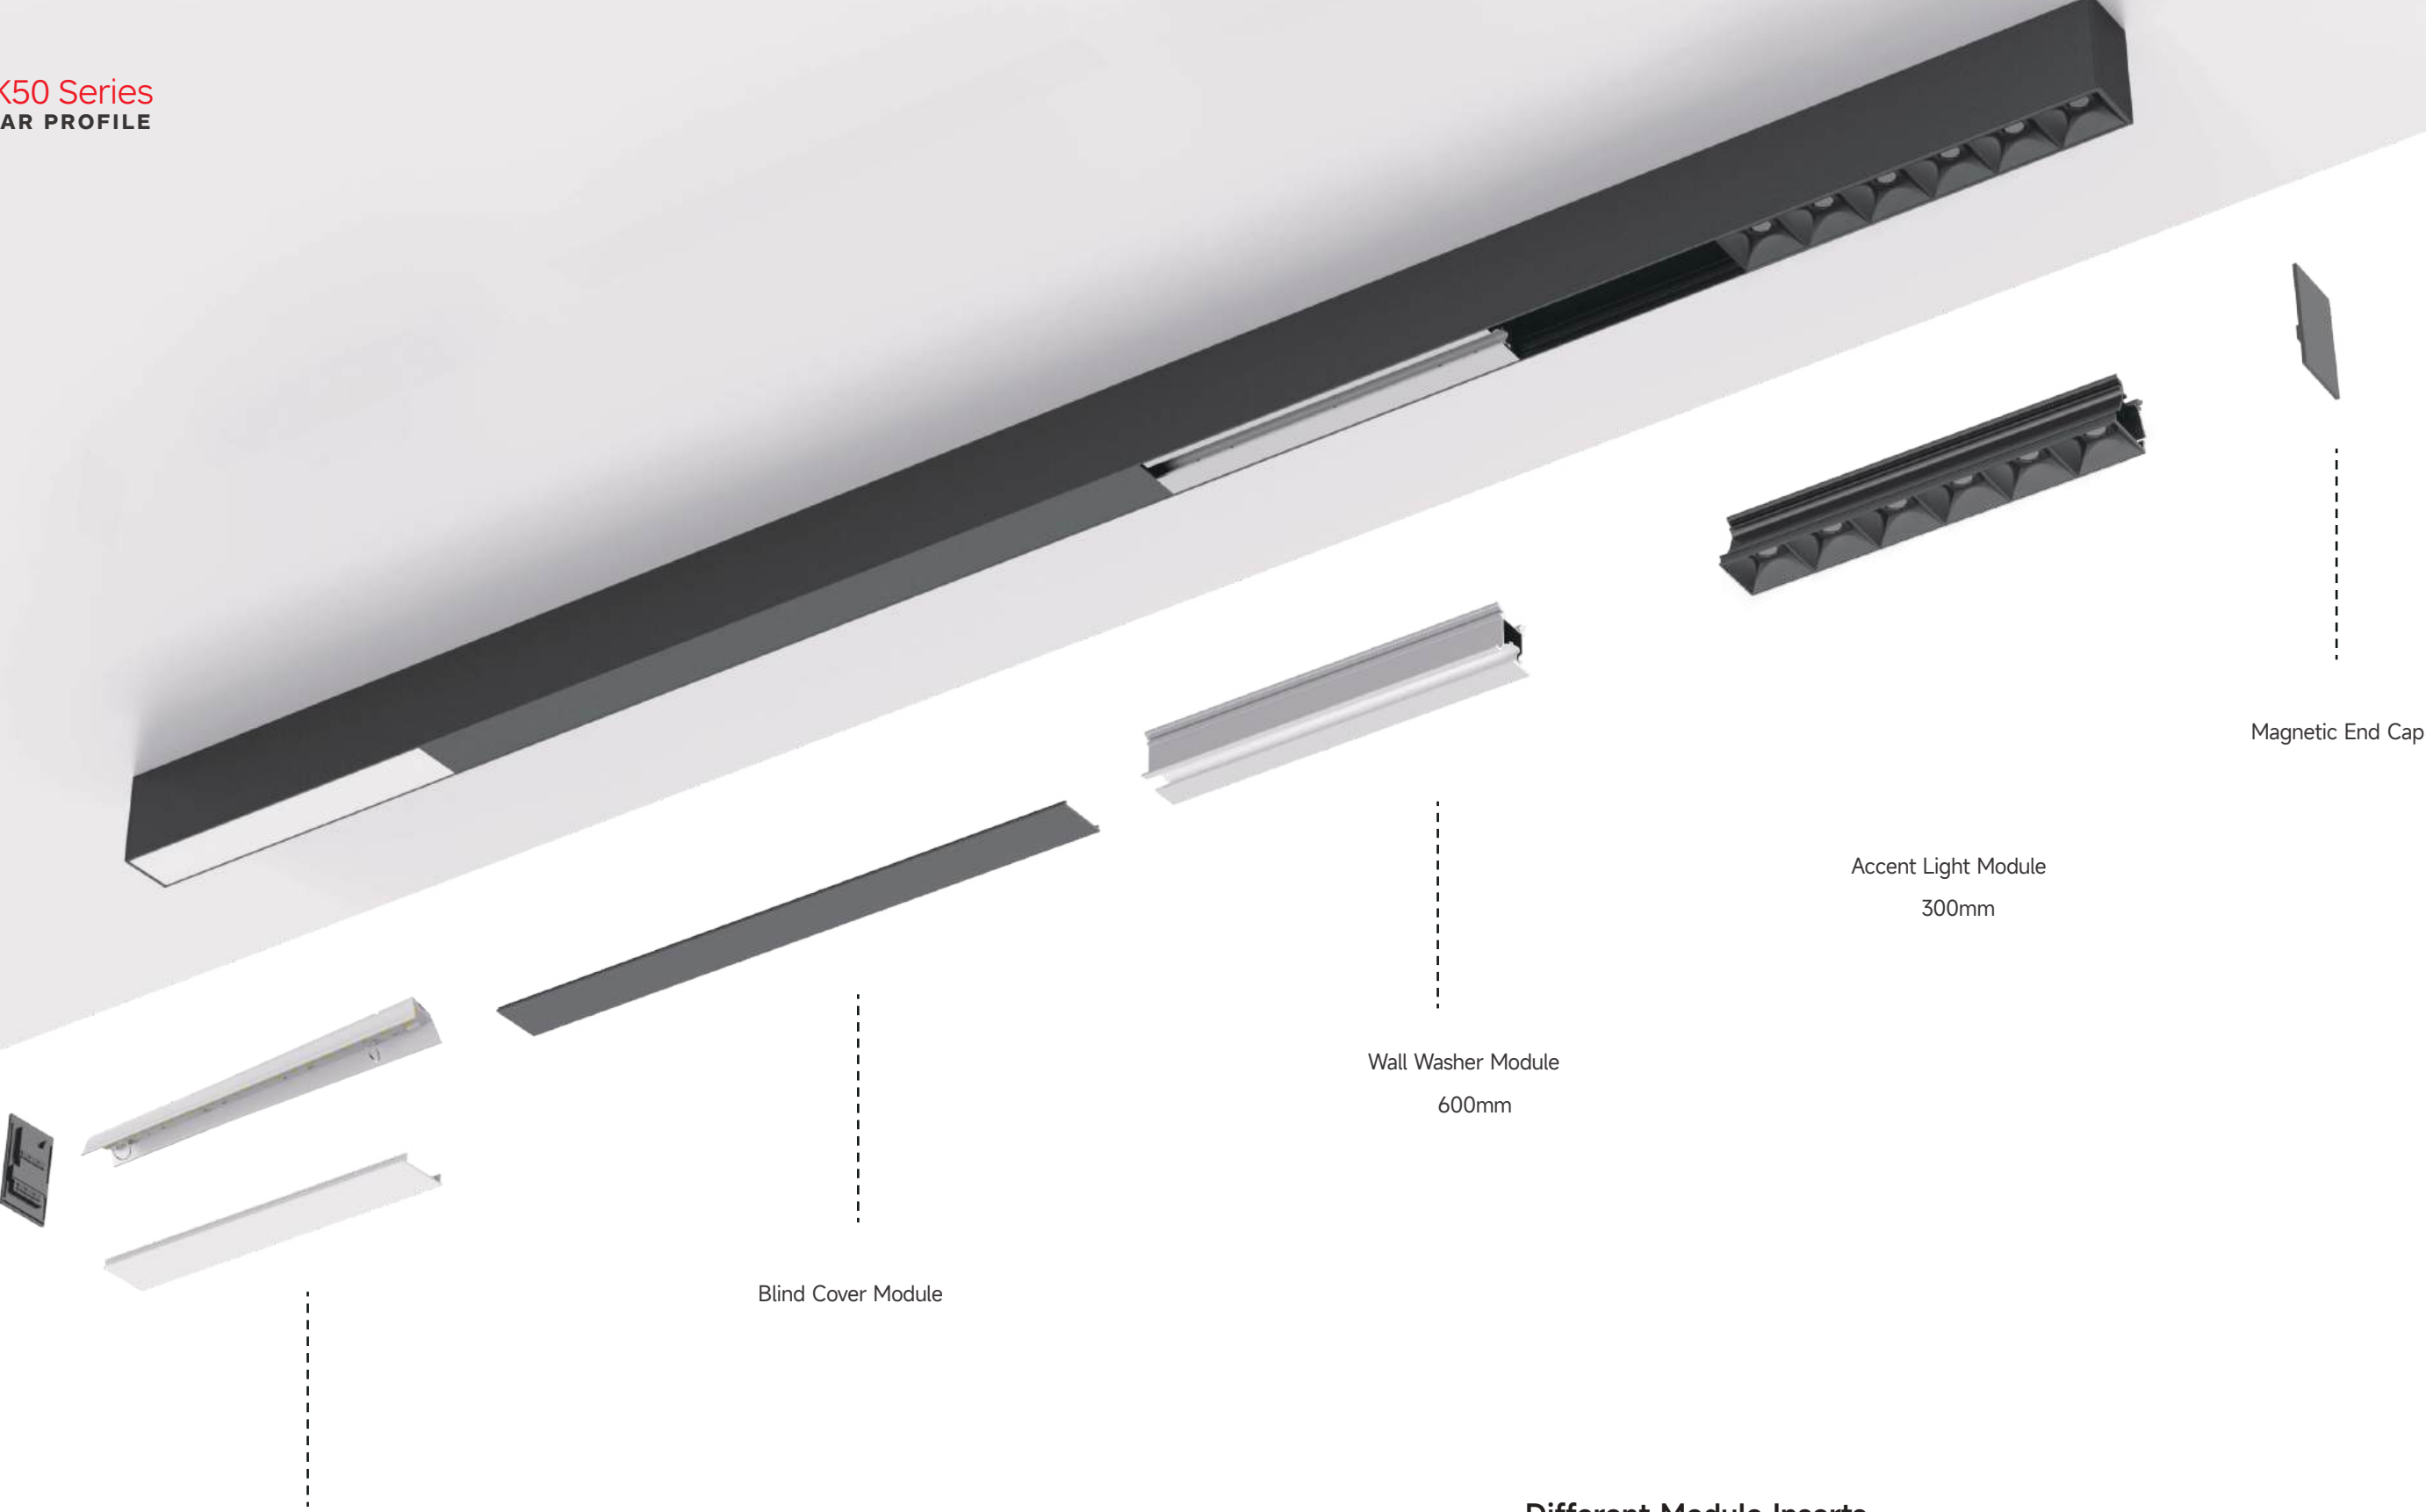

Different Module Inserts

Profile system made of extruded aluminium with 50mm width
various lighting modules suitable for multiple lighting applications
general light, accent light, and wall washer module for choice
Tool-free inserts mounting by clip-in mechanism
standard ,customized sizes module and cover for high precise system
Magnetic end cap without fixing screws

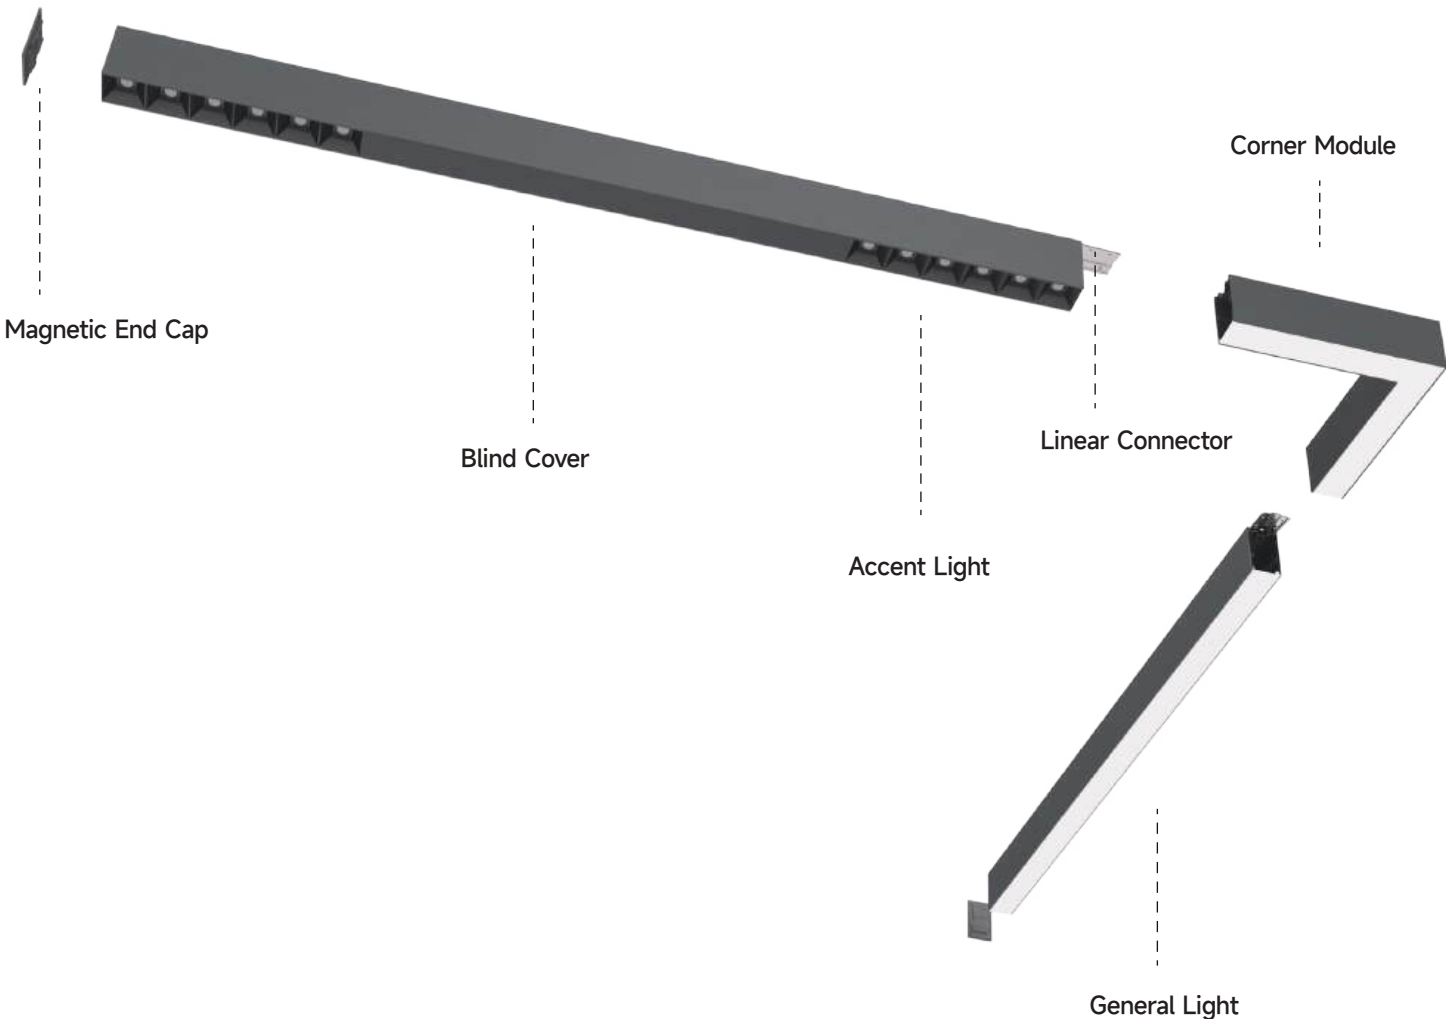

Linear Connector



Blind cover with customized length
providing seamless connection

Suspended Installation Version


Smart composition of different modules create equal spaced profiles
The end of the front profile and the open end of the following profile
can be seamlessly connected thanks to the blind cover
Perfect anti-glare due to black high-gloss grid
Up lighting is optional for suspended installation version

Corner module


Corner module is designed to take light around the corner
Its illuminated L-connectors opens up new scope for creative design
The 90° angle module is not only connector
It blends in as an integral part of the linear lighting system
Continuous light line linked by linear connector
The linear connector can be moved out from the end of the profile
It can't be seen from the outside

LINK 50 different module

Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology

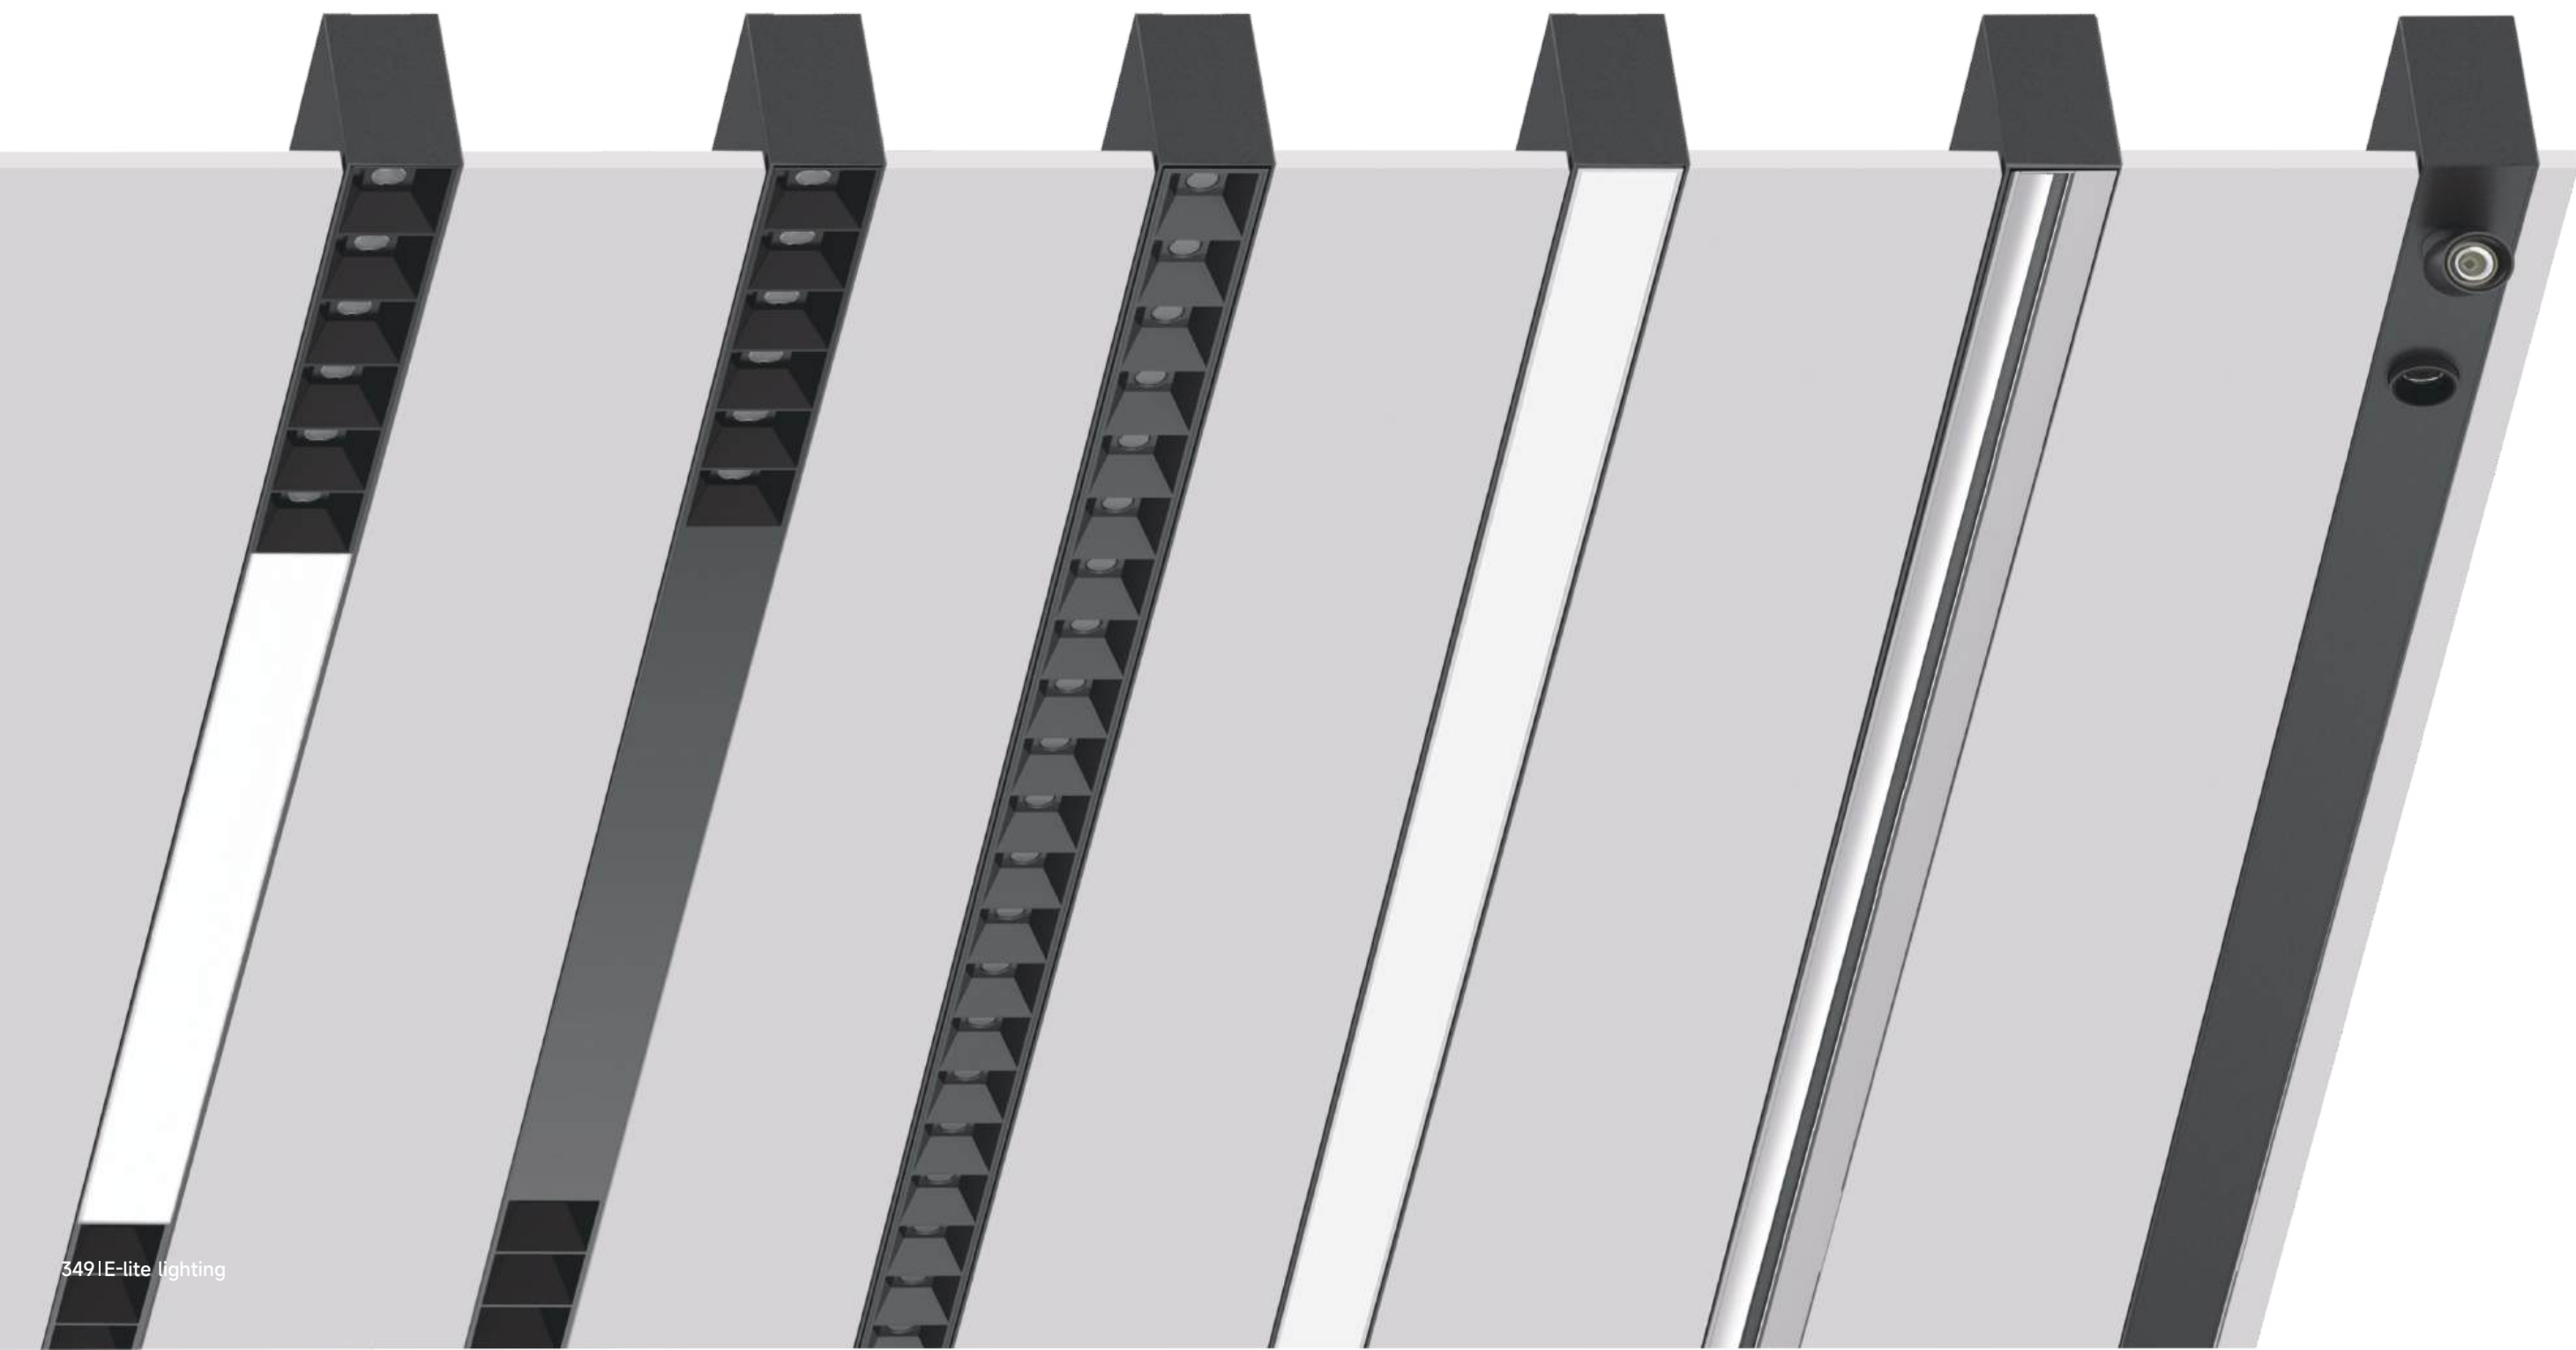

LINK50 Series
LINEAR PROFILE

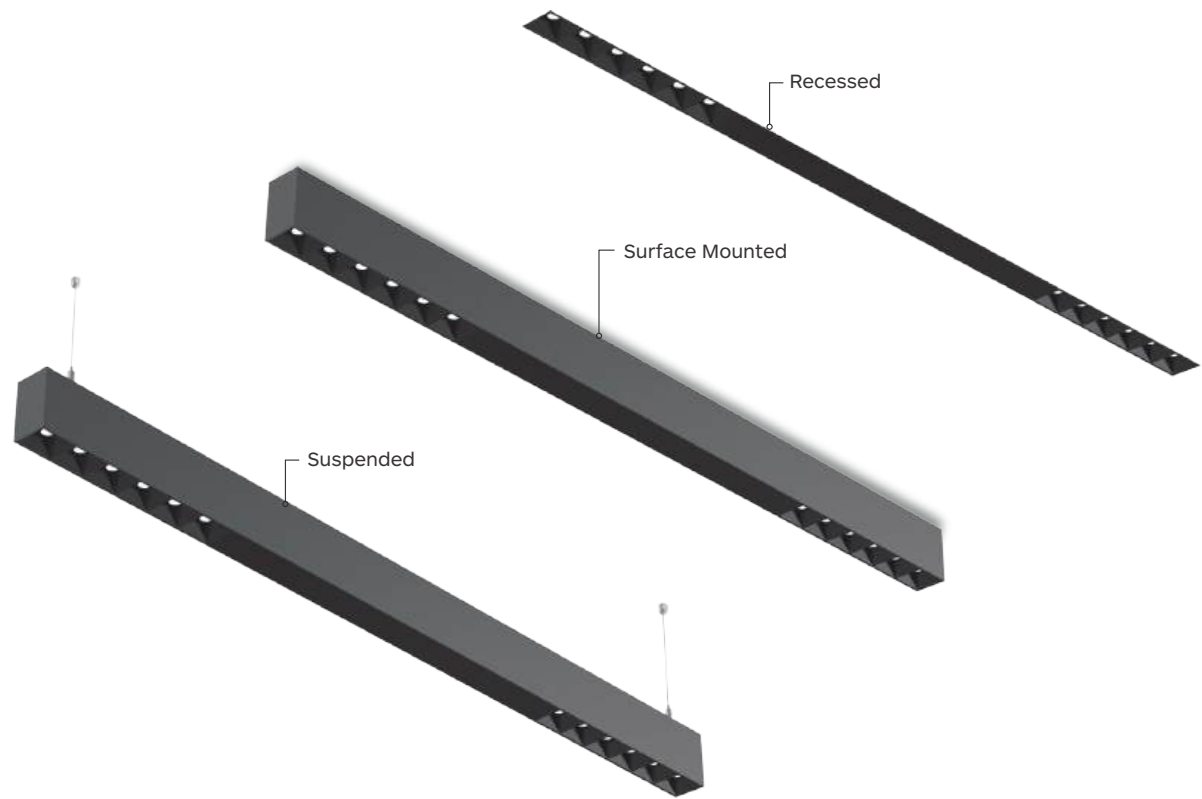

Accent Light Fixture

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>83

Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Non-Dim, 1-10V, DALI
- OSRAM LEDs
- Length options: 1200mm,1800mm


Installation Type




Housing Colour



Light Distribution

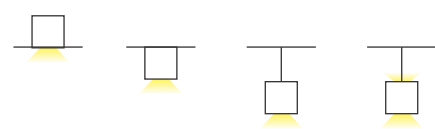


Secondary Reflector Colour

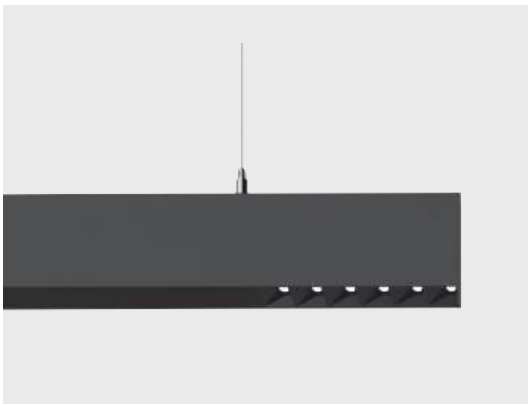

LINK50-AL
LINEAR PROFILE

Drawing

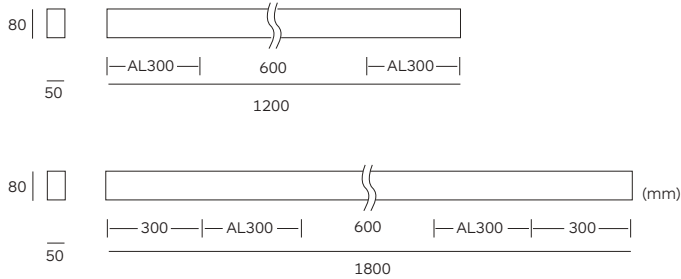


1200MM / 1800MM

30W 2200lm-2400lm		OSRAM						
Code	Size	System LM	LED W	System W	CRI	CCT	Beam	
Link50-2*AL300-30W-830-30-X	1200*50*80mm	2200lm	26W	30W	83	3000K	30°	
Link50-2*AL300-30W-840-30-X	1200*50*80mm	2400lm	26W	30W		4000K		
Link50-2*AL300-30W-830-35x15-X	1800*50*80mm	2200lm	26W	30W	83	3000K	35°x15°	
Link50-2*AL300-30W-840-35x15-X	1800*50*80mm	2400lm	26W	30W		4000K		

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

LINK50 Series
LINEAR PROFILE

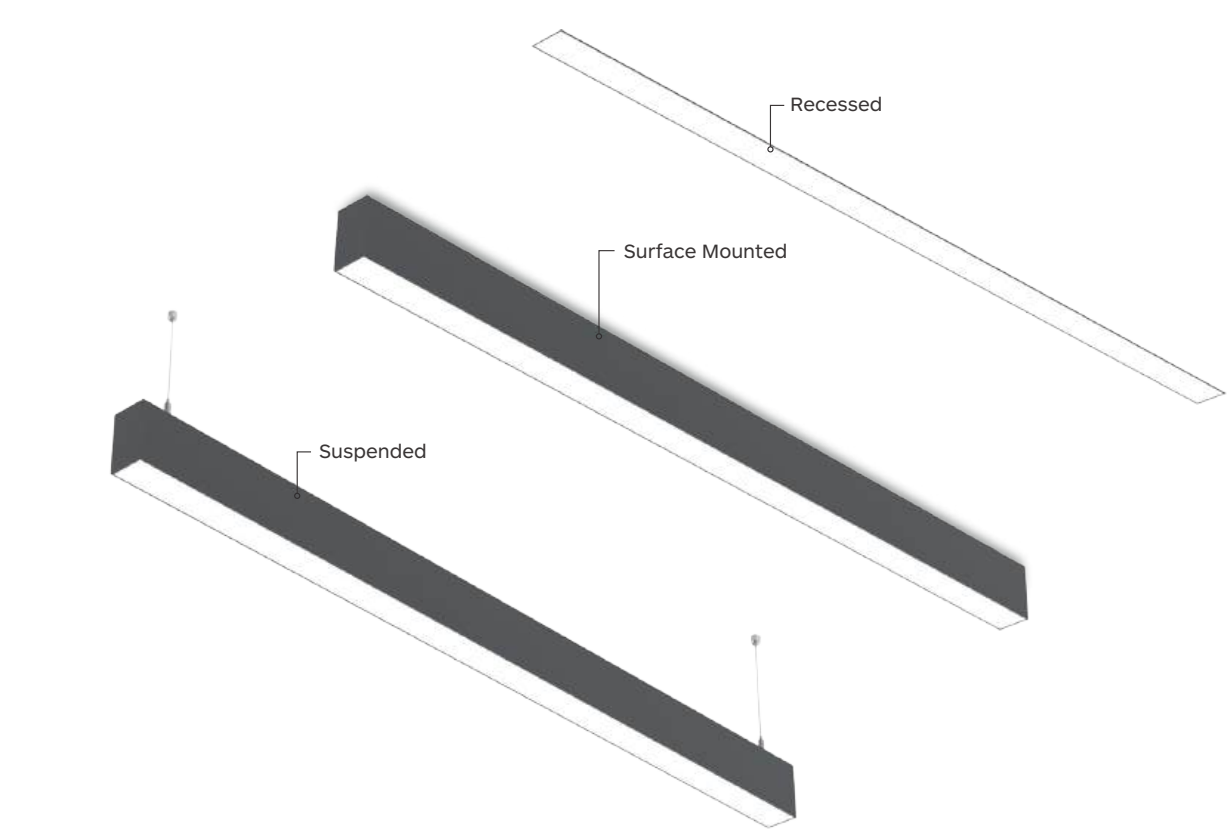

General Light Fixture

AC

220-240V

50000h

L80 B10

IP

20

CRI

>83

Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Non-Dim, 1-10V, DALI
- LUMILEDS LEDs
- Length options: 1200mm,1800mm



Installation Type



Housing Colour




Light Distribution

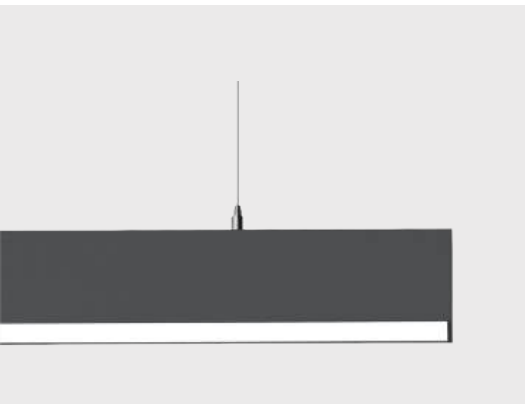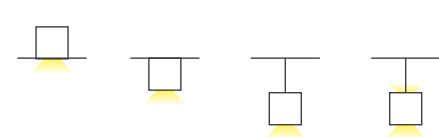

LINK50-GL
LINEAR PROFILE

Drawing

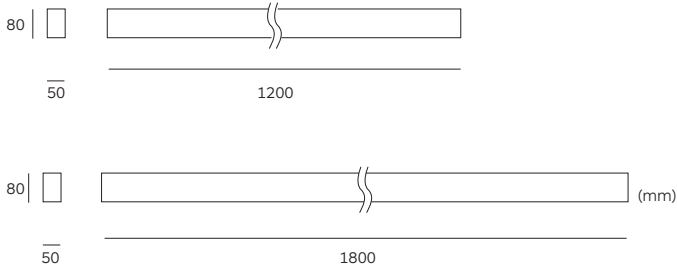


1200MM

26W 2700lm-2900lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
Link50-GL1200-26W-830-X	1200*50*80mm	2700lm	22W	26W	83	3000K	105°
Link50-GL1200-26W-840-X	1200*50*80mm	2900lm	22W	26W		4000K	
Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

1800MM

36W 3700lm-4000lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
Link50-GL1800-36W-830-X	1800*50*80mm	3700lm	32W	36W	83	3000K	105°
Link50-GL1800-36W-840-X	1800*50*80mm	4000lm	32W	36W		4000K	
Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

LINK50 Series
LINEAR PROFILE

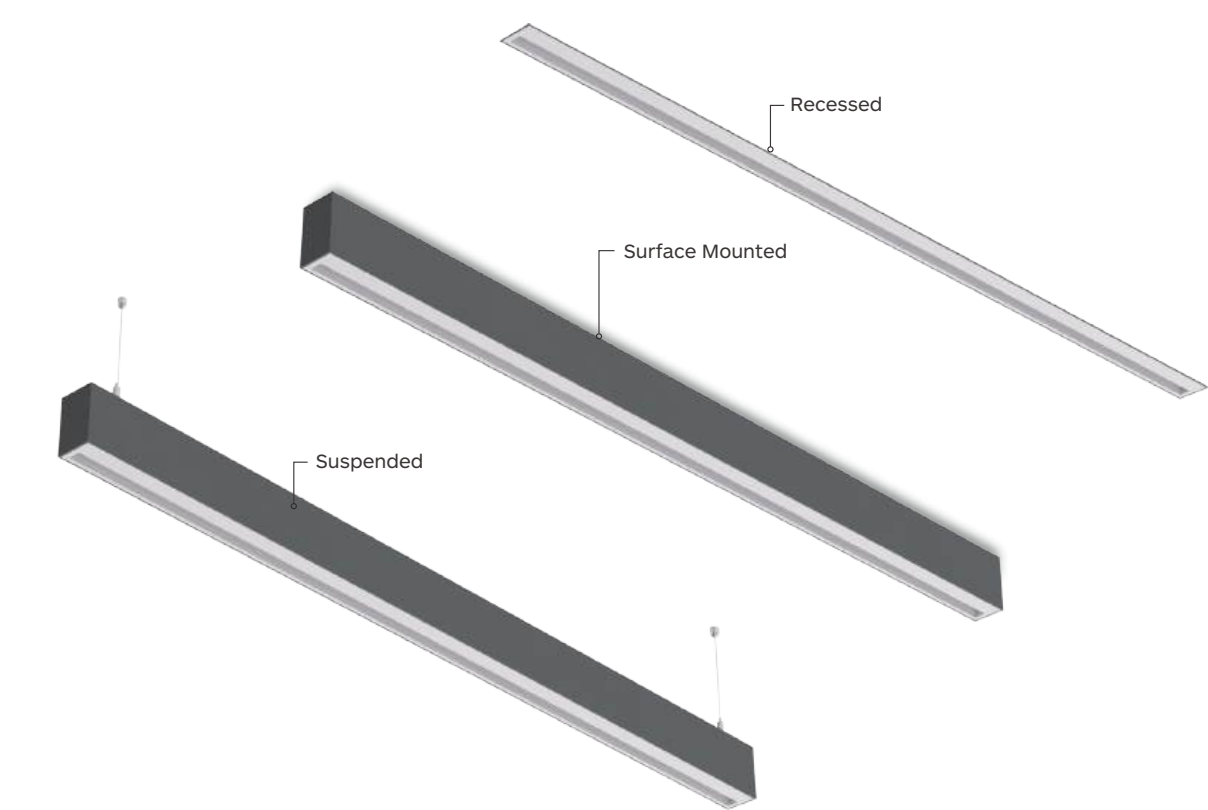

Wall Washer Fixture

AC

220-240V

50000h

L80 B10

IP

20

CRI

>83


Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications

Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Non-Dim, 1-10V, DALI
- LUMILEDS LEDs
- Length options: 1200mm,1800mm

Installation Type





Housing Colour

White


Balck

Light Distribution

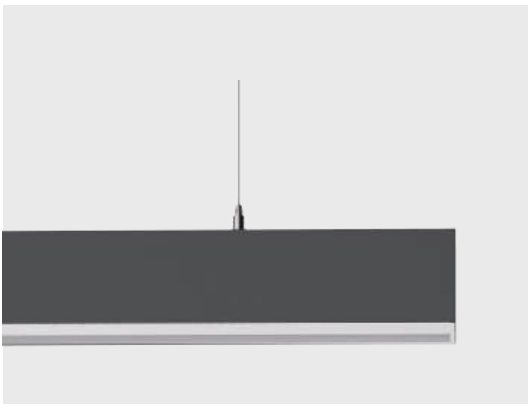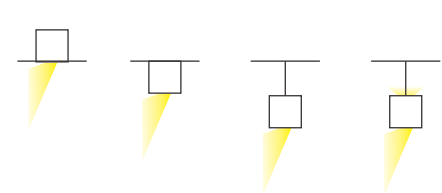

LINK50-WW
LINEAR PROFILE

Drawing

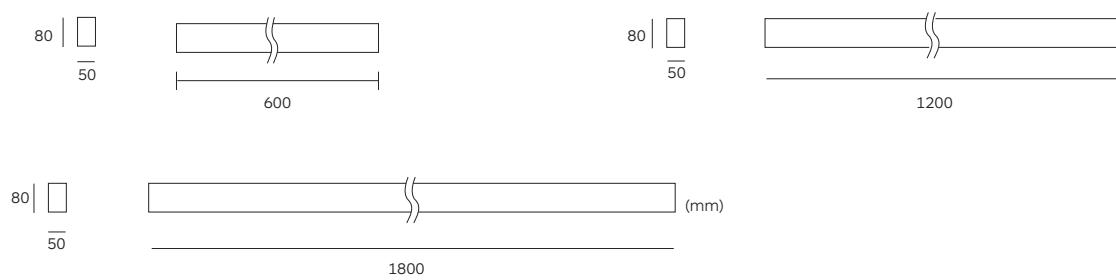


1200MM

26W 1800lm-1900lm 							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
Link50-WW1200-36W-830-X	1200*50*80mm	1800lm	22W	26W	80	3000K	Wall
Link50-WW1200-36W-840-X	1200*50*80mm	1900lm	22W	26W		4000K	Washer
			Remark: X=F (Non-Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)	

1800MM

36W 2700lm-2900lm 							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
Link50-WW1800-54W-830-X	1800*50*80mm	2700lm	32W	36W	80	3000K	Wall
Link50-WW1800-54W-840-X	1800*50*80mm	2900lm	32W	36W		4000K	Washer
			Remark: X=F (Non-Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)	

LINK50 Series
LINEAR PROFILE

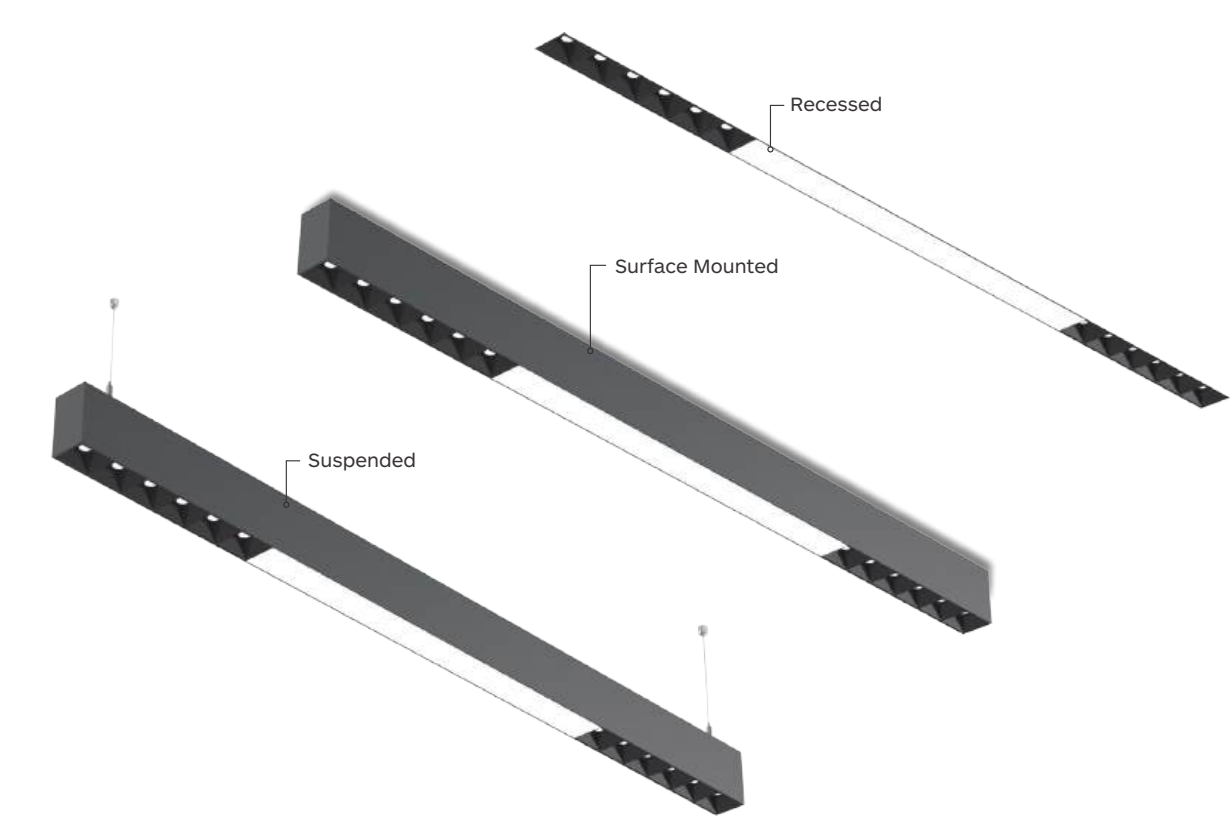

Combination of Accent Light and General Light

CE

EULUS

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>83


Features

- Continuous light lines composed of different module inserts, meeting the highest requirements in terms of architecture and lighting technology
- Profile system made of extruded aluminium with 50mm width Various lighting modules with multiple lighting applications


Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Non-Dim, 1-10V, DALI
- OSRAM LEDs,LUMILEDS LEDs
- Length options: 1200mm,1800mm

Installation Type





Housing Colour



White


Black

Light Distribution

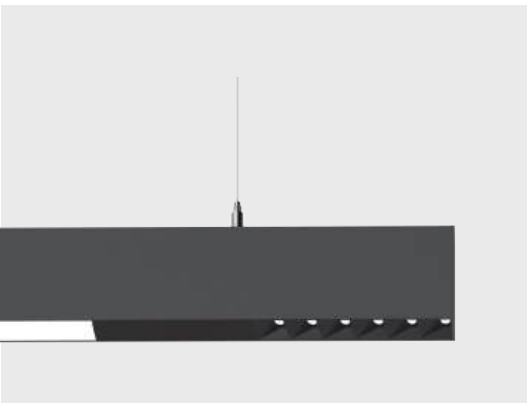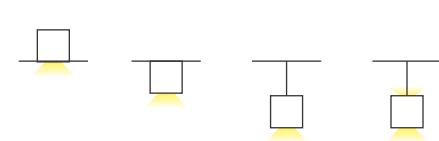

LINK50-2AL+GL
LINEAR PROFILE

Drawing



1200MM

38W 3100lm-3300lm		OSRAM	LUMILEDS					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam	
Link50-2*AL300+GL600-48W-830-30&105-X	1200*50*80mm	3100lm	34W	38W	83	3000K	30° +105°	
Link50-2*AL300+GL600-48W-840-30&105-X	1200*50*80mm	3300lm	34W	38W		4000K		
Link50-2*AL300+GL600-48W-830-35*15&105-X	1200*50*80mm	3100lm	34W	38W	83	3000K	35*15° +105°	
Link50-2*AL300+GL600-48W-840-35*15&105-X	1200*50*80mm	3300lm	34W	38W		4000K		
		Remark:	X=F (Non-Dim)	X=A (1-10V)	X=D (DALI)	X=N (Without Driver)		



LINK30


359IE-lite lighting



LINK30

linear lighting system

Extremely Compact Linear Light
UGR<16
Surface treatment process of high-quality profiles
The end cap is no visible screws
Pre-wired gear tray for quick installation

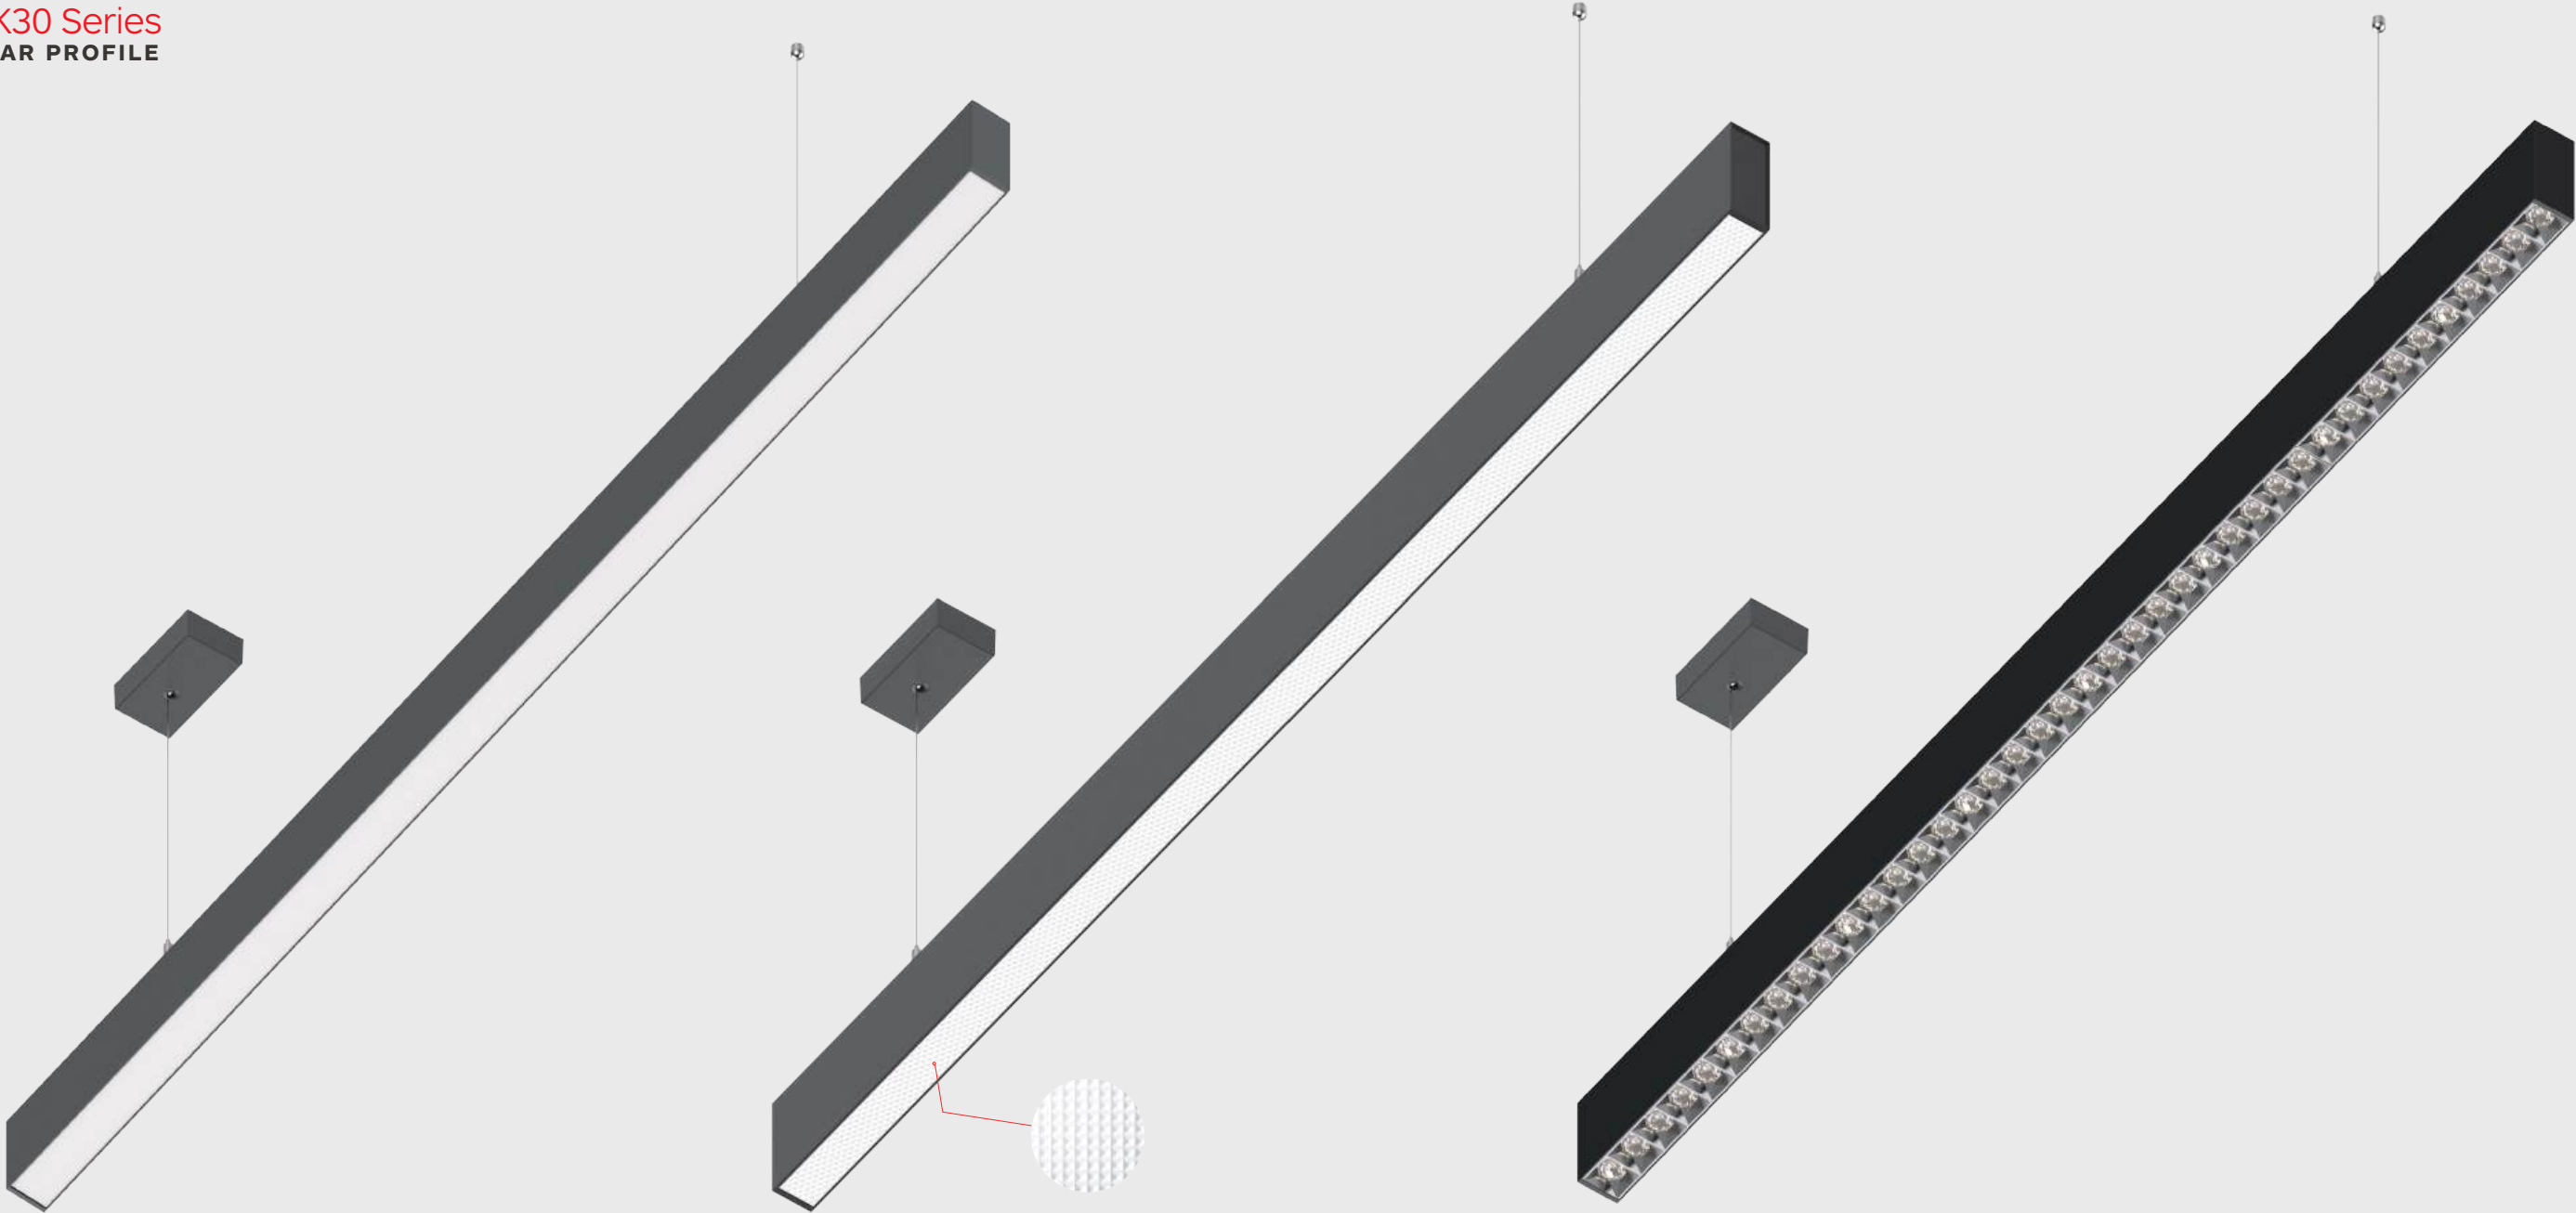


General Light


Comfort Light

Accent Light


Features

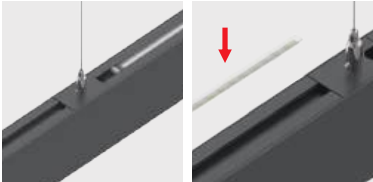


Switch for Uplight Up Light

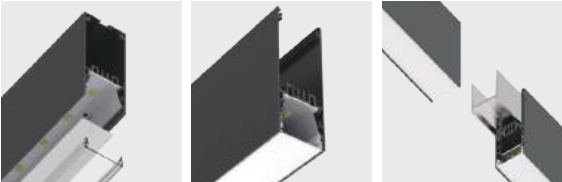

Opal Cover Easy stitching

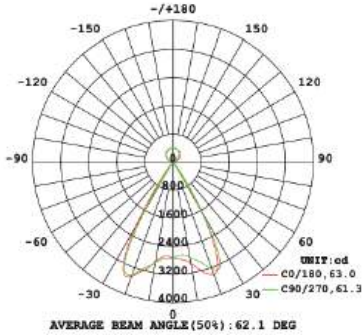

LINK30 Series
LINEAR PROFILE

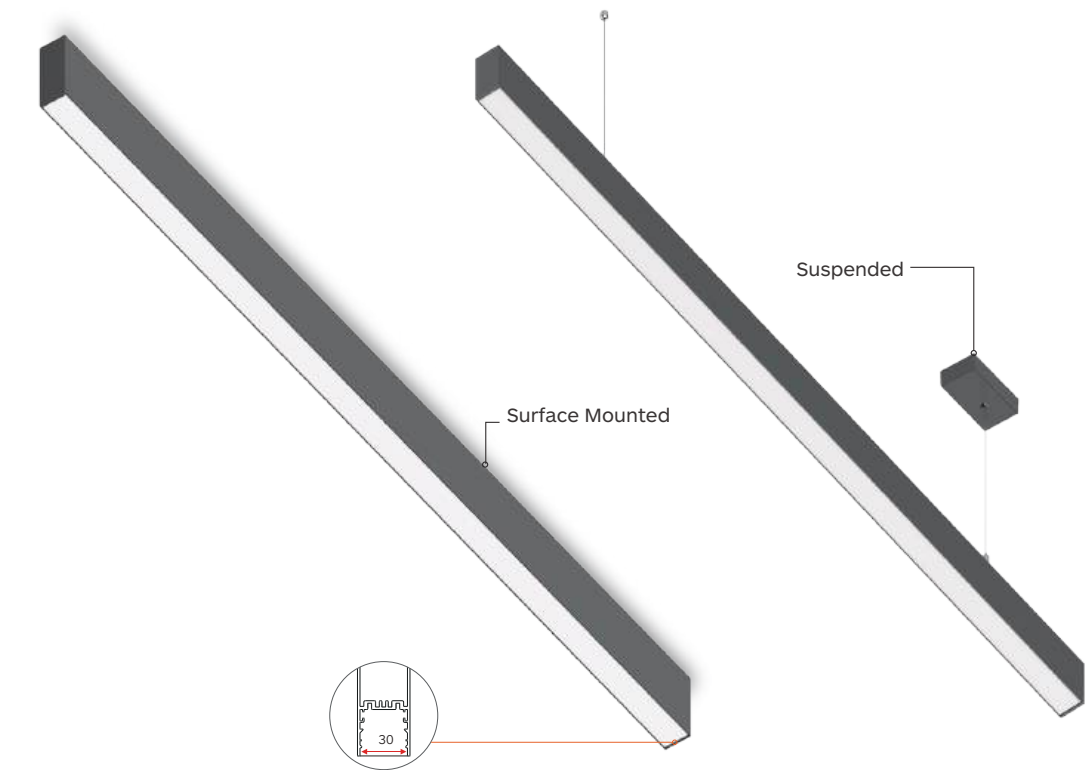

GL Fixture

CE

UK
CA

Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>80


Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation

Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: Non-Dim, 1-10V, DALI
- LUMILEDS LEDs
- Length options: 1060mm, 1200mm, 11590mm


Installation Type



Housing Colour




Light Distribution



LINK30-GL
LINEAR PROFILE

Drawing




Downward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1060MM							
LINK30-GL1060-28W-830-X	1060*78*34	2400lm	25W	28W	>80	3000K	110°
LINK30-GL1060-28W-840-X		2600lm	25W	28W		4000K	
1200MM							
LINK30-GL1200-31W-830-X	1200*78*34	3000lm	28W	31W	>80	3000K	110°
LINK30-GL1200-31W-840-X		3200lm	28W	31W		4000K	
1590MM							
LINK30-GL1590-41W-830-X	1590*78*34	4000lm	37W	41W	>80	3000K	110°
LINK30-GL1590-41W-840-X		4200lm	37W	41W		4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

Downward and upward lighting 							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1060MM							
LINK30-GL1060U-36W-830-X	1060*78*34	2400lm ↓ 1100lm ↑	25W ↓ 8W ↑	26W ↓ 10W ↑	>80	3000K	110° ↓ 100° ↑
LINK30-GL1060U-36W-840-X		2600lm ↓ 1300lm ↑	25W ↓ 8W ↑	26W ↓ 10W ↑		4000K	110° ↓ 100° ↑
1200MM							
LINK30-GL1200U-44W-830-X	1200*78*34	3000lm ↓ 1100lm ↑	28W ↓ 11W ↑	31W ↓ 13W ↑	>80	3000K	110° ↓ 100° ↑
LINK30-GL1200U-44W-840-X		3200lm ↓ 1300lm ↑	28W ↓ 11W ↑	31W ↓ 13W ↑		4000K	110° ↓ 100° ↑
1590MM							
LINK30-GL1590U-54W-830-X	1590*78*34	4000lm ↓ 1100lm ↑	37W ↓ 11W ↑	41W ↓ 13W ↑	>80	3000K	110° ↓ 100° ↑
LINK30-GL1590U-54W-840-X		4200lm ↓ 1300lm ↑	37W ↓ 11W ↑	41W ↓ 13W ↑		4000K	110° ↓ 100° ↑

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

LINK30 Series
LINEAR PROFILE

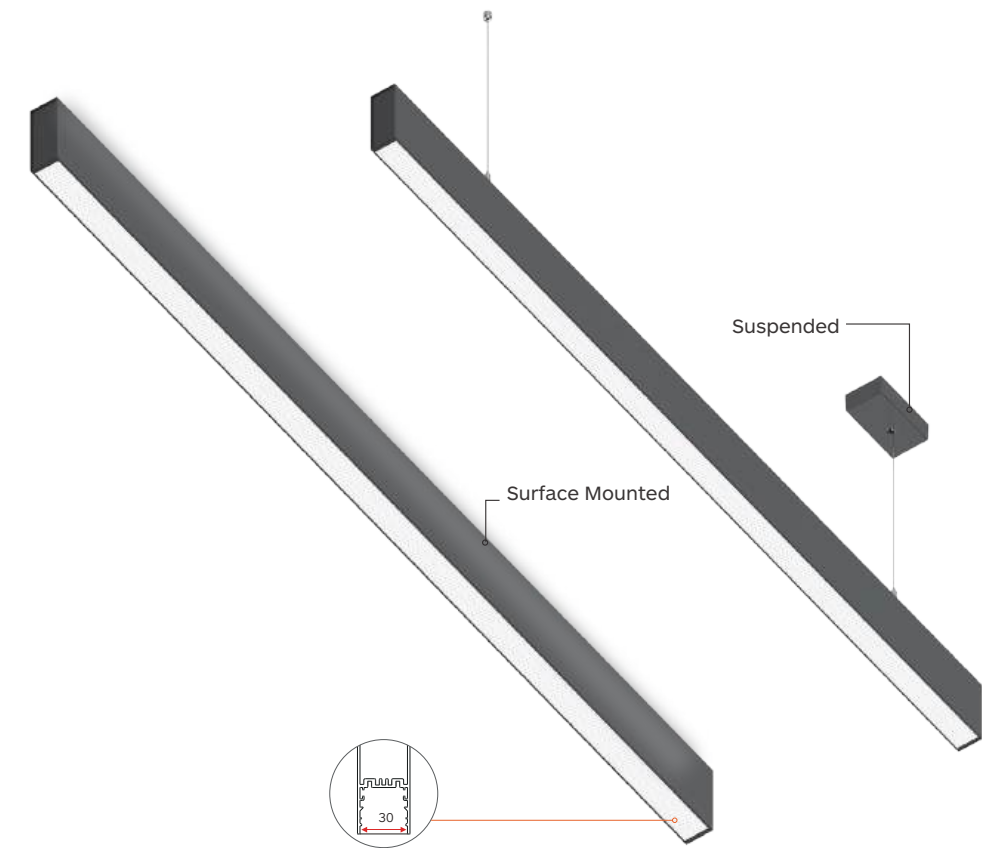

CL Fixture

CE

UK
CA

Intertek

5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>80

Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation



Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: Non-Dim 1-10V, DALI
- LUMILEDS LEDs
- Length options: 1060mm, 1200mm, 11590mm

Installation Type




Housing Colour

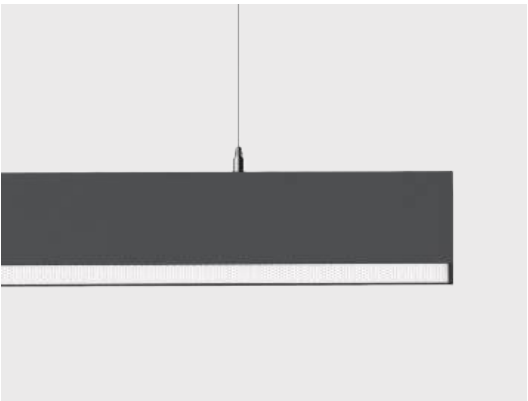

LINK30-CL
LINEAR PROFILE


Drawing



Downward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1060MM							
LINK30-CL1060-28W-830-X	1060*78*34	2200lm	25W	28W	>80	3000K	70°
LINK30-CL1060-28W-840-X		2400lm	25W	28W		4000K	
1200MM							
LINK30-CL1200-31W-830-X	1200*78*34	2700lm	28W	31W	>80	3000K	70°
LINK30-CL1200-31W-840-X		2900lm	28W	31W		4000K	
1590MM							
LINK30-CL1590-41W-830-X	1590*78*34	3600lm	37W	41W	>80	3000K	70°
LINK30-CL1590-41W-840-X		3800lm	37W	41W		4000K	
Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

Downward and upward lighting							
							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1060MM							
Link30-CL1060U-38W-830-X	1060*78*34	2200lm↓1100lm↑	25W↓ 8W ↑	28W↓10W ↑	>80	3000K	70° ↓100° ↑
Link30-CL1060U-38W-840-X		2400lm↓1300lm↑	25W↓ 8W ↑	28W↓10W ↑		4000K	70° ↓100° ↑
1200MM							
LINK30-CL1200U-44W-830-X	1200*78*34	2700lm↓1600lm↑	28W↓ 11W ↑	31W↓13W ↑	>80	3000K	70° ↓100° ↑
LINK30-CL1200U-44W-840-X		2900lm↓1800lm↑	28W↓ 11W ↑	31W↓13W ↑		4000K	70° ↓100° ↑
1590MM							
LINK30-CL1590U-54W-830-X	1590*78*34	3600lm↓1600lm↑	37W↓ 11W ↑	41W↓13W ↑	>80	3000K	70° ↓100° ↑
LINK30-CL1590U-54W-840-X		3800lm↓1800lm↑	37W↓ 11W ↑	41W↓13W ↑		4000K	70° ↓100° ↑
Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

LINK30 Series
LINEAR PROFILE

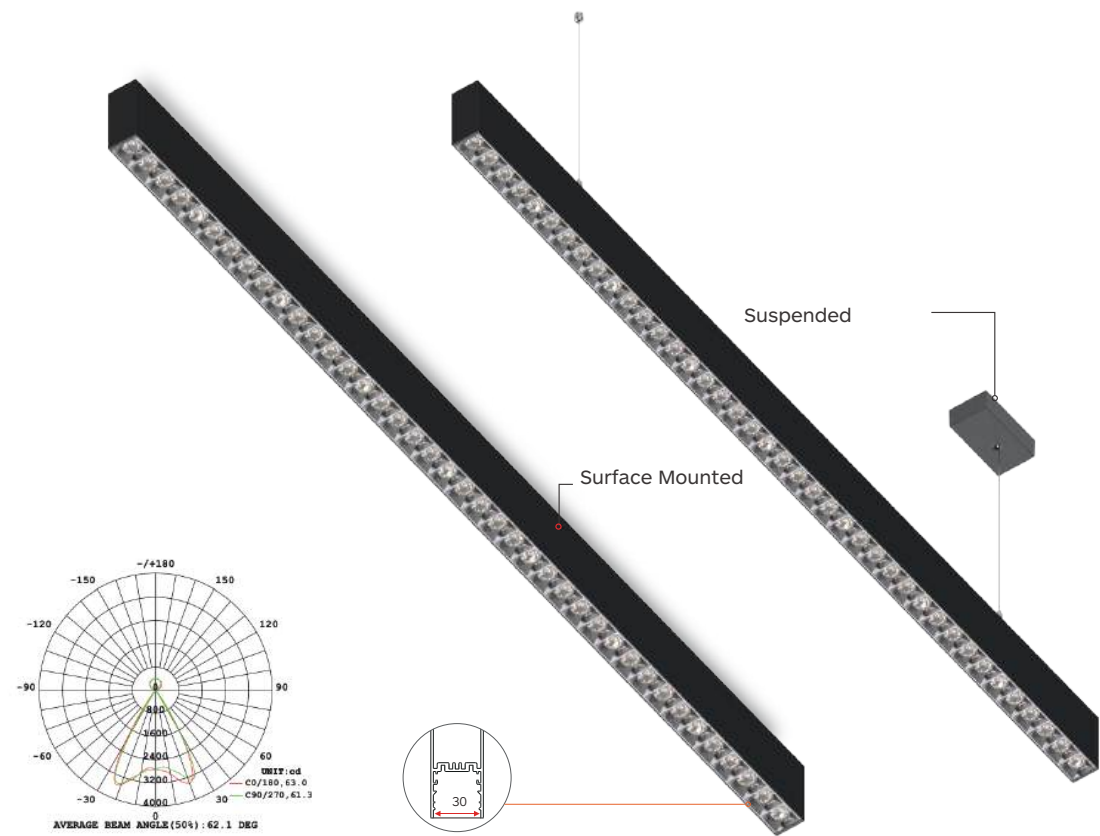

AL Fixture

CE

UKCA

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>80


Features

- Adopt Microprism mask with UGR<19, provide comfortable lighting
Total system lighting Efficacy is up to 104LM/W
- Surface treatment process of high-quality profiles
- The end cap is no visible screws
- Pre-wired gear tray for quick installation

Installation Type




Housing Colour




Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes: Non-Dim, 1-10V, DALI
- LUMILEDS LEDs
- Length options: 1060mm, 1200mm, 11590mm

Light Distribution




Secondary Reflector Colour

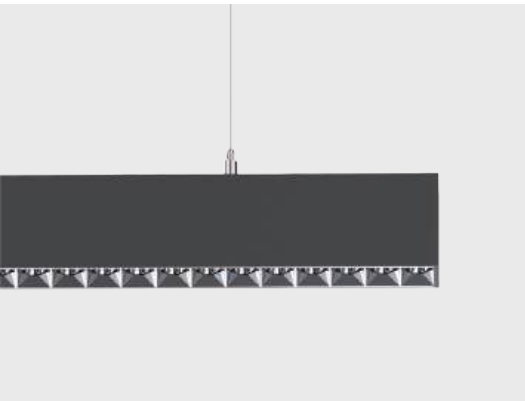

LINK30-AL
LINEAR PROFILE


Drawing



Downward lighting							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1060MM							
LINK30-AL1060-28W-830-15-X	1060*78*34	2700lm	25W	28W	>80	3000K	15°
LINK30-AL1060-28W-840-15-X		2900lm	25W	28W		4000K	
LINK30-AL1060-28W-830-35-X	1060*78*34	2700lm	25W	28W	>80	3000K	35°
LINK30-AL1060-28W-840-35-X		2900lm	25W	28W		4000K	
LINK30-AL1060-28W-830-60-X	1060*78*34	2800lm	25W	28W	>80	3000K	60°
LINK30-AL1060-28W-840-60-X		3000lm	25W	28W		4000K	
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1200MM							
LINK30-AL1200-31W-830-15-X	1200*78*34	3100lm	28W	31W	>80	3000K	15°
LINK30-AL1200-31W-840-15-X		3300lm	28W	31W		4000K	
LINK30-AL1200-31W-830-35-X	1200*78*34	3100lm	28W	31W	>80	3000K	35°
LINK30-AL1200-31W-840-35-X		3300lm	28W	31W		4000K	
LINK30-AL1200-31W-830-60-X	1200*78*34	3200lm	28W	31W	>80	3000K	60°
LINK30-AL1200-31W-840-60-X		3400lm	28W	31W		4000K	
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1590MM							
LINK30-AL1590-41W-830-15-X	1590*78*34	4100lm	37W	41W	>80	3000K	15°
LINK30-AL1590-41W-840-15-X		4300lm	37W	41W		4000K	
LINK30-AL1590-41W-830-35-X	1590*78*34	4100lm	37W	41W	>80	3000K	35°
LINK30-AL1590-41W-840-35-X		4300lm	37W	41W		4000K	
LINK30-AL1590-41W-830-60-X	1590*78*34	4200lm	37W	41W	>80	3000K	60°
LINK30-AL1590-41W-840-60-X		4400lm	37W	41W		4000K	


Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

LINK30 Series
LINEAR PROFILE

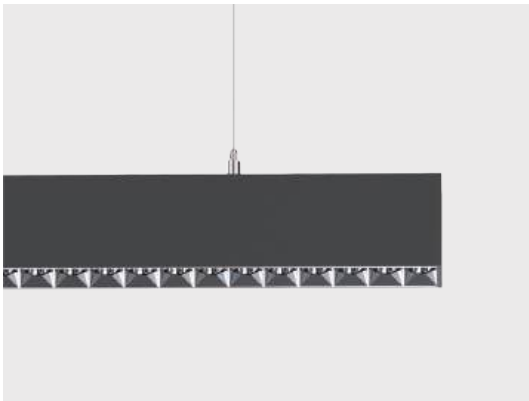

LINK30-AL
LINEAR PROFILE

Drawing



Downward and upward lighting 							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1060MM							
LINK30-AL1060U-38W-830-15-X	1060*78*34	2700lm↓1100lm↑	25W↓ 8W↑	28W↓ 10W↑	>80	3000K	15°
LINK30-AL1060U-38W-840-15-X		2800lm↓1200lm↑	25W↓ 8W↑	28W↓ 10W↑		4000K	
LINK30-AL1060U-38W-830-35-X	1060*78*34	2700lm↓1100lm↑	25W↓ 8W↑	28W↓ 10W↑	>80	3000K	35°
LINK30-AL1060U-38W-840-35-X		2800lm↓1200lm↑	25W↓ 8W↑	28W↓ 10W↑		4000K	
LINK30-AL1060U-38W-830-60-X	1060*78*34	2700lm↓1100lm↑	25W↓ 8W↑	28W↓ 10W↑	>80	3000K	60°
LINK30-AL1060U-38W-840-60-X		2800lm↓1200lm↑	25W↓ 8W↑	28W↓ 10W↑		4000K	
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1200MM							
LINK30-AL1200U-44W-830-15-X	1200*78*34	3100lm↓1600lm↑	28W↓ 11W↑	31W↓ 13W↑	>80	3000K	15°
LINK30-AL1200U-44W-840-15-X		3400lm↓1800lm↑	28W↓ 11W↑	31W↓ 13W↑		4000K	
LINK30-AL1200U-44W-830-35-X	1200*78*34	3100lm↓1600lm↑	28W↓ 11W↑	31W↓ 13W↑	>80	3000K	35°
LINK30-AL1200U-44W-840-35-X		3400lm↓1800lm↑	28W↓ 11W↑	31W↓ 13W↑		4000K	
LINK30-AL1200U-44W-830-60-X	1200*78*34	3100lm↓1600lm↑	28W↓ 11W↑	31W↓ 13W↑	>80	3000K	60°
LINK30-AL1200U-44W-840-60-X		3400lm↓1800lm↑	28W↓ 11W↑	31W↓ 13W↑		4000K	
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
1590MM							
LINK30-AL1590U-54W-830-15-X	1590*78*34	4100lm↓1600lm↑	37W↓ 11W↑	41W↓ 13W↑	>80	3000K	15°
LINK30-AL1590U-54W-840-15-X		4500lm↓1800lm↑	37W↓ 11W↑	41W↓ 13W↑		4000K	
LINK30-AL1590U-54W-830-35-X	1590*78*34	4100lm↓1600lm↑	37W↓ 11W↑	41W↓ 13W↑	>80	3000K	35°
LINK30-AL1590U-54W-840-35-X		4500lm↓1800lm↑	37W↓ 11W↑	41W↓ 13W↑		4000K	
LINK30-AL1590U-54W-830-60-X	1590*78*34	4100lm↓1600lm↑	37W↓ 11W↑	41W↓ 13W↑	>80	3000K	60°
LINK30-AL1590U-54W-840-60-X		4500lm↓1800lm↑	37W↓ 11W↑	41W↓ 13W↑		4000K	

Remark: X=F (Non-Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

Surface & Pendant

Surface & Pendant

LUCIA&FLATIA	373-392
FLATIA ECO	393-394
CREST	395-400
LUMI	401-406
NOVA-A 116	407-410
NOVA	411-424
ORBIT	425-430
KUBI	431-434
FELLOW MINI	435-440

LUCIA & FIATIA Series
SURFACE & PENDANT



LUCIA & FLATIA

373/E-lite lighting



374


LUCIA & FLATIA Series
SURFACE & PENDANT



LUCIA & FLATIA
Surface & Pendant

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
- 4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eyes' comfort

Surface-mounted

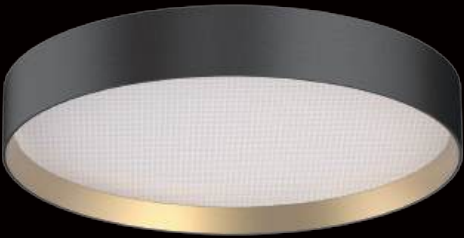

Cable Suspension




Rod Suspension



CCT switch
3000k-3500k-4000k



Microprismatic
super eye comfort
(Diffuser version available)




Uplight optional
easy to install by magnet




Three in one
1-10V & DALI &
Push dim for 26W&40W


LUCIA
High Lumen Output

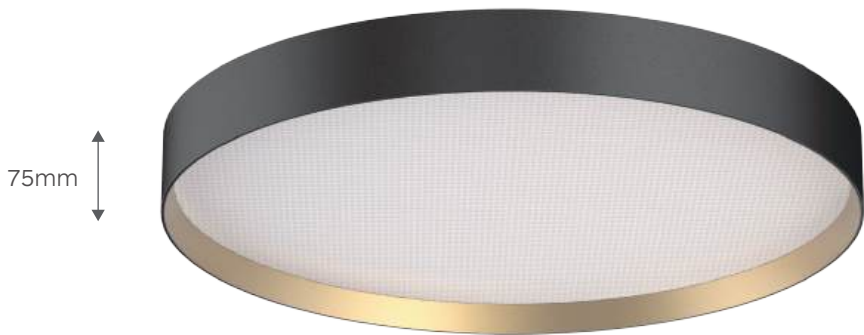

Decorative Version

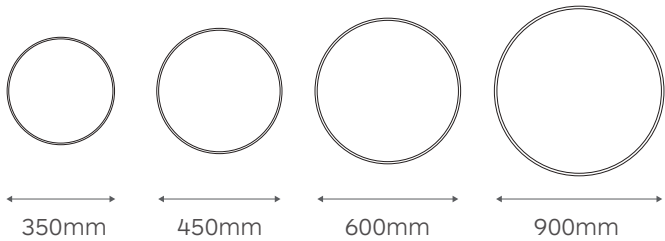


Classic Version

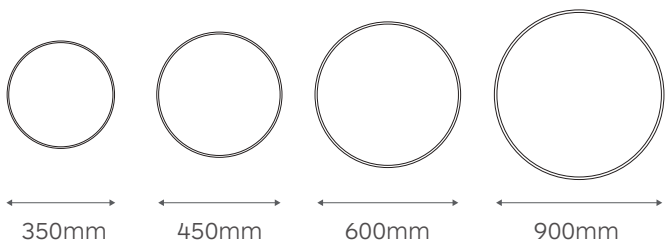


FLATIA
Super Slim Design



Decorative Version

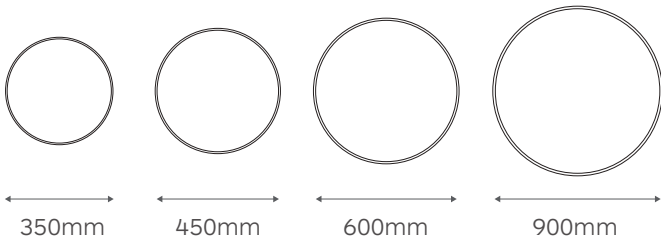

Classic Version

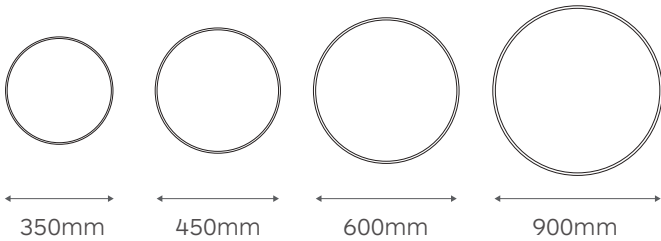

LUCIA & FLATIA Series
SURFACE & PENDANT

LUCIA




Classic Version



Decorative Version




Installation:

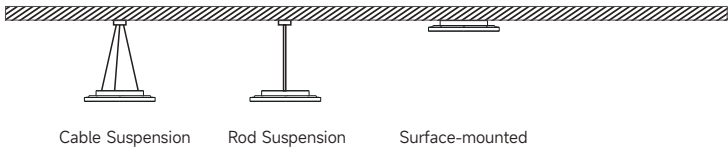

Uplight



FLATIA

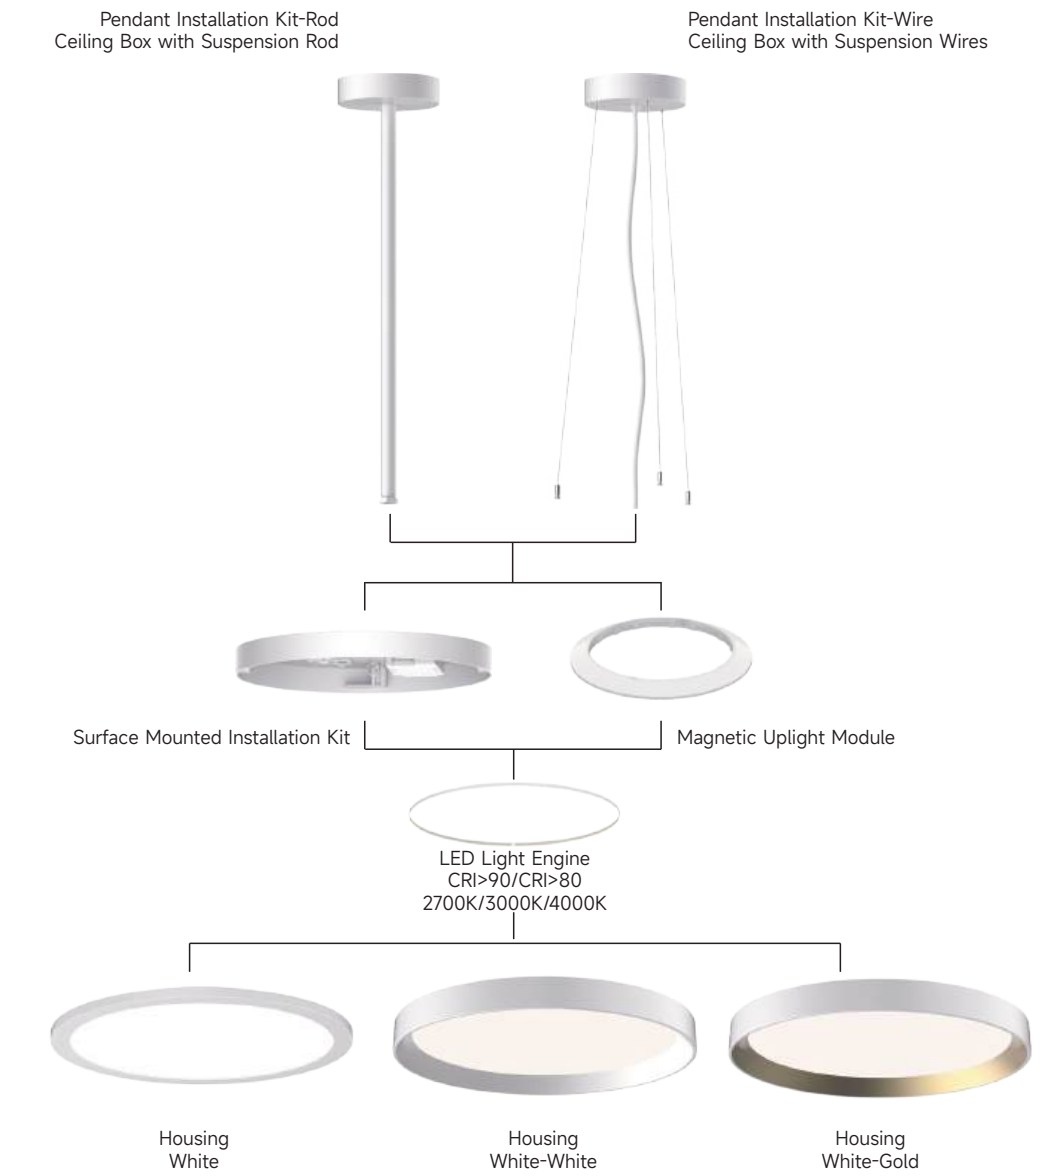


Classic Version



Decorative Version



Installation:

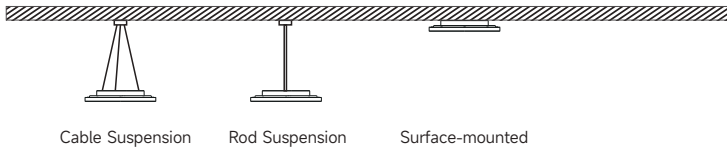

Uplight



LUCIA & FLATIA Series
SURFACE & PENDANT



Classic Version
LUCIA 350/450/600/900



Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eyes'comfort

Specifications

- Dimming modes: Non-Dim, Phase Dim, 1-10V, DALI
- Sizes: Ø350mm, Ø450mm, Ø600mm, Ø900mm,
- Installation: Surface mounted, Suspended

Installation Type



Housing Colour



Light Distribution



LUCIA
Surface & Pendant

Drawing



Order Options

14W-68W 1400lm-8800lm		OSRAM					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-C-14W-830-X	Ø350*50mm	1400Lm	12W	14W	80	3000K	90°
LUCIA 350-C-14W-840-X	Ø350*50mm	1500Lm	12W	14W	80	4000K	90°
LUCIA 350-C-18W-830-X	Ø350*50mm	2000Lm	16W	18W	80	3000K	90°
LUCIA 350-C-18W-840-X	Ø350*50mm	2200Lm	16W	18W	80	4000K	90°
LUCIA 450-C-18W-830-X	Ø450*50mm	2000Lm	16W	18W	80	3000K	90°
LUCIA 450-C-18W-840-X	Ø450*50mm	2200Lm	16W	18W	80	4000K	90°
LUCIA 450-C-26W-830-X	Ø450*50mm	2800Lm	24W	26W	80	3000K	90°
LUCIA 450-C-26W-840-X	Ø450*50mm	3100Lm	24W	26W	80	4000K	90°
LUCIA 600-C-40W-830-X	Ø600*50mm	4700Lm	36W	40W	80	3000K	90°
LUCIA 600-C-40W-840-X	Ø600*50mm	5100Lm	36W	40W	80	4000K	90°
LUCIA 600-C-50W-830-X	Ø600*50mm	6100Lm	46W	50W	80	3000K	90°
LUCIA 600-C-50W-840-X	Ø600*50mm	6700Lm	46W	50W	80	4000K	90°
LUCIA 900-C-68W-830-X	Ø900*50mm	8000Lm	65W	68W	80	3000K	90°
LUCIA 900-C-68W-840-X	Ø900*50mm	8800Lm	65W	68W	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

24W-96W 2250lm-11400lm		OSRAM					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-C-14W-830-X UL	Ø350*50mm	1400Lm ↓ 850Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	80	3000K	90°
LUCIA 350-C-14W-840-X UL	Ø350*50mm	1500Lm ↓ 900Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	80	4000K	90°
LUCIA 350-C-18W-830-X UL	Ø350*50mm	2000Lm ↓ 850Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	80	3000K	90°
LUCIA 350-C-18W-840-X UL	Ø350*50mm	2200Lm ↓ 900Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	80	4000K	90°
LUCIA 450-C-18W-830-X UL	Ø450*50mm	2000Lm ↓ 1100Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	80	3000K	90°
LUCIA 450-C-18W-840-X UL	Ø450*50mm	2200Lm ↓ 1200Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	80	4000K	90°
LUCIA 450-C-26W-830-X UL	Ø450*50mm	2800Lm ↓ 1100Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	80	3000K	90°
LUCIA 450-C-26W-840-X UL	Ø450*50mm	3100Lm ↓ 1200Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	80	4000K	90°
LUCIA 600-C-40W-830-X UL	Ø600*50mm	4700Lm ↓ 1700Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	80	3000K	90°
LUCIA 600-C-40W-840-X UL	Ø600*50mm	5100Lm ↓ 1800Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	80	4000K	90°
LUCIA 600-C-50W-830-X UL	Ø600*50mm	6100Lm ↓ 1700Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	80	3000K	90°
LUCIA 600-C-50W-840-X UL	Ø600*50mm	6700Lm ↓ 1800Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	80	4000K	90°
LUCIA 900-C-68W-830-X UL	Ø900*50mm	8000Lm ↓ 2400Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	80	3000K	90°
LUCIA 900-C-68W-840-X UL	Ø900*50mm	8800Lm ↓ 2600Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT



Decorative Version
LUCIA 350/450/600/900




Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
- 4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eyes'comfort

Specifications

- Dimming modes: Non-Dim, Phase Dim, 1-10V, DALI
- Sizes: Ø350mm, Ø450mm, Ø600mm, Ø900mm,
- Installation: Surface mounted, Suspended

Installation Type




Housing Colour



LUCIA
Surface & Pendant

Drawing



Order Options

14W-68W 1400lm-8800lm		OSRAM					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-D-14W-830-X	Ø350*50mm	1400Lm	12W	14W	80	3000K	90°
LUCIA 350-D-14W-840-X	Ø350*50mm	1500Lm	12W	14W	80	4000K	90°
LUCIA 350-D-18W-830-X	Ø350*50mm	2000Lm	16W	18W	80	3000K	90°
LUCIA 350-D-18W-840-X	Ø350*50mm	2200Lm	16W	18W	80	4000K	90°
LUCIA 450-D-18W-830-X	Ø450*50mm	2000Lm	16W	18W	80	3000K	90°
LUCIA 450-D-18W-840-X	Ø450*50mm	2200Lm	16W	18W	80	4000K	90°
LUCIA 450-D-26W-830-X	Ø450*50mm	2800Lm	24W	26W	80	3000K	90°
LUCIA 450-D-26W-840-X	Ø450*50mm	3100Lm	24W	26W	80	4000K	90°
LUCIA 600-D-40W-830-X	Ø600*50mm	4700Lm	36W	40W	80	3000K	90°
LUCIA 600-D-40W-840-X	Ø600*50mm	5100Lm	36W	40W	80	4000K	90°
LUCIA 600-D-50W-830-X	Ø600*50mm	6100Lm	46W	50W	80	3000K	90°
LUCIA 600-D-50W-840-X	Ø600*50mm	6700Lm	46W	50W	80	4000K	90°
LUCIA 900-D-68W-830-X	Ø900*50mm	8000Lm	65W	68W	80	3000K	90°
LUCIA 900-D-68W-840-X	Ø900*50mm	8800Lm	65W	68W	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

24W-96W 2250lm-11400lm		OSRAM					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-D-14W-830-X UL	Ø350*50mm	1400Lm ↓ 850Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	80	3000K	90°
LUCIA 350-D-14W-840-X UL	Ø350*50mm	1500Lm ↓ 900Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	80	4000K	90°
LUCIA 350-D-18W-830-X UL	Ø350*50mm	2000Lm ↓ 850Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	80	3000K	90°
LUCIA 350-D-18W-840-X UL	Ø350*50mm	2200Lm ↓ 900Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	80	4000K	90°
LUCIA 450-D-18W-830-X UL	Ø450*50mm	2000Lm ↓ 1100Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	80	3000K	90°
LUCIA 450-D-18W-840-X UL	Ø450*50mm	2200Lm ↓ 1200Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	80	4000K	90°
LUCIA 450-D-26W-830-X UL	Ø450*50mm	2800Lm ↓ 1100Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	80	3000K	90°
LUCIA 450-D-26W-840-X UL	Ø450*50mm	3100Lm ↓ 1200Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	80	4000K	90°
LUCIA 600-D-40W-830-X UL	Ø600*50mm	4700Lm ↓ 1700Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	80	3000K	90°
LUCIA 600-D-40W-840-X UL	Ø600*50mm	5100Lm ↓ 1800Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	80	4000K	90°
LUCIA 600-D-50W-830-X UL	Ø600*50mm	6100Lm ↓ 1700Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	80	3000K	90°
LUCIA 600-D-50W-840-X UL	Ø600*50mm	6700Lm ↓ 1800Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	80	4000K	90°
LUCIA 900-D-68W-830-X UL	Ø900*50mm	8000Lm ↓ 2400Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	80	3000K	90°
LUCIA 900-D-68W-840-X UL	Ø900*50mm	8800Lm ↓ 2600Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT

TW




LUCIA 350



LUCIA 450



LUCIA 600



LUCIA 350



LUCIA 450



LUCIA 600

Classic & Decorative Version-TW
LUCIA 350/450/600-TW




Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
- 4 diameters for options (350 mm, 450 mm, 600 mm)
- Microprismatic cover for super eyes'comfort

Specifications

- Dimming modes: 1-10V, DALI
- Sizes: Ø350mm, Ø450mm,Ø600mm,
- Installation: Surface mounted, Suspended


Installation Type



Light Distribution




Housing Colour

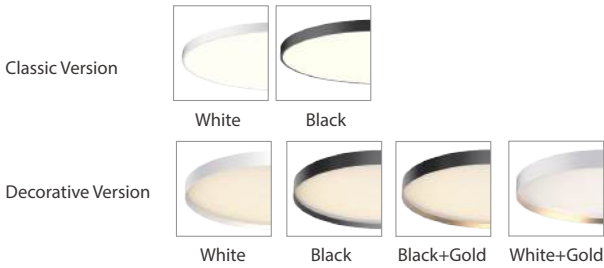

LUCIA
Surface & Pendant

Drawing



Order Options


14W-50W 1300-1600lm-5900-6500lm OSRAM							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-C-14W-TW-X	Ø350*50mm	1300-1600Lm	12W	14W	80	2700K-6500K	90°
LUCIA 350-C-18W-TW-X	Ø350*50mm	1900-2300Lm	16W	18W	80		90°
LUCIA 450-C-18W-TW-X	Ø450*50mm	1900-2300Lm	16W	18W	80	2700K-6500K	90°
LUCIA 450-C-26W-TW-X	Ø450*50mm	2700-3200Lm	24W	26W	80		90°
LUCIA 600-C-40W-TW-X	Ø600*50mm	4500-5000Lm	36W	40W	80	2700K-6500K	90°
LUCIA 600-C-50W-TW-X	Ø600*50mm	5900-6500Lm	46W	50W	80		90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately



LUCIA
Surface & Pendant

Drawing



Order Options

14W-50W 1300-1600lm-5900-6500lm OSRAM							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-D-14W-TW-X	Ø350*75mm	1300-1600Lm	12W	14W	80	2700K-6500K	90°
LUCIA 350-D-18W-TW-X	Ø350*75mm	1900-2300Lm	16W	18W	80		90°
LUCIA 450-D-18W-TW-X	Ø450*75mm	1900-2300Lm	16W	18W	80	2700K-6500K	90°
LUCIA 450-D-26W-TW-X	Ø450*75mm	2700-3200Lm	24W	26W	80		90°
LUCIA 600-D-40W-TW-X	Ø600*75mm	4500-5000Lm	36W	40W	80	2700K-6500K	90°
LUCIA 600-D-50W-TW-X	Ø600*75mm	5900-6500Lm	46W	50W	80		90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT

CCT




LUCIA 350



LUCIA 450



LUCIA 600



LUCIA 350



LUCIA 450



LUCIA 600

Classic & Decorative Version-CCT
LUCIA 350/450/600-CCT

CE

CB

5

5 Years Warranty

⏏

AC

220-240V

50000h

L80 B10

IP

40

UGR

<19


CRI

80


Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended installation
- 4 diameters for options (350 mm, 450 mm, 600 mm)
- Microprismatic cover for super eyes'comfort

Installation Type



Housing Colour

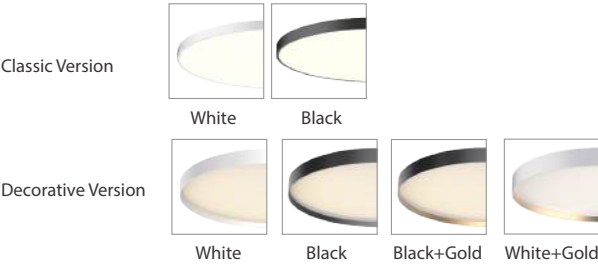

Specifications


- Dimming modes: Non-Dim, Phase Dim, 1-10V, DALI
- Sizes: Ø350mm, Ø450mm,Ø600mm,Ø900mm
- Installation: Surface mounted, Suspended

Light Distribution



LUCIA
Surface & Pendant


Drawing



Order Options


14W-50W 1300-1400lm-5800-6300lm OSRAM							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-C-14W-CCT-X	Ø350*50mm	1300-1400Lm	12W	14W	80	3000K-4000K	90°
LUCIA 350-C-18W-CCT-X	Ø350*50mm	1900-2000Lm	16W	18W	80		90°
LUCIA 450-C-18W-CCT-X	Ø450*50mm	1900-2000Lm	16W	18W	80	3000K-4000K	90°
LUCIA 450-C-26W-CCT-X	Ø450*50mm	2700-2900Lm	24W	26W	80		90°
LUCIA 600-C-40W-CCT-X	Ø600*50mm	4400-4800Lm	36W	40W	80	3000K-4000K	90°
LUCIA 600-C-50W-CCT-X	Ø600*50mm	5800-6300Lm	46W	50W	80		90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

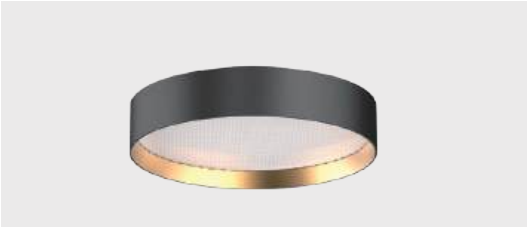

LUCIA
Surface & Pendant

Drawing



Order Options

14W-50W 1300-1400lm-5800-6300lm OSRAM							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUCIA 350-D-14W-CCT-X	Ø350*75mm	1300-1400Lm	12W	14W	80	3000K-4000K	90°
LUCIA 350-D-18W-CCT-X	Ø350*75mm	1900-2000Lm	16W	18W	80		90°
LUCIA 450-D-18W-CCT-X	Ø450*75mm	1900-2000Lm	16W	18W	80	3000K-4000K	90°
LUCIA 450-D-26W-CCT-X	Ø450*75mm	2700-2900Lm	24W	26W	80		90°
LUCIA 600-D-40W-CCT-X	Ø600*75mm	4400-4800Lm	36W	40W	80	3000K-4000K	90°
LUCIA 600-D-50W-CCT-X	Ø600*75mm	5800-6300Lm	46W	50W	80		90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT



Classic Version
FLATIA 350/450/600/900




Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended and recessed installation
4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eye comfort

Specifications

- Dimming modes: Non-Dim, Phase Dim, 1-10V, DALI
- Sizes: Ø350mm, Ø450mm, Ø600mm, Ø900mm,
- Installation: Surface mounted, Suspended


Installation Type



Light Distribution




Housing Colour



FLATIA
Surface & Pendant

Drawing



Order Options

14W-68W 1400lm-7700lm 							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA 350-C-14W-830-X	Ø350*14mm	1400Lm	12W	14W	80	3000K	90°
FLATIA 350-C-14W-840-X	Ø350*14mm	1500Lm	12W	14W	80	4000K	90°
FLATIA 350-C-18W-830-X	Ø350*14mm	2000Lm	16W	18W	80	3000K	90°
FLATIA 350-C-18W-840-X	Ø350*14mm	2200Lm	16W	18W	80	4000K	90°
FLATIA 450-C-18W-830-X	Ø450*14mm	2000Lm	16W	18W	80	3000K	90°
FLATIA 450-C-18W-840-X	Ø450*14mm	2200Lm	16W	18W	80	4000K	90°
FLATIA 450-C-26W-830-X	Ø450*14mm	2800Lm	24W	26W	80	3000K	90°
FLATIA 450-C-26W-840-X	Ø450*14mm	3000Lm	24W	26W	80	4000K	90°
FLATIA 600-C-40W-830-X	Ø600*14mm	4200Lm	36W	40W	80	3000K	90°
FLATIA 600-C-40W-840-X	Ø600*14mm	4600Lm	36W	40W	80	4000K	90°
FLATIA 600-C-50W-830-X	Ø600*14mm	5300Lm	46W	50W	80	3000K	90°
FLATIA 600-C-50W-840-X	Ø600*14mm	5800Lm	46W	50W	80	4000K	90°
FLATIA 900-C-68W-830-X	Ø900*14mm	7000Lm	65W	68W	80	3000K	90°
FLATIA 900-C-68W-840-X	Ø900*14mm	7700Lm	65W	68W	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

24W-96W 2250lm-10300lm 							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA 350-C-14W-830-X UL	Ø350*14mm	1400Lm ↓ 850Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	80	3000K	90°
FLATIA 350-C-14W-840-X UL	Ø350*14mm	1500Lm ↓ 900Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	80	4000K	90°
FLATIA 350-C-18W-830-X UL	Ø350*14mm	2000Lm ↓ 850Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	80	3000K	90°
FLATIA 350-C-18W-840-X UL	Ø350*14mm	2200Lm ↓ 900Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	80	4000K	90°
FLATIA 450-C-18W-830-X UL	Ø450*14mm	2000Lm ↓ 1100Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	80	3000K	90°
FLATIA 450-C-18W-840-X UL	Ø450*14mm	2200Lm ↓ 1200Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	80	4000K	90°
FLATIA 450-C-26W-830-X UL	Ø450*14mm	2800Lm ↓ 1100Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	80	3000K	90°
FLATIA 450-C-26W-840-X UL	Ø450*14mm	3000Lm ↓ 1200Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	80	4000K	90°
FLATIA 600-C-40W-830-X UL	Ø600*14mm	4200Lm ↓ 1700Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	80	3000K	90°
FLATIA 600-C-40W-840-X UL	Ø600*14mm	4600Lm ↓ 1800Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	80	4000K	90°
FLATIA 600-C-50W-830-X UL	Ø600*14mm	5300Lm ↓ 1700Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	80	3000K	90°
FLATIA 600-C-50W-840-X UL	Ø600*14mm	5800Lm ↓ 1800Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	80	4000K	90°
FLATIA 900-C-68W-830-X UL	Ø900*14mm	7000Lm ↓ 2400Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	80	3000K	90°
FLATIA 900-C-68W-840-X UL	Ø900*14mm	7700Lm ↓ 2600Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

LUCIA & FLATIA Series
SURFACE & PENDANT



Decorative Version
FLATIA 350/450/600/900




Features

- Round aluminum housing ensures the optimal cooling of the LEDs
- Available in standard version and decorative version
- Suitable for ceiling-mounted, wall-mounted suspended and recessed installation
- 4 diameters for options (350 mm, 450 mm, 600 mm, 900 mm)
- Microprismatic cover for super eye comfort

Specifications

- Dimming modes: Non-Dim, Phase Dim, 1-10V, DALI
- Sizes: Ø350mm, Ø450mm, Ø600mm, Ø900mm,
- Installation: Surface mounted, Suspended

Installation Type




Housing Colour



FLATIA
Surface & Pendant

Drawing



Order Options

14W-68W 1400lm-7700lm		LUMILEDS					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA 350-D-14W-830-X	Ø350*45mm	1400Lm	12W	14W	80	3000K	90°
FLATIA 350-D-14W-840-X	Ø350*45mm	1500Lm	12W	14W	80	4000K	90°
FLATIA 350-D-18W-830-X	Ø350*45mm	2000Lm	16W	18W	80	3000K	90°
FLATIA 350-D-18W-840-X	Ø350*45mm	2200Lm	16W	18W	80	4000K	90°
FLATIA 450-D-18W-830-X	Ø450*45mm	2000Lm	16W	18W	80	3000K	90°
FLATIA 450-D-18W-840-X	Ø450*45mm	2200Lm	16W	18W	80	4000K	90°
FLATIA 450-D-26W-830-X	Ø450*45mm	2800Lm	24W	26W	80	3000K	90°
FLATIA 450-D-26W-840-X	Ø450*45mm	3000Lm	24W	26W	80	4000K	90°
FLATIA 600-D-40W-830-X	Ø600*45mm	4200Lm	36W	40W	80	3000K	90°
FLATIA 600-D-40W-840-X	Ø600*45mm	4600Lm	36W	40W	80	4000K	90°
FLATIA 600-D-50W-830-X	Ø600*45mm	5300Lm	46W	50W	80	3000K	90°
FLATIA 600-D-50W-840-X	Ø600*45mm	5800Lm	46W	50W	80	4000K	90°
FLATIA 900-D-68W-830-X	Ø900*45mm	7000Lm	65W	68W	80	3000K	90°
FLATIA 900-D-68W-840-X	Ø900*45mm	7700Lm	65W	68W	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

24W-96W 2250lm-10300lm		LUMILEDS					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA 350-D-14W-830-X UL	Ø350*45mm	1400Lm ↓ 850Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	80	3000K	90°
FLATIA 350-D-14W-840-X UL	Ø350*45mm	1500Lm ↓ 900Lm ↑	12W ↓ 8W ↑	14W ↓ 10W ↑	80	4000K	90°
FLATIA 350-D-18W-830-X UL	Ø350*45mm	2000Lm ↓ 850Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	80	3000K	90°
FLATIA 350-D-18W-840-X UL	Ø350*45mm	2200Lm ↓ 900Lm ↑	16W ↓ 8W ↑	18W ↓ 10W ↑	80	4000K	90°
FLATIA 450-D-18W-830-X UL	Ø450*45mm	2000Lm ↓ 1100Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	80	3000K	90°
FLATIA 450-D-18W-840-X UL	Ø450*45mm	2200Lm ↓ 1200Lm ↑	16W ↓ 11W ↑	18W ↓ 13W ↑	80	4000K	90°
FLATIA 450-D-26W-830-X UL	Ø450*45mm	2800Lm ↓ 1100Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	80	3000K	90°
FLATIA 450-D-26W-840-X UL	Ø450*45mm	3000Lm ↓ 1200Lm ↑	24W ↓ 11W ↑	26W ↓ 13W ↑	80	4000K	90°
FLATIA 600-D-40W-830-X UL	Ø600*45mm	4200Lm ↓ 1700Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	80	3000K	90°
FLATIA 600-D-40W-840-X UL	Ø600*45mm	4600Lm ↓ 1800Lm ↑	36W ↓ 18W ↑	40W ↓ 20W ↑	80	4000K	90°
FLATIA 600-D-50W-830-X UL	Ø600*45mm	5300Lm ↓ 1700Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	80	3000K	90°
FLATIA 600-D-50W-840-X UL	Ø600*45mm	5800Lm ↓ 1800Lm ↑	46W ↓ 18W ↑	50W ↓ 20W ↑	80	4000K	90°
FLATIA 900-D-68W-830-X UL	Ø900*45mm	7000Lm ↓ 2400Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	80	3000K	90°
FLATIA 900-D-68W-840-X UL	Ø900*45mm	7700Lm ↓ 2600Lm ↑	65W ↓ 25W ↑	68W ↓ 28W ↑	80	4000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI) X=N (Without Driver)
Remark: Magnetic Uplight Module to be ordered separately

FLATIA ECO Series
SURFACE



FLATIA ECO 400

FLATIA ECO 600

FLATIA ECO 800

FLATIA ECO

AC

220-240V

50000h

L80 B10

CRI


90

Features

- Round aluminum housing ensures the optimal cooling of the LEDs.
- Decorative cover for esthetic purpose.
- GCT selectable between 3000K, 3500K and 4000K.
- Microprismatic cover for eye comfort.
- Various color options are available.

Specifications

- Dimming modes: Non-Dim , Phase Dim, DALI, 1-10V

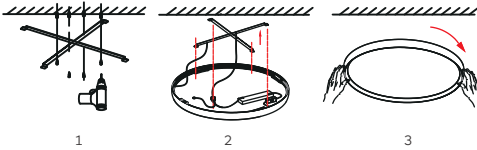


Installation Type



Housing Colour



Light Distribution

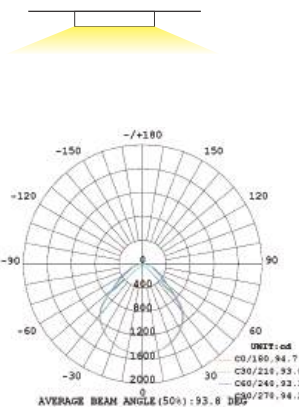

FLATIA ECO
Surface

Drawing



Order Options

36W-67W 2700lm-5400lm		LUMILEDS					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
FLATIA ECO 400-D-36W-X	Φ395*57mm	2700Lm	32W	36W	90	3000K	90°
FLATIA ECO 600-D-48W-X	Φ585*57mm	4400Lm	45W	48W	90	3000K	90°
FLATIA ECO 800-D-67W-X	Φ771*57mm	5400Lm	60W	67W	90	3000K	90°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI Dim)







Pendant



Surface mounted



Easy Installation
Twist and lock design
Loop in & loop out wiring design



Emergency back-up
(optional)



CCT Switchable
CCT:3000K/3500K/4000K



UGR<19
Microprism craftsmanship,
uniform and soft lighting.


🔴 **Microwave Sensor + CCT**



1. If there is enough ambient light, the lights will remain off even if motion is detected.



2. If there is insufficient ambient light, any motion detected by the lights will cause all lights to switch on simultaneously.




3. After a hold time, the lights will switch off if there is no new motion trigger.

🔴 **Master-slave Sensor +CCT**

The Master lights have a blue signal, while the Slave lights do not have any signal.



If there is enough ambient light, the lights will remain off even if motion is detected.

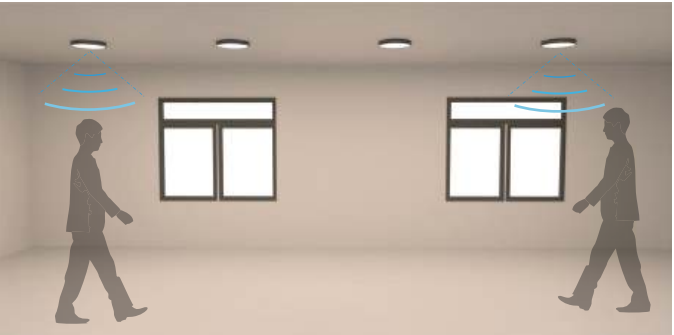

After a delay, the Slave lights will dim to a low level if there is no new motion trigger.



If there is insufficient ambient light, any motion detected by the Master lights will cause all lights to switch on simultaneously.



After a hold time, both the Master and Slave lights will switch off if there is no new motion trigger.

CREST Series
SURFACE & PENDANT



Surface & Pendant
CREST 400

CE

5

5 Years Warranty

AC

220-240V

IP

44

UGR

<19

CRI

>90

50000h

L80 B10


Features

- Round fixture with a microprismatic diffuser is ideal for workstations
- CREST's innovative technology make it flat and minimalistic design
- It integrates multiple installation options and dimming modes
- The surface mounted and suspended fixture comes with loop in & loop out design and easy installation

Specifications

- Dimming modes: CCT,Non-Diml, DALI, Bluetooth Dim, phase-dim,1-10V,Mircowave sensor, 3H Emergency, Master-Slave sensor
- Sizes: Ø400mm
- Installation: Surface mounted, Suspended


Installation Type



Housing Colour



Drawing

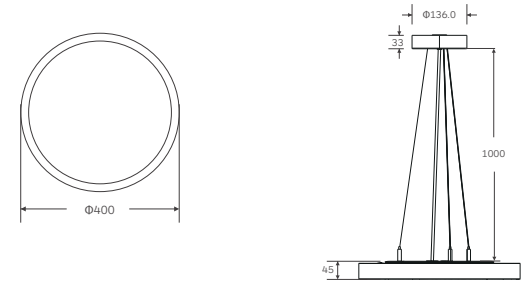

Order Options

26W 2100lm-2300lm 							
Code	Size	System LM	LED W	System W	CCT	CRI	Dimming Type
CREST400-SM-26W-CCT-F							CCT+ON-OFF
CREST400-SM-26W-CCT-D							CCT+DALI
CREST400-SM-26W-CCT-BT		2100Lm			3000K		CCT+Bluetooth
CREST400-SM-26W-CCT-MW-F							CCT+Microwave sensor
CREST400-SM-26W-CCT-3H-F	Ø400mm	2200Lm	24W	26W	3500K	90	CCT+3H Emergency+ON-OFF
CREST400-SM-26W-CCT-3H-D		2300Lm			4000K		CCT+3H Emergencye+DALI
CREST400-SM-26W-CCT-ML							CCT+Master Slave sensor (Master light)
CREST400-SM-26W-CCT-SL							CCT+Master Slave sensor (Slave light)

Code	Size	System LM	LED W	System W	CCT	CRI	Dimming Type
CREST400-SUS-26W-CCT-F							CCT+ON-OFF
CREST400-SUS-26W-CCT-D							CCT+DALI
CREST400-SUS-26W-CCT-BT		2100Lm			3000K		CCT+Bluetooth
CREST400-SUS-26W-CCT-MW-F							CCT+Microwave sensor
CREST400-SUS-26W-CCT-3H-F	Ø400mm	2200Lm	24W	26W	3500K	90	CCT+3H Emergency+ON-OFF
CREST400-SUS-26W-CCT-3H-D		2300Lm			4000K		CCT+3H Emergencye+DALI
CREST400-SUS-26W-CCT-ML							CCT+Master Slave sensor (Master light)
CREST400-SUS-26W-CCT-SL							CCT+Master Slave sensor (Slave light)



LUMI



Surface Mounted Light
LUMI 300/400/600

CE

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
44

UGR
<19

CRI
80

- Features**
- Luminous efficacy: up to 120 lm/W, microprismatic optic contributes to high visual comfort
 - 3000K, 3500K, 4000K CCT selectable by DIP Switch,easy to keep stock
 - Flat ceiling light with height of 65mm suitable for almost various applications

- Specifications**
- Dimming modes: Non-Dim, Phase Dim,1-10V,DALI
 - Sizes: Φ300mm, Φ400mm, Φ600mm
 - Installation: Surface mounted

Installation Type



Housing Colour




Light Distribution



LUMI
SURFACE MOUNTED

Drawing

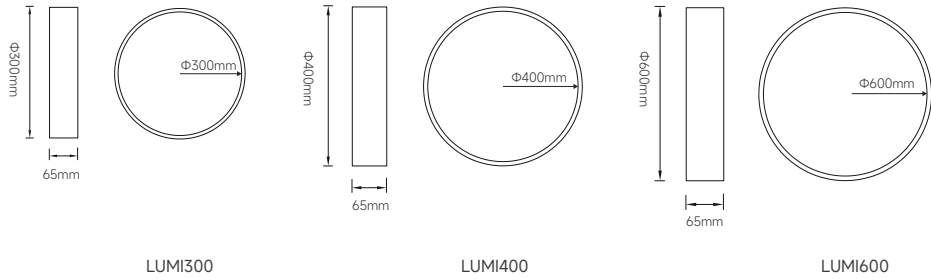

Order Options

10W-50W 1080lm-5850lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUMI300-SM-10W-3CCT-X	Φ300*65mm	1080-1150lm	8W	10W	80	3000K/3500K/4000K	75°
LUMI300-SM-13W-3CCT-X	Φ300*65mm	1400-1495lm	11W	13W	80	3000K/3500K/4000K	75°
LUMI400-SM-18W-3CCT-X	Φ400*65mm	2160-2250lm	16W	18W	80	3000K/3500K/4000K	75°
LUMI400-SM-26W-3CCT-X	Φ400*65mm	3120-3250lm	24W	26W	80	3000K/3500K/4000K	75°
LUMI600-SM-40W-3CCT-X	Φ600*65mm	5000-5200lm	36W	40W	80	3000K/3500K/4000K	75°
LUMI600-SM-45W-3CCT-X	Φ600*65mm	5630-5850lm	46W	50W	80	3000K/3500K/4000K	75°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)							

LUMI Series
SURFACE & PENDANT



LUMI300



LUMI400



LUMI600



CCT selectable

Pendant Light
LUMI 300/400/600

CE

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
44

UGR
<19

CRI
80

Features

- Luminous efficacy: up to 120 lm/W , microprismatic optic contributes to high visual comfort
- 3000K, 3500K, 4000K CCT selectable by DIP Switch,easy to keep stock
- Flat ceiling light with height of 65mm suitable for almost various applications

Installation Type



Cable Suspension

Housing Colour



White

Black

Specifications

- Dimming modes: Non-Dim, Phase Dim,1-10V,DALI
- Sizes: Φ300mm, Φ400mm, Φ600mm
- Installation: Suspended

Light Distribution



4000K


3500K

3000K



LUMI
PENDANT

Drawing

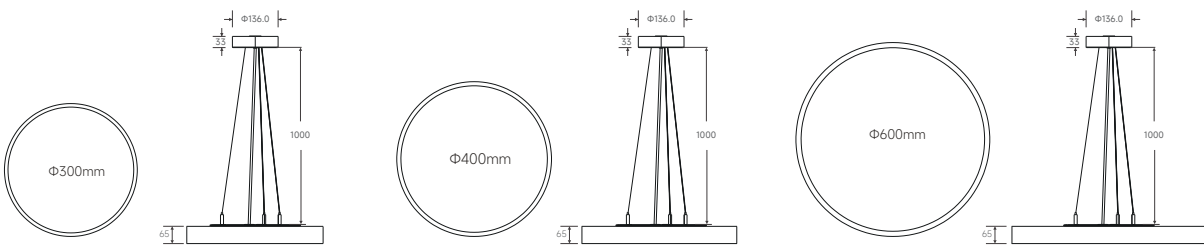

LUMI300

LUMI400

LUMI600

Order Options

10W-50W 1080lm-5850lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
LUMI300-SUS-10W-3CCT-X	Φ300*65mm	1080-1150lm	8W	10W	80	3000K/3500K/4000K	75°
LUMI300-SUS-13W-3CCT-X	Φ300*65mm	1400-1495lm	11W	13W	80	3000K/3500K/4000K	75°
LUMI400-SUS-18W-3CCT-X	Φ400*65mm	2160-2250lm	16W	18W	80	3000K/3500K/4000K	75°
LUMI400-SUS-26W-3CCT-X	Φ400*65mm	3120-3250lm	24W	26W	80	3000K/3500K/4000K	75°
LUMI600-SUS-40W-3CCT-X	Φ600*65mm	5000-5200lm	36W	40W	80	3000K/3500K/4000K	75°
LUMI600-SUS-45W-3CCT-X	Φ600*65mm	5630-5850lm	46W	50W	80	3000K/3500K/4000K	75°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

NOVA-A-116 Series
DOWNLIGHT



Downlight
NOVA-A-116

CE

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

UGR

<19

CRI

>90

Features

- The vertically adjustable angle is 30 degrees and can be rotated 350 degrees to precise adjustment of the illuminated object.

Applications

- Dimming modes: Non-Dim , Phase Dim, 1-10V, DALI
- Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, highend clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places.

Installation Type




Housing Colour



NOVA-A-116
Downlight

Drawing



Order Options

20W 1550lm-1800lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA-A-116-930-X	Ø116*H160	1550lm	17W	20W	90	3000K	20°
NOVA-A-116-930-X	Ø116*H160	1700lm	17W	20W	90	3000K	30°
NOVA-A-116-930-X	Ø116*H160	1800lm	17W	20W	90	3000K	40°
NOVA-A-116-930-X	Ø116*H160	1600lm	17W	20W	90	3000K	45°
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI Dim)							

Light Distribution



NOVA-A-116 Series
DOWNLIGHT





NOVA



NOVA-C L



NOVA-80



NOVA-C M



NOVA-C S





NOVA

Surface-mounted Luminaire

Modern aesthetic Ceiling & Pendant light
Engineering to combine maximum
performance with a sleek style



Important safety Notes

- 1.Switch off the electricity at the mains before commencing installation or lampchange and (if a fuse box is used) remove the appropriate circuit fuse to avoidaccidental switching on of the mains supply.
- 2.Connect to a 220V-240V supply in accordance with IEE regulations.
- 3.Make sure all connections are tight with no loose strands.
4. Ensure fire regulations are not breached when installing your lights.
5. If you are in any doubt regarding these instructions, consult a qualified electrician.

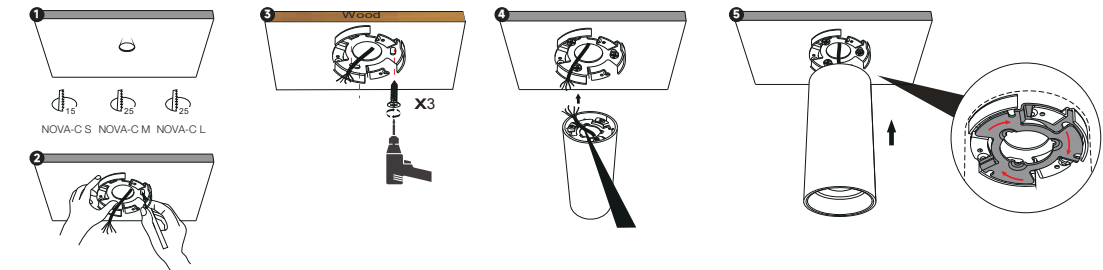

Very easy to change lens (twist and lock)

Spot, narrow and medium beam angles are available for different lighting applications

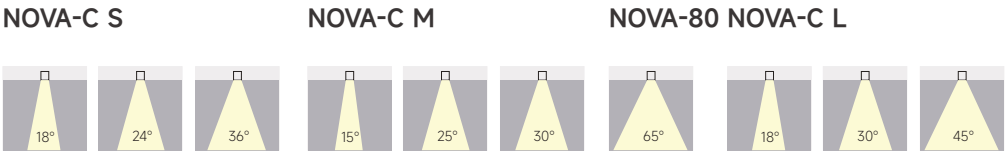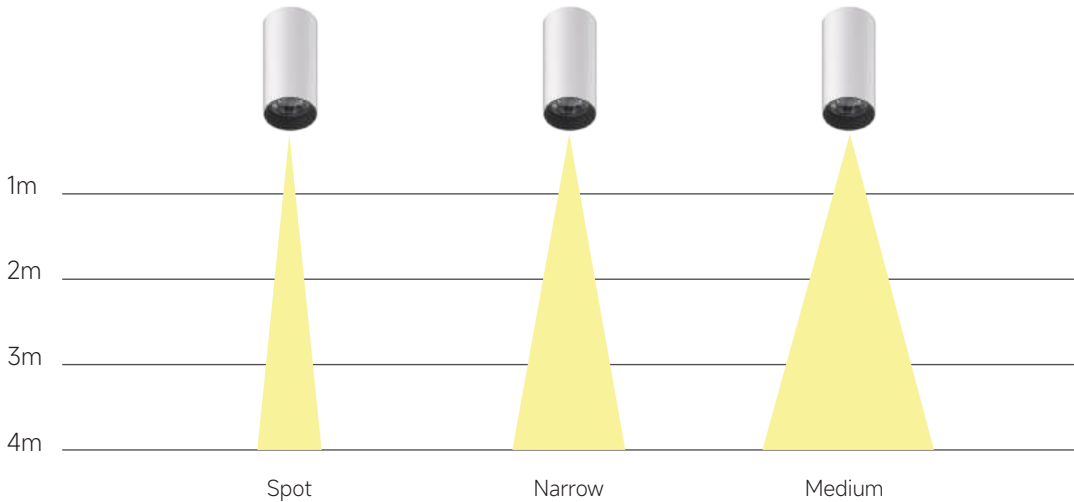

NOVA Series
SURFACE



NOVA-C S



NOVA-C M



NOVA-80



NOVA-C L

Surface Mounted

NOVA-C S /NOVA-C M /NOVA-80 /NOVA-C L




Features

- Cylindrical surface mounted light made of aluminum.
- Ultra-slim housing design with LED driver inside.
- Optimized passive cooling system
- Interchangeable decoration ring for various lighting application.
- Adopt of lens guarantees high luminous efficiency and uniform distribution.
- Easy to change lens (twist and lock) to choose spot, narrow and medium beam angle.


Specifications

- Dimming modes: Non-Dim , Phase Dim, 1-10V
- Sizes: Φ55mm,Φ72mm,Φ80mm,Φ90mm
- Installation: Surface mounted

Installation Type




Light Distribution



Housing Colour




Decoration Ring Colour



NOVA-C S/M
Surface

Drawing

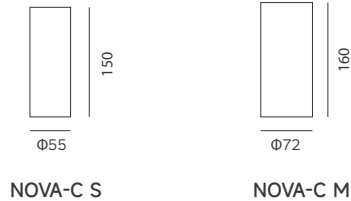


Order Options

11W 750lm-850lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA-C S-11W-930-18-X	Φ55*150mm	750 lm	9W	11W	90	3000K	18°
NOVA-C S-11W-940-18-X	Φ55*150mm	850 lm	9W	11W		4000K	
NOVA-C S-11W-930-24-X	Φ55*150mm	750 lm	9W	11W	90	3000K	24°
NOVA-C S-11W-940-24-X	Φ55*150mm	850 lm	9W	11W		4000K	
NOVA-C S-11W-930-36-X	Φ55*150mm	750 lm	9W	11W	90	3000K	36°
NOVA-C S-11W-940-36-X	Φ55*150mm	850 lm	9W	11W		4000K	
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V)							
15W 1200lm-1300lm		CITIZEN					
NOVA-C M-15W-930-15-X	Φ72*160mm	1200 lm	13W	15W	90	3000K	15°
NOVA-C M-15W-940-15-X	Φ72*160mm	1300 lm	13W	15W		4000K	
NOVA-C M-15W-930-25-X	Φ72*160mm	1200 lm	13W	15W	90	3000K	25°
NOVA-C M-15W-940-25-X	Φ72*160mm	1300 lm	13W	15W		4000K	
NOVA-C M-15W-930-30-X	Φ72*160mm	1200 lm	13W	15W	90	3000K	30°
NOVA-C M-15W-940-30-X	Φ72*160mm	1300 lm	13W	15W		4000K	
Remark: X=F (Non-Dim) X=P(Phase Dim) X=A (1-10V)							
21W 1600lm-1700lm		CITIZEN					
NOVA-C M-21W-930-15-X	Φ72*160mm	1600 lm	18W	21W	90	3000K	15°
NOVA-C M-21W-940-15-X	Φ72*160mm	1700 lm	18W	21W		4000K	
NOVA-C M-21W-930-25-X	Φ72*160mm	1600 lm	18W	21W	90	3000K	25°
NOVA-C M-21W-940-25-X	Φ72*160mm	1700 lm	18W	21W		4000K	
NOVA-C M-21W-930-30-X	Φ72*160mm	1600 lm	18W	21W	90	3000K	30°
NOVA-C M-21W-940-30-X	Φ72*160mm	1700 lm	18W	21W		4000K	
Remark: X=F (Non-Dim) X=A(1-10V)							



NOVA-80/NOVA-C L
Surface

Drawing



Order Options

21W 1400lm-1650lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA80-C-21W-CCT-60-X	Φ80*200mm	1400lm-1650lm	18W	21W	90	3000K 3500K 4000K	60°
28W 2300lm-2500lm	CITIZEN						
NOVA-C L-28W-930-18-X	Φ90*230mm	2300 lm	25W	28W	90	3000K	18°
NOVA-C L-28W-940-18-X	Φ90*230mm	2500 lm	25W	28W		4000K	
NOVA-C L-28W-930-30-X	Φ90*230mm	2300 lm	25W	28W	90	3000K	30°
NOVA-C L-28W-940-30-X	Φ90*230mm	2500 lm	25W	28W		4000K	
NOVA-C L-28W-930-45-X	Φ90*230mm	2300 lm	25W	28W	90	3000K	45°
NOVA-C L-28W-940-45-X	Φ90*230mm	2500 lm	25W	28W		4000K	
Remark: X=F (Non-Dim)					X=A (1-10V)	X=D(DALI)	



NOVA Series
PENDANT





Pendant

Modern aesthetic Ceiling & Pendant light
Engineering to combine maximum
performance with a sleek style



Important safety Notes

1. Switch off the electricity at the mains before commencing installation or lampchange and (if a fuse box is used) remove the appropriate circuit fuse to avoid accidental switching on of the mains supply.
2. Connect to a 220V-240V supply in accordance with IEE regulations.
3. Make sure all connections are tight with no loose strands.
4. Ensure fire regulations are not breached when installing your lights.
5. If you are in any doubt regarding these instructions, consult a qualified electrician.

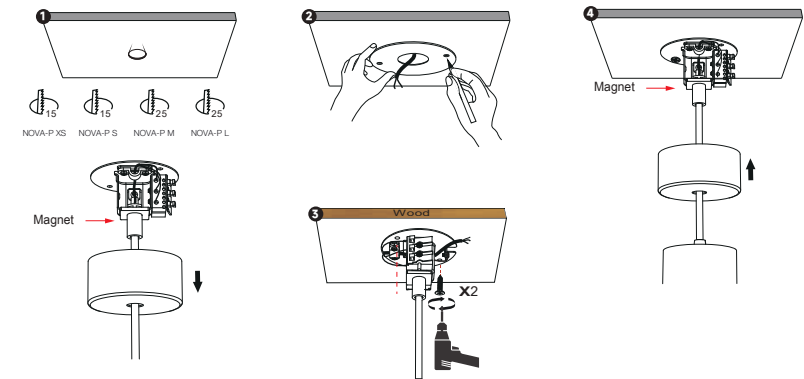

Very easy to change lens (twist and lock)

Spot, narrow and medium beam angles are available for different lighting applications

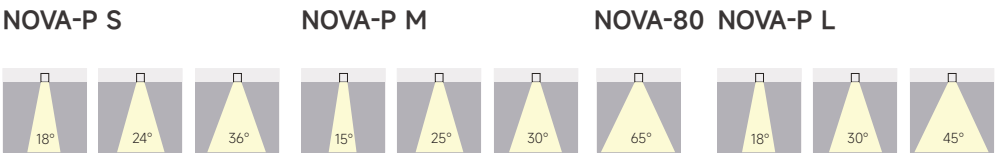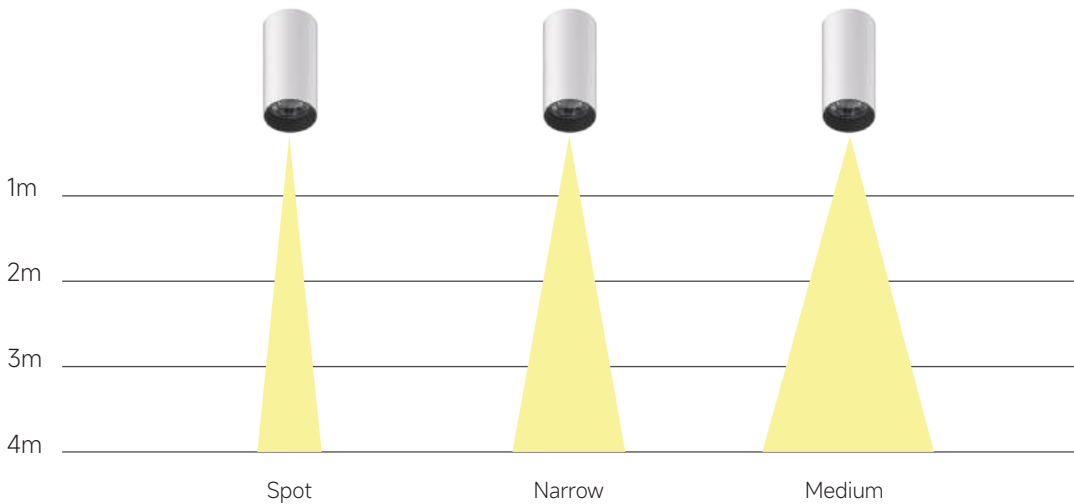

NOVA Series
PENDANT



Pendant
NOVA-P S /NOVA-P M /NOVA 80/NOVA-P L




Features

- Cylindrical surface mounted light made of aluminum.
- Ultra-slim housing design with LED driver inside.
- Optimized passive cooling system
- Interchangeable decoration ring for various lighting application.
- Adopt of lens guarantees high luminous efficiency and uniform distribution.
- Easy to change lens (twist and lock) to choose spot, narrow and medium beam angle.


Specifications

- Dimming modes: Non-Dim , Phase Dim, 1-10V
- Sizes: Φ55mm,Φ72mm,Φ90mm
- Installation: Pendant


Installation Type




Light Distribution



Housing Colour




Decoration Ring Colour



NOVA-P S/M
Pendant

Drawing



Order Options


11W 750lm-850lm		CITIZEN					
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA-P S-11W-930-18-X	Φ55*250mm	750 lm	9W	11W	90	3000K	18°
NOVA-P S-11W-940-18-X	Φ55*250mm	850 lm	9W	11W		4000K	
NOVA-P S-11W-930-24-X	Φ55*250mm	750 lm	9W	11W	90	3000K	24°
NOVA-P S-11W-940-24-X	Φ55*250mm	850 lm	9W	11W		4000K	
NOVA-P S-11W-930-36-X	Φ55*250mm	750 lm	9W	11W	90	3000K	36°
NOVA-P S-11W-940-36-X	Φ55*250mm	850 lm	9W	11W		4000K	
Remark: X=F (Non-Dim)				X=P (Phase Dim)	X=A(1-10V)	X=D (DALI)	
15W 1200lm-1300lm		CITIZEN					
NOVA-P M-15W-930-15-X	Φ72*250mm	1200 lm	13W	15W	90	3000K	15°
NOVA-P M-15W-940-15-X	Φ72*250mm	1300 lm	13W	15W		4000K	
NOVA-P M-15W-930-25-X	Φ72*250mm	1200 lm	13W	15W	90	3000K	25°
NOVA-P M-15W-940-25-X	Φ72*250mm	1300 lm	13W	15W		4000K	
NOVA-P M-15W-930-30-X	Φ72*250mm	1200 lm	13W	15W	90	3000K	30°
NOVA-P M-15W-940-30-X	Φ72*250mm	1300 lm	13W	15W		4000K	
Remark: X=F (Non-Dim)				X=P (Phase Dim)	X=A(1-10V)		
21W 1600lm-1700lm		CITIZEN					
NOVA-P M-21W-930-15-X	Φ72*250mm	1600 lm	18W	21W	90	3000K	15°
NOVA-P M-21W-940-15-X	Φ72*250mm	1700 lm	18W	21W		4000K	
NOVA-P M-21W-930-25-X	Φ72*250mm	1600 lm	18W	21W	90	3000K	25°
NOVA-P M-21W-940-25-X	Φ72*250mm	1700 lm	18W	21W		4000K	
NOVA-P M-21W-930-30-X	Φ72*250mm	1600 lm	18W	21W	90	3000K	30°
NOVA-P M-21W-940-30-X	Φ72*250mm	1700 lm	18W	21W		4000K	
Remark: X=F (Non-Dim)				X=A(1-10V)			

NOVA Series
PENDANT



NOVA-80/NOVA-P L
Pendant

Drawing



Order Options

21W 1400lm-1650lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
NOVA80-P-21W-CCT-60-X	Φ80*200mm	1400lm-1650lm	18W	21W	90	3000K 3500K 4000K	60°

28W 2700lm-2900lm		CITIZEN					
NOVA-P L-28W-930-18-X	Φ90*230mm	2700 lm	25W	28W	90	3000K	18°
NOVA-P L-28W-940-18-X	Φ90*230mm	2900 lm	25W	28W		4000K	
NOVA-P L-28W-930-30-X	Φ90*230mm	2700 lm	25W	28W	90	3000K	30°
NOVA-P L-28W-940-30-X	Φ90*230mm	2900 lm	25W	28W		4000K	
NOVA-P L-28W-930-45-X	Φ90*230mm	2700 lm	25W	28W	90	3000K	45°
NOVA-P L-28W-940-45-X	Φ90*230mm	2900 lm	25W	28W		4000K	

Remark: X=F (Non-Dim) X=A(1-10V) X=D (DALI)





ORBIT

425IE-lite lighting



SMALL & POWERFUL

Minimum Design, Maximum Comfort

A variety of color options
Fashionable and changeable



Gold



Silver




Black



White

Benefits of using LUMENS brand
AC LED board

No additional power supply is required,
making the structure as compact as possible.

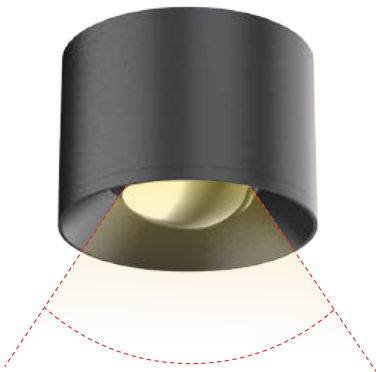

Beam angle: 50°

Easy Installation

Split structure design



Plano-convex lens design

No multiple shadows,
with larger beam angle and better lighting effect.



ORBIT Series

SURFACE



ORBIT-S



ORBIT-M

Surface Mounted

ORBIT-S / ORBIT-M

CE

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>90


Features

- ORBIT Surface-mounted luminaire made of aluminium, available in 2 sizes;
- luminaire heatsink can be attached to mounting plate, easy to be mounted.


Specifications

- Dimming modes: Phase Dim
- Sizes: Ø65mm,Ø80mm
- Installation: Surface mounted

Installation Type



Light Distribution




Housing Colour



ORBIT

SURFACE

Drawing

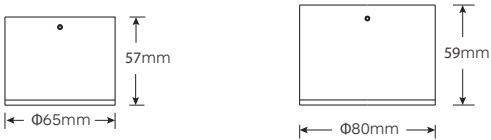

Order Options

4W 210lm-250lm LUMENS Leading the LED Revolution						
Code	Size	System LM	System W	CRI	CCT	Beam
ORBIT-S-4W-930-40-P	Ø65*57mm	210lm	4W	90	3000K	40°
ORBIT-S-4W-940-40-P	Ø65*57mm	250lm	4W	90	4000K	40°

Remark: P=Phase Dim

8W 500lm-550lm LUMENS Leading the LED Revolution						
Code	Size	System LM	System W	CRI	CCT	Beam
ORBIT-M-8W-930-40-P	Ø80*59mm	500lm	8W	90	3000K	50°
ORBIT-M-8W-940-40-P	Ø80*59mm	550lm	8W	90	4000K	50°

Remark: P=Phase Dim




KUBI

4311 Recessed lighting



SMALL & POWERFUL

Light up your world with KUBI
Simplicity is the ultimate sophistication
Pure lines and Essential geometry

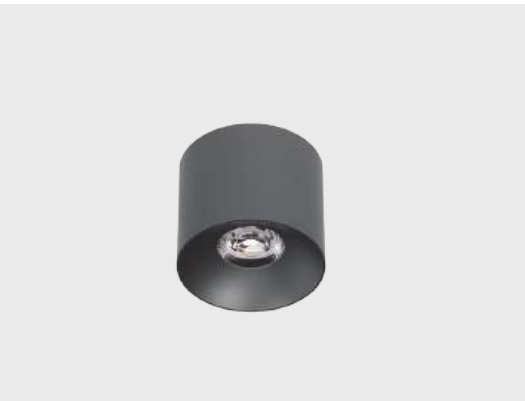

KUBI
SURFACE MOUNTED

Classic Version
KUBI

AC

220-240V

50000h

L80 B10

IP

20

UGR

<19

CRI

90

Features

- Delicate and compact design
- Triple safety construction
- Easy and quick installation
- A variety of color options

Specifications

- Dimming modes: Non-Dim / Phase Dim
- Sizes: $\Phi 65\text{mm}$
- Installation: Surface mounted

Installation Type




Surface-mounted

Light Distribution




Housing Colour



Anti-glare Accessory




Drawing



Order Options

6W 500lm-550lm							
Code	Size	System LM	LED W	System W	CRI	CCT	Beam
KUBI-65-6W-930-20-X	$\Phi 65\text{mm} \times 65\text{mm}$	600lm	5W	6W	90	3000K	20°
KUBI-65-6W-930-24-X	$\Phi 65\text{mm} \times 65\text{mm}$	600lm	5W	6W	90	3000K	24°
KUBI-65-6W-930-36-X	$\Phi 65\text{mm} \times 65\text{mm}$	600lm	5W	6W	90	3000K	36°
KUBI-65-6W-940-20-X	$\Phi 65\text{mm} \times 65\text{mm}$	650lm	5W	6W	90	4000K	20°
KUBI-65-6W-940-24-X	$\Phi 65\text{mm} \times 65\text{mm}$	650lm	5W	6W	90	4000K	24°
KUBI-65-6W-940-36-X	$\Phi 65\text{mm} \times 65\text{mm}$	650lm	5W	6W	90	4000K	36°


Remark: X=F (Non-Dim) X=P (Phase Dim)

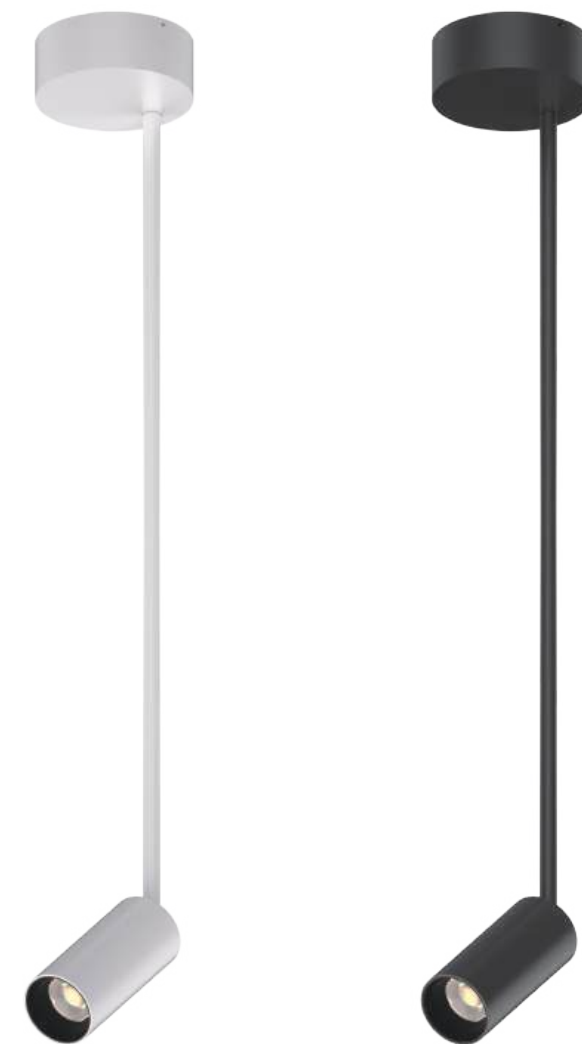


FELLOW MINI

FELLOW MINI Series

FELLOW MINI-Ceiling Lighting

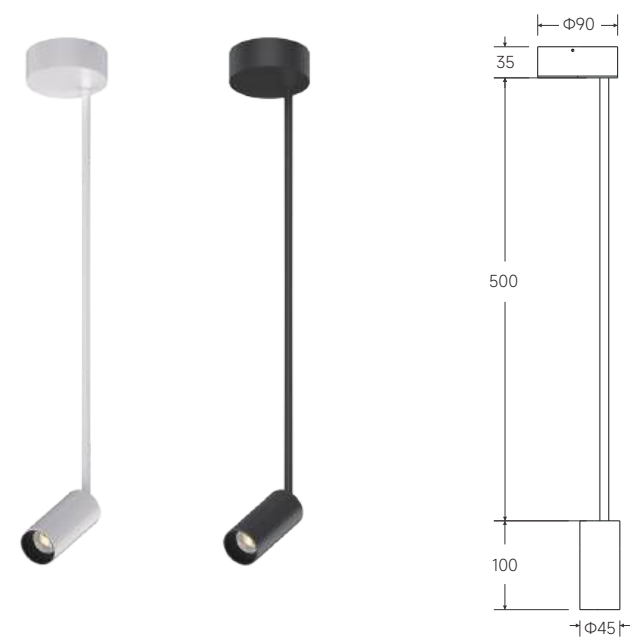

FELLOW MINI-Wall Lighting

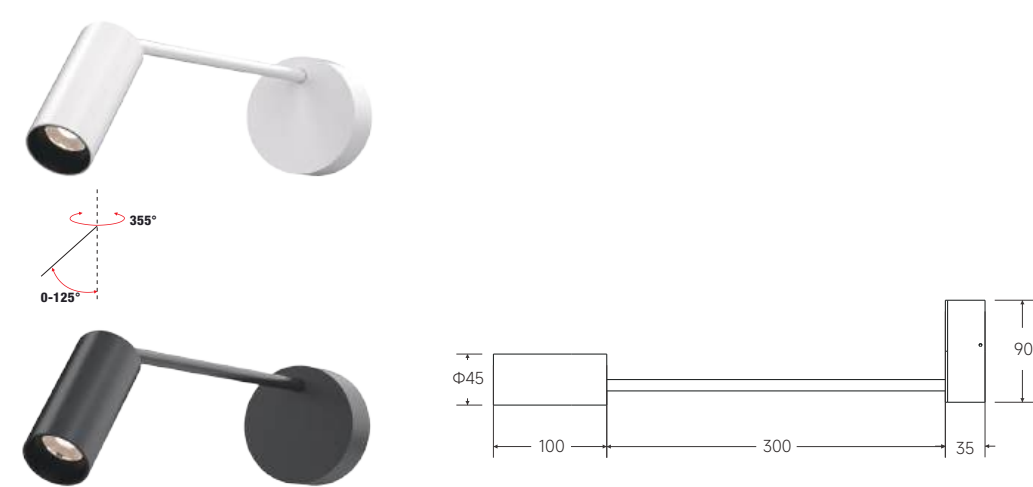

FELLOW MINI Series
SPOTLIGHT



FELLOW MINI-C



FELLOW MINI-W

Surface Mounted

FELLOW MINI-C/W

CE

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

UGR

<19

CRI

>90


Features

- FELLOW Mini perfectly combines functionality and esthetics
- Elegant design with LED driver inside housing
- The head rotates through 355° and pivots through 125°
- Optimized passive cooling system ensures low temperature and long lifetime of LED


Specifications

- Dimming modes:Non-Dim,Phase Dim
- Beam angle: 15°,24°,36°,45°
- Physical: aluminium, powder coating
- Accessories: Honeycomb mesh

Light Distribution



Installation Type



Housing Colour



Anti-glare Ring Colour



FELLOW MINI
SPOTLIGHT

Order Options

FELLOW MINI-C								
7W 450lm-480lm			CITIZEN					
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
FELLOW Mini-C-7W-500-930-15-X	Φ45*635mm	450lm	30V	5W	7W	90	3000K	15°
FELLOW Mini-C-7W-500-930-24-X	Φ45*635mm	480lm	30V	5W	7W	90	3000K	24°
FELLOW Mini-C-7W-500-930-36-X	Φ45*635mm	450lm	30V	5W	7W	90	3000K	35°
FELLOW Mini-C-7W-500-930-45-X	Φ45*635mm	450lm	30V	5W	7W	90	3000K	45°

8W 550lm-650lm								
8W 550lm-650lm			CITIZEN					
FELLOW Mini-C-8W-500-930-15-X	Φ45*635mm	550lm	30V	6W	8W	90	3000K	15°
FELLOW Mini-C-8W-500-930-25-X	Φ45*635mm	600lm	30V	6W	8W	90	3000K	24°
FELLOW Mini-C-8W-500-930-36-X	Φ45*635mm	550lm	30V	6W	8W	90	3000K	35°
FELLOW Mini-C-8W-500-930-45-X	Φ45*635mm	550lm	30V	6W	8W	90	3000K	45°

Remark: X=F (Non-Dim) X=P (Phase Dim)

FELLOW MINI-W								
7W 450lm-480lm			CITIZEN					
Code	Size	System LM	System LM	LED W	System W	CRI	CCT	Beam
FELLOW Mini-W-7W-300-930-15-X	Φ45*435mm	450lm	30V	5W	7W	90	3000K	15°
FELLOW Mini-W-7W-300-930-24-X	Φ45*435mm	480lm	30V	5W	7W	90	3000K	24°
FELLOW Mini-W-7W-300-930-36-X	Φ45*435mm	450lm	30V	5W	7W	90	3000K	35°
FELLOW Mini-W-7W-300-930-45-X	Φ45*435mm	450lm	30V	5W	7W	90	3000K	45°

8W 550lm-650lm								
8W 550lm-650lm			CITIZEN					
FELLOW Mini-W-8W-300-930-15-X	Φ45*435mm	550lm	30V	6W	8W	90	3000K	15°
FELLOW Mini-W-8W-300-930-24-X	Φ45*435mm	600lm	30V	6W	8W	90	3000K	24°
FELLOW Mini-W-8W-300-930-36-X	Φ45*435mm	550lm	30V	6W	8W	90	3000K	35°
FELLOW Mini-W-8W-300-930-45-X	Φ45*435mm	550lm	30V	6W	8W	90	3000K	45°

Remark: X=F (Non-Dim) X=P (Phase Dim)

Architectural & Decorative

Architectural & Decorative

Q LINE07	443-450
FINO	451-454
DENE	457-458
BIBO	459-460
FLEX	461-474





Ultra-Slim Pendant Light


QLINE 07

With a mere **7mm** ultra-slim profile, unique dual-sided lighting design ensures even and soft light distribution, eliminating glare and creating a cozy atmosphere.



QLINE 07 Series LINEAR PROFILE


Features

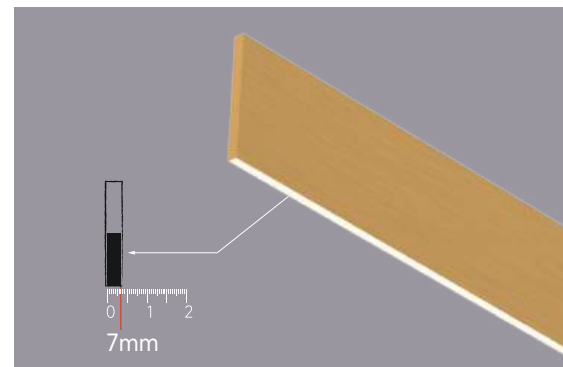


Ultra-narrow 7mm width only.



Both upwards and downwards.

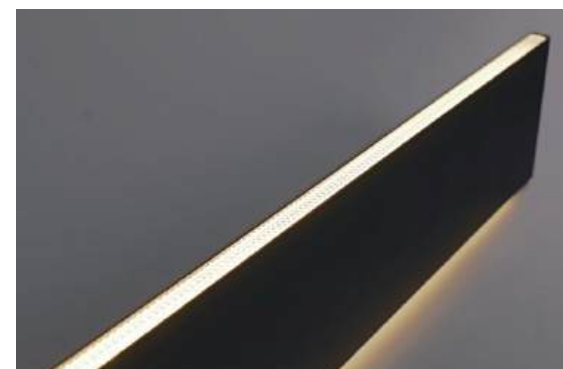


Homogeneous pendant luminaire.

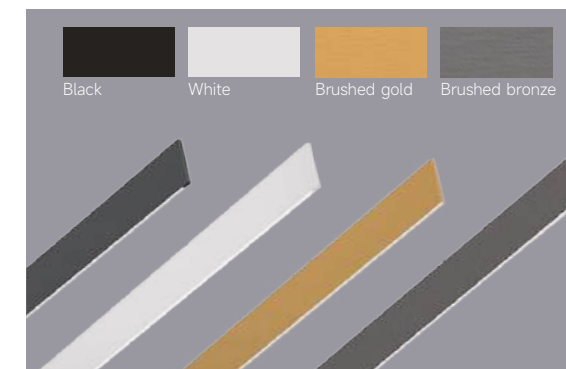


Luxury quality with four different colors.

QLINE 07 Series
LINEAR PROFILE

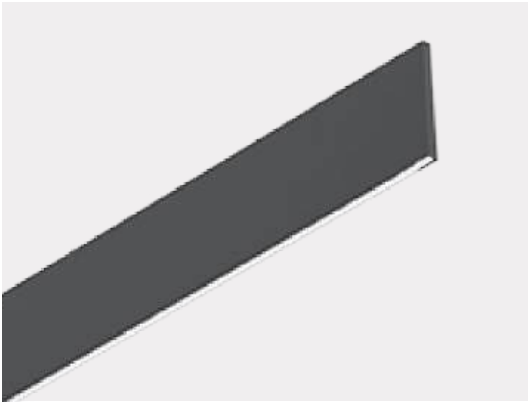

QLINE 07
Linear Profile

Drawing

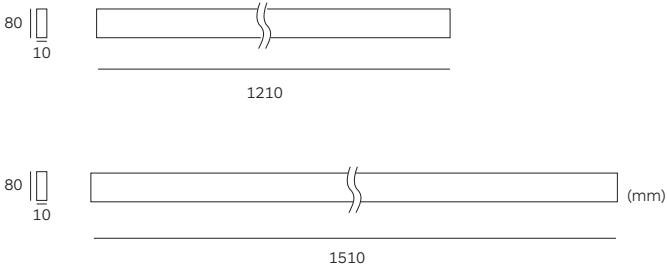

CE

5

AC
220-240V

50000h
L80 B10

IP
20

CRI
>90

Features

- The QLINE 07 is a 7mm wide, ultra-narrow, suspended linear light fixture that offers uniform lighting both upwards and downwards.
- Available in lengths of 1.2 meters and 1.5 meters, its driver is seamlessly integrated into the ceiling-mounted box. Ideal for modern interiors.

Installation Type



Specifications

- Indirect lighting can brighten the ceiling and create a comfortable and transparent light environment
- Dimming modes:Phase Dim, 1-10V, DALI
- Length options: 1210mm, 1510mm

Light Distribution



Housing Colour



1200MM

40W 3000lm-3200lm @ White Housing						
Code	System LM	LED W	System W	CRI	CCT	Beam
QLINE 07-1200-40W-930-X	3000lm	36W	40W	90	3000K	↑110° ↓80°
QLINE 07-1200-40W-940-X	3200lm	36W	40W		4000K	
		Remark:	X=F (Non-Dim)	X=P (Phase Dim)	X=A (1-10V)	X=D (DALI)
					X=N (Without Driver)	

1500MM

50W 3800lm-4000lm @ White Housing						
Code	System LM	LED W	System W	CRI	CCT	Beam
QLINE 07-1500-50W-930-X	3800lm	46W	50W	90	3000K	↑110° ↓80°
QLINE 07-1500-50W-940-X	4000lm	46W	50W		4000K	
Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)						

QLINE 07





FINO

451IE-lite lighting



FINO

Decorative Pendant Light

FINO Series
Decorative Pendant Light



Decorative Pendant Light
FINO

CE

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

UGR

<19

CRI

>90

Features

- Premium Frosted Glass – Soft, diffused lighting for a warm, inviting ambiance
- Three Sizes Available – Perfect for different spaces, from cozy corners to grand settings
- Versatile Elegance – Blends seamlessly with modern, classic, or transitional décor


Specifications

- Dimming modes:Non-Dim,Phase Dim,1-10V
- Physical: Opal Glass
- Installation: Pendant

Light Distribution



Installation Type



Pendant Canopy Colour



Black White

LED Engine Colour



Black White Gold Chrome

Glass Colour




Smoky Grey Opal Amber



FINO
DECORATIVE PENDANT LIGHT

Drawing

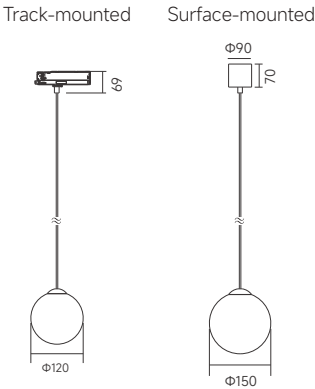

Order Options

FC-SPD120 (Surface Mounted Version)

5W 350lm-370lm									
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	
FC-SPD120-5W-930-300-X	Φ120mm	350lm	12V	4W	5W	90	3000K	300°	
FC-SPD120-5W-940-300-X	Φ120mm	370lm	12V	4W	5W	90	4000K	300°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V)

FC-SPD150 (Surface Mounted Version)

7W 550lm-600lm									
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	
FC-SPD150-7W-930-300-X	Φ150mm	550lm	12V	6W	7W	90	3000K	300°	
FC-SPD150-7W-940-300-X	Φ150mm	600lm	12V	6W	7W	90	4000K	300°	

Remark: X=F (Non-Dim) X=P (Phase Dim)

FC-SPD200 (Surface Mounted Version)

10W 700lm-750lm									
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	
FC-SPD200-10W-930-300-X	Φ200mm	700lm	12V	8W	10W	90	3000K	300°	
FC-SPD200-10W-940-300-X	Φ200mm	750lm	12V	8W	10W	90	4000K	300°	

Remark: X=F (Non-Dim) X=P (Phase Dim)



DENE & BIBO

Decorative Pendant Light

DENE Series
Decorative Pendant Light



Decorative Pendant Light
DENE

CE

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
20

UGR
<19

CRI
>90


Features

- Designed with timeless elegance
- Perfect for creating an intimate and cozy atmosphere
- Neutral exterior with a subtle pop of color adds understated sophistication to both commercial and residential spaces

Specifications

- Dimming modes: Non-Dim
- Physical: aluminium, wet painting
- Installation: Pendant

Installation Type



Housing Colour




White/Gold Black/Gold

Light Distribution



DENE
DECORATIVE PENDANT LIGHT

Drawing

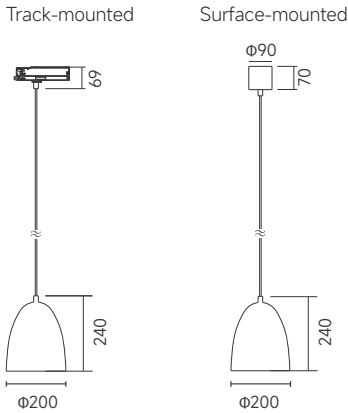

Order Options

Surface Mounted Version

19W 900lm-1000lm		OSRAM						
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
DENE-19W-930-90-X	Ø200*240mm	900lm	34V	17W	19W	90	3000K	90°
DENE-19W-940-90-X	Ø200*240mm	1000lm	34V	17W	19W	90	4000K	90°

Remark: X=F (Non-Dim)

BIBO Series
Decorative Pendant Light



Decorative Pendant Light
BIBO

CE

5

5 Years Warranty

AC

220-240V

50000h

L80 B10

IP

20

UGR

<19


CRI

>90

- Features**
- Designed with timeless elegance
 - Perfect for creating an intimate and cozy atmosphere
 - Neutral exterior with a subtle pop of color adds understated sophistication to both commercial and residential spaces

- Specifications**
- Dimming modes: Non-Dim
 - Physical: aluminium, wet painting
 - Installation: Pendant

Installation Type




Housing Colour



BIBO
DECORATIVE PENDANT LIGHT


Drawing

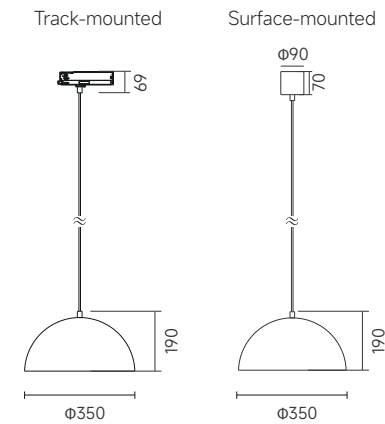

Order Options

14W 900lm-1000lm OSRAM								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
BIBO-14W-930-100-X	Φ350*190mm	900 lm	34V	12W	14W	90	3000K	100°
BIBO-14W-940-100-X	Φ350*190mm	1000 lm	34V	12W	14W	90	4000K	100°

Remark: X=F (Non-Dim)

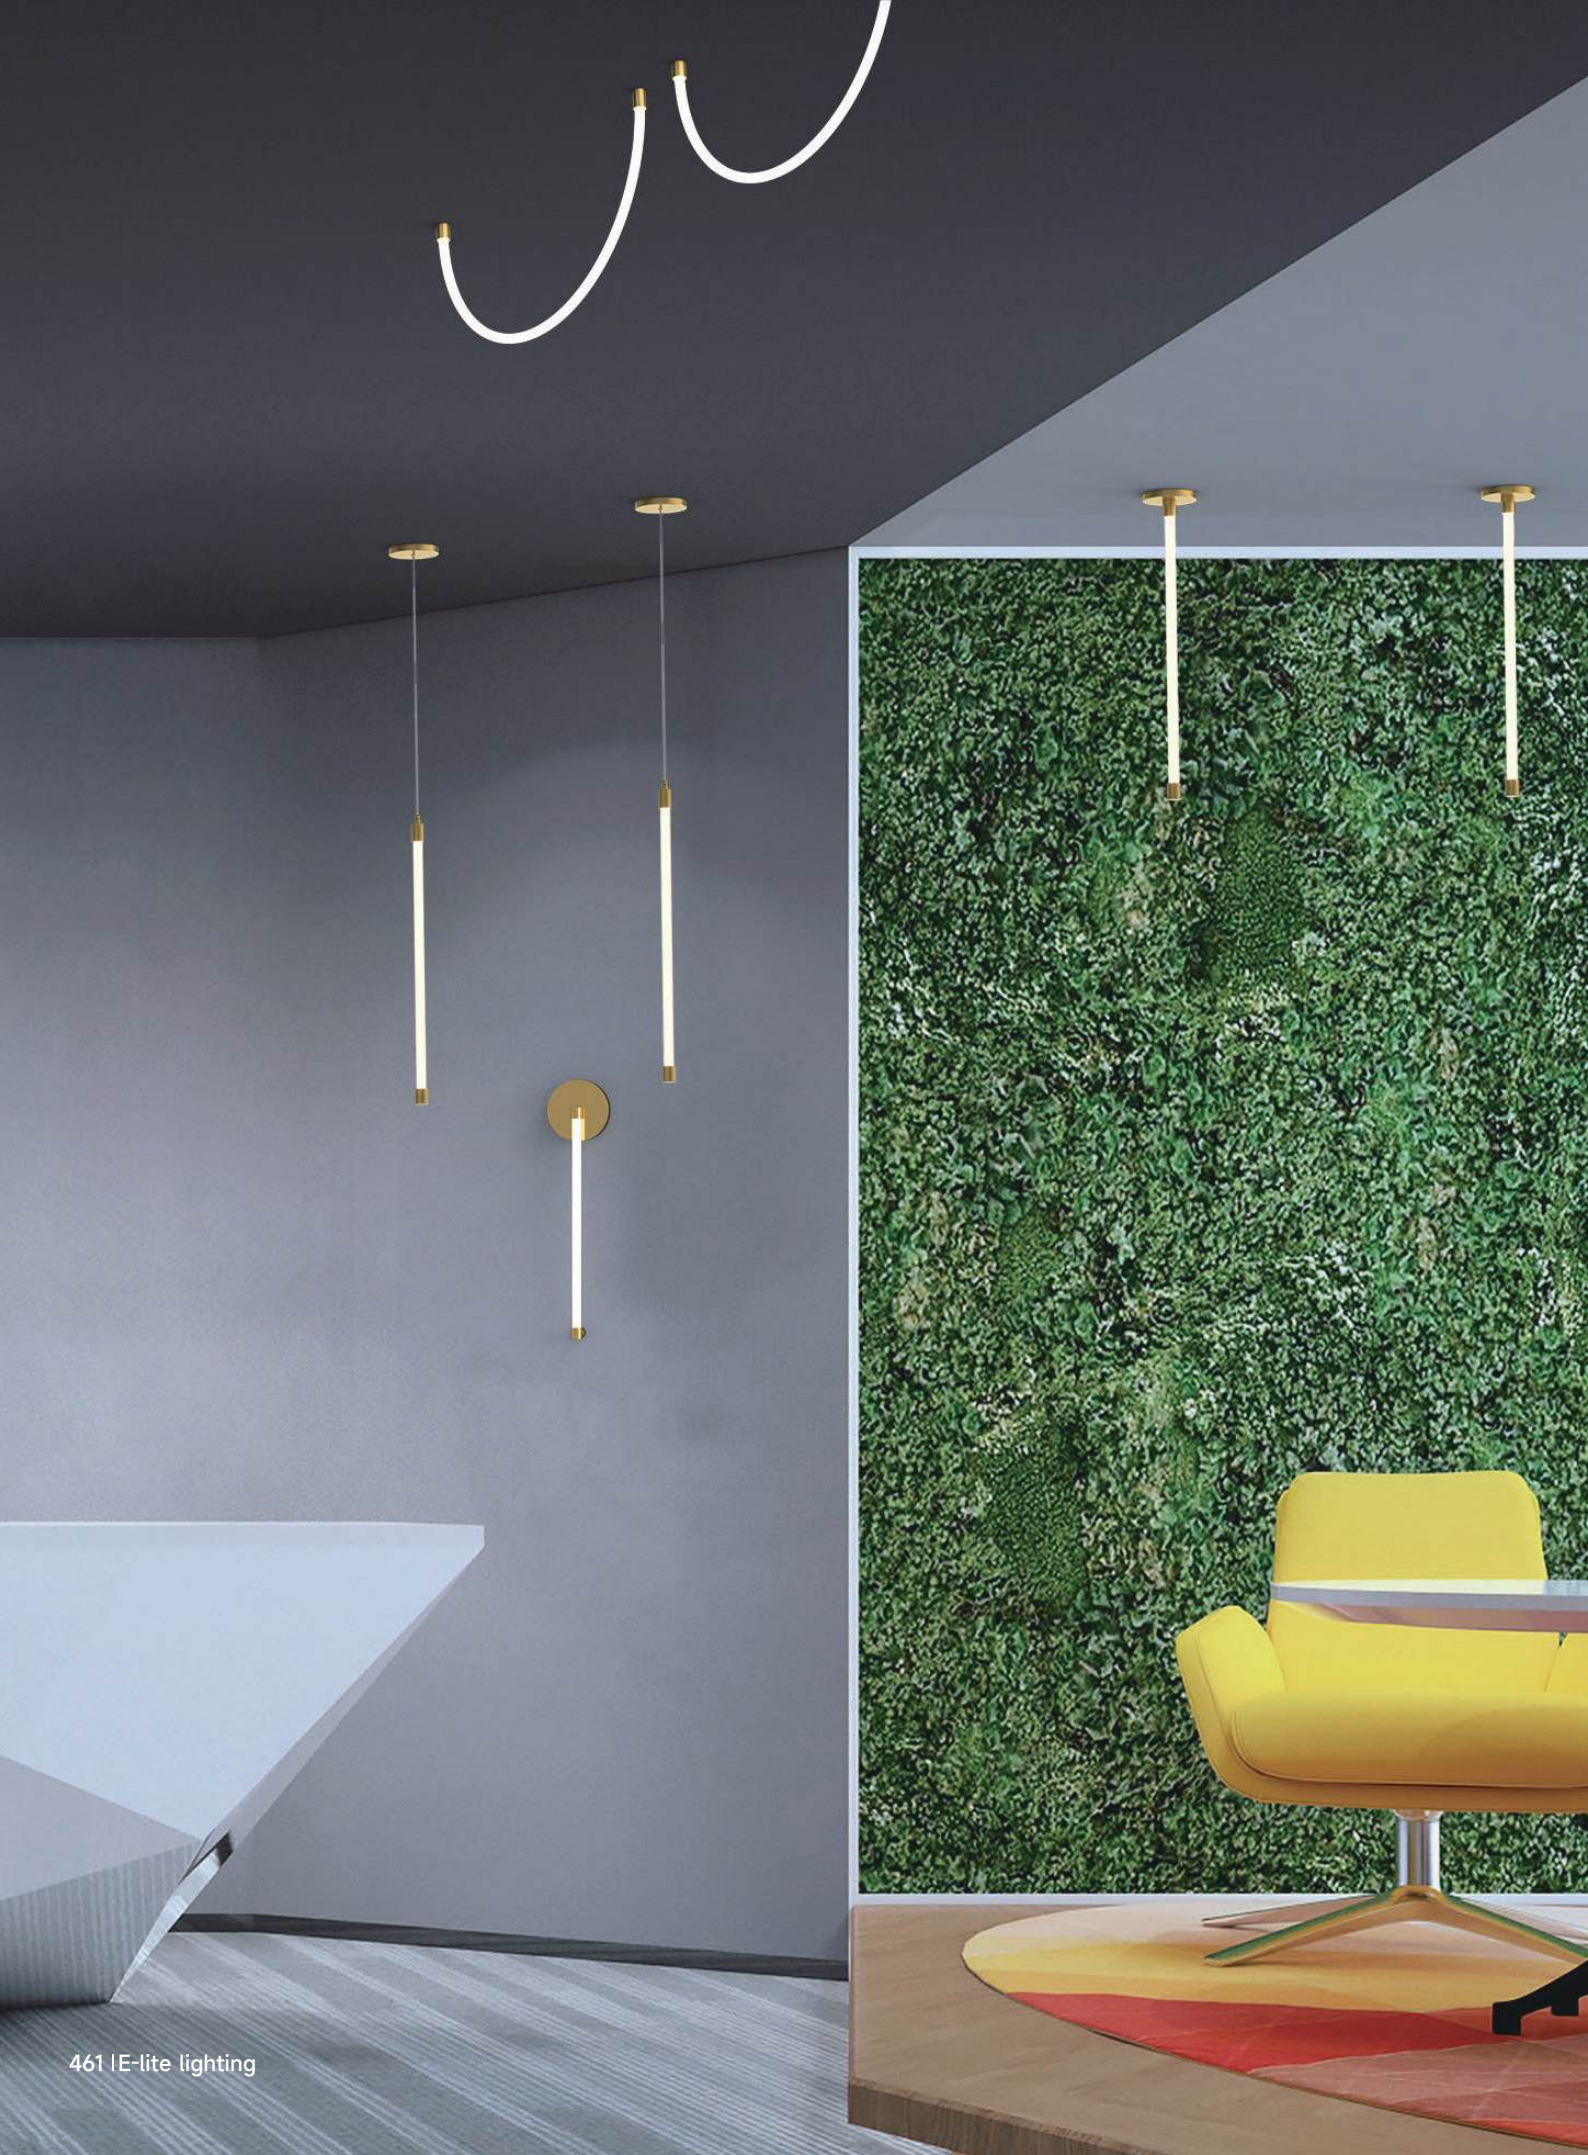

FLEX Series

360°Circular Lighting Neon Strip



FLEX

FLEX Series
360°Circular Lighting Neon Strip

360° Circular Lighting Neon Strip



Water Proof – IP65
Indoor Application

FLEX Series

360°Circular Lighting Neon Strip

Illuminate your space with flexibility
360° circular lighting neon strip
Creative design and Casual combination



Arbitrary Cutting

FLEX Series
360°Circular Lighting Neon Strip

Quickinfo:

COLOUR TEMPERATURE

3000K
4000K

CRI 90

Voltage: 24VDC

Maximum length: 5 meters

Regular length;

0.6m(2ft) 1.2m(4ft)
1.8m(6ft) 2.4m (8ft)
3m(10ft) 5m(17ft)

Minimum bending diameter: 250mm

Wattage: 14.5W/M

Dimension:
23mm

Output lumen:
1000lm/m Φ23mm for 3000K

Light distribution



360°




Horizontal




Vertical



Semi-circle



Free bending




Minimum bending diameter




Top Outlet



Side Outlet

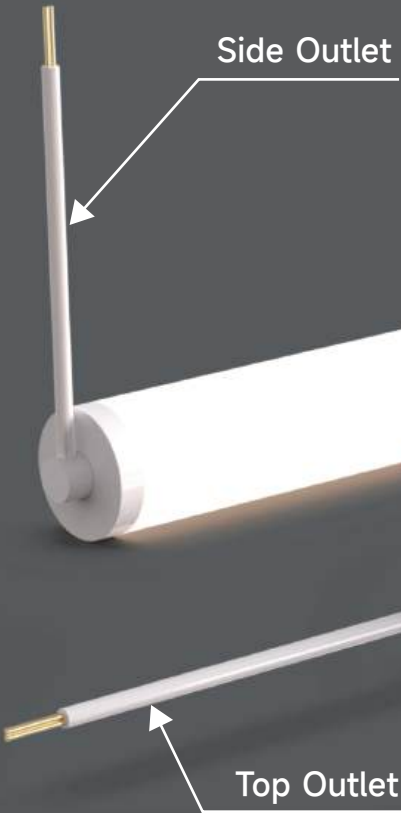

FLEX Series
360°Circular Lighting Neon Strip





FLEX-SH06-SM



	Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	Canopy Color
	FLEX-SH06-SM-9W-930-X	900lm	24VDC	9W	12W	90	3000K	360°	White Black Gold

Remark: X=F (Non-Dim) X=P(Phase Dim) X=N (Without Driver)

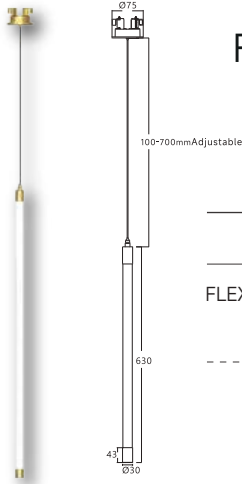

FLEX-SV06-SUS



	Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	Canopy Color
	FLEX-SV06-SUS-9W-930-X	900lm	24VDC	9W	12W	90	3000K	360°	White Black Gold

Remark: X=F (Non-Dim) X=P(Phase Dim) X=A(1-10V) X=D(DALI) X=N (Without Driver)

FLEX Series
360°Circular Lighting Neon Strip




FLEX-C4A2

CE	5	IP65	DC 24V	50000h L80 B10	IP 65	CRI >90
----	---	------	--------	----------------	-------	---------

Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	Canopy Color
FLEX-C4A2-46W-930-X	4600lm	24VDC	46W	54W	90	3000K	360°	White Black Gold

Remark: X=F (Non-Dim) X=P(Phase Dim) X=A(1-10V) X=D(DALI) X=N (Without Driver)




FLEX-SV06-SM

CE	5	IP65	DC 24V	50000h L80 B10	IP 65	CRI >90
----	---	------	--------	----------------	-------	---------


Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	Canopy Color
FLEX-SV06-SM-9W-930-X	900lm	24VDC	9W	12W	90	3000K	360°	White Black Gold

Remark: X=F (Non-Dim) X=P(Phase Dim) X=A(1-10V) X=D(DALI) X=N (Without Driver)

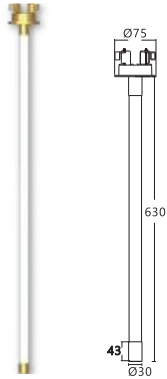



FLEX-SHN12-SM

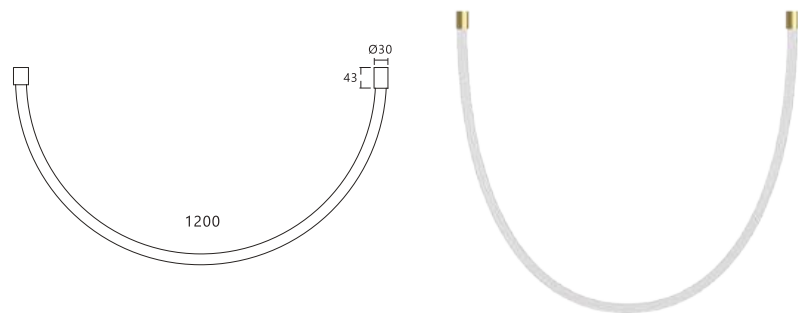

CE   DC 24V 50000h L80 B10 IP 65 CRI >90

Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam	Canopy Color
FLEX-SHN12-SM-930-X	1700lm	24VDC	17W	20W	90	3000K	360°	White Black Gold

Remark: X=F (Non-Dim) X=P(Phase Dim) X=A(1-10V) X=D(DALI) X=N (Without Driver)

Stair Light



Stair Light

ANGEL ----- 477-480



ANGEL

ANGEL Series
STAIR LIGHT

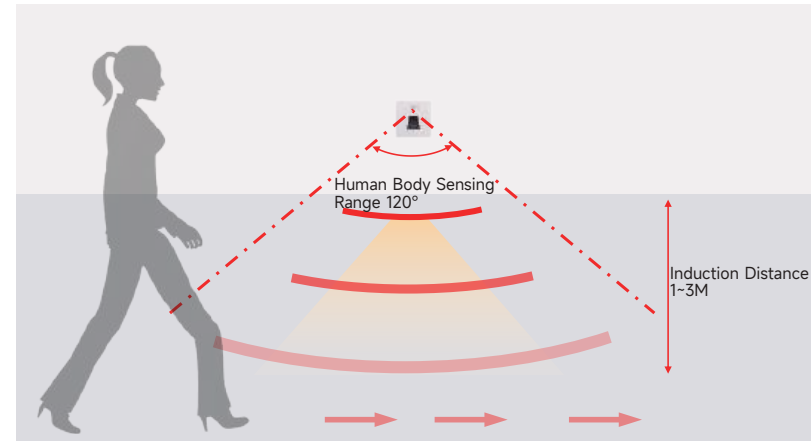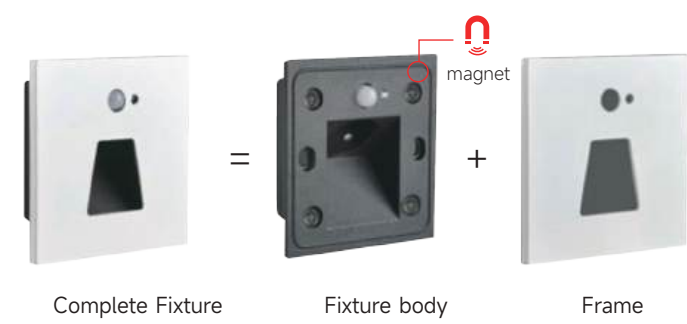

Intelligent PIR & Lux Sensor

When ambient brightness ≥ 8 lux, the light will not switch on;
When the human body leaves the induction range, the light automatically turns off after approximately 40 seconds, with a margin of error of 10 seconds.

Stair light
ANGEL




Features

- One module is compatible with three types of optical surface covers,
- The installation method of the cover is a magnetic attraction structure,
- Embedded induction foot light, with infrared and photosensitive sensing functions, as well as switch versions

Specifications

- Dimming modes: Non-Dim
- Physical: Aluminum,


Frame Type



Frame Colour




Light Distribution



ANGEL
STAIRLIGHT

Drawing

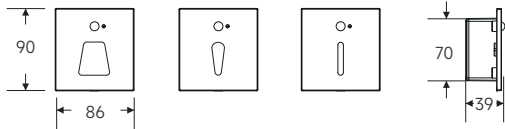

Order Options


OSRAM

With Sensor

Code	Size	Input	System W	CRI	CCT	IP	Control
ANS1-3W-930S-WN/SN/BN	86*90mm	220-240V	3W	90	3000K	65	Sensor
ANS2-3W-930S-WN/SN/BN	86*90mm	220-240V	3W	90	3000K	65	Sensor
ANS3-3W-930S-WN/SN/BN	86*90mm	220-240V	3W	90	3000K	65	Sensor



Drawing

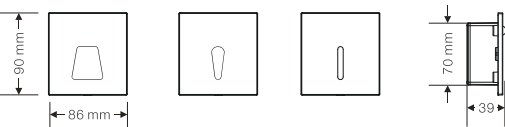

Order Options

OSRAM

Without Sensor

Code	Size	Input	System W	CRI	CCT	IP	Control
ANS4-3W-927S-WN/SN/BN	86*90mm	220-240V	3W	90	2700K	65	Non-Dim
ANS5-3W-927S-WN/SN/BN	86*90mm	220-240V	3W	90	2700K	65	Non-Dim
ANS6-3W-927S-WN/SN/BN	86*90mm	220-240V	3W	90	2700K	65	Non-Dim



Outdoor Light

Outdoor Light

OTTO	483-490
FAIRY	491-498
SWAMM&CRANE	499-500
PLUTO	501-510
SOLAR	511-512
EOS	513-516
EPO	517-520
DORI	521-524
FOCAL	525-526



OTTO

OUTDOOR IP65 Ceiling/Wall Light

OTTO is a modular and decorative outdoor wall lights, which are crafted with a blend of elegance and durability.

Designed to enhance the allure of your home's facade.

Timeless design casts a soft, inviting glow, transforming your evenings into a canvas of comfort and charm.



OTTO Series
OUTDOOR IP65 CEILING/WALL LIGHT



Installation type



OTTO Series
OUTDOOR IP65 CEILING/WALL LIGHT

IP65 Ceiling/Wall Light



487IE-lite lighting



488

OTTO Series
OUTDOOR IP65 CEILING/WALL LIGHT



IP65 Ceiling/Wall light
OTTO

CE

CB

5

5 Years Warranty

AC

220~240V

50000h

L80 B10

IP

65

IK

07

Ta

< 50°

CRI

>90


Features

- Versatile Design: a shade with a wave/convex/reseau
- With an IP65 rating
- Easily switch between 2200K,2700K,and 3000K
- Customized Aesthetics: Choose from six decorative ring colors to personalize the look of your OTTO lighting fixture


Specification

- Dimming modes: Non-Dim Phase Dim
- Beam angle: 110°
- Physical: Glass, PC

Installation Type






Light Distribution



OTTO
IP65 Ceiling/Wall Light



Drawing



Order Options

6W 210lm~480lm								
Code	Size	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
OTTO-6W-CCT-X	Φ130*H77mm (81mm)	210lm~480lm	14V	4W	6W	90	2200/2700/3000K	110°
Remark: X=F (Non-Dim) X=P (Phase Dim)								



FAIRY S100 B

FAIRY Series

IP66 Garden Light

4911E-lite lighting



- The top cover is designed to prevent loss, requiring a downward press to unlock, similar to the safety cap mechanism.



- Interchangeable Covers



A



B



C





• 2200K/3000K Selectable

• Press button for 2CCT changeable



Benefit & Features

Extension poles available with shrubbery growing

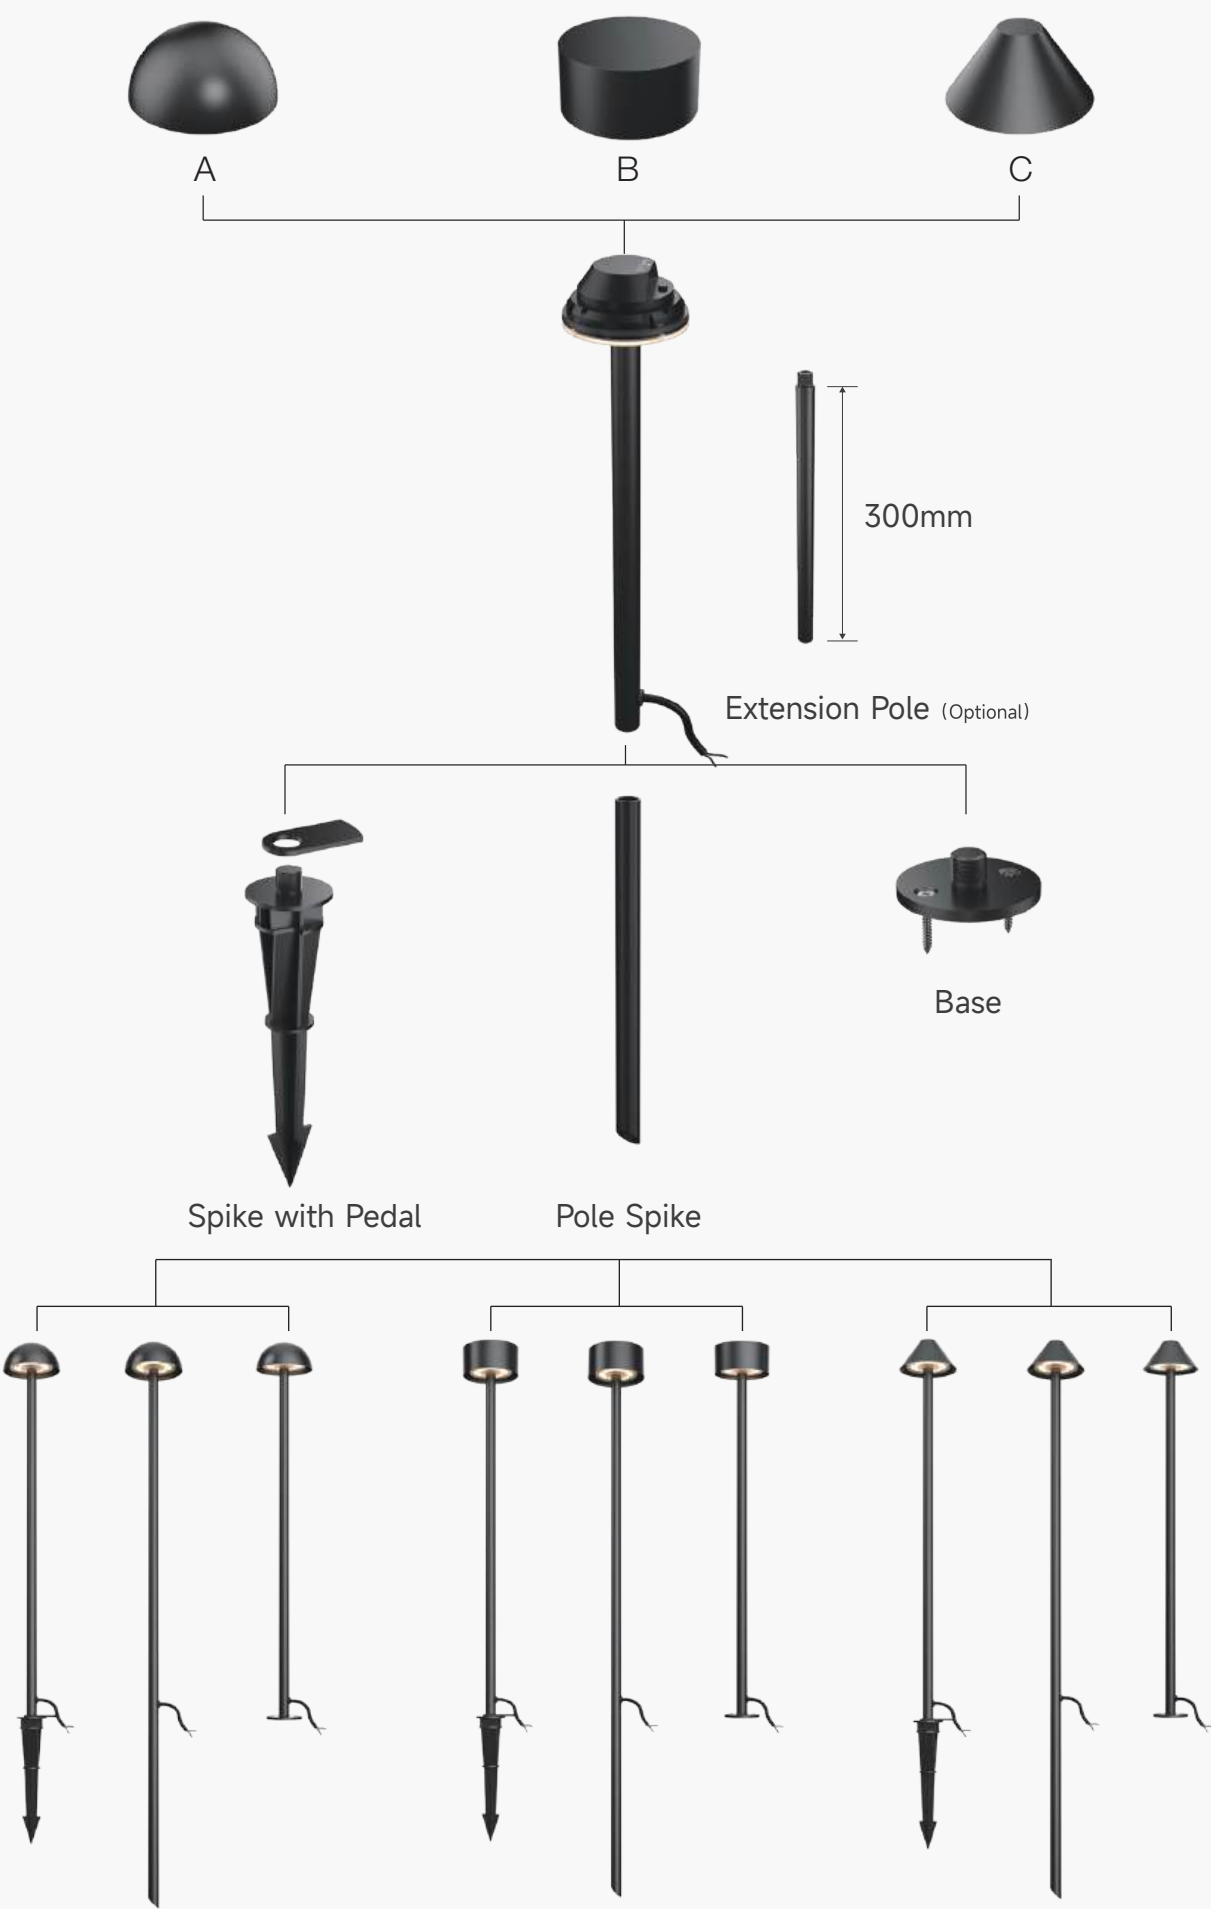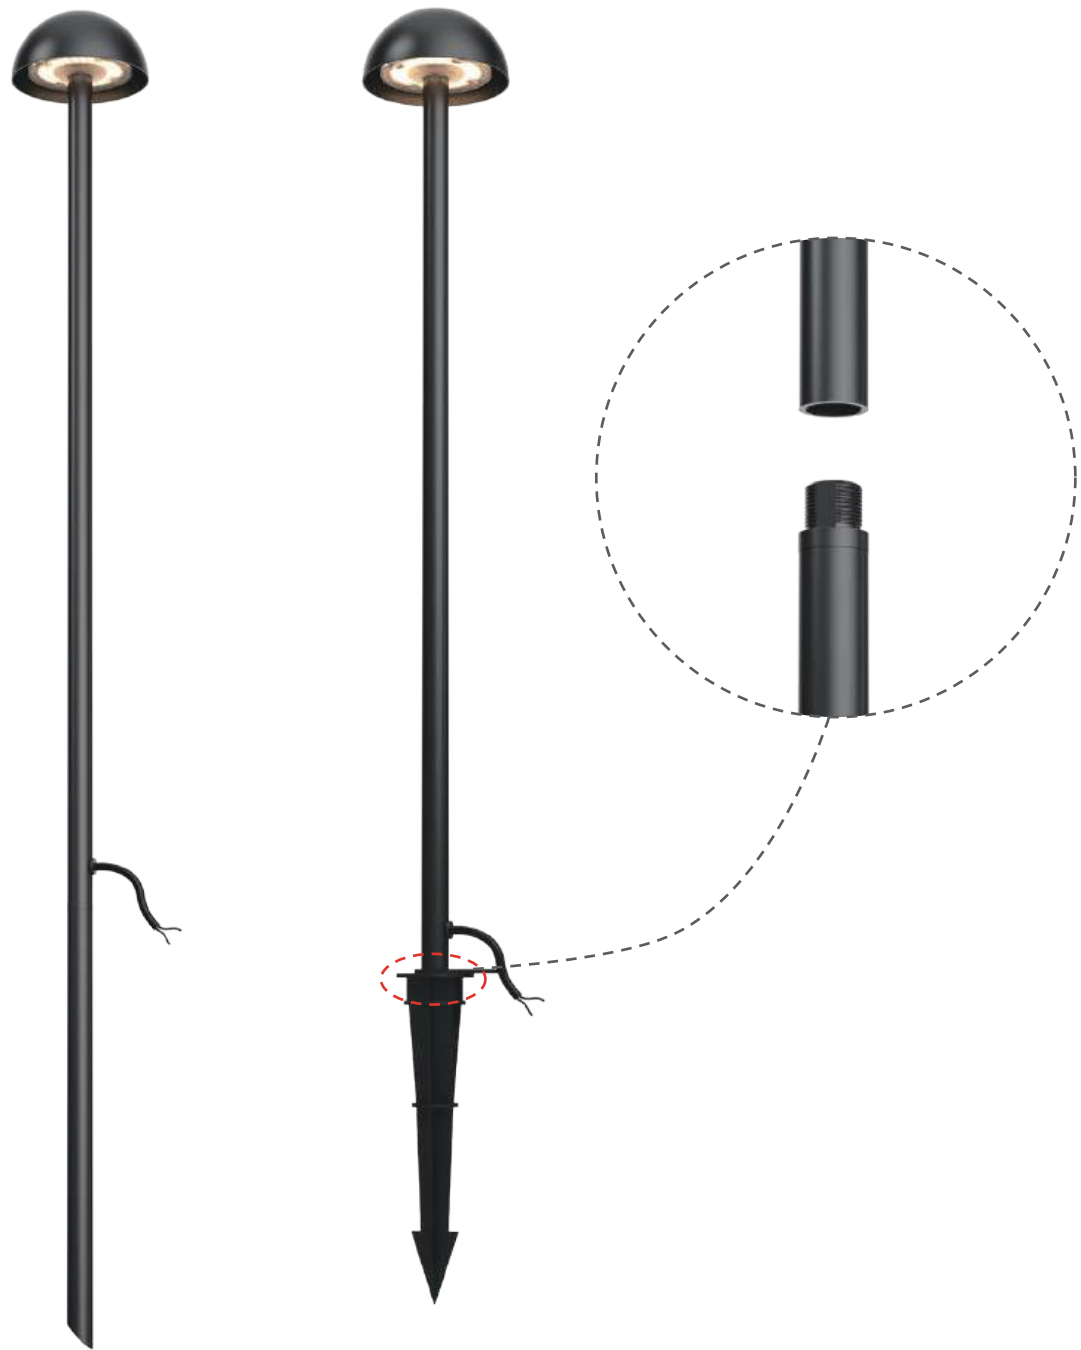

FAIRY Series
IP66 OUTDOOR LIGHT



FAIRY S100 A



FAIRY S100 B



FAIRY S100 C

Garden light
FAIRY S100 A / FAIRY S100 B / FAIRY S100 C


Features

- Modular designed pathway light with IP66 waterproof rating,perfect for outdoor use
- TWist&Lock covers are interchangeable, styles can be custom made
- Press button for CCT changeable, warm 2200K or cozy 3000K
- Extension poles are available with shrubby growing
- Multiple installation accessories; Pole, Spike or base mounting
- Triple layer coating, ensuring over 1000hours of salt mist test, suitable for seaside installations
- 24VDC or 220-240VAC input are optional
- Wider light distribution 130° achieved by advanced lens design
- Invisible screws for esthetic appeal
- 5 years warranty

Specifications

- Input Voltage:24VDC/220-240VAC
- Beam angle:130°
- Physical: Die-casting, Powder coating

Installation Type



Light Distribution



Housing Colour



Black

Accessory



MT01

Pole spike

For soft soil



MT02

Spike with pedal

For hard soil



MT03

Base

For wood or concrete



Anchor bolt




EP300

Extension Pole 300mm


Length can be tailored

NEW

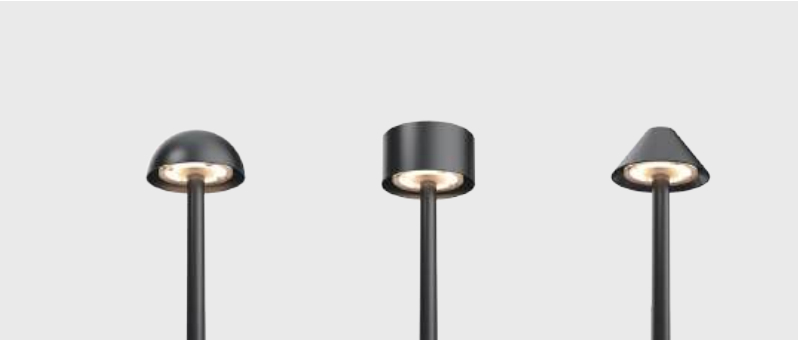


FAIRY
GARDEN LIGHT


Drawing



FAIRY S100 A



FAIRY S100 B




FAIRY S100 C

Order Options

5W 260/390lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
FAIRY S100 A CV-82230							
FAIRY S100 B CV-82230	260 /390lm	4W	5W	24V DC	80	2200/3000K	130°
FAIRY S100 C CV-82230							

7W 300/460lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
FAIRY S100 A HV-82230							
FAIRY S100 B HV-82230	300 /460lm	6W	7W	220-240VAC	80	2200/3000K	130°
FAIRY S100 C HV-82230							

SWAMM / CRANE Series
IP67 OUTDOOR LIGHT

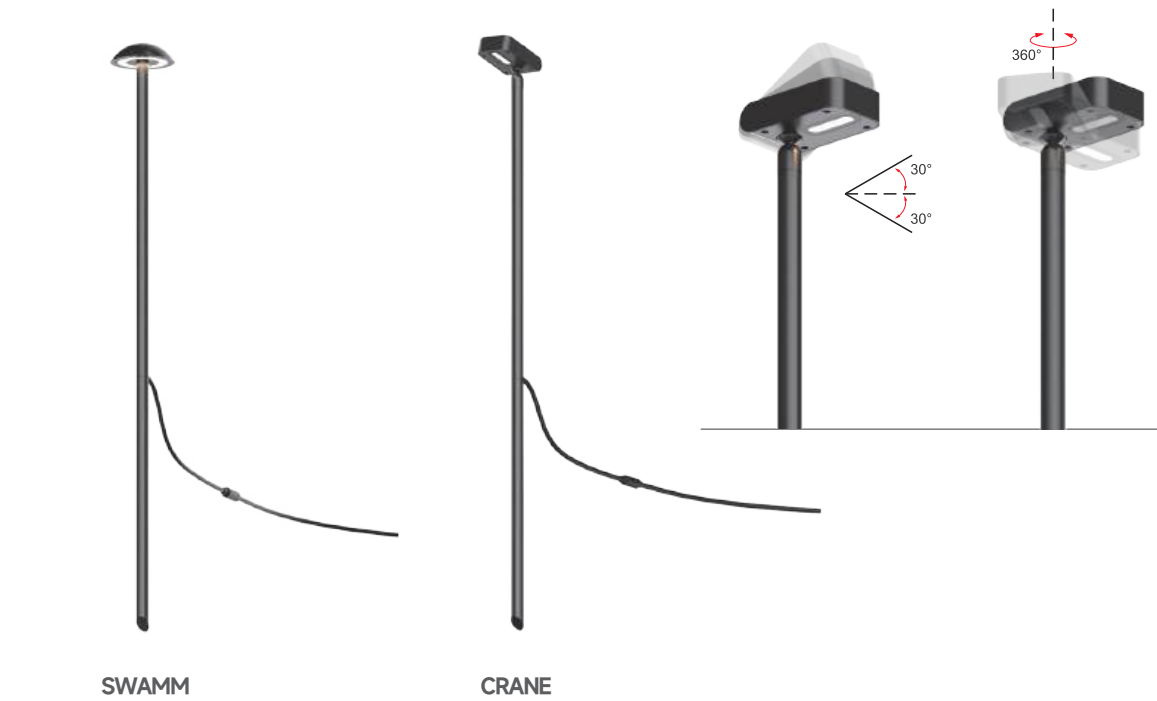

Garden light
SWAMM / CRANE

CE

3
3 Years Warranty

DC
24V

50000h
L80 B10

IP
67

IK
10

CRI
>90

Features

- Simple,compact and aesthetic design
- IP67,perfect for outdoor use
- Extension pole reduces the stock and shipment cost
- SWAMM is fixed design,CRANE is 360°rotatable and 30°tiltable
- Triple layer coating,passing 1000hrs salt spray test,marine grade for coastal projects
- 24V Low voltage input,extremely safe for outdoor application
- Anti-siphon function guranteed by water stopper on the cable

Specifications

- Dimming modes: Non-Dim
- Beam angle:80°,65°
- Physical: Aluminum, Triple layer coating

Installation Type



Light Distribution




Housing Colour



SWAMM/ CRANE
GARDEN LIGHT

Drawing

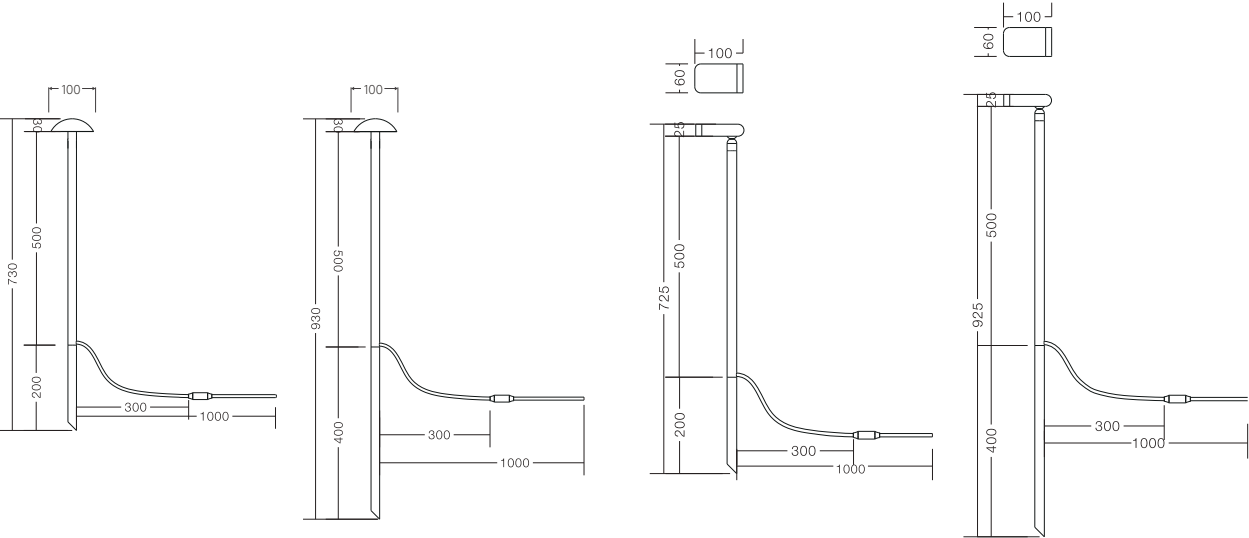

Order Options

2W 85lm						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
SWAMM S100	85lm	2W	24V DC	90	2700K	80°

Remark: X=F (Non-Dim)

3W 90lm						
Code	System LM	System W	Input Voltage	CRI	CCT	Beam
CRANE	90lm	3W	24V DC	90	2700K	65°

Remark: X=F (Non-Dim)



PLUTO Series

IP66 Outdoor Projector Light




PLUTO Series
IP66 Outdoor Projector Light

NEW



Projector light
PLUTO-U XS /-F S /-F M /-F L CV



Features

- Different installation,based on the same fixture body.
- Triple layer coating technology make 1,000 hours salt spray test successful.
- Construction waterproof technology.
- PA66 material spike, good for ground installation.
- Super narrow 10° can well lit up the high palm tree or top church.
- Concealed bottom cable entry for aesthetics and anti-vandalism.


Specifications

- Dimming modes:Non-Dim, Phase-dim, 1-10V, DALI
- Beam angle:10°,12°,18°,20°,24°,30°,35°,45°,55°
- Physical: Aluminum, Triple layer coating

Installation Type



Light Distribution



Housing Colour




Accessory



PLUTO-U XS/-F S/-F M/-F L CV
Projector Light

Drawing

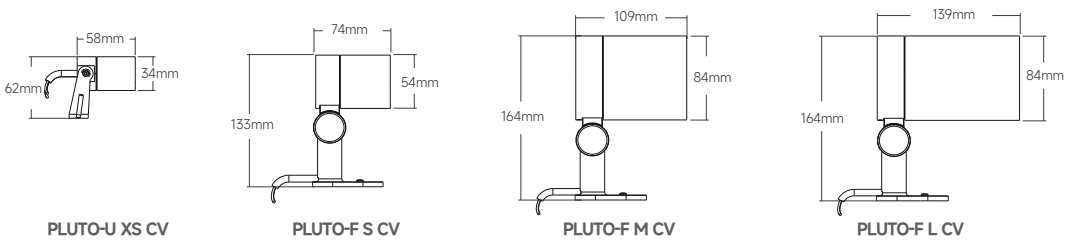

Order Options

3W 150lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-U XS CV-830-12-X	150 lm	2.5W	3W	24V DC	80	3000K	12°
PLUTO-U XS CV-830-18-X							18°
PLUTO-U XS CV-830-30-X							30°
PLUTO-U XS CV-830-50-X							50°
5W 350lm-420lm		CREE					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-F S CV-830-15-X	420 lm	4.2W	5W	24V DC	80	3000K	15°
PLUTO-F S CV-830-20-X	420 lm						20°
PLUTO-F S CV-830-35-X	420 lm						35°
PLUTO-F S CV-830-45-X	350 lm						45°
12W 1000lm		CREE					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-F M CV-830-10-X	1000 lm	11W	12W	24V DC	80	3000K	10°
PLUTO-F M CV-830-24-X							24°
PLUTO-F M CV-830-35-X							35°
PLUTO-F M CV-830-55-X							55°
18W 1450lm		CREE					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-F L CV-830-10-X	1450 lm	16W	18W	24V DC	80	3000K	10°
PLUTO-F L CV-830-24-X	1450 lm						24°
PLUTO-F L CV-830-35-X	1450 lm						35°
PLUTO-F L CV-830-55-X	1450 lm						55°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A(1-10V) X=D (DALI)

PLUTO Series
IP66 Outdoor Projector Light

NEW



Projector light
PLUTO-F S / M / L HV

CE

5
5 Years Warranty

AC
220-240V

50000h
L80 B10

IP
66

IK
08

Ta
< 50°

CRI
>80

Features

- Different installation,based on the same fixture body.
- Triple layer coating technology make 1,000 hours salt spray test successful.
- Construction waterproof technology.
- PA66 material spike, good for ground installation.
- Super narrow 10° can well lit up the high palm tree or top church.


Specifications

- Dimming modes:Non-Dim, Phase-dim, 1-10V, DALI
- Beam angle:8°,10°,15°,24°,30°,35°,40°,55°
- Physical: Aluminum, Triple layer coating

Type



Light Distribution



Housing Colour



Black

Accessory



Honeycomb



Snoot-45



Snoot
(Only for S/M size)



Spike



Pole spike




Tree strap



PLUTO-F S/ M/ L HV
Projector Light

Drawing

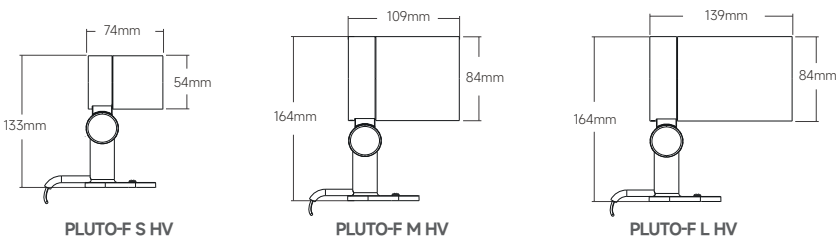

Order Options

3.5W 150lm-175lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-F S HV-830-8-X	175 lm	2.5W	3.5W	220-240V AC	80	3000K	8°
PLUTO-F S HV-830-15-X	175 lm						15°
PLUTO-F S HV-830-30-X	175 lm						30°
PLUTO-F S HV-830-40-X	150 lm						40°
13W 1000lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-F M HV-830-10-X	1000 lm	11W	13W	220-240V AC	80	3000K	10°
PLUTO-F M HV-830-24-X							24°
PLUTO-F M HV-830-35-X							35°
PLUTO-F M HV-830-55-X							55°
19W 1450lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-F L HV-830-10-X	1450 lm	16W	19W	220-240V AC	80	3000K	10°
PLUTO-F L HV-830-24-X							24°
PLUTO-F L HV-830-35-X							35°
PLUTO-F L HV-830-55-X							55°

Remark: X=F (Non-Dim)

220~240Vac Input Version

Installation possibilities:

- 1 - Directly to the ground
- 2 - Metal tube
- 3 - Plastic tube
- 4 - Direct cable
- 5 - Corrugated tube
- 6- Spike mounted

The PLUTO HV package includes: 1 base, 2 closing cap, 1 M20x1.5 cable gland, 3 wire connectors, 2 KA4x25 screws, 2 plastic anchors, 2 rubber ring For the detail operation, please refer to the installation instruction.



PLUTO Series IP66 Outdoor Projector Light



Projector light PLUTO-B S / M / L HV

CE	5 Years Warranty	IP66	AC 220-240V	50000h L80 B10	IP 66	IK 08	Ta < 50°	CRI > 80
----	------------------	------	-------------	----------------	-------	-------	----------	----------

Features

- Different installation,based on the same fixture body.
- Triple layer coating technology make 1,000 hours salt spray test successful.
- Construction waterproof technology.
- PA66 material spike, good for ground installation.
- Super narrow 10° can well lit up the high palm tree or top church.

Specifications

- Dimming modes:Non-Dim
- Beam angle:8°,10°,15°,20°,24°,35°,55°
- Physical: Aluminum, Triple layer coating

Installation Type



Light Distribution



Housing Colour



Black

Accessory



Honeycomb



Snoot-45



Snoot

(Only for S/M size)



Spike



Pole spike




Tree strap

NEW



PLUTO-B S/ M/ L HV
Projector Light

Drawing

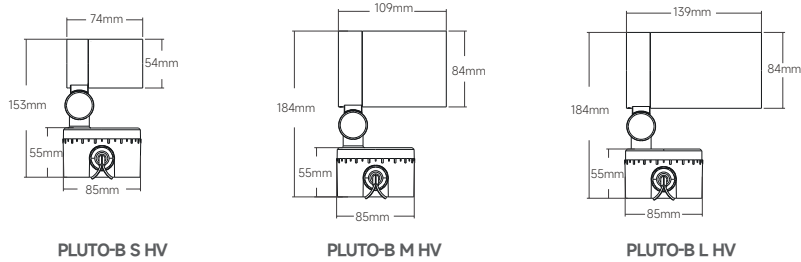

Order Options

6W 350lm-420lm 							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-B S HV-830-15-X	420 lm	4W	6W	220-240V	80	3000K	15°
PLUTO-B S HV-830-20-X	420 lm						20°
PLUTO-B S HV-830-35-X	420 lm						35°
PLUTO-B S HV-830-45-X	350 lm						45°
13W 1000lm 							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-B M HV-830-10-X	1000 lm	11W	13W	220-240V	80	3000K	10°
PLUTO-B M HV-830-24-X							24°
PLUTO-B M HV-830-35-X							35°
PLUTO-B M HV-830-55-X							55°
19W 1450lm 							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
PLUTO-B L HV-830-10-X	1450 lm	16W	19W	220-240V	80	3000K	10°
PLUTO-B L HV-830-24-X	1450 lm						24°
PLUTO-B L HV-830-35-X	1450 lm						35°
PLUTO-B L HV-830-55-X	1450 lm						55°

Remark: X=F (Non-Dim)



SOLAR Series
IP67 OUTDOOR LIGHT



SOLAR Mini



SOLAR Maxi

Projector light
SOLAR Mini / SOLAR Maxi

CE

CB

UK
CA

3
Years Warranty

DC
24V

50000h
L80 B10

IP
67

IK
08

CRI
>80

Features

- Laser-etched Bracket for Accurate Angles
- Durable Anodized Aluminum Body
- Anti-glare Ring with Drainage Feature
- Thick Tempered Glass for High IK rating
- Triple-Coated for Marine-Grade Durability

Specifications

- Beam angle:20°,30°,45°,50°
- Physical: Aluminum, Triple layer coating

Installation Type



Light Distribution



Housing Colour



Dark Grey

Accessory



MT01
Glare Guard




MT02
Installation Stake
For hard soil



SOLAR
Projector Light

Drawing

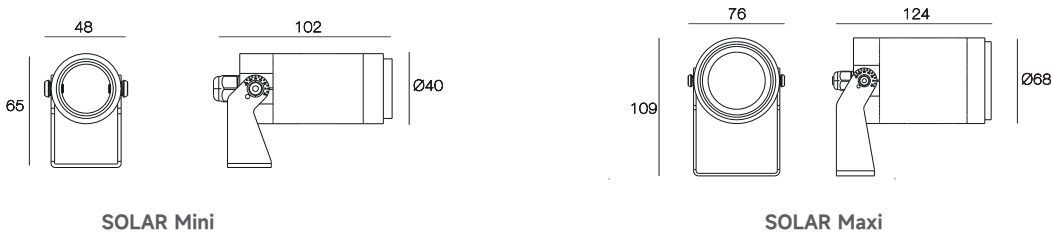

Order Options

5.5W 500lm-550lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
Solar Mini-830-30	500lm	5W	5.5W	24V DC	80	3000K	30°
Solar Mini-840-30	550lm	5W	5.5W	24V DC	80	4000K	30°
Solar Mini-830-45	500lm	5W	5.5W	24V DC	80	3000K	45°
Solar Mini-840-45	550lm	5W	5.5W	24V DC	80	4000K	45°

10W 850lm-900lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
Solar Maxi-830-20	850lm	9W	10W	24V DC	80	3000K	20°
Solar Maxi-840-20	900lm	9W	10W	24V DC	80	4000K	20°
Solar Maxi-830-30	850lm	9W	10W	24V DC	80	3000K	30°
Solar Maxi-840-30	900lm	9W	10W	24V DC	80	4000K	30°
Solar Maxi-830-50	850lm	9W	10W	24V DC	80	3000K	50°
Solar Maxi-840-50	900lm	9W	10W	24V DC	80	4000K	50°

EOS Series
IP67 OUTDOOR LIGHT



EOS Nano

EOS Mini

EOS Maxi

Projector light
EOS Nano / EOS Mini / EOS Maxi



Features

- CNC-Machined, Anodized Aluminum Body: Offers robustness with
- IP67 and IK08 ratings.
- Anti-glare Ring with Drainage Hole: Minimizes glare and prevents water accumulation.
- Thick, Tempered Glass Lens: Ensures consistent light distribution and high resistance to impacts and scratches.
- Triple Layer Coating: withstands 1000 hours of salt spray testing, suitable for coastal environments.

Installation Type



Housing Colour



Specifications

- Dimming modes: Non-Dim
- Beam angle:15°,20°,25°,30°,40°,60°
- Physical: Die-CNC, Triple layer coating


Light Distribution



Accessory



EOS Nano
PROJECTOR LIGHT




Order Options

2W 120lm-140lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
EOS Nano-830-15	120lm	1.6W	2W	12-24V DC	80	3000K	15°
EOS Nano-840-15	140lm	1.6W	2W	12-24V DC	80	4000K	15°
EOS Nano-830-25	120lm	1.6W	2W	12-24V DC	80	3000K	25°
EOS Nano-840-25	140lm	1.6W	2W	12-24V DC	80	4000K	25°
EOS Nano-830-40	120lm	1.6W	2W	12-24V DC	80	3000K	40°
EOS Nano-840-40	140lm	1.6W	2W	12-24V DC	80	4000K	40°



EOS Mini
PROJECTOR LIGHT




Order Options

4.8W 380lm-420lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
EOS Mini-830-15	380lm	4.3W	4.8W	12-24V DC	80	3000K	15°
EOS Mini-840-15	420lm	4.3W	4.8W	12-24V DC	80	4000K	15°
EOS Mini-830-40	380lm	4.3W	4.8W	12-24V DC	80	3000K	40°
EOS Mini-840-40	420lm	4.3W	4.8W	12-24V DC	80	4000K	40°
EOS Mini-830-60	380lm	4.3W	4.8W	12-24V DC	80	3000K	60°
EOS Mini-840-60	420lm	4.3W	4.8W	12-24V DC	80	4000K	60°



EOS Maxi
PROJECTOR LIGHT



Order Options

11.5W 1000lm-1100lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
EOS Maxi-830-20	1000lm	11W	11.5W	24V DC	80	3000K	20°
EOS Maxi-840-20	1100lm	11W	11.5W	24V DC	80	4000K	20°
EOS Maxi-830-30	1000lm	11W	11.5W	24V DC	80	3000K	30°
EOS Maxi-840-30	1100lm	11W	11.5W	24V DC	80	4000K	30°
EOS Maxi-830-60	1000lm	11W	11.5W	24V DC	80	3000K	60°
EOS Maxi-840-60	1100lm	11W	11.5W	24V DC	80	4000K	60°



EPO Series
IP67 OUTDOOR LIGHT



EPO Nano



EPO Mini



EPO Maxi

Ground light
EPO Nano / EPO Mini / EPO Maxi

CE

UK
CA

3
3 Years Warranty

DC
12-24V

50000h
L80 B10

IP
67

IK
08

CRI
>80

Features

- High precision CNC machining ensures perfect mechanical match with IP67 rating.
- 8 mm tempered glass support 800KG driver-over performance.
- Very low fixture temperature, surface can be touched without injury.


Specifications

- Input voltage:12-24VDC
- Beam angle:15°,20°,25°,30°,40°,60°
- Physical: Die-casting, Powder coating


Installation Type



Light Distribution

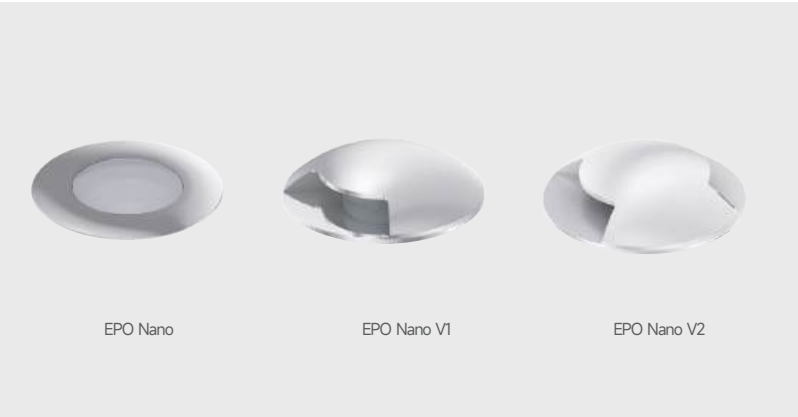

EPO Nano
GROUND LIGHT




Order Options

2W 120lm-140lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
EPO Nano-830-15	120lm	1.6W	2W	12-24V DC	80	3000K	15°
EPO Nano-840-15	140lm	1.6W	2W	12-24V DC	80	4000K	15°
EPO Nano-830-25	120lm	1.6W	2W	12-24V DC	80	3000K	25°
EPO Nano-840-25	140lm	1.6W	2W	12-24V DC	80	4000K	25°
EPO Nano-830-40	120lm	1.6W	2W	12-24V DC	80	3000K	40°
EPO Nano-840-40	140lm	1.6W	2W	12-24V DC	80	4000K	40°



EPO Mini
GROUND LIGHT




Order Options

4.8W 380lm-420lm		OSRAM					
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
EPO Mini-830-15	380lm	4.3W	4.8W	12-24V DC	80	3000K	15°
EPO Mini-840-15	420lm	4.3W	4.8W	12-24V DC	80	4000K	15°
EPO Mini-830-30	380lm	4.3W	4.8W	12-24V DC	80	3000K	30°
EPO Mini-840-30	420lm	4.3W	4.8W	12-24V DC	80	4000K	30°
EPO Mini-830-40	380lm	4.3W	4.8W	12-24V DC	80	3000K	40°
EPO Mini-840-40	420lm	4.3W	4.8W	12-24V DC	80	4000K	40°
EPO Mini-830-60	380lm	4.3W	4.8W	12-24V DC	80	3000K	60°
EPO Mini-840-60	420lm	4.3W	4.8W	12-24V DC	80	4000K	60°



EPO Maxi
GROUND LIGHT



Order Options

11.5W 1000lm-1100lm OSRAM							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
EPO Maxi-830-20	1000lm	11W	11.5W	20-24V DC	80	3000K	20°
EPO Maxi-840-20	1100lm	11W	11.5W	20-24V DC	80	4000K	20°
EPO Maxi-830-30	1000lm	11W	11.5W	20-24V DC	80	3000K	30°
EPO Maxi-840-30	1100lm	11W	11.5W	20-24V DC	80	4000K	30°
EPO Maxi-830-60	1000lm	11W	11.5W	20-24V DC	80	3000K	60°
EPO Maxi-840-60	1100lm	11W	11.5W	20-24V DC	80	4000K	60°

- Patented IP 67 optics design pumps out heat from LED to maintain thermal characteristics for optimal long life performance
- IP 67 Stability is attained through high precision machining of housing for perfect threaded mechanical fit. IP 67 protection without use of glue or sealants that are subject to change in extreme environments ensures long life and easy maintenance.
- Robust fixture construction is able to bear 1,000 KGS **compression**, compliant with IK8



Patented Design: High precision machining of housing ensures perfect threaded mechanical fit. Silicone gaskets ensure IP 67 protection without use of sealants or screws for long life and easy maintenance.

Equipped with a cable with "Water Stopper" system which prevent any infiltrations.



IP 68 connector is optional.

DORI Series
IP67 OUTDOOR LIGHT



Ground light
DORI MICRO / DORI NANO / DORI MINI / DORI MAXI




Features

- High precision CNC machining ensures perfect mechanical match with IP67 rating.
- 8 mm tempered glass support 800KG driver-over performance.
- Very low fixture temperature, surface can be touched without injury.

Specifications

- Input Voltage:12-24VDC
- Beam angle:18°,20°,28°,30°,35°,40°,45° ,50° ,60°
- Physical:Die-CNC,Triple layer coating

Installation Type




Light Distribution



DORI
GROUND LIGHT

Drawing

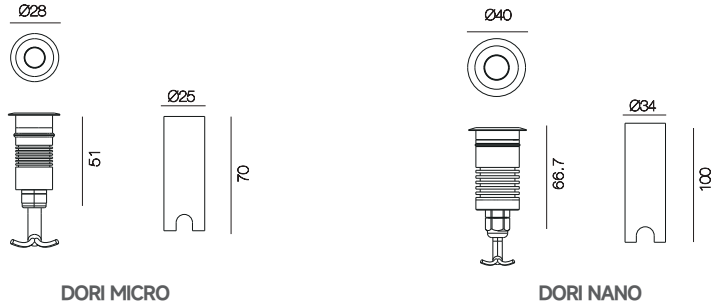

Order Options


1.5W 70lm-80lmOSRAM							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
DORI MICRO-830-28	70lm	1W	1.5W	12-24V DC	80	3000K	28°
DORI MICRO-840-28	80lm	1W	1.5W	12-24V DC	80	4000K	28°
DORI MICRO-830-40	70lm	1W	1.5W	12-24V DC	80	3000K	40°
DORI MICRO-840-40	80lm	1W	1.5W	12-24V DC	80	4000K	40°
DORI MICRO-830-45	70lm	1W	1.5W	12-24V DC	80	3000K	45°
DORI MICRO-840-45	80lm	1W	1.5W	12-24V DC	80	4000K	45°

3W 120lm-130lmOSRAM							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
DORI NANO-830-18	120lm	1.6W	2W	12-24V DC	80	3000K	18°
DORI NANO-840-18	130lm	1.6W	2W	12-24V DC	80	4000K	18°
DORI NANO-830-35	120lm	1.6W	2W	12-24V DC	80	3000K	35°
DORI NANO-840-35	130lm	1.6W	2W	12-24V DC	80	4000K	35°
DORI NANO-830-60	120lm	1.6W	2W	12-24V DC	80	3000K	60°
DORI NANO-840-60	130lm	1.6W	2W	12-24V DC	80	4000K	60°



DORI
GROUND LIGHT

Drawing

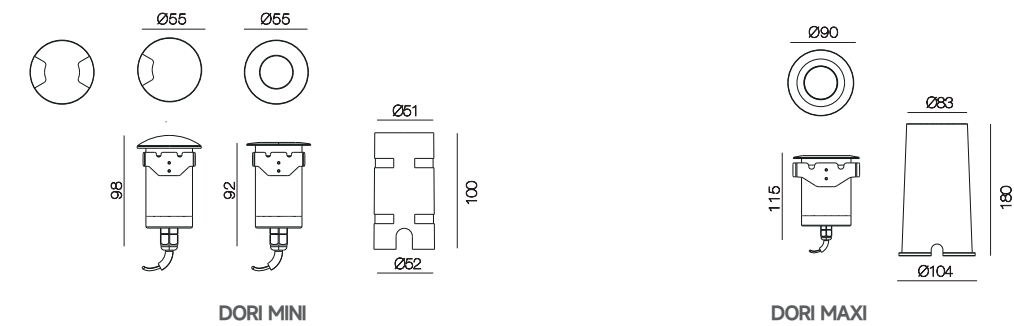

Order Options

5.5W 450lm-500lm 							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
DORI MINI-830-30	450lm	5W	5.5W	20-24V	80	3000K	30°
DORI MINI-840-30	500lm	5W	5.5W	20-24V	80	4000K	30°
DORI MINI-830-45	450lm	5W	5.5W	20-24V	80	3000K	45°
DORI MINI-840-45	500lm	5W	5.5W	20-24V	80	4000K	45°

10W 850lm-900lm 							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
DORI MAXI-830-20	850lm	9W	10W	20-24V	80	3000K	20°
DORI MAXI-840-20	900lm	9W	10W	20-24V	80	4000K	20°
DORI MAXI-830-30	850lm	9W	10W	20-24V	80	3000K	30°
DORI MAXI-840-30	900lm	9W	10W	20-24V	80	4000K	30°
DORI MAXI-830-50	850lm	9W	10W	20-24V	80	3000K	50°
DORI MAXI-840-50	900lm	9W	10W	20-24V	80	4000K	50°



FOCAL Series
IP67 OUTDOOR LIGHT



FOCAL R



FOCAL S

Ground light
FOCAL R / FOCAL S

CE

3
3 Years Warranty

DC
12-24V

50000h
L80 B10

IP
67

IK
08

CRI
>80

Features

- High precision CNC machining ensures perfect mechanical match with IP67 rating.
- Constructed with sturdy, anti-corrosion stainless steel 316 for long-lasting performance in any condition.
- 8 mm tempered glass support 800KG driver-over performance.
- Very low fixture temperature, surface can be touched without injury.

Specifications

- Input voltage:12-24VDC
- Beam angle:15°,25°,40°
- Physical: Die-casting, Powder coating


Installation Type



Light Distribution



FOCAL R
GROUND LIGHT




Order Options

2W 120lm-140lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
FOCAL R-830-15	120lm	1.6W	2W	12-24V DC	80	3000K	15°
FOCAL R-840-15	140lm	1.6W	2W	12-24V DC	80	4000K	15°
FOCAL R-830-25	120lm	1.6W	2W	12-24V DC	80	3000K	25°
FOCAL R-840-25	140lm	1.6W	2W	12-24V DC	80	4000K	25°
FOCAL R-830-40	120lm	1.6W	2W	12-24V DC	80	3000K	40°
FOCAL R-840-40	140lm	1.6W	2W	12-24V DC	80	4000K	40°



FOCAL S
GROUND LIGHT



Order Options

4.8W 120lm-140lm							
Code	System LM	LED W	System W	Input Voltage	CRI	CCT	Beam
FOCAL S-830-15	120lm	1.6W	2W	12-24V DC	80	3000K	15°
FOCAL S-840-15	140lm	1.6W	2W	12-24V DC	80	4000K	15°
FOCAL S-830-25	120lm	1.6W	2W	12-24V DC	80	3000K	25°
FOCAL S-840-25	140lm	1.6W	2W	12-24V DC	80	4000K	25°
FOCAL S-830-40	120lm	1.6W	2W	12-24V DC	80	3000K	40°
FOCAL S-840-40	140lm	1.6W	2W	12-24V DC	80	4000K	40°

