



START 68 Series
DOWNLIGHT / Adjustable



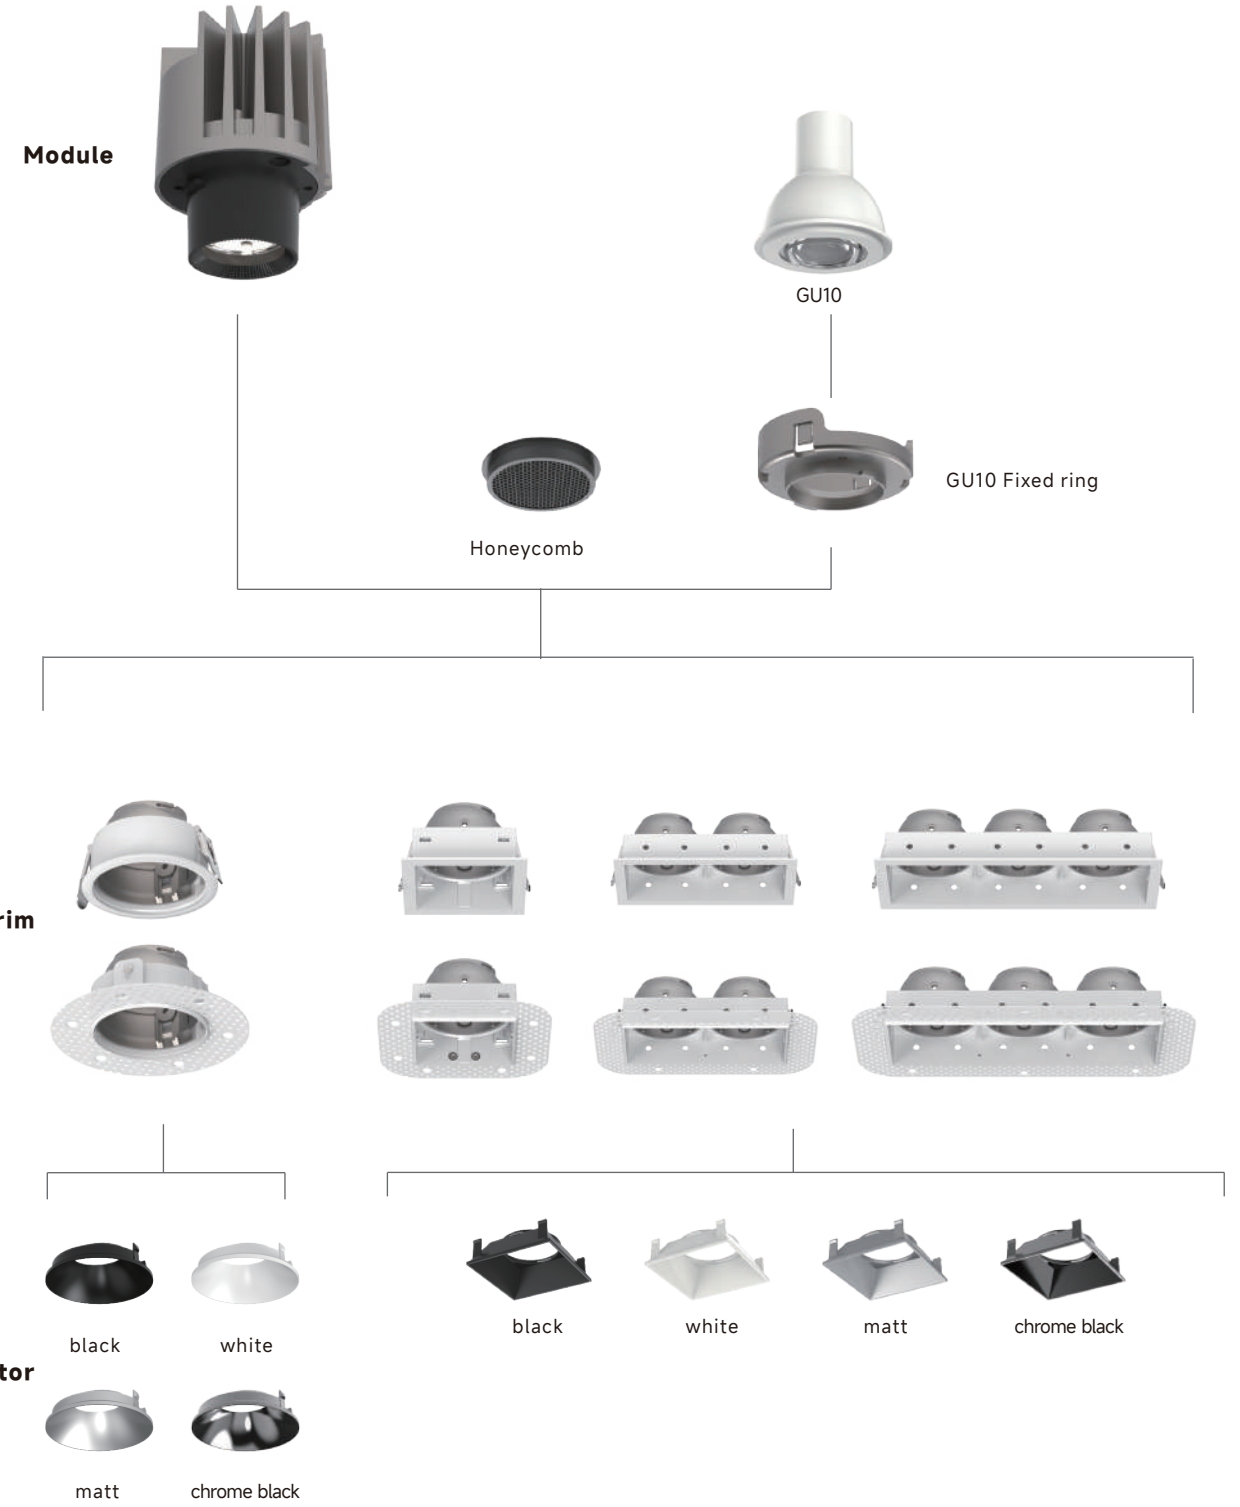

Downlight
SRA68 /TRA68 2.0



Features

- One light engine with various accessories.
- Easy to specify, easy to manage stock.
- Easy to install and adjust
- Easy to change reflector


Specifications

- Dimming modes: Non-Dim, Phase Dim, 1-10V, DALI
- Beam angle: 24°, 36°, 55°
- Physical: Die-casting, wet painting
- Accessories: Honeycomb louver

Installation Type



Light Distribution




Trim Colour



Trimless Colour



Anti-glare Accessory




Secondary Reflector Colour



SRA68 /TRA68 2.0
Downlight

Drawing

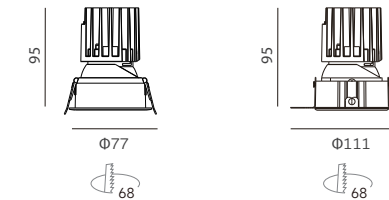


Order Options

9W 900-950Lm									
Code	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
SRA68-2.0-9W-930-24D-X	900 lm	34 V	250mA	9 W	11 W	90	3000K	24°	
SRA68-2.0-9W-940-24D-X	950 lm	34 V	250mA	9 W	11 W	90	4000K	24°	
SRA68-2.0-9W-930-36D-X	900 lm	34 V	250mA	9 W	11 W	90	3000K	36°	
SRA68-2.0-9W-940-36D-X	950 lm	34 V	250mA	9 W	11 W	90	4000K	36°	
SRA68-2.0-9W-930-55D-X	900 lm	34 V	250mA	9 W	11 W	90	3000K	55°	
SRA68-2.0-9W-940-55D-X	950 lm	34 V	250mA	9 W	11 W	90	4000K	55°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)


12W 1200-1250Lm									
Code	System LM	LED Voltage	LED Current	LED W	System W	CRI	CCT	Beam	
SRA68-2.0-12W-930-24D-X	1200 lm	34 V	350mA	12 W	14 W	90	3000K	24°	
SRA68-2.0-12W-940-24D-X	1250 lm	34 V	350mA	12 W	14 W	90	4000K	24°	
SRA68-2.0-12W-930-36D-X	1200 lm	34 V	350mA	12 W	14 W	90	3000K	36°	
SRA68-2.0-12W-940-36D-X	1250 lm	34 V	350mA	12 W	14 W	90	4000K	36°	
SRA68-2.0-12W-930-55D-X	1200 lm	34 V	350mA	12 W	14 W	90	3000K	55°	
SRA68-2.0-12W-940-55D-X	1250 lm	34 V	350mA	12 W	14 W	90	4000K	55°	

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

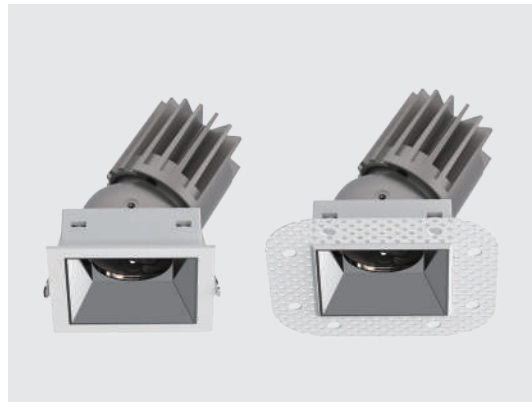

SSA68 / TSA68 2.0 Downlight

Drawing

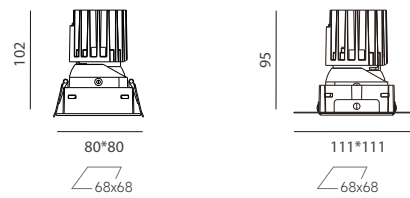

Order Options

9W 900-950Lm							
Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA68-2.0-9W-930-24D-X	900 lm	34 V	9 W	11 W	90	3000K	24°
SSA68-2.0-9W-940-24D-X	950 lm	34 V	9 W	11 W	90	4000K	24°
SSA68-2.0-9W-930-36D-X	900 lm	34 V	9 W	11 W	90	3000K	36°
SSA68-2.0-9W-940-36D-X	950 lm	34 V	9 W	11 W	90	4000K	36°
SSA68-2.0-9W-930-55D-X	900 lm	34 V	9 W	11 W	90	3000K	55°
SSA68-2.0-9W-940-55D-X	950 lm	34 V	9 W	11 W	90	4000K	55°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

12W 1200-1250Lm							
Code	System LM	LED Voltage	LED W	System W	CRI	CCT	Beam
SSA68-2.0-12W-930-24D-X	1200 lm	34 V	12 W	14 W	90	3000K	24°
SSA68-2.0-12W-940-24D-X	1250 lm	34 V	12 W	14 W	90	4000K	24°
SSA68-2.0-12W-930-36D-X	1200 lm	34 V	12 W	14 W	90	3000K	36°
SSA68-2.0-12W-940-36D-X	1250 lm	34 V	12 W	14 W	90	4000K	36°
SSA68-2.0-12W-930-55D-X	1200 lm	34 V	12 W	14 W	90	3000K	55°
SSA68-2.0-12W-940-55D-X	1250 lm	34 V	12 W	14 W	90	4000K	55°

Remark: X=F (Non-Dim) X=P (Phase Dim) X=A (1-10V) X=D (DALI) X=N (Without Driver)

